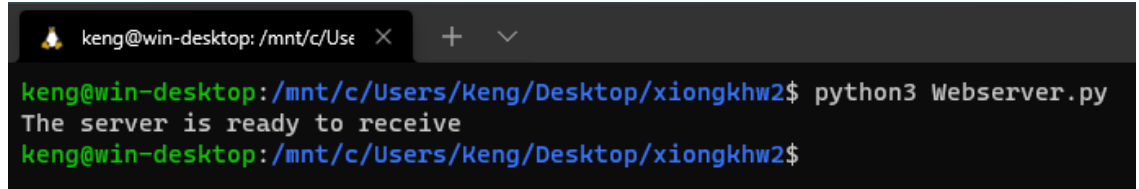


## HW2 - Webserver


### Captures for hello.html:

- Webserver Output:

A terminal window with a dark background. The prompt is 'keng@win-desktop: /mnt/c/Use'. The command 'python3 Webserver.py' has been executed, and the output is 'The server is ready to receive'. The prompt is now 'keng@win-desktop: /mnt/c/Users/Keng/Desktop/xionghw2\$'.


```
keng@win-desktop: /mnt/c/Use x + v
keng@win-desktop: /mnt/c/Users/Keng/Desktop/xionghw2$ python3 Webserver.py
The server is ready to receive
keng@win-desktop: /mnt/c/Users/Keng/Desktop/xionghw2$
```

- Browser Output:

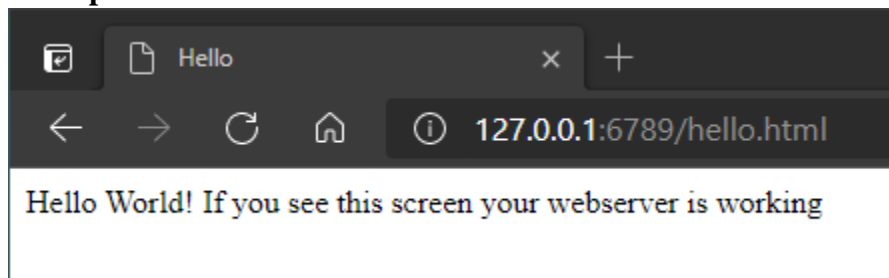

### Captures for helloBAD.html:

- Webserver Output:

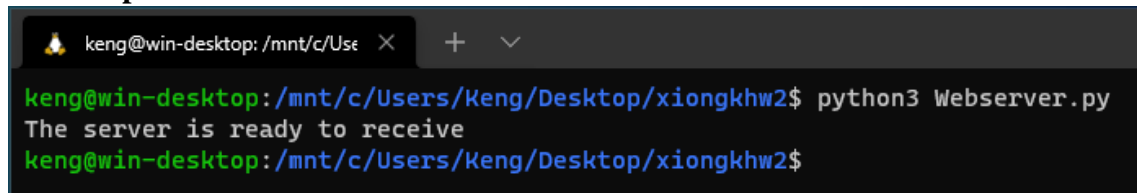A terminal window with a dark background. The prompt is 'keng@win-desktop: /mnt/c/Use'. The command 'python3 Webserver.py' has been executed, and the output is 'The server is ready to receive'. The prompt is now 'keng@win-desktop: /mnt/c/Users/Keng/Desktop/xionghw2\$'.

```
keng@win-desktop: /mnt/c/Use x + v
keng@win-desktop: /mnt/c/Users/Keng/Desktop/xionghw2$ python3 Webserver.py
The server is ready to receive
keng@win-desktop: /mnt/c/Users/Keng/Desktop/xionghw2$
```

- Browser Output:

