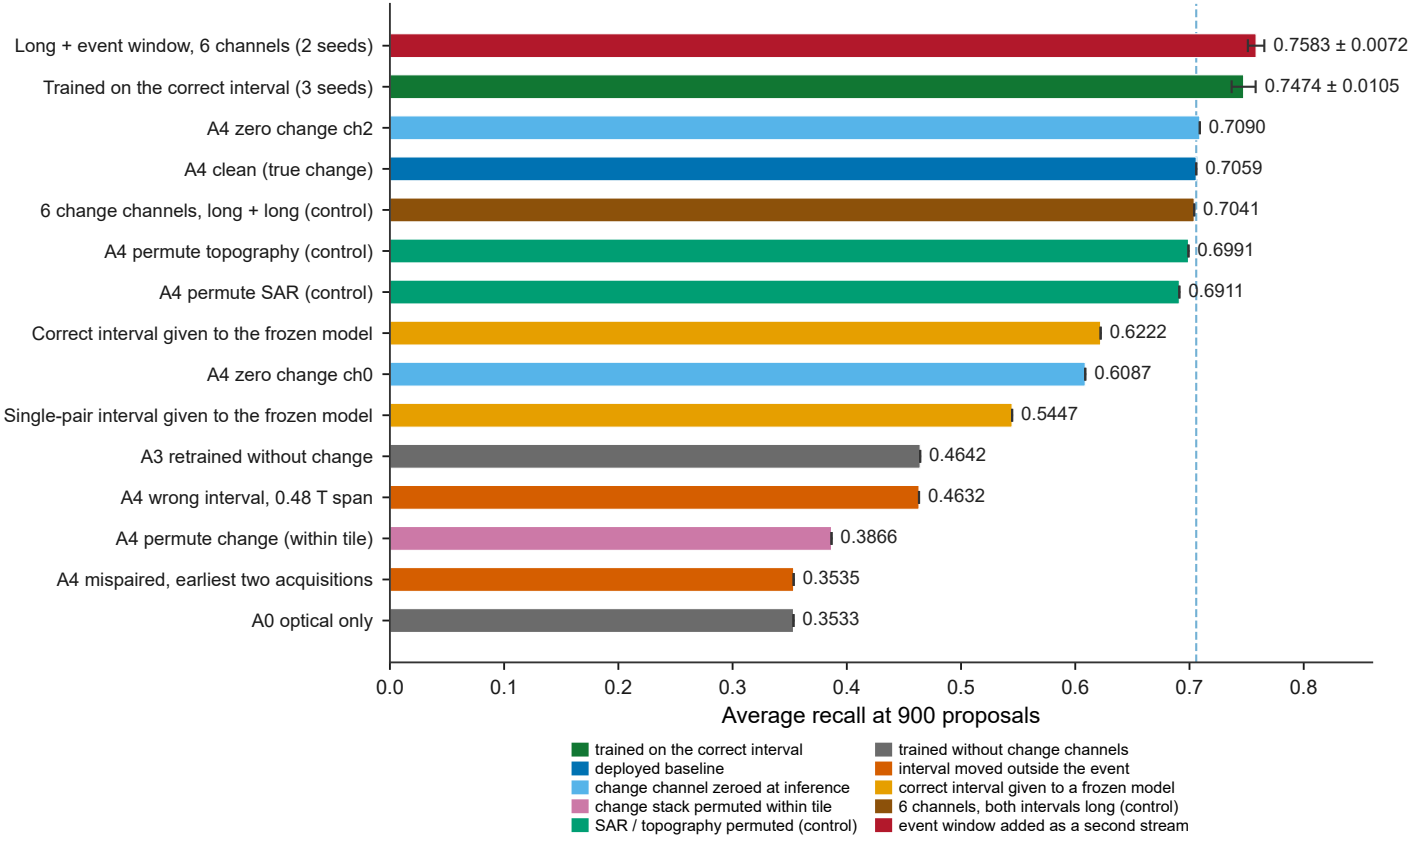
Long + event window, 6 channels (2 seeds)
Trained on the correct interval (3 seeds)
A4 zero change ch2
A4 clean (true change)
6 change channels, long + long (control)
A4 permute topography (control)
A4 permute SAR (control)
Correct interval given to the frozen model
A4 zero change ch0
Single-pair interval given to the frozen model
A3 retrained without change
A4 wrong interval, 0.48 T span
A4 permute change (within tile)
A4 mispaired, earliest two acquisitions
A0 optical only
0.7583 ± 0.0072
0.7474 ± 0.0105
0.7090
0.7059
0.7041
0.6991
0.6911
0.6222
0.6087
0.5447
0.4642
0.4632
0.3866
0.3535
0.3533
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
Average recall at 900 proposals
trained on the correct interval
deployed baseline
change channel zeroed at inference
change stack permuted within tile
SAR / topography permuted (control)
trained without change channels
interval moved outside the event
correct interval given to a frozen model
6 channels, both intervals long (control)
event window added as a second stream