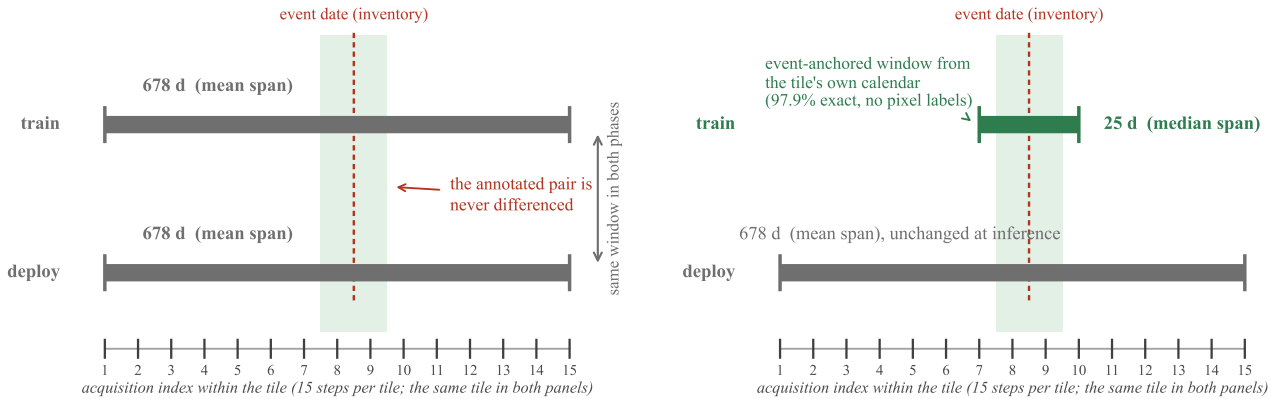
(a) Conventional: one interval for both phases
event date (inventory)
678 d (mean span)
train
the annotated pair is never differenced
same window in both phases
678 d (mean span)
deploy
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
acquisition index within the tile (15 steps per tile; the same tile in both panels)
(b) This work: the interval is chosen per phase
event date (inventory)
event-anchored window from the tile's own calendar (97.9% exact, no pixel labels)
train
25 d (median span)
678 d (mean span), unchanged at inference
deploy
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
acquisition index within the tile (15 steps per tile; the same tile in both panels)