
where the feature is located

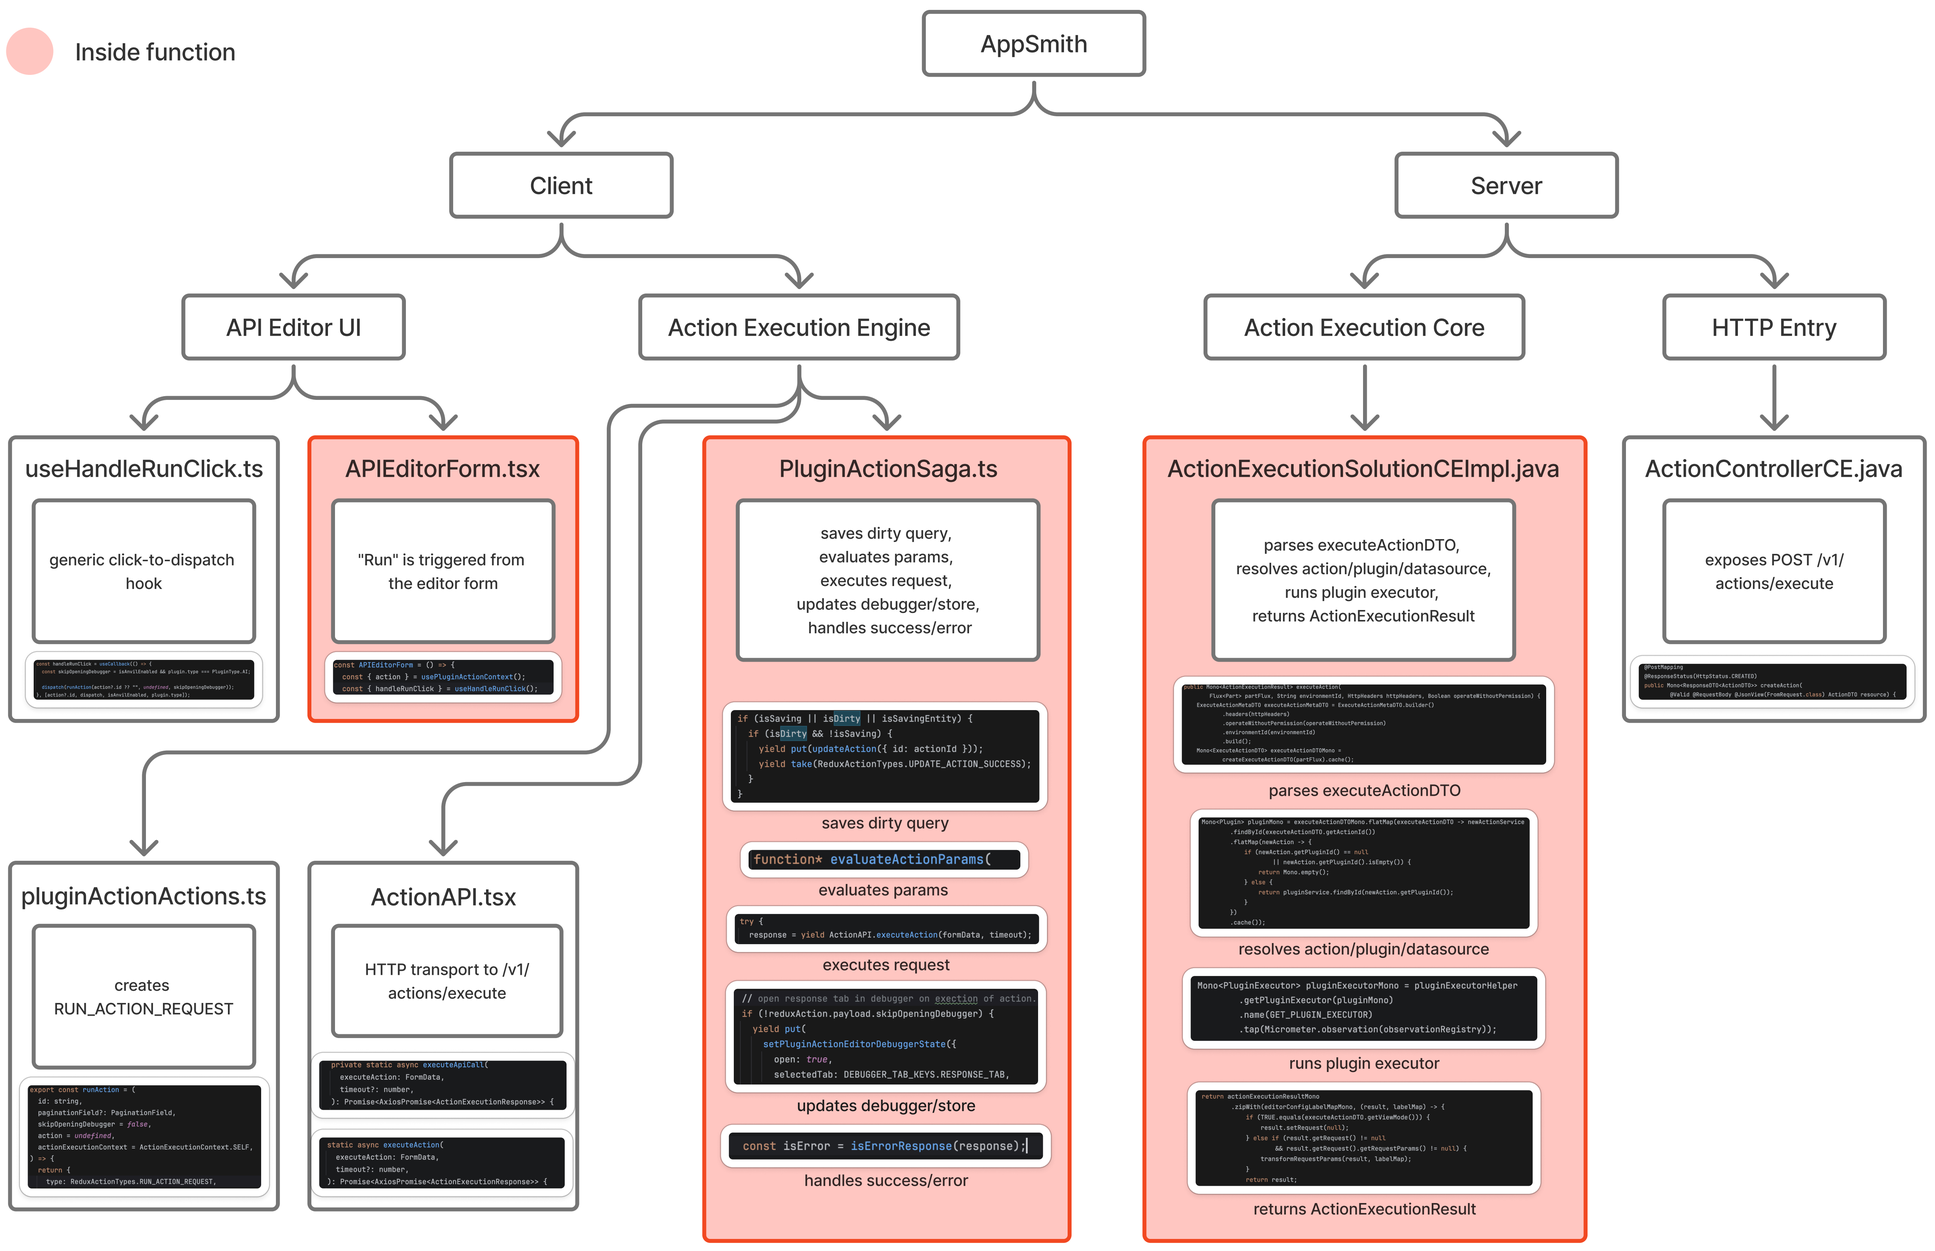

Why Inside The Boundary

- **APIEditorForm.tsx** is inside because this is the query editor surface where the feature is initiated. Its onTestClick calls the run behavior directly at lines 30-32.
- **PluginActionSaga.ts** is inside because this is the client-side core of action execution. It decides whether to save first, opens the debugger, constructs the execution request, sends it, and handles success/error.
- **ActionExecutionSolutionCEImpl.java** is inside because this is the server-side core of the feature. It resolves the action, datasource, plugin, and executor, then actually performs the execution and produces the result.

Why Outside The Boundary

- **useHandleRunClick.ts** is outside because it is just a small adapter between the UI and Redux dispatch. It forwards the click into the system, but it does not implement query execution logic itself.
- **ActionAPI.tsx** is outside because it is a transport layer. It knows how to send multipart HTTP to /execute, but it does not decide how execution should behave.
- **ActionControllerCE.java** is outside because it is a web controller boundary. It exposes the endpoint and forwards to the solution layer, but the execution rules live deeper in the solution.

how the feature works

