


FIGURE 03 / SPATIAL SAMPLING

Boundary-Aware Layered Still-Scan Planning

Sparse boundary observations define a 3D volume; 4-6 layers place camera poses before multi-view capture.

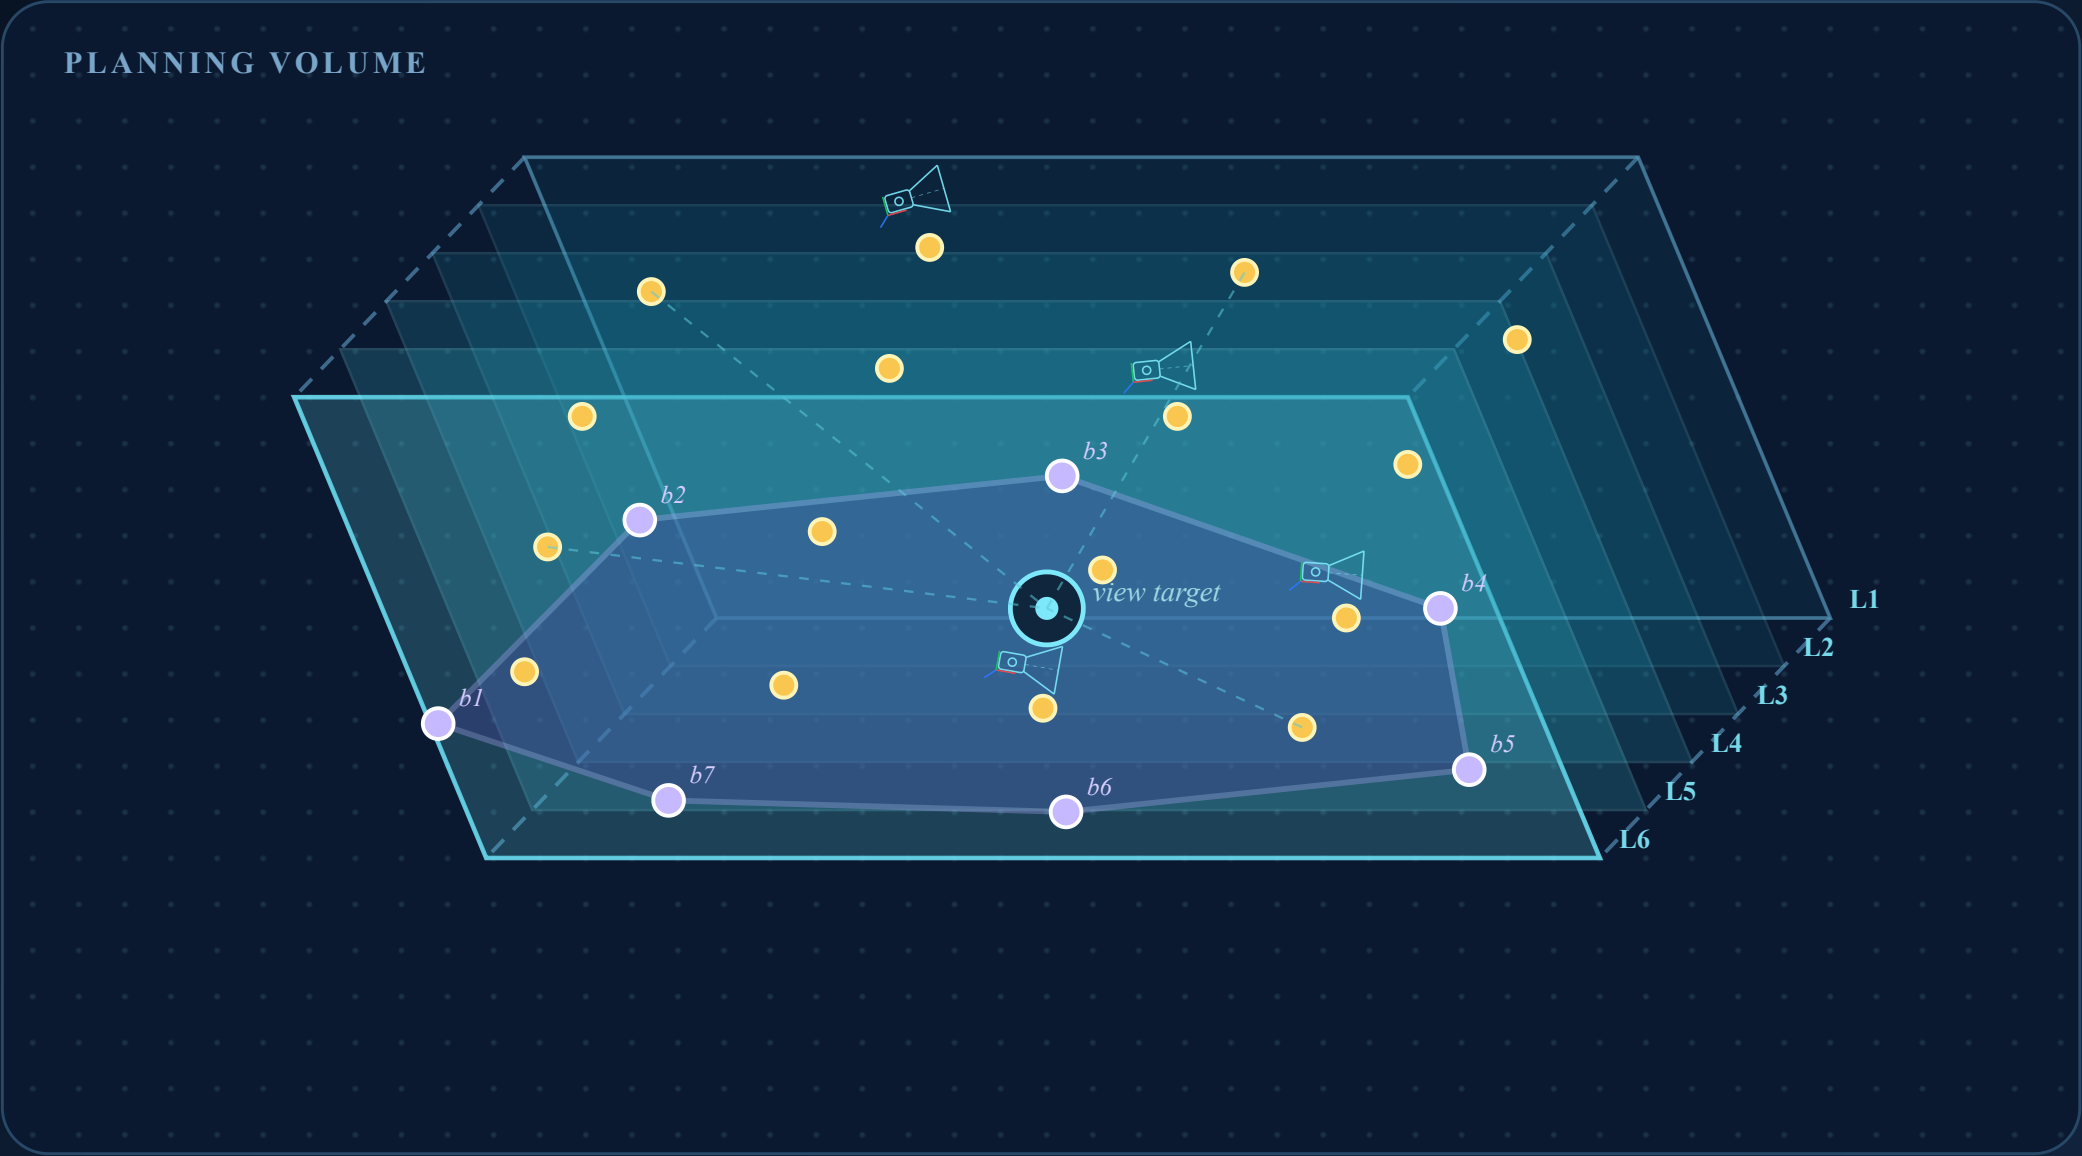

PLANNER

- 01 Record boundary**
Sparse XYZ samples delimit the scene volume.
- 02 Generate 4-6 layers**
Interpolate valid positions inside the boundaries.
- 03 Assign view directions**
Orient poses toward targets or angular sectors.
- 04 Capture and validate**
Save RGB frames with measured camera poses.

N positions x K view directions
dataset scale remains configurable