

李航《统计学习方法》笔记






从原理到实现：基于 R

$$P(y | x) = \frac{P(x | y) P(y)}{P(x)}$$

$$\hat{y} = \arg \max_y P(y | x)$$

$$R_{\text{emp}}(f) = \frac{1}{N} \sum_{i=1}^N L(y_i, f(x_i))$$

$$H(P) = - \sum_i p_i \log p_i$$

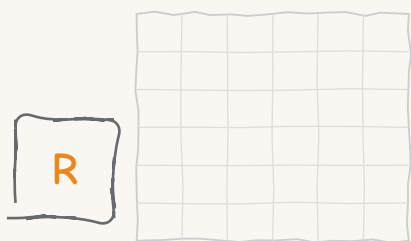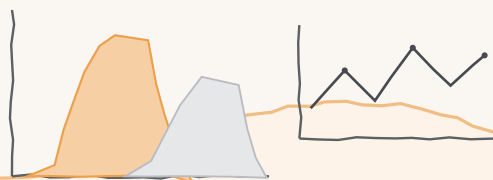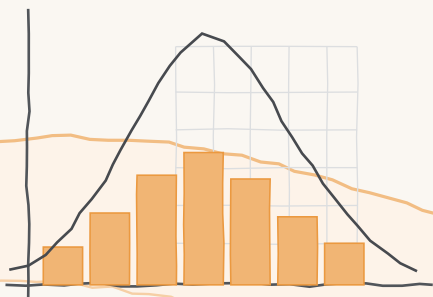

$$p(x | \mu, \sigma) = \frac{1}{\sqrt{2\pi}\sigma} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right)$$

$$L(y, z) = \max(0, 1 - yz)$$

$$w \leftarrow w - \eta \nabla L(w)$$

$$H(p, q) = - \sum_i p_i \log q_i$$

作者：DefTruth

声明：本笔记仅用于学习交流，未经本人同意，不得用于任何商业传播。