

# RevTrack: Evaluating Whether Scientific Assistants Know When a Review Concern Has Been Fixed

Anonymous ACL submission

## Abstract

Scientific review assistance requires temporal judgment: after authors revise a paper, a useful assistant must decide whether an old reviewer concern is still valid, partially addressed, or obsolete. Existing review-assistance evaluations mostly score static critiques and therefore miss this revision-aware capability. We introduce REVTRACK, an issue-level benchmark that aligns a review concern with author response and revision evidence, then asks whether the concern is *fixed*, *partially fixed*, *unresolved*, or *regressed*. On a hardened ICLR 2024 benchmark, a structured revision-evidence model reaches 0.704 macro-F1, compared with 0.389 for the strongest semantic encoder baseline. On ICLR 2025, a stress set and an 80-row standard-labeled active frontier show that cross-year transfer remains brittle: TF-IDF collapses to zero fixed-case F1, and the best expanded-frontier macro-F1 is 0.469. A user-confirmed 80-row NeurIPS 2024 active frontier adds a second venue axis: the best transferred semantic encoder reaches 0.348 macro-F1, while prompted LLMs and vote ensembles remain near majority on this frontier. RevTrack re-frames scientific review assistance as longitudinal evidence tracking and ships with auditable construction artifacts for blind validation, leakage control, label evidence, and claim readiness.

## 1 Introduction

Large language models are increasingly used as research assistants: they summarize papers, draft reviews, suggest experiments, and help authors revise manuscripts. For these systems, static critique is not enough. A scientifically useful assistant must update its judgment when the paper changes. If a reviewer originally asked for computational-cost evidence and the revision adds a direct cost comparison, then repeating the old criticism is no longer helpful. Conversely, a long and polite author re-

sponse does not mean the concern was actually fixed.

This paper studies revision-status tracking: given a paper context, one reviewer concern, author response evidence, and a revision summary, predict whether the original concern is *fixed*, *partially fixed*, *unresolved*, or *regressed*. The task targets an evaluation blind spot. Many review-assistance evaluations ask whether a model can produce plausible critiques, answer reviewer questions, or rate paper quality. Those settings do not measure whether the model can maintain a structured memory of scientific concerns across revision. As a result, systems can appear competent while still failing at the workflow that matters to authors, reviewers, and program chairs: deciding which concerns remain unresolved after the evidence changes. Our thesis is simple: static critique quality is a misleading proxy for longitudinal scientific judgment.

We introduce REVTRACK, a benchmark and diagnostic suite for revision-aware scientific judgment. RevTrack builds issue-level examples from public OpenReview discussions, prioritizes hard cases with model disagreement, and keeps blind validation sheets separate from assistant/model keys. The benchmark is organized around evidence rather than surface plausibility: each label must be supported by a review concern span, a response or revision evidence span, and a short boundary note. The current standard validation set covers 301 audit rows across ICLR 2024, ICLR 2025, NeurIPS 2024, and ICLR 2023. It includes 80-row active frontiers for ICLR 2025 and NeurIPS 2024, plus an 80-row ICLR 2023 random/stratified slice; all standard rows have complete evidence spans.

The empirical picture is deliberately diagnostic rather than model-chasing. On the hardened ICLR 2024 clean-dev benchmark, a structured evidence model reaches 0.704 macro-F1, compared with 0.389 for the strongest semantic encoder baseline. At the same time, cross-year transfer ex-

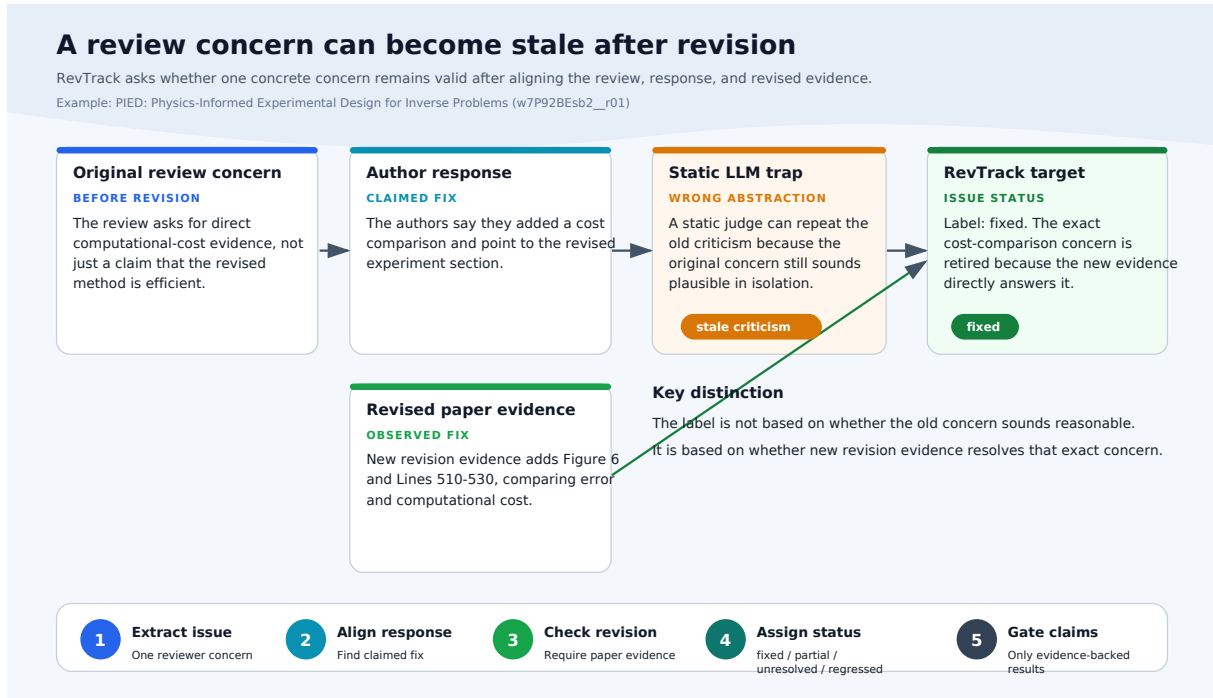


Figure 1: RevTrack exposes a temporal failure mode: a criticism that is valid before revision can become stale after new evidence is added. The benchmark aligns each concern to the author response and revised-paper evidence before assigning an issue status, preventing static assistants from repeating obsolete criticism.

poses brittleness. On the ICLR 2025 stress set, a TF-IDF model matches the majority baseline in accuracy while assigning zero F1 to fixed cases. On the standard-labeled expanded80 frontier, the best model reaches only 0.469 macro-F1; structured transfer over-credits unresolved concerns in 66 cases, while TF-IDF misses all fixed and regressed examples in that frontier. On the user-confirmed NeurIPS 2024 active frontier, the best transferred semantic encoder reaches 0.348 macro-F1, while prompted LLMs and calibrated votes remain near the majority reference. The ICLR 2023 random/stratified slice adds bounded external-validity evidence outside disagreement-focused active frontiers while preserving the same no-IAA and no-natural-prevalence boundary.

The central contribution is therefore not a new state-of-the-art review model. REVTRACK argues that the community is measuring the wrong capability for scientific assistants. A useful assistant must not merely produce a plausible static review; it must track evidence over time, retire stale criticism, resist superficial reassurance, and flag regressions when revision makes a concern worse. To make these claims auditable, the release includes packet-integrity checks, leakage controls, label-evidence audits, a failure taxonomy, and a claim ledger that

blocks overclaiming.

Our contributions are:

- We define revision-status tracking as an issue-level task for scientific review assistance.
- We release a reproducible construction and validation pipeline with blind/key separation, evidence-span auditing, leakage checks, and claim-readiness gates.
- We provide a validated ICLR 2024 benchmark slice, a 21-row ICLR 2025 stress set, 80-row user-confirmed active frontiers for ICLR 2025 and NeurIPS 2024, and an 80-row ICLR 2023 random/stratified standard slice.
- We show that semantic baselines can look reasonable by accuracy while failing fixed, unresolved, and regressed-case recovery.
- We demonstrate that structured revision evidence improves in-domain macro-F1 and use prompted LLMs, vote ensembles, and a failure taxonomy to explain where transfer models still break.

## 2 Task Definition

**Input.** Each example contains a paper title and optional abstract, one reviewer concern, author response candidates, an aligned response excerpt, and

a revision summary. The unit of prediction is a single issue, not a paper-level decision. This design prevents a model from hiding behind a global paper-quality judgment when one concern was fixed and another remains unresolved.

**Output labels.** The label set is: *fixed*, *partially fixed*, *unresolved*, and *regressed*. *Fixed* means the exact concern is addressed with concrete revision evidence. *Partially fixed* means the revision makes real progress but leaves a material part open. *Unresolved* means the concern remains present, is deferred, or is reframed without enough evidence. *Regressed* means the attempted fix introduces a new issue on the same axis or makes the paper less reliable.

**Evaluation.** Macro-F1 is the primary metric because label skew is central to the task. Accuracy is reported only with null baselines and per-label recovery. We explicitly track fixed-case and unresolved-case F1 because stale criticism and over-crediting are the most consequential failures for review support.

### 3 Benchmark Construction

RevTrack uses a staged construction pipeline. First, we collect public OpenReview submissions and discussion notes (OpenReview, 2026). Second, we extract issue candidates from review fields such as weaknesses, questions, and summary. Third, we align each concern with response candidates and revision-summary text. Fourth, we use model disagreement to prioritize hard examples. Finally, we create blind human-validation sheets with a hidden assistant/model key and run packet integrity audits before any labels are promoted.

**Example schema and leakage control.** Each example keeps the issue identifier, paper title, review metadata, a review-concern excerpt, the top and aligned author-response excerpts, a revision summary, the status label, confidence, evidence span, and annotator note. Blind packets omit labels, assistant suggestions, and model predictions; hidden key files retain those fields only for audit and promotion. The packet audit checks row identity, duplicate issue identifiers, source-sheet consistency, forbidden label leakage into blind files, missing model snapshots in signoff files, and evidence-span completeness before a sheet can support a paper claim.

**Quality gates.** The ICLR 2024 candidate pool contains 230 candidates with complete required text fields and 82 multi-model disagreement rows. The expanded ICLR 2025 pool contains 322 candidates from 80 submissions, has a complete-field rate of 0.963, and includes 244 disagreement rows. The NeurIPS 2024 limit100 candidate pool contains 393 entries with 1.000 complete-field rate and 316 disagreement rows; its 80-row active frontier is user-confirmed single-pass standard validation. The ICLR expanded80 frontier is standard-labeled through user-confirmed single-pass validation. The ICLR 2023 complete-field pool contains 241 candidates and 83 TF-IDF/issue-ledger disagreement rows; its 80-row random/stratified validation slice is user-confirmed single-pass standard validation. Because the ICLR 2025 and NeurIPS 2024 frontiers are active-sampled from model disagreement, we treat them as hardened transfer frontiers rather than estimates of natural venue-level issue prevalence. Because the ICLR 2023 slice is random/stratified rather than an active frontier, we report it by measured slice design and still avoid unmeasured natural-prevalence claims.

**Validation provenance.** The current standard human-validation set contains 301 rows: 40 from ICLR 2024, 21 from the ICLR 2025 repro stress set, 80 from the ICLR 2025 expanded frontier, 80 from the NeurIPS 2024 active frontier, and 80 from the ICLR 2023 random/stratified slice. The first 61 rows were promoted after user-reviewed AI-assisted signoff on 2026-04-26; expanded80 was promoted after user-confirmed review of the assistant-adjudication draft on the same date; the NeurIPS 2024 resolved candidate was promoted after user confirmation on 2026-04-28. The ICLR 2023 random80 slice was promoted after user confirmation on 2026-04-29. We report this provenance explicitly. The primary 301-row standard set remains single-user confirmed. Separately, a bounded independent second-pass mini60 packet was completed with agreement = 1.0, Cohen’s  $\kappa$  = 1.0, and zero mismatches. Because mini60 is intentionally bounded and boundary-focused, we use it as protocol-consistency evidence on hard cases rather than as full-scale two-annotator coverage of all packets. Accordingly, we do not report full-dataset inter-annotator reliability claims for the entire benchmark in this version. The release package includes a dataset card, claim-evidence ledger, packet audits, label-evidence audits, and the scripts

## RevTrack Pipeline: From OpenReview Threads to Auditable Claims

Two evidence lanes are tracked separately: disagreement-focused active frontiers and broader random/stratified slices.

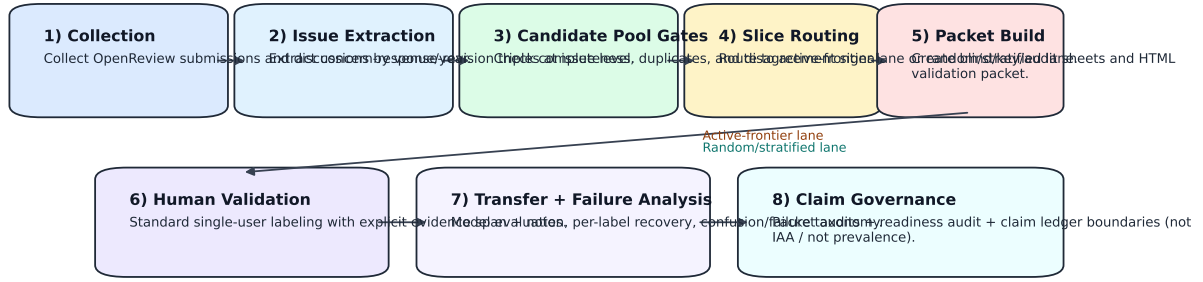


Figure 2: RevTrack construction and claim-governance pipeline. The release keeps extraction quality gates, blind/key/source packet audits, label-evidence checks, and claim-readiness audits in one reproducible path so transfer claims cannot bypass provenance boundaries.

| Artifact                            | Rows | Status                   | Notes                                                             |
|-------------------------------------|------|--------------------------|-------------------------------------------------------------------|
| ICLR 2024 clean dev v7              | 148  | release candidate        | fixed 50 / partial 86 / unresolved 11 / regressed 1               |
| ICLR 2024 train v8                  | 180  | transfer training source | fixed 63 / partial 104 / unresolved 12 / regressed 1              |
| ICLR 2024 candidate pool            | 230  | quality gate passed      | complete rate 1.000; disagreement rows 82                         |
| ICLR 2024 validation v1             | 40   | standard labels locked   | user-reviewed signoff promoted on 2026-04-26                      |
| ICLR 2025 repro v2                  | 21   | validated stress sample  | fixed 5 / partial 16                                              |
| ICLR 2025 expanded80 pool           | 322  | construction-ready       | complete rate 0.963; disagreement rows 244                        |
| ICLR 2025 expanded80 validation v1  | 80   | standard labels locked   | user-confirmed single-pass validation; active frontier            |
| NeurIPS 2024 limit100 validation v1 | 80   | standard labels locked   | user-confirmed single-pass validation; partial 44 / unresolved 36 |
| ICLR 2023 random80 validation v1    | 80   | standard labels locked   | random/stratified slice; fixed 5 / partial 49 / unresolved 26     |

Table 1: Current RevTrack dataset and validation artifacts. Expanded80 and NeurIPS 2024 limit100 are user-confirmed single-pass active frontiers; ICLR 2023 random80 is a user-confirmed random/stratified slice. None of these artifacts is a two-annotator agreement set or an unmeasured natural-prevalence estimate.

used to regenerate tables and figures from machine-readable CSV, JSON, TSV, and JSONL artifacts.

## 4 Baselines and Diagnostic Models

We compare three families of models. **Null baselines** predict the majority label, primarily to expose the accuracy trap under skew. **Semantic baselines** train TF-IDF or encoder representations with a linear classifier. They test whether issue resolution can be recovered from generic text similarity. **Structured diagnostic models** expose evidence slots and follow-up cues to a calibrator. This model is deliberately simple: its purpose is to test whether revision-specific structure helps, not to maximize architecture novelty.

The issue-ledger and structured calibrator are designed as diagnostic interventions. They encode cues such as concrete added experiments, softened claims, future-work deferrals, and response-only fixes. Hard overrides are reported with an ablation so that the gain from explicit revision cues is visible. We treat these systems as task-shaped diagnostic baselines (learned components plus explicit rule

cues), not as a claim of architecture-level state of the art for general revision tracking.

**Structured feature groups.** The structured calibrator uses only observable fields from the issue sheet: request type cues in the review concern, response/revision cues for added evidence, broad-evaluation responses, theory or notation fixes, code-release promises, future-work deferrals, digit/count buckets, and the disagreement pattern among semantic baselines. It also includes an issue-ledger label and rule as diagnostic features. For ICLR 2024 clean-dev evaluation, we use leave-one-out training: each row is predicted by a classifier trained on all other labeled rows, with hard overrides disabled in the ablation row. Transfer predictions train on the frozen labeled source sheet and are never used as labels for blind validation packets.

## 5 Experiments

The experiments ask whether systems can update a concrete review issue after revision evidence, not merely whether they can produce plausible criticism. We therefore read every result through two

| Model                         | Accuracy     | Macro-F1     | Fixed F1     |
|-------------------------------|--------------|--------------|--------------|
| Majority label                | 0.581        | 0.184        | 0.000        |
| TF-IDF + LinearSVC            | 0.561        | 0.376        | 0.510        |
| ModernBERT                    | 0.561        | 0.387        | 0.509        |
| MPNet                         | 0.581        | 0.389        | 0.554        |
| Structured without hard rules | 0.655        | 0.424        | 0.602        |
| Structured                    | <b>0.682</b> | <b>0.704</b> | <b>0.624</b> |

Table 2: ICLR 2024 clean dev v7 results. Macro-F1 is the primary metric because label skew makes accuracy misleading.

lenses: macro-F1 and per-label recovery under skew, and the failure modes in Table 4. The first two RQs quantify the accuracy trap; the latter two explain what breaks when models transfer across years. Across all splits, three findings persist: (i) structured evidence gives the clearest in-domain gain, (ii) accuracy alone hides severe label-level failures, and (iii) prompted transfer remains brittle even with model voting and calibration rules.

### 5.1 RQ1: Does Structure Help In Domain?

Table 2 shows that structured revision evidence substantially improves macro-F1 on ICLR 2024 clean dev v7. The strongest semantic baseline, MPNet with a linear classifier, reaches 0.581 accuracy and 0.389 macro-F1. The structured model reaches 0.682 accuracy and 0.704 macro-F1. Removing structured hard overrides drops macro-F1 to 0.424, showing that explicit revision-follow-up cues drive much of the minority-label recovery. This large drop also clarifies the model role: the strongest in-domain system is a diagnostic hybrid that combines learned scoring with benchmark-specific explicit cues. To address the weak-baseline concern directly, we also run a stronger learned baseline: a fine-tuned ModernBERT classifier with three random seeds (Appendix Table 16). In-domain performance improves over frozen semantic encoders (ICLR 2024 macro-F1  $0.531 \pm 0.021$ ), but still remains below the structured model. Under transfer, unresolved and regressed recovery stay near zero across seeds (ICLR 2025 expanded80 unresolved F1  $0.000 \pm 0.000$ , regressed F1  $0.000 \pm 0.000$ ), reinforcing that the main bottleneck is longitudinal transfer rather than only baseline weakness.

### 5.2 RQ2: When Does Accuracy Mislead?

Table 3 shows why accuracy is insufficient. On ICLR 2024, the majority-label baseline reaches the same accuracy as the best semantic baseline but has zero F1 for fixed, unresolved, and regressed cases. On the ICLR 2025 repro stress set, TF-IDF exactly

| Dataset   | System   | Accuracy | Macro-F1 | Fixed F1 |
|-----------|----------|----------|----------|----------|
| ICLR 2024 | Majority | 0.581    | 0.184    | 0.000    |
| ICLR 2024 | TF-IDF   | 0.561    | 0.376    | 0.510    |
| ICLR 2025 | Majority | 0.762    | 0.216    | 0.000    |
| ICLR 2025 | TF-IDF   | 0.762    | 0.216    | 0.000    |

Table 3: Null-baseline comparison. On the ICLR 2025 stress set, TF-IDF matches the majority baseline while failing fixed-case recovery.

matches the majority baseline while assigning zero F1 to fixed cases. This is the core evaluation failure RevTrack is designed to surface.

### 5.3 RQ3: What Fails Qualitatively?

The failure taxonomy is the bridge from aggregate scores to reviewer-facing risk and is a primary claim-bearing result, not an auxiliary error list. It identifies five recurring modes. *Stale criticism* occurs when a model preserves an old concern after direct revision evidence fixes it. *Over-crediting* occurs when a long response acknowledges a limitation without resolving it. *Fixed under-recovery* occurs when the model keeps a resolved concern alive because the original critique remains lexically salient. *Partial-fix ambiguity* occurs when added evidence narrows but does not eliminate the concern. *Regression scarcity* remains a limitation: the current clean-dev pool contains only one regressed example, so regression performance is not yet a stable claim. Table 4 turns these modes into paper-facing evidence rather than a post-hoc error list. On expanded80, the structured transfer model over-credits unresolved concerns as fixed or partially fixed in 66 cases, TF-IDF misses all four fixed examples and all six regressed examples, and the strongest issue-ledger model still makes four partial/full-boundary errors. These counts should be read as active-frontier diagnostics, not natural prevalence. Appendix Table 20 provides worked concern/evidence examples for fixed, partially\_fixed, unresolved, and regressed boundary behavior.

### 5.4 RQ4: What Transfers Across Years and Venues?

**In-domain to ICLR 2025** is still the strongest signal for proving in-year revision-aware gain, but both expanded80 and NeurIPS limit100 are purposefully hard. Cross-venue transfer confirms the same pattern: high aggregate scores alone can mask clinically important misses, while unresolved concerns remain the hardest safety-critical case.



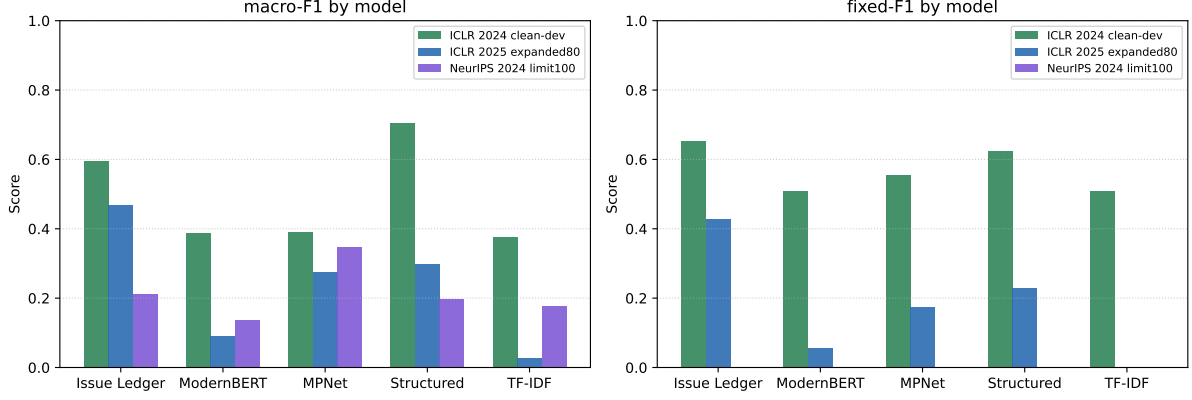


Figure 3: Transfer-profile summary from three settings. Structured models and issue-ledger rules dominate in-domain and frontier settings on macro-F1, but fixed-label recovery remains weak under transfer and the NeurIPS 2024 frontier is dominated by unresolved cases.

| Failure mode          | Pattern                                                                                            | Evidence use                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Stale criticism       | predicts partially_fixed or unresolved because the original concern remains semantically plausible | This example separates revision-aware judgment from static semantic plausibility.                   |
| Over-crediting        | over-credits unresolved concerns as fixed or partially fixed (66 expanded80 errors)                | This is the practical stale-assistant failure: the model would stop tracking an unresolved concern. |
| Fixed under-recovery  | keeps a fixed concern alive as partially fixed or unresolved (4 expanded80 errors)                 | This motivates fixed-case F1 rather than accuracy-only reporting.                                   |
| Regression blindness  | misses cases where the revision introduces or worsens a problem (6 expanded80 errors)              | This justifies keeping the regressed label while avoiding strong regression-performance claims.     |
| Partial/full boundary | collapses partial resolution into fixed (4 expanded80 errors)                                      | This is the central label-boundary risk for benchmark reliability.                                  |

Table 4: Qualitative failure taxonomy used to interpret RevTrack errors. Expanded80 counts are from the user-confirmed standard active frontier and should not be read as natural prevalence.

| Model        | Accuracy     | Macro-F1     | Fixed F1     | Regressed F1 |
|--------------|--------------|--------------|--------------|--------------|
| TF-IDF       | 0.050        | 0.026        | 0.000        | 0.000        |
| ModernBERT   | 0.125        | 0.092        | 0.056        | 0.000        |
| MPNet        | 0.312        | 0.276        | 0.174        | 0.500        |
| Structured   | 0.150        | 0.298        | 0.229        | <b>0.800</b> |
| Issue ledger | <b>0.850</b> | <b>0.469</b> | <b>0.429</b> | 0.500        |

Table 5: ICLR 2025 expanded80 standard-labeled active frontier. The frontier is intentionally hard and model-disagreement-heavy, so it supports transfer brittleness analysis rather than natural label-prevalence estimates.

| Model        | Acc.  | Macro | Fixed | Partial | Unres. |
|--------------|-------|-------|-------|---------|--------|
| Issue Ledger | 0.500 | 0.211 | 0.000 | 0.167   | 0.679  |
| ModernBERT   | 0.200 | 0.137 | 0.000 | 0.229   | 0.320  |
| MPNet        | 0.550 | 0.348 | 0.000 | 0.516   | 0.875  |
| Structured   | 0.362 | 0.197 | 0.000 | 0.545   | 0.244  |
| TF-IDF       | 0.550 | 0.177 | 0.000 | 0.710   | 0.000  |

Table 6: NeurIPS 2024 limit100 user-confirmed single-pass active frontier transfer from the ICLR 2024 model stack. No fixed or regressed examples are present in this frontier, so fixed/regressed F1 are unavailable for stronger interpretation.

The validated ICLR 2025 repro set is a stress test, not a full benchmark. It reveals brittleness: the majority baseline and TF-IDF both reach 0.762 accuracy, while TF-IDF has fixed-label F1 of 0.000. The expanded ICLR 2025 frontier removes the scale blocker at the active-frontier stage: it contains 322 candidates and 244 model-disagreement rows, and its 80-row validation packet has complete standard labels and evidence spans. Table 5 shows this frontier remains difficult under transfer. Table 6 shows the same trend in a different venue ecology and is included as a standard single-user cross-venue active frontier. It also shows unresolved labels still dominating and fixed recovery absent in the current split. Appendix Table 19 reports the exact split-level label coverage

and missing-label patterns used for boundary interpretation. Issue-ledger rules are strongest overall in this bounded frontier setting, while TF-IDF and encoder baselines have weak macro-F1 and poor fixed-case recovery. This supports a cross-year brittleness claim, but not a broad prevalence claim, because the frontier is intentionally model-disagreement-heavy. Because these frontiers are disagreement-harvested hard subsets, they should be read as stress-test transfer evidence rather than as a full distributional estimate of venue-wide revision behavior. The ICLR 2023 random/stratified slice complements these frontiers with 80 standard rows and a fixed/partial/unresolved label mix of

| Model            | ICLR24 | ICLR25 | NeurIPS | Mean  |
|------------------|--------|--------|---------|-------|
| Majority         | 0.184  | 0.226  | 0.177   | 0.196 |
| GPT-5.5 (v2)     | 0.350  | 0.081  | 0.171   | 0.201 |
| GPT-4.1          | 0.326  | 0.070  | 0.166   | 0.187 |
| GPT-4o-mini      | 0.299  | 0.077  | 0.178   | 0.185 |
| GPT-4.1-nano     | 0.210  | 0.161  | 0.126   | 0.166 |
| Qwen2.5-72B      | 0.334  | 0.072  | 0.165   | 0.190 |
| GPT-4.1-mini     | 0.347  | 0.066  | 0.181   | 0.198 |
| Vote-3 (top)     | 0.352  | 0.071  | 0.179   | 0.201 |
| Vote-3 (diverse) | 0.347  | 0.088  | 0.174   | 0.203 |
| Vote-3 (U-guard) | 0.345  | 0.092  | 0.170   | 0.202 |
| Vote-3 (U+F)     | 0.350  | 0.094  | 0.167   | 0.204 |
| Vote-6 (all)     | 0.344  | 0.064  | 0.177   | 0.195 |

Table 7: Macro-F1 of prompted LLMs and vote ensembles on three standard-labeled splits. Voting improves in-domain stability but does not resolve cross-year brittleness on expanded80.

5/49/26. It supports bounded external-validity evidence by measured slice design, not a claim about natural venue prevalence. Appendix Table 13 reports stratified-bootstrap confidence intervals for all three standard splits; ranking uncertainty is small for the in-domain gap and substantially larger on transfer frontiers.

## 5.5 RQ5: How Do Prompted LLM Baselines Behave Under Transfer?

Table 7 adds six prompted-LLM baselines, five vote-calibration variants, and a majority-label reference on the same standard-labeled splits. In-domain ICLR 2024 is competitive for several prompted variants, but transfer remains brittle. On ICLR 2025 expanded80, all prompted and ensemble variants remain below the majority-label macro-F1 baseline (0.226); the strongest calibrated vote reaches 0.094. On NeurIPS limit100, the best prompted model reaches 0.181 macro-F1, while the best vote reaches 0.179 and stays near the majority baseline (0.177). Model pooling therefore improves stability but does not close the longitudinal transfer gap. Appendix Table 14 shows the same risk under bootstrap uncertainty: ICLR24 prompted rows are above majority, ICLR25 rows remain below majority, and NeurIPS24 rows mostly overlap the majority reference. Appendix Table 15 reports paired stratified-bootstrap significance against the majority baseline: prompted rows are reliably above majority in-domain, reliably below majority on ICLR25 expanded80, and statistically overlapping on NeurIPS24.

Table 8 shows targeted decoding/prompt ablations on expanded80. Raising temperature (0.0 to 0.3/0.7) lowers macro-F1 from 0.077 to around 0.020, so transfer errors are not resolved by sam-

pling diversity. Unresolved-strict prompting is model-dependent: it hurts GPT-4o-mini and GPT-5.5(v2), but improves GPT-4.1-mini and GPT-4.1-nano with different fixed-recall trade-offs. Even with those gains, absolute transfer performance remains low and below the majority baseline. Full offline calibration-rule search results are reported in Appendix Table 11.

Figure 5 explains why pooled prompted systems still fail under transfer. In ICLR 2025 expanded80, prompted systems frequently over-credit unresolved cases as fixed or partial, so unresolved recall collapses to near-zero levels while regressed recall remains zero. In NeurIPS limit100, the user-confirmed active frontier contains only partially-fixed and unresolved labels, and prompted models again collapse unresolved recall to zero by over-predicting partially-fixed. Figure 6 localizes this failure in confusion space: most unresolved rows are reassigned to fixed/partial columns under prompted transfer.

Figure 7 quantifies the same pattern at error-type granularity. Across models, over-crediting unresolved concerns is the largest error bucket by a wide margin, while regression misses remain persistent. These label-level failures explain why aggregate in-domain gains do not translate into robust transfer behavior.

## 6 Discussion

RevTrack suggests that review assistance should be evaluated as evidence tracking rather than static critique generation. The practical failure mode is not merely that a model makes a wrong label. It is that the model may keep repeating a criticism that has been fixed, or may credit a response that only defers the issue. Both failures can distort author effort and reviewer attention.

The benchmark also changes how model progress should be read. Small accuracy differences are not meaningful when most examples are partially fixed. Macro-F1 and per-label recovery are closer to the scientific workload: fixed cases test whether stale criticism is retired, while unresolved cases test whether a model resists superficial reassurance. The stronger fine-tuned ModernBERT probe narrows the baseline gap in-domain, but it does not remove the transfer failure pattern, so the central conclusion is not an artifact of using only frozen encoders. The failure taxonomy makes this point concrete. On the expanded ICLR 2025

| Variant      | Prompt            | Temp | Accuracy | Macro-F1 | U Recall | F Recall |
|--------------|-------------------|------|----------|----------|----------|----------|
| GPT-4o-mini  | default           | 0.0  | 0.062    | 0.077    | 0.015    | 0.250    |
| GPT-4o-mini  | default           | 0.3  | 0.038    | 0.020    | 0.015    | 0.000    |
| GPT-4o-mini  | default           | 0.7  | 0.038    | 0.021    | 0.015    | 0.000    |
| GPT-4o-mini  | unresolved-strict | 0.0  | 0.062    | 0.032    | 0.015    | 0.000    |
| GPT-5.5(v2)  | default           | 0.0  | 0.088    | 0.081    | 0.045    | 0.250    |
| GPT-5.5(v2)  | unresolved-strict | 0.0  | 0.100    | 0.059    | 0.091    | 0.000    |
| GPT-4.1-mini | default           | 0.0  | 0.062    | 0.066    | 0.015    | 1.000    |
| GPT-4.1-mini | unresolved-strict | 0.0  | 0.100    | 0.086    | 0.061    | 1.000    |
| GPT-4.1-nano | default           | 0.0  | 0.350    | 0.161    | 0.379    | 0.750    |
| GPT-4.1-nano | unresolved-strict | 0.0  | 0.412    | 0.171    | 0.485    | 0.250    |

Table 8: Expanded80 decoding/prompt ablation for prompted transfer. Temperature increases are uniformly harmful. Unresolved-strict prompting is model-dependent: it hurts GPT-4o-mini and GPT-5.5(v2) macro-F1, while improving GPT-4.1-mini and GPT-4.1-nano unresolved recall and macro-F1 with trade-offs on fixed recall.

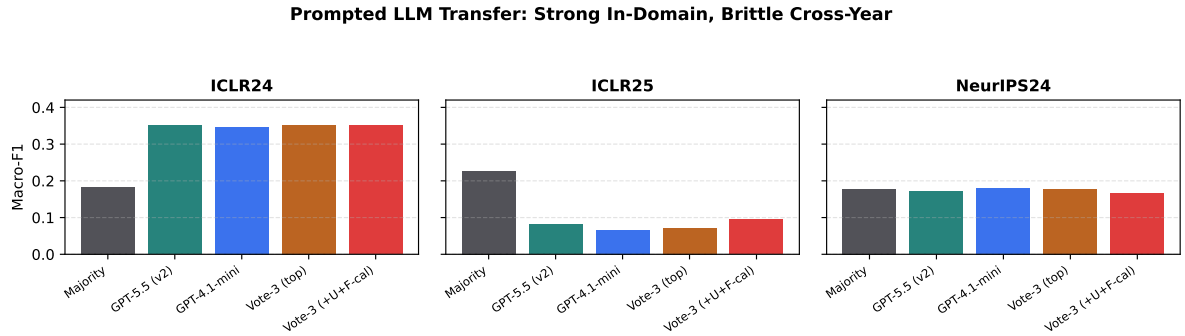


Figure 4: Prompted-LLM transfer profile with majority baseline and vote ensembles, including calibrated unresolved/fixed safeguards. Ensemble voting improves ICLR 2024 stability but does not recover cross-year robustness on expanded80.

frontier, many transfer errors are not random confusions; they are recognizable scientific-assistance failures such as over-crediting unresolved concerns, keeping fixed criticisms alive, and missing regressions.

The expanded ICLR 2025 frontier strengthens the cross-year story but also sharpens the boundary of the claim. It confirms brittleness on a larger active frontier, yet the sample is deliberately hard and disagreement-heavy. This is useful evidence for a benchmark paper because it shows where static matching breaks under pressure. The NeurIPS active frontier and ICLR 2023 random/stratified slice broaden that evidence, but they still do not imply that the same label distribution holds across all venues or years. A bounded independent second-pass mini60 check now provides reliability support, but the next step is still a non-ICLR random/stratified slice for broader prevalence-sensitive evidence. In this sense, the current release is best interpreted as an audited stress-oriented benchmark suite with one bounded random/stratified axis, rather than as a complete population-level estimate of scientific revision tracking.

More broadly, RevTrack points to a design requirement for scientific assistants. They need an issue ledger: a structured representation of what was criticized, what evidence was added, and what status each concern should now have. That representation is not a complete solution, but it gives the field a measurable target for longitudinal scientific judgment.

## 7 Related Work

**Scientific peer review and review assistance.** Peer-review datasets have enabled computational study of review text, scores, decisions, and reviewing workflows. PeerRead introduced a public corpus of paper drafts, decisions, and expert reviews from venues including ACL, NeurIPS, and ICLR (Kang et al., 2018). NLPeer expands this line with a clearly licensed, multi-domain resource that includes drafts, camera-ready versions, reviews, metadata, and versioning information (Dycke et al., 2023). More recent resources such as Re2 collect full-stage review and rebuttal discussions across many OpenReview venues (Zhang et al., 2025). Task inventories for peer-review automation also emphasize that reviewing decomposes into many



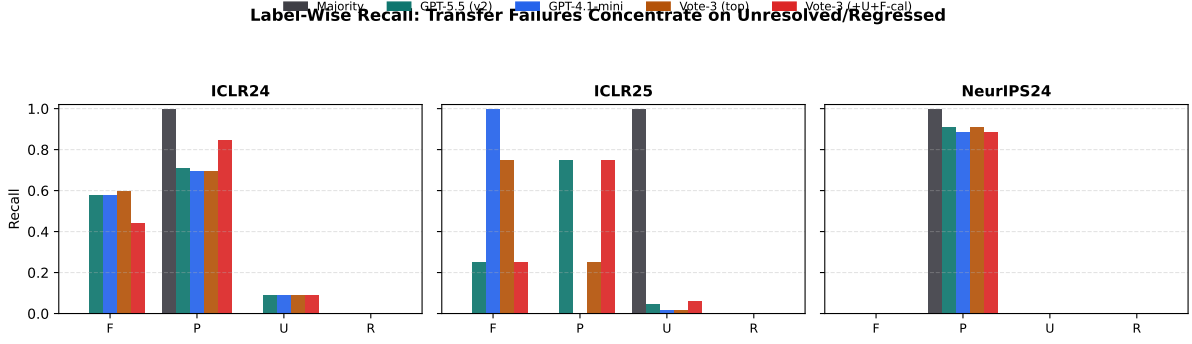


Figure 5: Label-wise recall for majority baseline, prompted LLMs, and vote ensemble. Cross-year failures are dominated by unresolved under-recovery and zero regressed recall under prompted transfer.

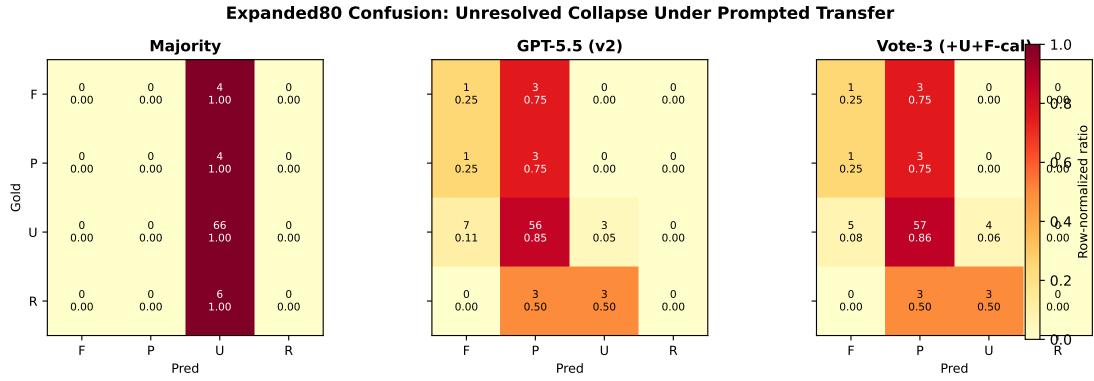


Figure 6: Expanded80 row-normalized confusion matrices for majority baseline, GPT-5.5(v2), and Vote-3(+U+F-cal). Prompted transfer over-credits unresolved concerns as fixed/partial, while calibrated safeguards increase unresolved recovery but introduce additional tradeoffs.

different subtasks and that dataset documentation matters for comparability (Staudinger et al., 2024). These resources provide the raw setting for studying scientific review, but their main tasks are usually paper-level prediction, review understanding, or discussion modeling. RevTrack changes the unit of evaluation. Rather than predicting acceptance, summarizing reviews, or modeling discussions wholesale, it isolates one reviewer concern and asks whether later revision evidence changes that concern’s status. This makes revision tracking closer to an issue ledger than to a static review corpus.

**Review-question answering and evidence grounding.** PeerQA uses peer-review questions as document-level scientific QA prompts and asks systems to retrieve evidence, identify unanswerable questions, and generate answers (Baumgärtner et al., 2025). RevTrack shares the emphasis on authentic reviewer information needs, but changes the output from answer generation to status tracking. More broadly, evidence-verification

benchmarks such as FEVER test whether claims are supported, refuted, or lack enough information with respect to textual evidence (Thorne et al., 2018). RevTrack differs in two ways. First, the claim is not a standalone fact: it is an old review concern whose status depends on later author response and revision evidence. Second, the correct label is not only supported versus refuted. Partial fixes and regressions are first-class outcomes because scientific revision often narrows, complicates, or worsens a concern rather than simply resolving it. This perspective is also connected to QA with conflicting evidence, where systems must avoid over-confident answers when contexts disagree (Liu et al., 2025; Shaier et al., 2024).

**LLM-assisted reviewing.** LLM-based review assistance has focused heavily on generating reviewer feedback. Large-scale empirical work suggests that GPT-4 feedback can overlap with human-reviewer feedback and can be perceived as useful by authors (Liang et al., 2023). For example, MARG

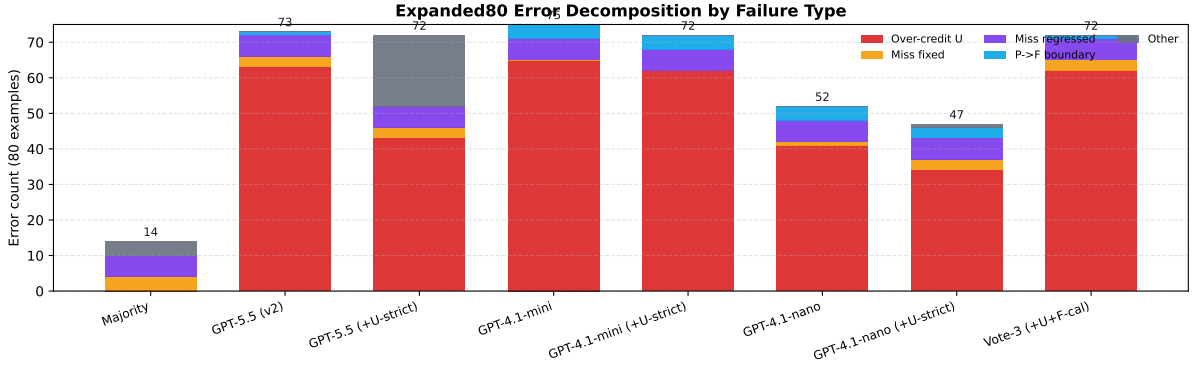


Figure 7: Expanded80 stacked error decomposition. Over-crediting unresolved concerns dominates all prompted variants; unresolved-strict prompting reduces this category for GPT-5.5, GPT-4.1-mini, and GPT-4.1-nano, but transfer brittleness remains.

uses multiple specialized LLM agents to generate scientific-paper feedback and reduce generic comments (D’Arcy et al., 2024). This direction is useful, but review generation alone does not test whether an assistant can retire stale criticisms after a paper changes. RevTrack therefore evaluates a narrower and more auditable capability: revision-aware issue tracking. This framing also separates assistance quality from fluency. A system can write a plausible comment while still failing the longitudinal decision of whether a prior comment should remain active.

**Reliability, calibration, and hallucination under evidence conflict.** LLM-as-judge methods have become common for scalable open-ended evaluation (Zheng et al., 2023; Liu et al., 2023), and related work explores using panels of smaller judges to reduce cost and single-model bias (Verga et al., 2024). At the same time, LLM evaluators can show position and fairness biases that require calibration (Wang et al., 2024). LLMs are also increasingly studied as data annotators or annotation assistants (Tan et al., 2024; Gu et al., 2025). These lines motivate our prompted-LLM baselines, but they also make direct substitution of LLM labels for validated status labels risky. Recent work has shown that strong language models can remain unreliable under factual pressure or conflicting evidence, even when outputs are fluent (Lin et al., 2022; Ji et al., 2023). Confidence-aware analyses also show that model certainty is not a sufficient proxy for correctness (Kadavath et al., 2022). This reliability gap under shift is consistent with broader calibration and robustness findings beyond review tasks (Guo et al., 2017; Ovadia et al., 2019; Koh et al.,

2021). Post-hoc hallucination checks can improve auditing (Manakul et al., 2023), but they do not directly solve the longitudinal decision in review workflows. RevTrack complements this line by making the evaluation target explicit: whether a previously raised concern should stay active after revision evidence.

**Evaluation under skew.** The accuracy trap observed here is a standard risk in imbalanced classification, but it is especially damaging for review support. The minority labels are often the scientifically important ones: fixed cases determine whether stale criticism should be retired, and unresolved cases determine whether a blocker remains active. RevTrack therefore treats macro-F1, fixed-case recovery, unresolved-case recovery, and regressed-case analysis as part of the task definition rather than secondary diagnostics.

## 8 Limitations

The current strongest performance evidence is in-domain ICLR 2024. The ICLR 2025 repro set is validated but small, and expanded80 plus NeurIPS 2024 limit100 are active frontiers rather than random or natural-prevalence samples. The ICLR 2023 random80 slice adds random/stratified evidence within the ICLR venue family, but it is still standard single-user validation and not a full natural-prevalence estimate for all venues. Most labels are standard single-user confirmed labels, and only a bounded mini60 packet has an independent second pass. We therefore frame cross-year and cross-venue evidence as bounded transfer and external-validity evidence, not as a complete estimate of performance on all issues. For

the same reason, frontier failure-taxonomy counts should be read as diagnostic counts on intentionally hard frontiers, while random80 counts should be read by measured slice design rather than as broad prevalence estimates. The mini60 agreement result should be interpreted narrowly: it is a bounded consistency check on hard cases, not a substitute for full two-annotator coverage across all packets.

The label rubric is issue-level and evidence-based, but some concerns remain ambiguous. For example, a narrowed claim may make an original criticism less severe without fully resolving it. These cases depend on careful evidence spans and notes.

The current labeled pool has too few regressed examples for stable regression-performance conclusions. We include the label because it is conceptually important, but treat regression performance as provisional until more examples are collected.

RevTrack is also text-first. The current pipeline uses review text, author responses, revision summaries, and available paper metadata rather than full PDF differencing. This keeps the first benchmark auditable and lightweight, but it can miss changes that are only visible in figures, equations, or revised appendices. Future versions should add PDF-aware evidence extraction while preserving issue-level provenance.

Finally, the current standard labels come from user-reviewed AI-assisted signoff and user-confirmed expanded80, NeurIPS 2024, and ICLR 2023 adjudication. A separate independent mini60 second pass is now complete and provides bounded reliability evidence, but full-scale two-annotator coverage remains future work.

## 9 Ethics Statement

RevTrack is built from public OpenReview discussions and is intended for evaluation and diagnostic research. The benchmark should not be used to automate acceptance decisions or replace human reviewers. Its appropriate use is to test whether research-assistant systems preserve scientific standards when helping authors or reviewers reason about revisions.

Because the data involves real papers and reviews, releases should preserve only necessary text snippets, document provenance, and follow venue policies. We separate blind validation sheets from hidden assistant/model keys to reduce label leakage and to make audit boundaries explicit. We do not re-

lease hidden assistant/model keys as human labels unless they have passed the documented promotion path. The intended release artifact is therefore an audited benchmark package: minimally necessary text excerpts, labels with evidence spans, provenance metadata, scripts, and machine-readable audit reports, rather than a bulk mirror of full review discussions.

We also note deployment risks beyond privacy. First, systems optimized on this benchmark can over-credit polished rebuttal language or under-credit substantive but terse revisions, which can unfairly affect downstream editorial triage if used naively. Second, venue-style and discipline norms differ: a model tuned on ICLR/NeurIPS review discourse may transfer poorly to other communities and may encode style-specific bias in what counts as "resolved." Third, issue-level status tracking can privilege concerns that are easy to verbalize in short review snippets while underweighting subtler methodological, safety, or fairness concerns. For these reasons, we frame RevTrack as an evaluation benchmark for assistant behavior under revision, not as a decision-making system for paper outcomes.

## References

- Association for Computational Linguistics. 2026. Acl style files. <https://github.com/acl-org/acl-style-files/>.
- Tim Baumgärtner, Ted Briscoe, and Iryna Gurevych. 2025. *PeerQA: A scientific question answering dataset from peer reviews*. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 508–544, Albuquerque, New Mexico. Association for Computational Linguistics.
- Mike D’Arcy, Tom Hope, Larry Birnbaum, and Doug Downey. 2024. *MARG: Multi-agent review generation for scientific papers*. *Preprint*, arXiv:2401.04259.
- Nils Dycke, Ilia Kuznetsov, and Iryna Gurevych. 2023. *NLPeer: A unified resource for the computational study of peer review*. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5049–5073, Toronto, Canada. Association for Computational Linguistics.
- EMNLP 2026 Organizing Committee. 2026. Call for main conference papers: Emnlp 2026. [https://2026.emnlp.org/calls/main\\_conference\\_papers/](https://2026.emnlp.org/calls/main_conference_papers/).

|     |                                                             |                                                                              |     |
|-----|-------------------------------------------------------------|------------------------------------------------------------------------------|-----|
| 739 | Feng Gu, Zongxia Li, Carlos Rafael Colon, Benjamin          | Open domain question answering with conflicting                              | 796 |
| 740 | Evans, Ishani Mondal, and Jordan Lee Boyd-Graber.           | contexts. In <i>Findings of the Association for Compu-</i>                   | 797 |
| 741 | 2025. Large language models are effective human             | tational Linguistics: NAACL 2025, pages 1838–1854,                           | 798 |
| 742 | annotation assistants, but not good independent an-         | Albuquerque, New Mexico. Association for Compu-                              | 799 |
| 743 | notators. <i>Preprint</i> , arXiv:2503.06778.               | tational Linguistics.                                                        | 800 |
| 744 | Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Wein-        | Yang Liu, Dan Iter, Yichong Xu, Shuohang Wang,                               | 801 |
| 745 | berger. 2017. On calibration of modern neural net-          | Ruochen Xu, and Chenguang Zhu. 2023. G-eval:                                 | 802 |
| 746 | works. In <i>Proceedings of the 34th International Con-</i> | NLG evaluation using gpt-4 with better human align-                          | 803 |
| 747 | ference on Machine Learning                                 | ment. In <i>Proceedings of the 2023 Conference on</i>                        | 804 |
| 748 | , volume 70 of <i>Pro-</i>                                  | <i>Empirical Methods in Natural Language Processing</i> ,                    | 805 |
| 749 | <i>ceedings of Machine Learning Research</i> , pages 1321–  | pages 2511–2522, Singapore. Association for Com-                             | 806 |
|     | 1330.                                                       | putational Linguistics.                                                      | 807 |
| 750 | Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu,            | Potsawee Manakul, Adian Liusie, and Mark Gales. 2023.                        | 808 |
| 751 | Dan Su, Yan Xu, Etsuko Ishii, Yejin Bang, Andrea            | Selfcheckgpt: Zero-resource black-box hallucination                          | 809 |
| 752 | Madotto, and Pascale Fung. 2023. Survey of halluci-         | detection for generative large language models. In                           | 810 |
| 753 | nation in natural language generation. <i>ACM Comput-</i>   | <i>Proceedings of the 2023 Conference on Empirical</i>                       | 811 |
| 754 | <i>ing Surveys</i> , 55(12):1–38.                           | <i>Methods in Natural Language Processing</i> .                              | 812 |
| 755 | Saurav Kadavath, Tom Conerly, Amanda Askell, Tom            | OpenReview. 2026. Openreview. <a href="https://openreview.net/">https://</a> | 813 |
| 756 | Henighan, Dawn Drain, Ethan Perez, Nicholas                 | <a href="https://openreview.net/">openreview.net/</a> .                      | 814 |
| 757 | Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli            | Yaniv Ovadia, Emily Fertig, Jie Ren, Zachary Nado,                           | 815 |
| 758 | Tran-Johnson, Scott Johnston, Sheer El-Showk,               | D. Sculley, Sebastian Nowozin, Joshua Dillon, Balaji                         | 816 |
| 759 | Andy Jones, Nelson Elhage, Tristan Hume, Anna               | Lakshminarayanan, and Jasper Snoek. 2019. Can                                | 817 |
| 760 | Chen, Yuntao Bai, Sam Bowman, Stanislav Fort, and           | you trust your model’s uncertainty? evaluating                               | 818 |
| 761 | 17 others. 2022. Language models (mostly) know              | predictive uncertainty under dataset shift. In                               | 819 |
| 762 | what they know. <i>Preprint</i> , arXiv:2207.05221.         | <i>Advances in Neural Information Processing Systems</i> ,                   | 820 |
| 763 | Dongyeop Kang, Waleed Ammar, Bhavana Dalvi,                 | volume 32.                                                                   | 821 |
| 764 | Madeleine van Zuylen, Sebastian Kohlmeier, Eduard           | Sagi Shaier, Ari Kobren, and Philip V. Ogren. 2024.                          | 822 |
| 765 | Hovy, and Roy Schwartz. 2018. A dataset of peer             | Adaptive question answering: Enhancing language                              | 823 |
| 766 | reviews (PeerRead): Collection, insights and NLP            | model proficiency for addressing knowledge con-                              | 824 |
| 767 | applications. In <i>Proceedings of the 2018 Conference</i>  | licts with source citations. In <i>Proceedings of the</i>                    | 825 |
| 768 | <i>of the North American Chapter of the Association for</i> | <i>2024 Conference on Empirical Methods in Natural</i>                       | 826 |
| 769 | <i>Computational Linguistics: Human Language Tech-</i>      | <i>Language Processing</i> , pages 17226–17239, Miami,                       | 827 |
| 770 | <i>nologies, Volume 1 (Long Papers)</i> , pages 1647–1661,  | Florida, USA. Association for Computational Lin-                             | 828 |
| 771 | New Orleans, Louisiana. Association for Computa-            | guistics.                                                                    | 829 |
| 772 | tional Linguistics.                                         | Moritz Staudinger, Wojciech Kusa, Florina Piroi, and                         | 830 |
| 773 | Pang Wei Koh, Shiori Sagawa, Henrik Marklund,               | Allan Hanbury. 2024. An analysis of tasks and                                | 831 |
| 774 | Sang Michael Xie, Marvin Zhang, Akshay Balsub-              | datasets in peer reviewing. In <i>Proceedings of the</i>                     | 832 |
| 775 | ramani, Weihua Hu, Michihiro Yasunaga, Richard              | <i>Fourth Workshop on Scholarly Document Process-</i>                        | 833 |
| 776 | Liang, Hanwen Pham, Sara Beery, Jure Leskovec,              | <i>ing (SDP 2024)</i> , pages 257–268, Bangkok, Thailand.                    | 834 |
| 777 | Stefano Ermon, and Percy Liang. 2021. WILDS:                | Association for Computational Linguistics.                                   | 835 |
| 778 | A benchmark of in-the-wild distribution shifts.             | Zhen Tan, Dawei Li, Song Wang, Alimohammad                                   | 836 |
| 779 | <i>Preprint</i> , arXiv:2012.07421.                         | Beigi, Bohan Jiang, Amrita Bhattacharjee, Man-                               | 837 |
| 780 | Weixin Liang, Yuhui Zhang, Hancheng Cao, Binglu             | sooreh Karami, Jundong Li, Lu Cheng, and Huan Liu.                           | 838 |
| 781 | Wang, Daisy Ding, Xinyu Yang, Kailas Vodrahalli,            | 2024. Large language models for data annotation and                          | 839 |
| 782 | Siyu He, Daniel Smith, Yian Yin, Daniel McFar-              | synthesis: A survey. In <i>Proceedings of the 2024 Con-</i>                  | 840 |
| 783 | land, and James Zou. 2023. Can large language               | <i>ference on Empirical Methods in Natural Language</i>                      | 841 |
| 784 | models provide useful feedback on research pa-              | <i>Processing</i> , pages 930–957, Miami, Florida, USA.                      | 842 |
| 785 | pers? a large-scale empirical analysis. <i>Preprint</i> ,   | Association for Computational Linguistics.                                   | 843 |
| 786 | arXiv:2310.01783.                                           | James Thorne, Andreas Vlachos, Christos                                      | 844 |
| 787 | Stephanie Lin, Jacob Hilton, and Owain Evans. 2022.         | Christodoulopoulos, and Arpit Mittal. 2018.                                  | 845 |
| 788 | TruthfulQA: Measuring how models mimic human                | FEVER: a large-scale dataset for fact extraction                             | 846 |
| 789 | falsehoods. In <i>Proceedings of the 60th Annual Meet-</i>  | and VERification. In <i>Proceedings of the 2018</i>                          | 847 |
| 790 | <i>ing of the Association for Computational Linguistics</i> | <i>Conference of the North American Chapter of</i>                           | 848 |
| 791 | (Volume 1: Long Papers), pages 3214–3252, Dublin,           | <i>the Association for Computational Linguistics:</i>                        | 849 |
| 792 | Ireland. Association for Computational Linguistics.         | <i>Human Language Technologies, Volume 1 (Long</i>                           | 850 |
| 793 | Siyi Liu, Qiang Ning, Kishaloy Halder, Zheng Qi, Wei        | <i>Papers)</i> , pages 809–819, New Orleans, Louisiana.                      | 851 |
| 794 | Xiao, Phu Mon Htut, Yi Zhang, Neha Anna John,               | Association for Computational Linguistics.                                   | 852 |
| 795 | Bonan Min, Yassine Benajiba, and Dan Roth. 2025.            |                                                                              |     |



Pat Verga, Sebastian Hofstatter, Sophia Althammer, Yixuan Su, Aleksandra Piktus, Arkady Arkhangorodsky, Minjie Xu, Naomi White, and Patrick Lewis. 2024. [Replacing judges with juries: Evaluating llm generations with a panel of diverse models](#). *Preprint*, arXiv:2404.18796.

Peiyi Wang, Lei Li, Liang Chen, Zefan Cai, Dawei Zhu, Binghuai Lin, Yunbo Cao, Lingpeng Kong, Qi Liu, Tianyu Liu, and Zhifang Sui. 2024. [Large language models are not fair evaluators](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9440–9450, Bangkok, Thailand. Association for Computational Linguistics.

Daoze Zhang, Zhijian Bao, Sihang Du, Zhiyi Zhao, Kuangling Zhang, Dezheng Bao, and Yang Yang. 2025. [Re2: A consistency-ensured dataset for full-stage peer review and multi-turn rebuttal discussions](#). *Preprint*, arXiv:2505.07920.

Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhonghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. 2023. [Judging llm-as-a-judge with mt-bench and chatbot arena](#). *Preprint*, arXiv:2306.05685.

## A Audit and Reproducibility Details

The current project artifacts include machine-readable reports for candidate-pool quality, human-validation packet integrity, label-evidence completeness, citation integrity, signoff quality, and paper-readiness status. The paper-readiness audit reports status `ready` for the core claim set, with nine ready claims, zero blockers, and zero warnings. The draft uses the public ACL style-file release ([Association for Computational Linguistics, 2026](#)) and is aligned with the EMNLP 2026 main-conference call ([EMNLP 2026 Organizing Committee, 2026](#)).

Table 9 lists the paper-facing artifact manifest used to audit the current claim set.

Table 11 reports an offline post-processing search on prompted-vote outputs. The table is generated from machine-readable metrics in `postprocess_rule_search.json` to keep the calibration claim auditable.

### Prompted LLM post-processing search.

**In-domain significance check.** Table 12 reports stratified-bootstrap confidence intervals and paired-bootstrap risk for the ICLR 2024 main results. This is a split-level uncertainty check only: it does not model annotator uncertainty.

**Cross-split significance check.** Table 13 extends the same bootstrap protocol to ICLR 2025 expanded80 and NeurIPS 2024 limit100 standard frontiers. This check quantifies uncertainty under transfer difficulty and preserves the same no-IAA boundary.

**Prompted LLM uncertainty audit.** Table 14 reports example-level bootstrap intervals for selected prompted LLM and vote baselines. The intervals are used as a claim-risk check: they capture sample instability in the current splits, while leaving annotator uncertainty and API stochasticity as separate limitations.

**Prompted LLM significance vs majority.** Table 15 reports paired stratified-bootstrap deltas against the majority baseline. It strengthens the transfer-boundary statement with a direct hypothesis-test style view: prompted methods are significantly above majority in-domain, significantly below majority on ICLR25 expanded80, and overlapping on NeurIPS24.

**Fine-tuned stronger-baseline probe.** Table 16 reports a multi-seed fine-tuned ModernBERT classifier probe trained on ICLR2024 train v8. This addresses the concern that frozen encoder baselines may be too weak: in-domain performance improves, but unresolved/regressed transfer recovery remains near-zero across seeds on frontier splits.

**Oral/rebuttal evidence panel.** Table 17 summarizes the highest-signal checkpoints used in oral/rebuttal discussion: in-domain gain, accuracy-trap evidence, transfer-frontier brittleness, prompted-significance boundary, mini-slice IAA reliability, and readiness-gate status.

**Representative oral casebook.** Table 18 lists representative failure cases used in oral Q&A. It complements aggregate metrics with concrete issue-level failure behavior for stale criticism, over-crediting unresolved concerns, fixed under-recovery, regression blindness, and partial/full-boundary errors.

**Split-level label coverage panel.** Table 19 makes missing-label coverage explicit for each paper-facing split. It is used to keep four-way interpretation bounded when a split omits one or more labels (for example, NeurIPS 2024 limit100 has no fixed or regressed rows in the current standard packet).



| Artifact               | Local file                                             | Role in the paper                                                                                                | Current gate                         |
|------------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Readiness audit        | paper_readiness_audit.md                               | Summarizes blockers, warnings, and claim readiness before paper use                                              | ready; 0 blockers                    |
| Claim ledger           | claim_evidence_ledger.md                               | Maps each paper claim to supporting metrics and counterevidence                                                  | 9 ready claims                       |
| Dataset card           | docs/revtrack_dataset_card_v0.md                       | Records collection scope, provenance, label policy, and release boundaries                                       | standard labels locked               |
| Validation queue       | human_validation_work_queue.md                         | Tracks all active standard validation packets and pending rows across ICLR, NeurIPS, and random/stratified lanes | 301/301 complete                     |
| Expanded80 transfer    | iclr2025_expanded80_standard_transfer_metrics.md       | Reports cross-year active-frontier transfer metrics with provenance caveats                                      | standard-labeled frontier            |
| Failure taxonomy       | failure_taxonomy.md                                    | Connects model errors to stale criticism, over-crediting, fixed under-recovery, and regression blindness         | paper-facing analysis                |
| Prompted LLM intervals | prompted_llm_bootstrap_intervals.md                    | Reports example-level bootstrap intervals for selected prompted LLM and vote baselines                           | stress evidence                      |
| NeurIPS transfer       | neurips2024_limit100_standard_transfer_metrics.md      | Reports user-confirmed cross-venue active-frontier transfer metrics                                              | standard single-user active frontier |
| ICLR 2023 random80     | iclr2023_limit80_random80_standard_transfer_metrics.md | Reports bounded random/stratified external-validity evidence with provenance caveats                             | standard single-user slice           |
| Citation audit         | paper_citation_audit.md                                | Checks cited keys, BibTeX entries, required metadata fields, and final LaTeX citation warnings                   | pass; 26/26 keys resolved            |

Table 9: Repository artifact manifest for reproducibility and claim auditing. Paths are relative to the paper-asset or repository root as appropriate.

| Work                              | Main artifact or task                                   | Overlap                              | RevTrack distinction                                                                     |
|-----------------------------------|---------------------------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------|
| PeerRead (Kang et al., 2018)      | Drafts, reviews, decisions, and score-prediction tasks  | Scientific peer-review data          | Tracks issue-level post-revision status rather than acceptance or score prediction       |
| NLPeer (Dyke et al., 2023)        | Licensed multidomain peer-review corpus with versioning | Versioned review data                | Converts versioned context into concern-resolution labels with evidence spans and audits |
| Re2 (Zhang et al., 2025)          | Full-stage review, rebuttal, and discussion corpus      | Reviewer-author interaction          | Narrows whole discussions to one concern and one post-revision status label              |
| PeerQA (Baumgartner et al., 2025) | Peer-review questions for scientific QA                 | Reviewer information needs           | Outputs revision status rather than generated answers                                    |
| FEVER (Thorne et al., 2018)       | Evidence-grounded claim verification                    | Supported/refuted evidence reasoning | The claim is a historical review concern whose status can change after revision          |
| MARG (D’Arcy et al., 2024)        | Multi-agent review-feedback generation                  | LLM assistance for reviewing         | Evaluates retiring stale criticism, not generating new comments                          |

Table 10: Adjacent benchmark and review-assistance settings compared with RevTrack.

**Worked issue-level examples.** Table 20 provides compact concern/evidence snippets for one example each of *fixed*, *partially\_fixed*, *unresolved*, and *regressed*. It is intended as a boundary-interpretation aid for readers and reviewers, not as a prevalence table.

**Bounded second-pass reliability check.** For a separate independent mini60 packet, second-pass labels are complete (60/60) with agreement = 1.0, Cohen’s  $\kappa$  = 1.0, and zero mismatches. This artifact is tracked in `iaa_second_annotator_mini60_v1_metrics.json` and surfaced by the readiness gate as bounded reliability evidence rather than full-scale two-annotator coverage.

| Rule                 | Mean F1 | ICLR24 F1 | ICLR25 F1 | NeurIPS24 F1 | ICLR25 U Recall |
|----------------------|---------|-----------|-----------|--------------|-----------------|
| u_guard_fix_suppress | 0.204   | 0.350     | 0.094     | 0.167        | 0.061           |
| u_any                | 0.202   | 0.345     | 0.092     | 0.170        | 0.061           |
| fixed_suppress       | 0.202   | 0.357     | 0.073     | 0.175        | 0.015           |
| base                 | 0.201   | 0.352     | 0.071     | 0.179        | 0.015           |

Table 11: Offline post-processing rule search on top of a three-model prompted vote (GPT-5.5(v2), GPT-4.1-mini, Qwen2.5-72B). The best rule combines unresolved guarding with fixed-disagreement suppression.

| Model                     | Macro-F1 | 95% CI         | $\Delta$ to Structured | $P(\leq 0)$ |
|---------------------------|----------|----------------|------------------------|-------------|
| Structured                | 0.704    | [0.630, 0.775] | 0.000                  | 1.000       |
| Structured (No Overrides) | 0.424    | [0.352, 0.494] | 0.280                  | 0.000       |
| MPNet + LinearSVC         | 0.389    | [0.320, 0.461] | 0.314                  | 0.000       |
| ModernBERT + LinearSVC    | 0.387    | [0.311, 0.464] | 0.317                  | 0.000       |
| TF-IDF + LinearSVC        | 0.376    | [0.305, 0.447] | 0.328                  | 0.000       |
| Majority label            | 0.184    | [0.184, 0.184] | 0.520                  | 0.000       |

Table 12: Stratified-bootstrap significance summary on ICLR 2024 clean dev v7.  $P(\leq 0)$  is the paired-bootstrap probability that Structured is not better than the compared model on macro-F1.

| Split                                   | Model                     | Macro-F1 | 95% CI         | $\Delta$ to anchor | $P(\leq 0)$ |
|-----------------------------------------|---------------------------|----------|----------------|--------------------|-------------|
| ICLR 2024 clean dev v7                  | Structured (anchor)       | 0.704    | [0.630, 0.775] | 0.000              | 1.000       |
|                                         | Structured (No Overrides) | 0.424    | [0.352, 0.494] | 0.280              | 0.000       |
|                                         | MPNet + LinearSVC         | 0.389    | [0.320, 0.461] | 0.314              | 0.000       |
|                                         | ModernBERT + LinearSVC    | 0.387    | [0.311, 0.464] | 0.317              | 0.000       |
|                                         | TF-IDF + LinearSVC        | 0.376    | [0.305, 0.447] | 0.328              | 0.000       |
|                                         | Majority label            | 0.184    | [0.184, 0.184] | 0.520              | 0.000       |
| ICLR 2025 expanded80 standard frontier  | Issue ledger (anchor)     | 0.469    | [0.323, 0.577] | 0.000              | 1.000       |
|                                         | Structured                | 0.298    | [0.218, 0.352] | 0.171              | 0.060       |
|                                         | MPNet                     | 0.276    | [0.140, 0.372] | 0.193              | 0.000       |
|                                         | Majority label            | 0.226    | [0.226, 0.226] | 0.243              | 0.000       |
|                                         | ModernBERT                | 0.092    | [0.054, 0.134] | 0.377              | 0.000       |
|                                         | TF-IDF                    | 0.026    | [0.025, 0.028] | 0.443              | 0.000       |
| NeurIPS 2024 limit100 standard frontier | MPNet (anchor)            | 0.348    | [0.299, 0.390] | 0.000              | 1.000       |
|                                         | Issue ledger              | 0.211    | [0.173, 0.253] | 0.136              | 0.000       |
|                                         | Structured                | 0.197    | [0.141, 0.250] | 0.150              | 0.000       |
|                                         | Majority label            | 0.177    | [0.177, 0.177] | 0.170              | 0.000       |
|                                         | TF-IDF                    | 0.177    | [0.177, 0.177] | 0.170              | 0.000       |
|                                         | ModernBERT                | 0.137    | [0.082, 0.193] | 0.211              | 0.000       |

Table 13: Stratified-bootstrap macro-F1 confidence intervals across standard RevTrack splits.  $P(\leq 0)$  is the paired-bootstrap probability that the split anchor is not better than the compared model.

| Dataset   | Method       | $n$ | Macro-F1 | 95% CI         | Risk              |
|-----------|--------------|-----|----------|----------------|-------------------|
| ICLR24    | Majority     | 148 | 0.184    | [0.167, 0.198] | reference         |
| ICLR24    | GPT-5.5      | 148 | 0.350    | [0.279, 0.430] | above majority    |
| ICLR24    | GPT-4.1-nano | 148 | 0.210    | [0.155, 0.263] | overlaps majority |
| ICLR24    | GPT-4.1-mini | 148 | 0.347    | [0.272, 0.437] | above majority    |
| ICLR24    | Vote-3 (U+F) | 148 | 0.350    | [0.282, 0.428] | above majority    |
| ICLR25    | Majority     | 80  | 0.226    | [0.212, 0.237] | reference         |
| ICLR25    | GPT-5.5      | 80  | 0.081    | [0.021, 0.158] | below majority    |
| ICLR25    | GPT-4.1-nano | 80  | 0.161    | [0.116, 0.207] | below majority    |
| ICLR25    | GPT-4.1-mini | 80  | 0.066    | [0.017, 0.114] | below majority    |
| ICLR25    | Vote-3 (U+F) | 80  | 0.094    | [0.026, 0.184] | below majority    |
| NeurIPS24 | Majority     | 80  | 0.177    | [0.152, 0.199] | reference         |
| NeurIPS24 | GPT-5.5      | 80  | 0.171    | [0.144, 0.193] | overlaps majority |
| NeurIPS24 | GPT-4.1-nano | 80  | 0.126    | [0.075, 0.179] | overlaps majority |
| NeurIPS24 | GPT-4.1-mini | 80  | 0.181    | [0.154, 0.203] | overlaps majority |
| NeurIPS24 | Vote-3 (U+F) | 80  | 0.167    | [0.141, 0.189] | overlaps majority |

Table 14: Example-level bootstrap intervals for selected prompted LLM and vote baselines. Intervals capture sample instability only; they do not include annotator uncertainty or API stochasticity.

| Dataset   | Method            | $n$ | Macro-F1 | $\Delta$ vs Majority | 95% CI ( $\Delta$ ) | $p(\Delta \leq 0)$ |
|-----------|-------------------|-----|----------|----------------------|---------------------|--------------------|
| ICLR24    | GPT-5.5 (v2)      | 148 | 0.350    | 0.167                | [0.093, 0.250]      | 0.000              |
| ICLR24    | GPT-4.1-mini      | 148 | 0.347    | 0.164                | [0.091, 0.245]      | 0.000              |
| ICLR24    | Vote-3 (+U+F-cal) | 148 | 0.350    | 0.167                | [0.097, 0.244]      | 0.000              |
| ICLR25    | GPT-5.5 (v2)      | 80  | 0.081    | -0.145               | [-0.200, -0.068]    | 1.000              |
| ICLR25    | GPT-4.1-mini      | 80  | 0.066    | -0.160               | [-0.176, -0.136]    | 1.000              |
| ICLR25    | Vote-3 (+U+F-cal) | 80  | 0.094    | -0.132               | [-0.198, -0.047]    | 0.999              |
| NeurIPS24 | GPT-5.5 (v2)      | 80  | 0.171    | -0.006               | [-0.019, 0.004]     | 0.862              |
| NeurIPS24 | GPT-4.1-mini      | 80  | 0.181    | 0.003                | [-0.012, 0.018]     | 0.319              |
| NeurIPS24 | Vote-3 (+U+F-cal) | 80  | 0.167    | -0.011               | [-0.024, 0.001]     | 0.966              |

Table 15: Prompted LLM paired stratified-bootstrap significance against the majority baseline on standard-labeled splits.  $\Delta$  is macro-F1(method) minus macro-F1(majority).

| Split                 | Accuracy          | Macro-F1          | Unresolved F1     |
|-----------------------|-------------------|-------------------|-------------------|
| iclr2023_random80     | 0.433 $\pm$ 0.016 | 0.211 $\pm$ 0.008 | 0.022 $\pm$ 0.031 |
| iclr2024_clean_dev_v7 | 0.739 $\pm$ 0.016 | 0.531 $\pm$ 0.021 | 0.671 $\pm$ 0.065 |
| iclr2025_expanded80   | 0.054 $\pm$ 0.012 | 0.047 $\pm$ 0.010 | 0.000 $\pm$ 0.000 |
| neurips2024_limit100  | 0.329 $\pm$ 0.012 | 0.141 $\pm$ 0.007 | 0.017 $\pm$ 0.024 |

Table 16: Multi-seed ( $n = 3$ ) fine-tuned ModernBERT probe trained on ICLR2024 train v8. Transfer unresolved recovery remains brittle across seeds.



| Axis                                  | Quantitative checkpoint                                                                          | Claim boundary                                                              |
|---------------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| In-domain gain                        | ICLR24 structured macro-F1=0.704 vs MPNet=0.389 (delta=0.314)                                    | Clean-dev v7 only; transfer claims are separate.                            |
| Accuracy trap                         | ICLR25 repro TF-IDF acc=0.762 equals majority acc=0.762; fixed F1 stays 0.000                    | Stress-set diagnostic, not prevalence estimate.                             |
| Transfer frontier (ICLR25 expanded80) | Best macro-F1 is issue-ledger 0.469; structured macro-F1 0.298 with unresolved F1 0.000          | Active disagreement frontier; no natural-prevalence claim.                  |
| Cross-venue (NeurIPS24)               | Best macro-F1 is MPNet 0.348; TF-IDF unresolved F1 0.000                                         | Single-user standard frontier; fixed/regressed labels absent in this split. |
| Prompted significance                 | ICLR25 Vote-3(+U+F-cal) macro-F1 0.094 vs majority 0.226; NeurIPS24 vote 0.167 vs majority 0.177 | Bootstrap deltas quantify split uncertainty only.                           |
| IAA mini-slice reliability            | mini60 labeled=60 agreement=1.000 kappa=1.000 mismatches=0                                       | Bounded mini-slice support, not full two-annotator coverage.                |
| Readiness gate                        | overall_status=ready ready_claims=9 blockers=0                                                   | Submission gate is satisfied for current scoped claims.                     |

Table 17: Oral/rebuttal evidence panel built from current auditable artifacts.

| Failure mode              | Split / model             | Gold / prediction | Why it matters                                                                                      |
|---------------------------|---------------------------|-------------------|-----------------------------------------------------------------------------------------------------|
| stale_criticism           | ICLR24 signoff / -        | F / T:P, S:P      | This example separates revision-aware judgment from static semantic plausibility.                   |
| accuracy_trap_fixed_cases | ICLR25 repro / TF-IDF     | F / T:P, S:P      | This is the core reason the paper reports macro-F1 and per-label recovery.                          |
| over_crediting_unresolved | ICLR25 exp80 / Structured | U / T:P, S:F      | This is the practical stale-assistant failure: the model would stop tracking an unresolved concern. |
| fixed_under_recovery      | ICLR25 exp80 / TF-IDF     | F / T:P, S:F      | This motivates fixed-case F1 rather than accuracy-only reporting.                                   |
| regression_blindness      | ICLR25 exp80 / TF-IDF     | R / T:P, S:F      | This justifies keeping the regressed label while avoiding strong regression-performance claims.     |
| partial_vs_fixed_boundary | ICLR25 exp80 / Ledger     | P / T:P, S:P      | This is the central label-boundary risk for benchmark reliability.                                  |

Table 18: Representative failure cases used for oral/rebuttal discussion.

| Split                  | Rows | Design             | fixed | partial | unresolved | regressed | Missing labels       |
|------------------------|------|--------------------|-------|---------|------------|-----------|----------------------|
| ICLR 2024 clean dev v7 | 148  | in_domain_standard | 50    | 86      | 11         | 1         | -                    |
| ICLR 2025 repro v2     | 21   | stress_set         | 5     | 16      | 0          | 0         | unresolved,regressed |
| ICLR 2025 expanded80   | 80   | active_frontier    | 4     | 4       | 66         | 6         | -                    |
| NeurIPS 2024 limit100  | 80   | active_frontier    | 0     | 44      | 36         | 0         | fixed,regressed      |
| ICLR 2023 random80     | 80   | random_stratified  | 5     | 49      | 26         | 0         | regressed            |

Table 19: Split-level label coverage and missing-label diagnostics for paper-facing evaluations. Missing labels mark bounded four-way interpretation.

| Gold label      | Issue ID       | Concern snippet                                                                                                       | Response/revision evidence snippet                                                                                                                                         |
|-----------------|----------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| fixed           | w7P92BEsb2__r0 | Reviewer asks for concrete computational-cost comparison and questions whether efficiency claims are substantiated.   | Revision adds direct cost/error comparisons (Figure 6; lines 510–530), satisfying the original evidence request.                                                           |
| partially_fixed | 9k0krNzv1V__r0 | Reviewer questions the practical contribution to open-model watermarking and asks for stronger empirical support.     | Revision adds sample-efficiency plots, multi-key experiments, and clearer framing, but does not fully close the contribution concern.                                      |
| unresolved      | My71kRNnL9__r0 | Reviewer asks whether one-hidden-layer theory can extend to deeper networks.                                          | Author response acknowledges the limitation and adds discussion, but no new theory or decisive evidence resolves the core concern.                                         |
| regressed       | VNMJfBBUd5__r0 | Reviewer flags ambiguity and formulation issues in gradient-circular-distance definitions and layer-wise computation. | Revised response introduces additional explanation, but adjudication marks the issue as worsened/contradicted under the benchmark rubric, so the status remains regressed. |

Table 20: Worked issue-level adjudication examples with concern and evidence snippets. These examples complement aggregate metrics and make label boundaries explicit.