


CH5 Cross Compilation Toolchain

Cross Compilation Tool-chain



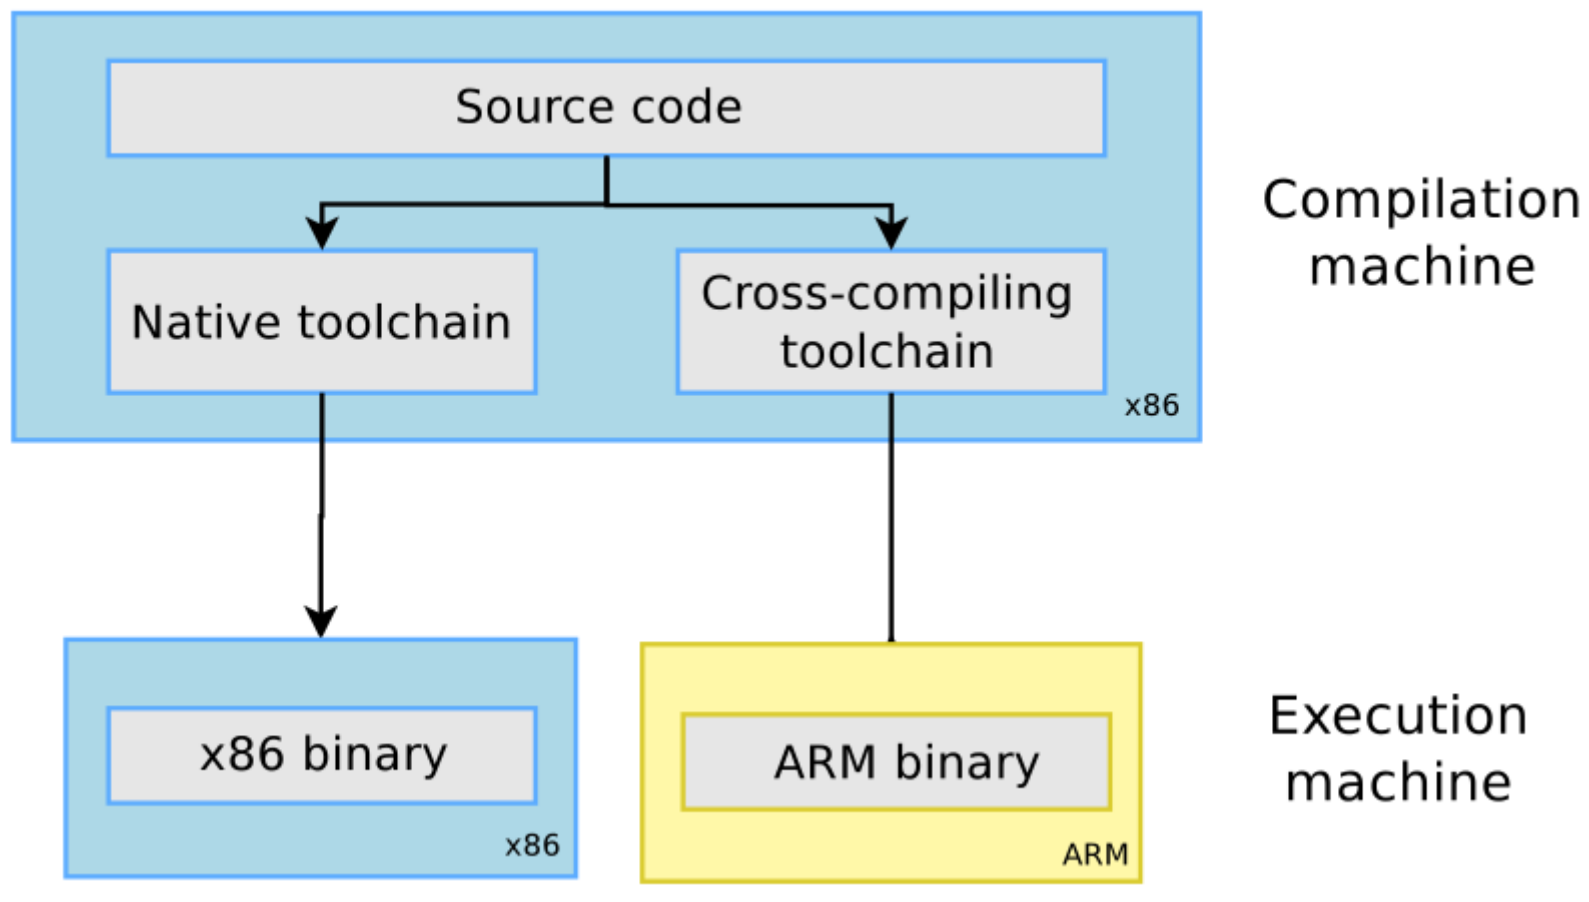

GCC Components

- The GNU C Compiler
- The GNU Compiler Collection

Binutils

Kernel head

C/C++ libraries

GCC compiler

GDB debugger

Binutils

Binutils

- **as** : the assembler, that generates binary code from assembler source code
- **ld** : the linker
- **ar, ranlib** : to generate .a archives, used for libraries
- **objdump, readelf, size, nm, strings** : to inspect binaries
- **strip** : to strip useless parts of binaries in order to reduce their size

Kernel head

- The C library and compiled programs needs to interact with the kernel
- Compiling the C library requires kernel headers, and many applications also require them
- The kernel to user space ABI is backward compatible



GCC

➤ GCC originally stood for the "GNU C Compiler."

➤ GNU Compiler Collection

- C, C++, Ada, Objective-C, Fortran, JAVA ...

➤ <http://gcc.gnu.org/>

GCC flag (1)

 arm-linux-gnueabihf-gcc --help

- -c : Compile and assemble, but do not link
- -o <file> : Place the output into <file>
- -shared : Create a shared library
- -g : add debug information
- -O : sets the compiler's optimization level

GCC flag (2)

 arm-linux-gnueabi-gcc -help

- -Wall : enables all compiler's warning messages
- -D : defines a macro to be used by the preprocessor
- -I : adds include directory of header files
- -L,-l :
 - -L looks in directory for library files
 - -l links with a library file

C library

- The C library is an essential component of a Linux system
- Several C libraries are available:
 - **glibc, uClibc, eglibc, dietlibc, newlib**
- The choice of the C library must be made at the time of the cross-compiling toolchain generation, as the GCC compiler is compiled against a specific C library.



Floating point support

- For processors having a **floating point unit**, the toolchain should generate hard float code, in order to use the floating point instructions directly

- For processors without a floating point unit
 - Generate hard float code and rely on the kernel to emulate the floating point instructions
 - Generate soft float code, so that instead of generating floating point instructions, calls to a user space library are generated

Floating point support

<https://www.linaro.org/downloads/>

Latest Linux Targeted Binary Toolchain Releases

arm-linux-gnueabi	32-bit Armv7 Cortex-A, hard-float , little-endian
armv8l-linux-gnueabi	32-bit Armv8 Cortex-A, hard-float , little-endian
aarch64-linux-gnu	64-bit Armv8 Cortex-A, little-endian

RockPi4 Toolchain

<https://releases.linaro.org/components/toolchain/binaries/7.3-2018.05/aarch64-linux-gnu/>

Obtain a Toolchain

▶ Building a cross-compiling toolchain by ourself

- Crosstool-NG
- <http://crosstool-ng.org/#introduction>

▶ Pre-build toolchain

- Linaro - <https://www.linaro.org/downloads/>
- By Linux distribution -
 - `sudo apt-get install gcc-arm-linux-gnueabi`
- BSP
- CodeSourcery



Installing and using Toolchain

➤ Add the path to toolchain binaries in your PATH: export

- [CMD] `PATH=${TOOLCHAIN_PATH}/bin/:$PATH`

➤ Compile your applications


- [CMD] `${PREFIX}-gcc -o testme testme.c`

➤ **PREFIX**

- depends on the toolchain configuration

Compile, Assembler, Linker

Software Development Tools Overview

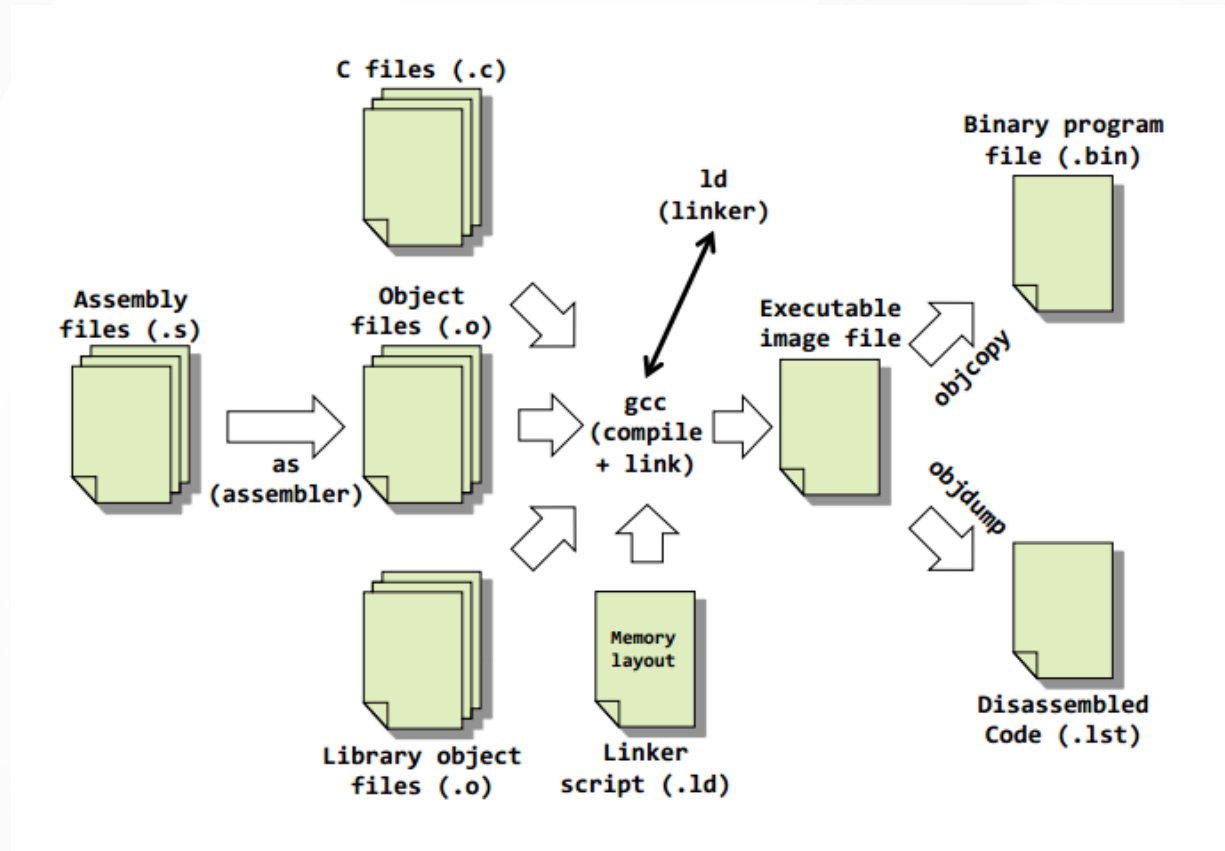

Tools Descriptions

➤ Assembler

➤ Translates Assembly Language Source Files Into Machine Language Object modules

➤ C/C++ compiler

➤ produces ARM machine code object modules

➤ Linker

➤ Combines object files into a single executable object module

Create Linux Library

Linux Library

» Static Libraries

- » statically aware

» Dynamically Linked "Shared Object" Libraries

- » Dynamically linked at run time

Static Libraries

➤ static_lib_name.a

➤ Create static library with **ar**

- **ar --help**
- **ar -cvq libctest.a test1.o test2.o**

➤ Compile

- gcc -o test main.c **libctest.a**
- gcc -o test main.c -L/path/to/library-directory **-lctest**

Dynamically Linked "Shared Object" Libraries

➤ Dynamic_lib_name.so

➤ Create share library

- gcc -share -Wl,-soname,soname -o libname filelist liblist
- gcc -shared -Wl,-soname,libctest.so.1 -o libctest.so.1.0 test1.o test2.o
- ln -s libctest.so.1.0 libctest.so.1
- ln -s libctest.so.1 libctest.so

➤ gcc -o test main.c -L/library_PATH/ -lctest

➤ export LD_LIBRARY_PATH=LIB_PATH:\$LD_LIBRARY_PATH

➤ ./test

Dynamically Linked "Shared Object" Libraries

» ldconfig

» configure dynamic linker run-time bindings

» /etc/ld.so.conf

- 1. `$ vim /etc/ld.so.conf`
 - and add LIB in path `/usr/local`
- 2. `#ldconfig /usr/local/`
 - `/etc/ld.so.cache`

What and Need soname ?

Real-name	libctest.so.1.0		
Soname	libctest.so.1	→	libctest.so.1.0
Linkname	libctest.so	→	libctest.so.1

Modify

Real-name	libctest.so.1.1		
Soname	libctest.so.1	→	libctest.so.1.1
Linkname	libctest.so	→	libctest.so.1

Real-name	libctest.so.1.5		
Soname	libctest.so.1	→	libctest.so.1.5
Linkname	libctest.so	→	libctest.so.1

main.c no need to re-compile

```
gcc -o test main.c -L/library_PATH/ -lctest
```