



fivefold | ten separate BH families, three models in each


binary MeanLogScore

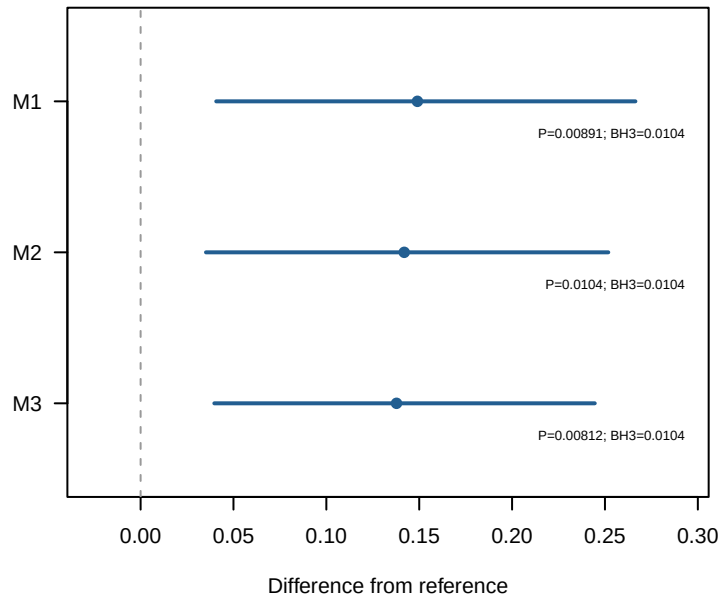


joint_bb MeanLogScore

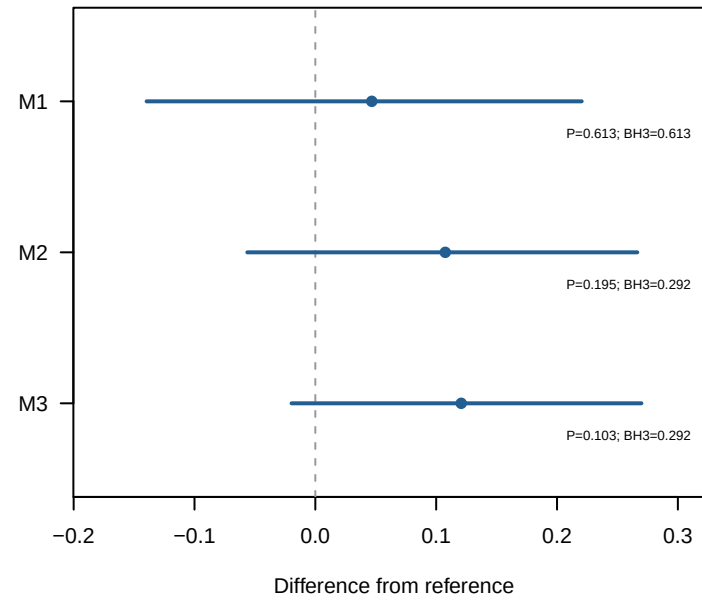


binary AUC

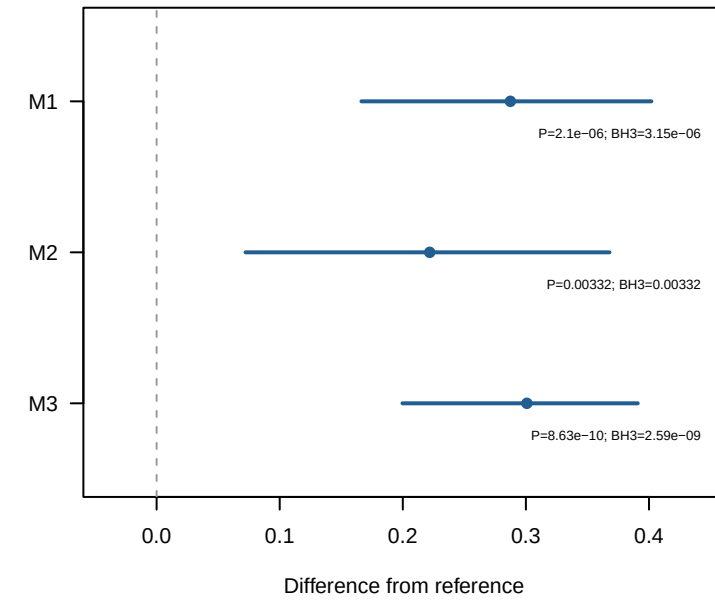

joint_bb MAE

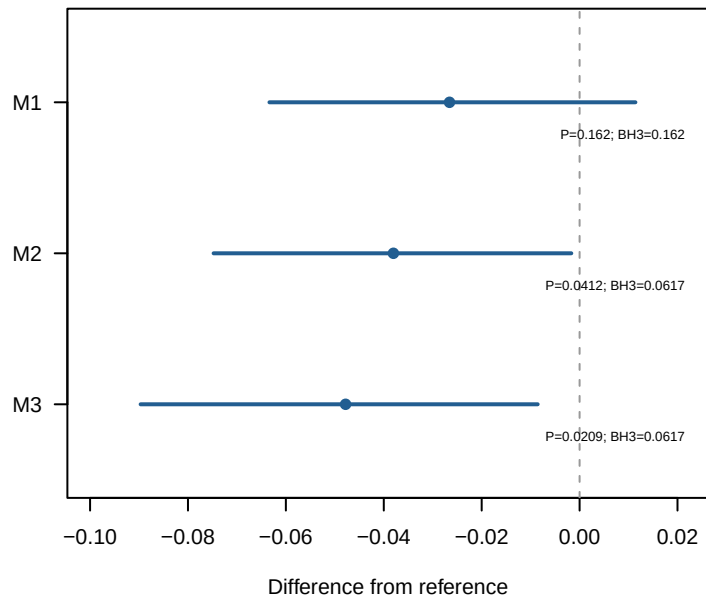

joint_bb RMSE

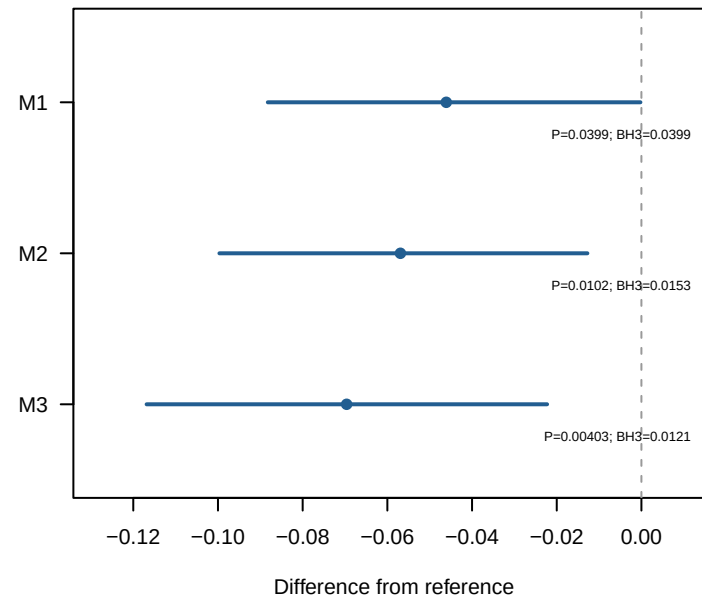

References: AUC 0.5; other metrics Null


MeanLogScore: positive favors the model
MAE/RMSE: negative favors the model

Fixed-OOF conditional approximations. Intervals are unadjusted 95% bootstrap percentiles.


BH3 does not account for all earlier development/selection. Do not infer usefulness from P alone.

tenfold | ten separate BH families, three models in each


binary MeanLogScore

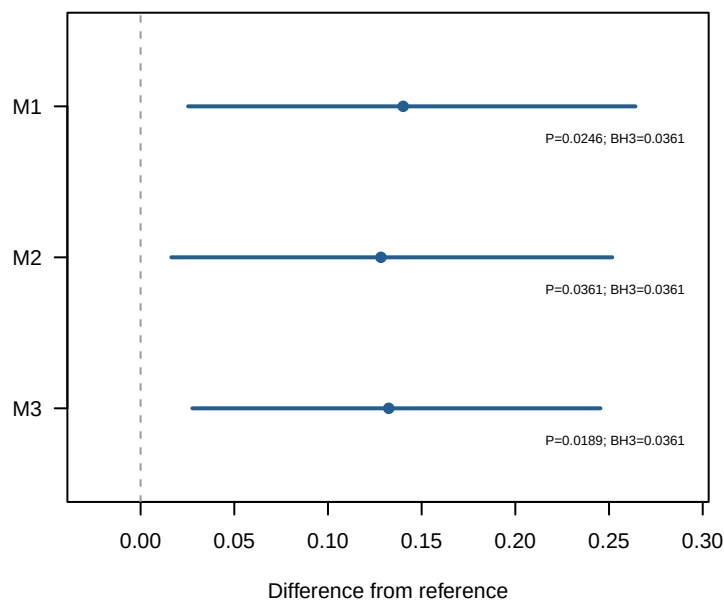


joint_bb MeanLogScore

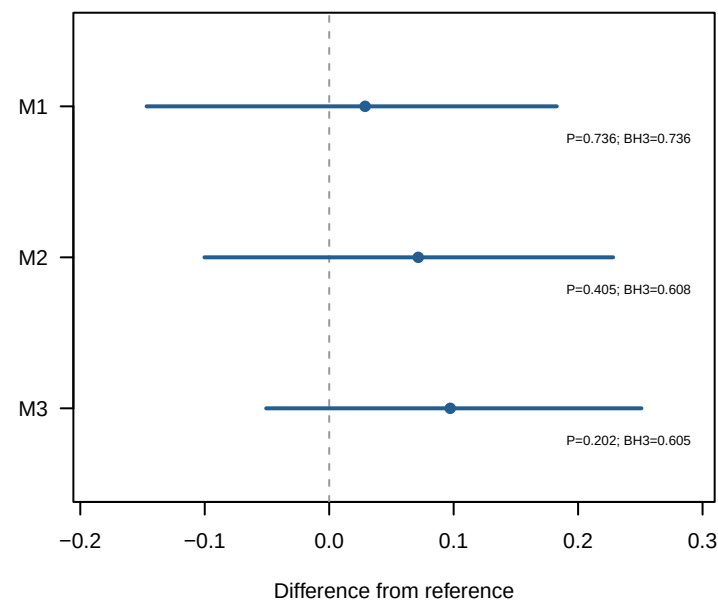


binary AUC

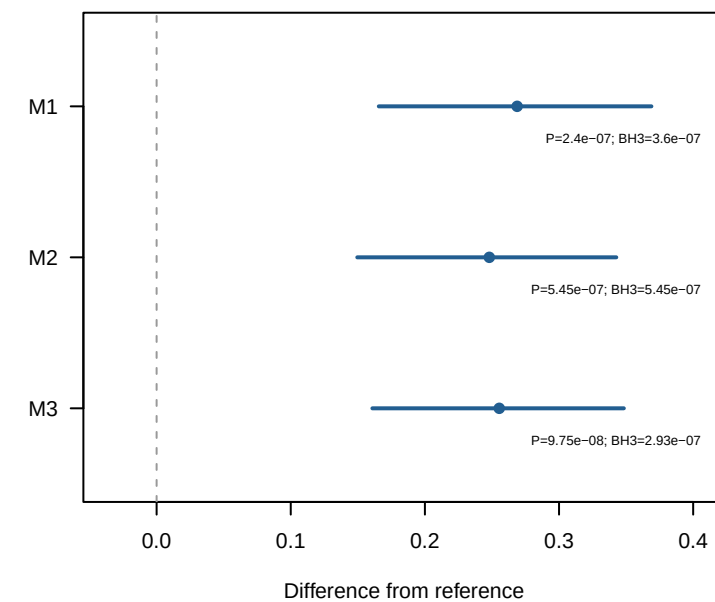

joint_bb MAE

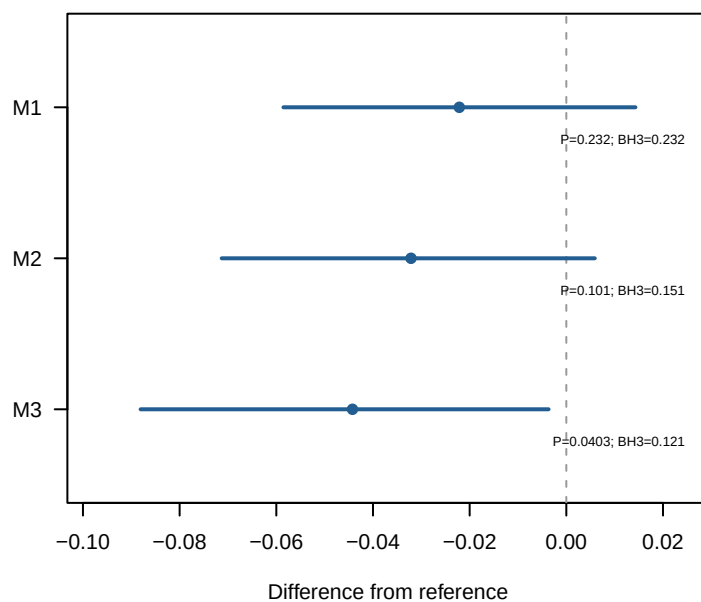

joint_bb RMSE

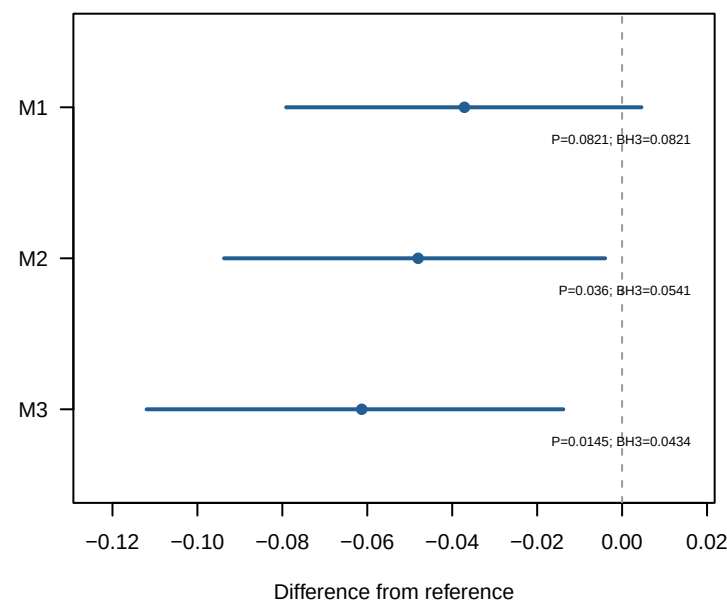

References: AUC 0.5; other metrics Null

MeanLogScore: positive favors the model
MAE/RMSE: negative favors the model

Fixed-OOF conditional approximations. Intervals are unadjusted 95% bootstrap percentiles.
BH3 does not account for all earlier development/selection. Do not infer usefulness from P alone.