



fivefold | BH within each panel: M1, M2, M3 (n = 3)


binary MeanLogScore

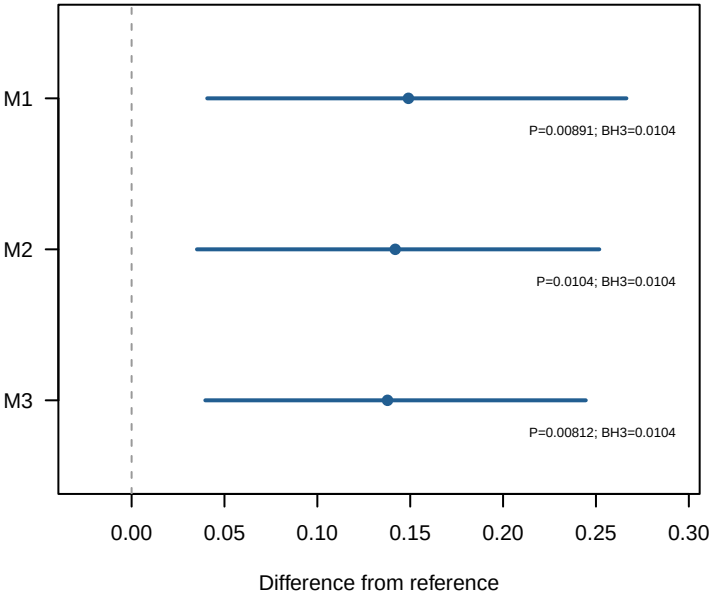


joint_bb MeanLogScore

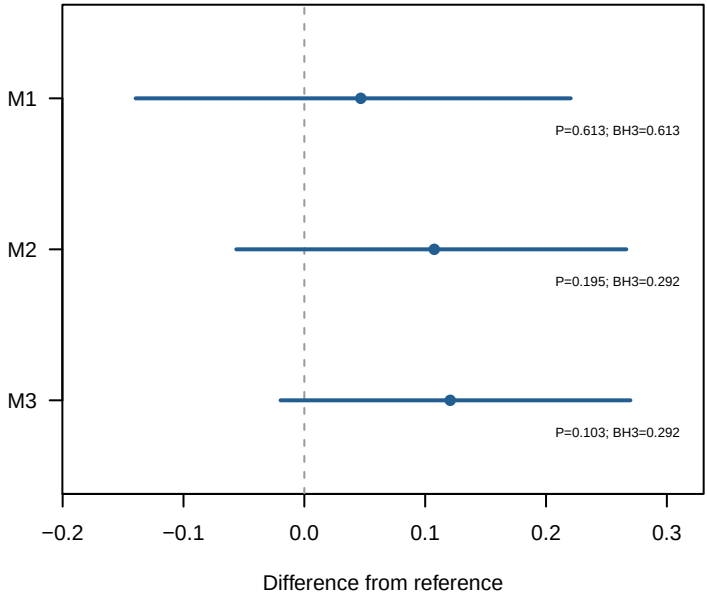


binary AUC

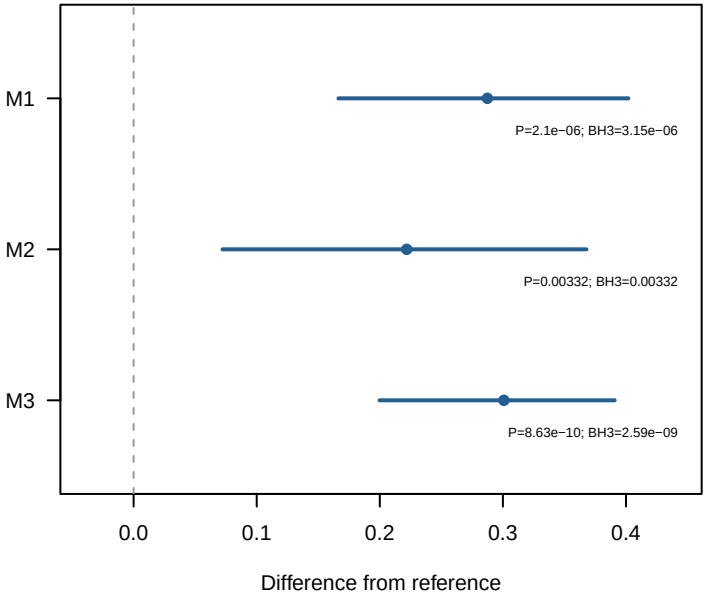

joint_bb MAE

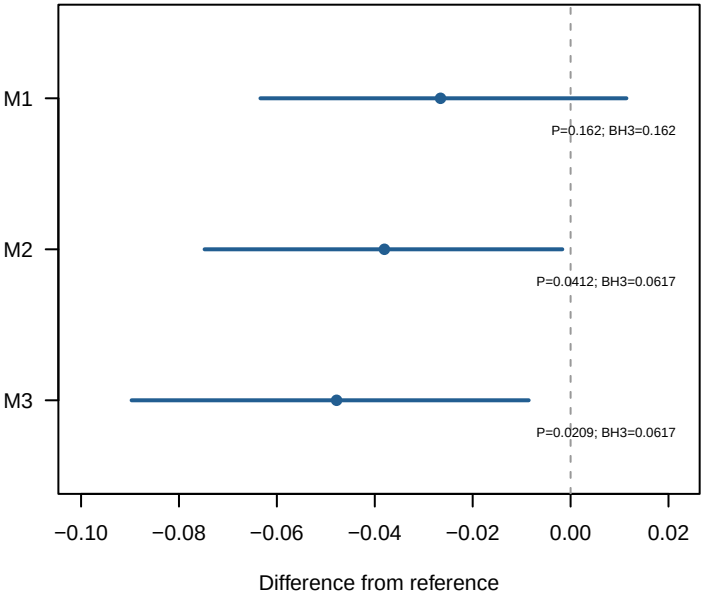

joint_bb RMSE

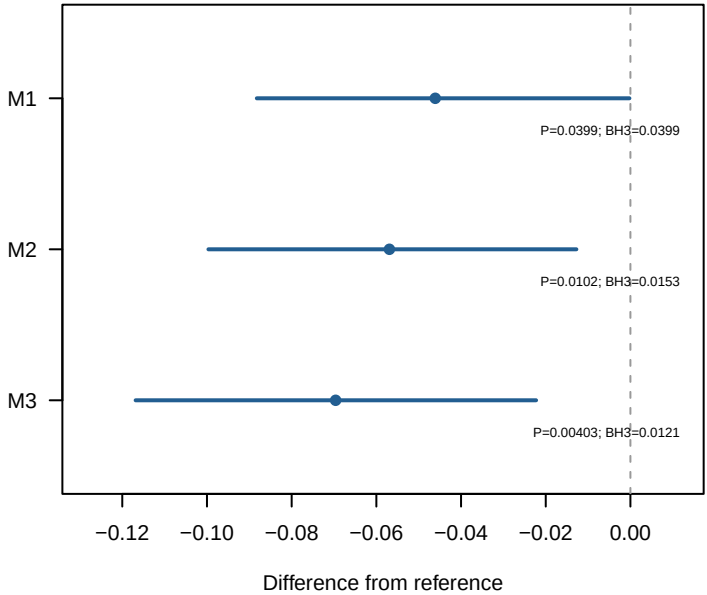


References: AUC 0.5; other metrics Null

MeanLogScore: positive favors the model
MAE/RMSE: negative favors the model


Fixed-OOF conditional approximations. Intervals are unadjusted 95% bootstrap percentiles.
BH3 does not account for all earlier development/selection. Do not infer usefulness from P alone.

tenfold | BH within each panel: M1, M2, M3 (n = 3)


binary MeanLogScore

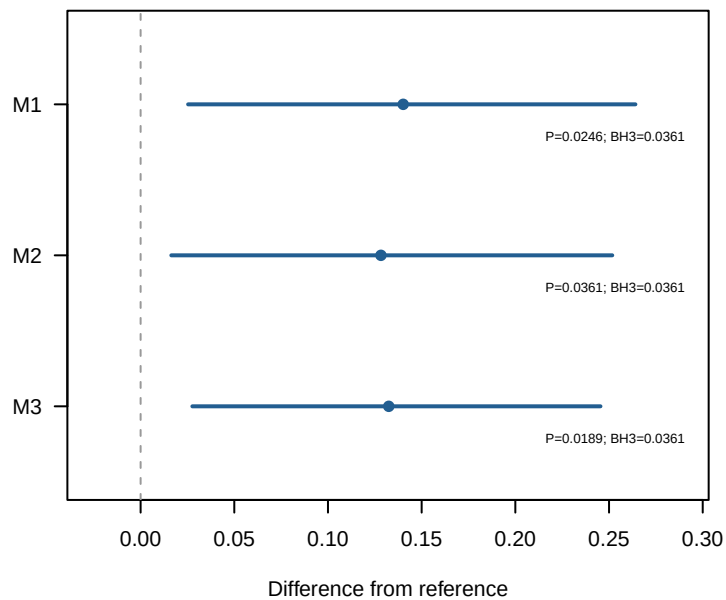


joint_bb MeanLogScore

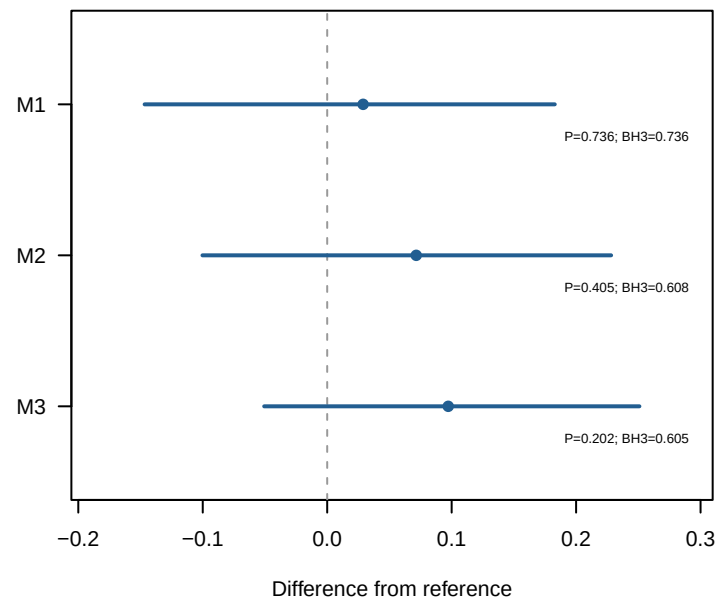


binary AUC

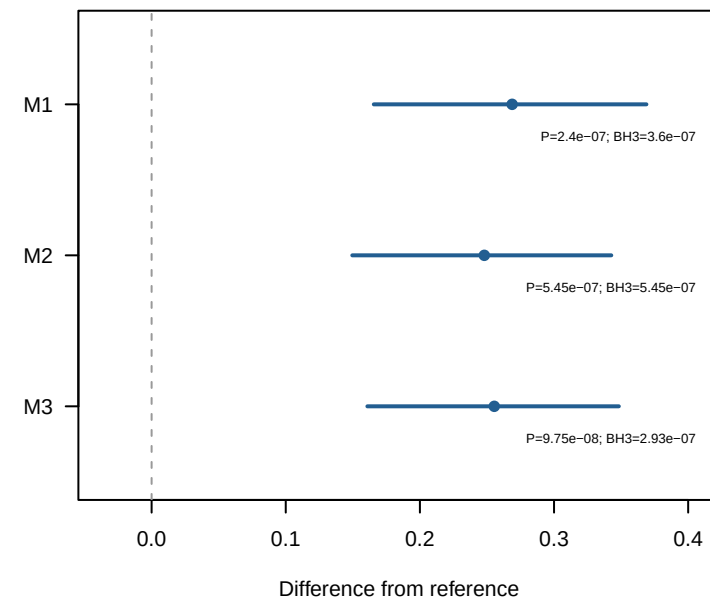

joint_bb MAE

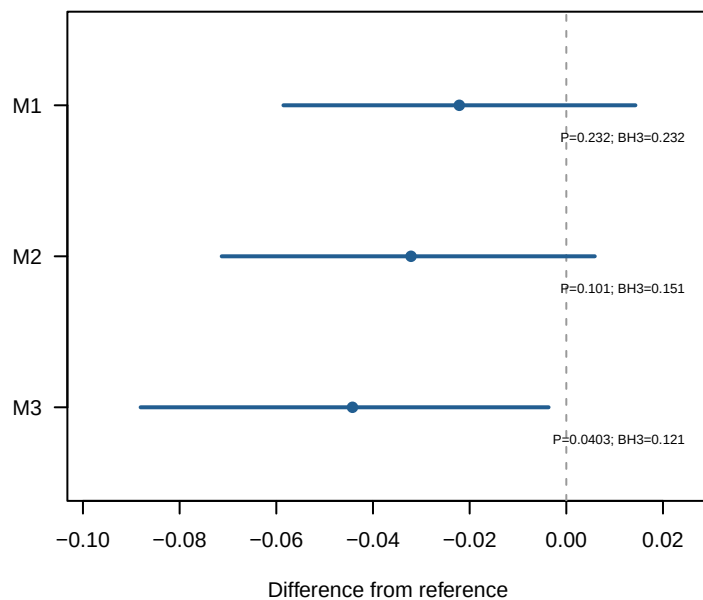

joint_bb RMSE

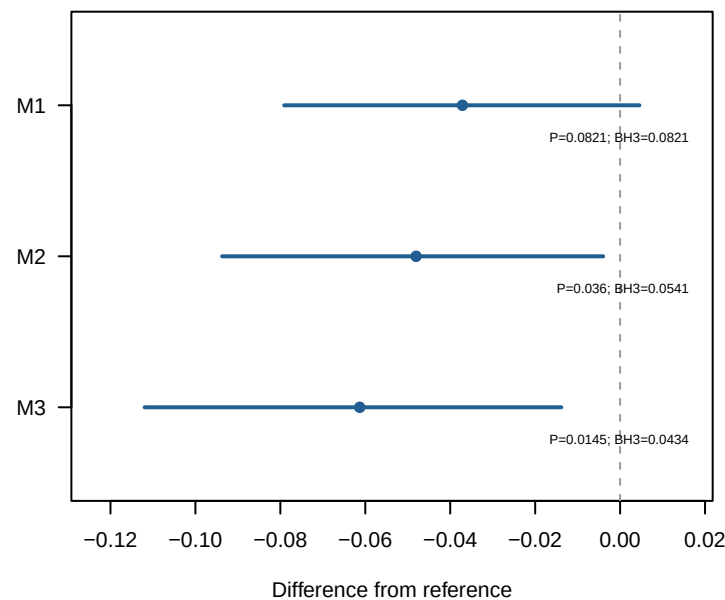

References: AUC 0.5; other metrics Null

MeanLogScore: positive favors the model
MAE/RMSE: negative favors the model

Fixed-OOF conditional approximations. Intervals are unadjusted 95% bootstrap percentiles.

BH3 does not account for all earlier development/selection. Do not infer usefulness from P alone.