



► **Obtener todas las mercancías disponibles para transporte (estado pendiente).**


Metiendo cualquier dato incorrecto:

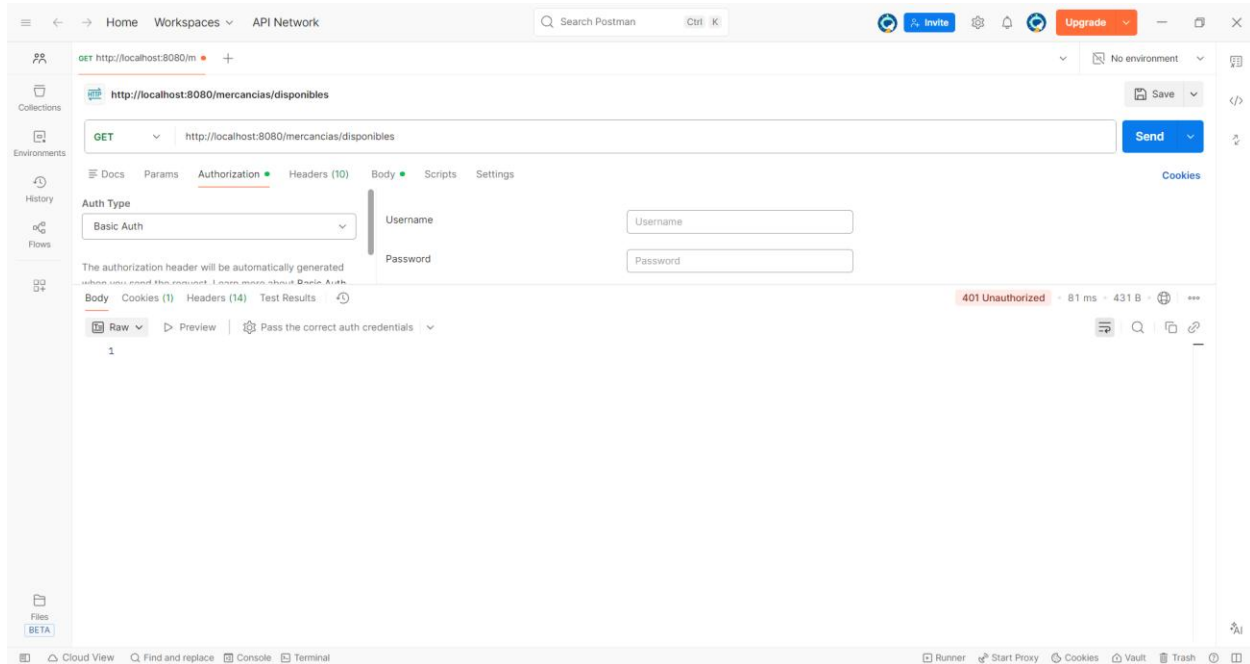

Metiendo a un conductor:

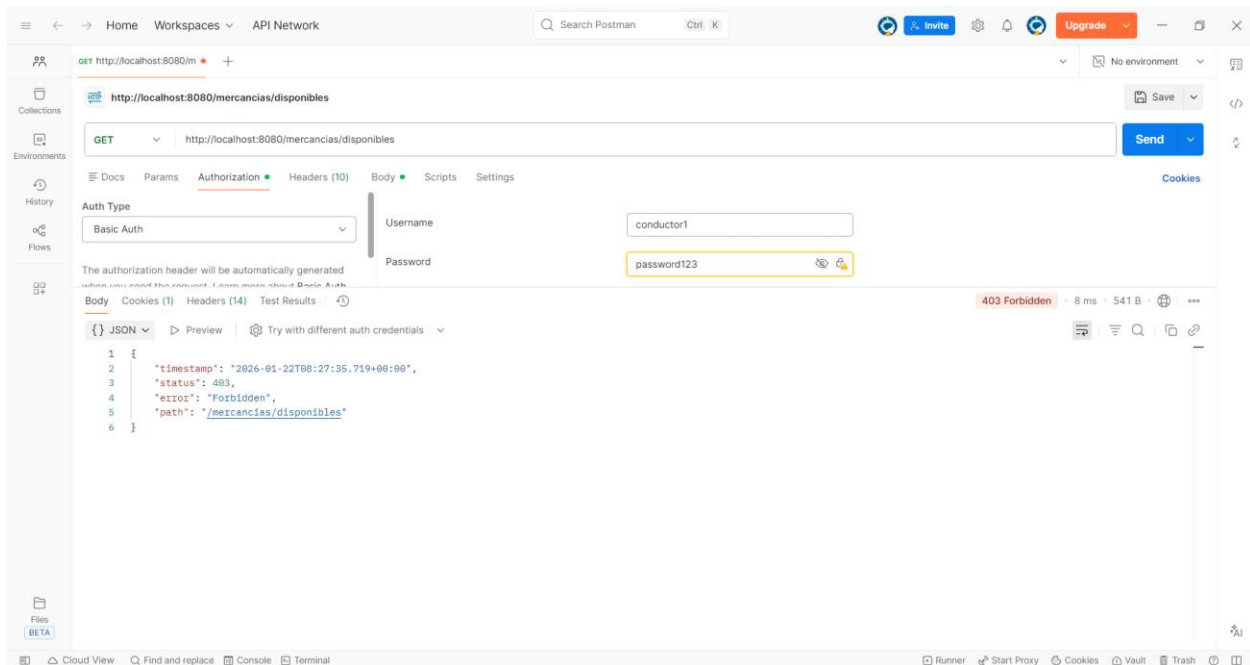


Metiendo a una empresa:

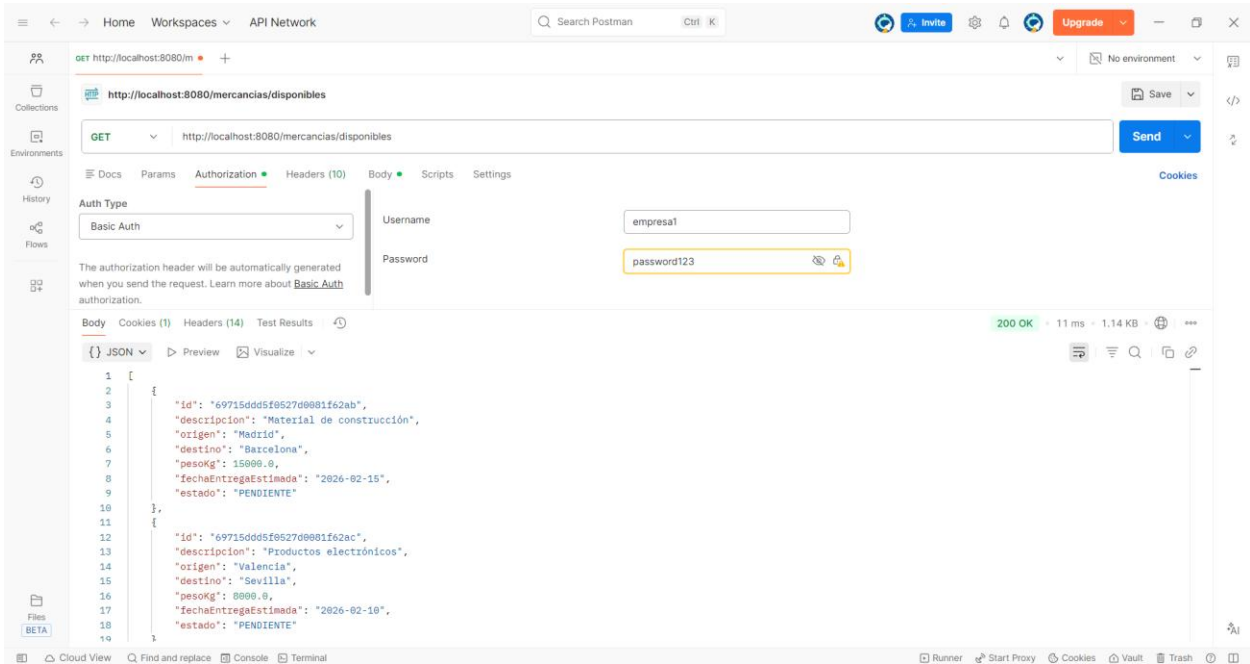

Solo nos aparecen las de estado pendiente.

► Consultar los camiones de un conductor que están disponibles.

Metiendo cualquier dato incorrecto:

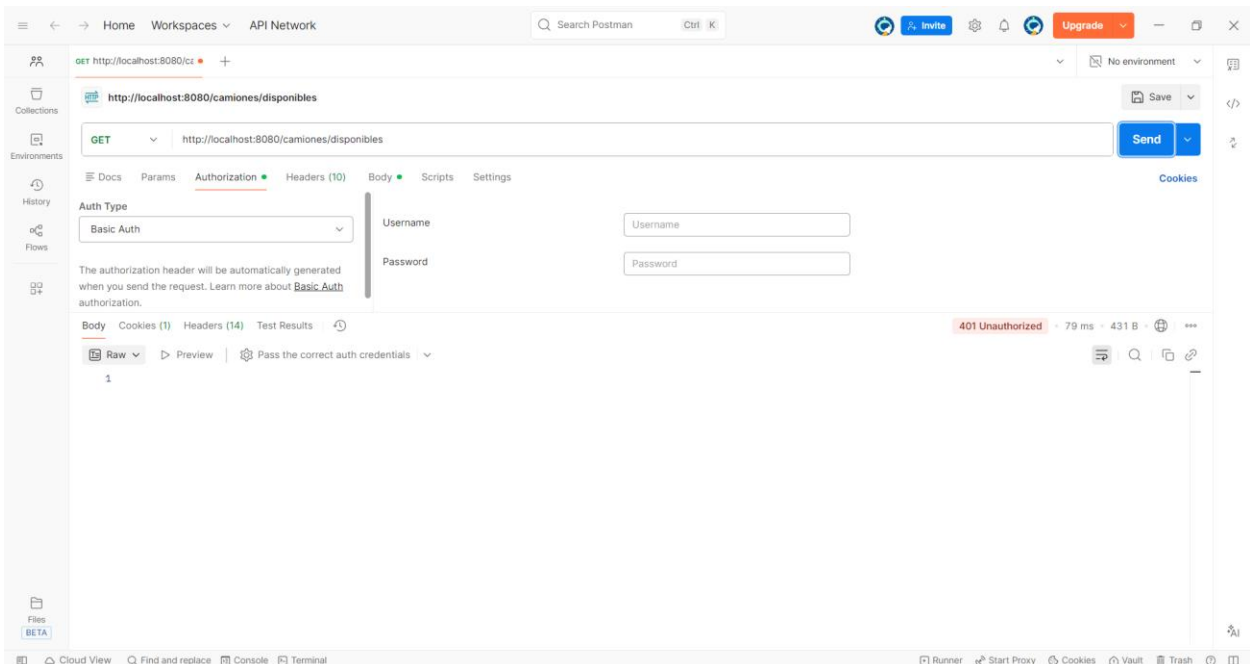

Metiendo a una empresa:

Postman interface showing a GET request to `http://localhost:8080/camiones/disponibles` using Basic Auth. The Username is `empresa1` and the Password is `password123`. The response is a 403 Forbidden status with a JSON body:


```
{
  "timestamp": "2026-01-22T08:59:30.418+00:00",
  "status": 403,
  "error": "Forbidden",
  "path": "/camiones/disponibles"
}
```

Metiendo a un conductor:

Postman interface showing a GET request to `http://localhost:8080/camiones/disponibles` using Basic Auth. The Username is `conductor2` and the Password is `password123`. The response is a 200 OK status with a JSON body:

```
[
  {
    "id": "69715dc15f0527d0001f629d",
    "conductorId": "conductor2",
    "matricula": "9012GHI",
    "modelo": "Scania R500",
    "capacidadKg": 26000.0,
    "estado": "ACTIVO"
  }
]
```


Metiendo al mismo conductor sin especificar disponibles, cambiando la ruta a /camiones:

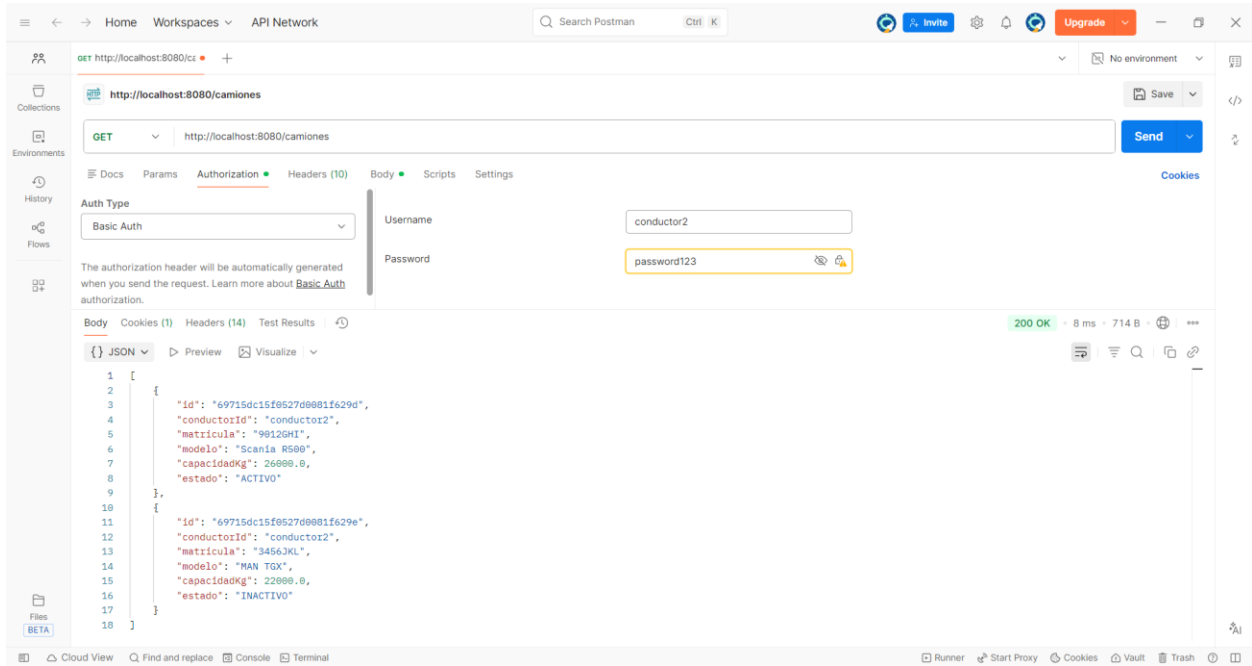


Tambien indicar que solo nos aparecerán los camiones asignados a ese conductor concreto.

► Listar las inscripciones a una mercancía con su estado.


Metiendo cualquier dato incorrecto:

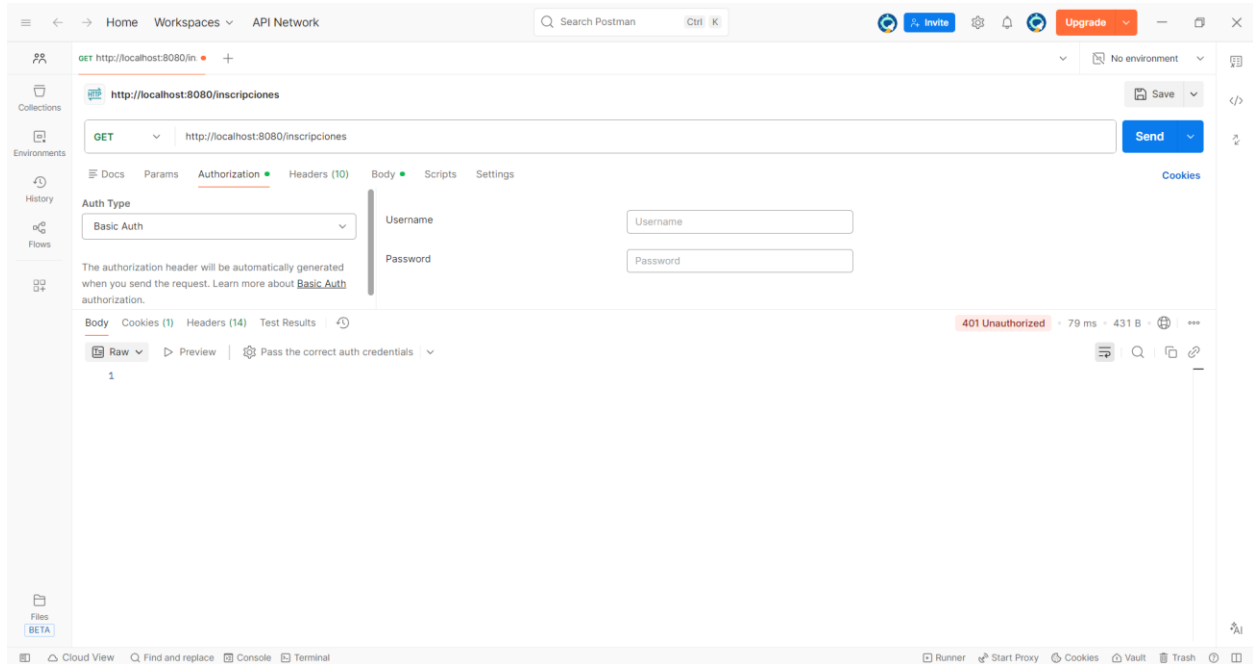

Metiendo un conductor:

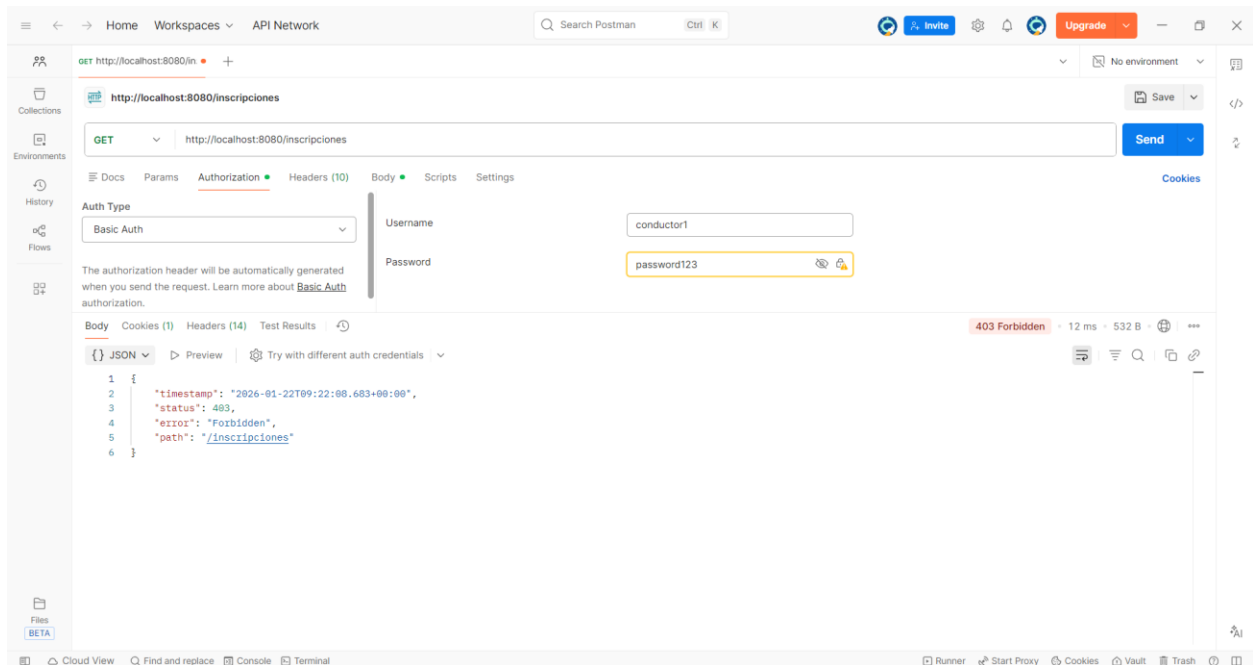


Metiendo una empresa:

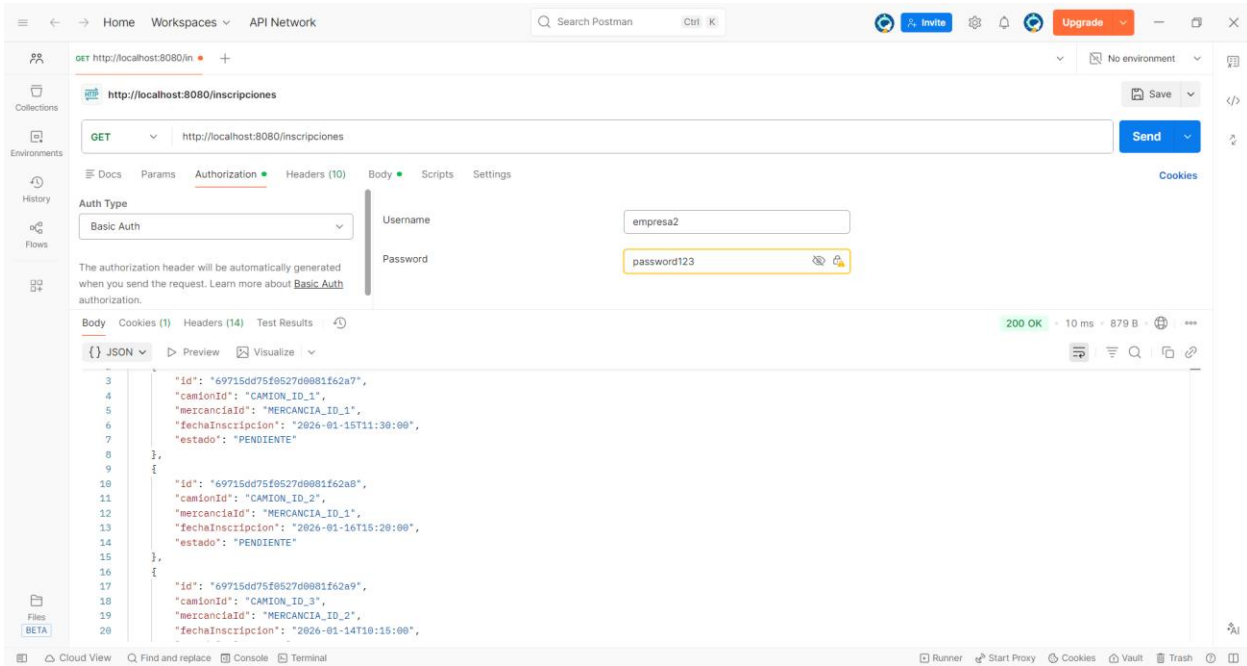

► **Mostrar mercancías transportadas por un conductor específico.**

Metiendo cualquier dato:

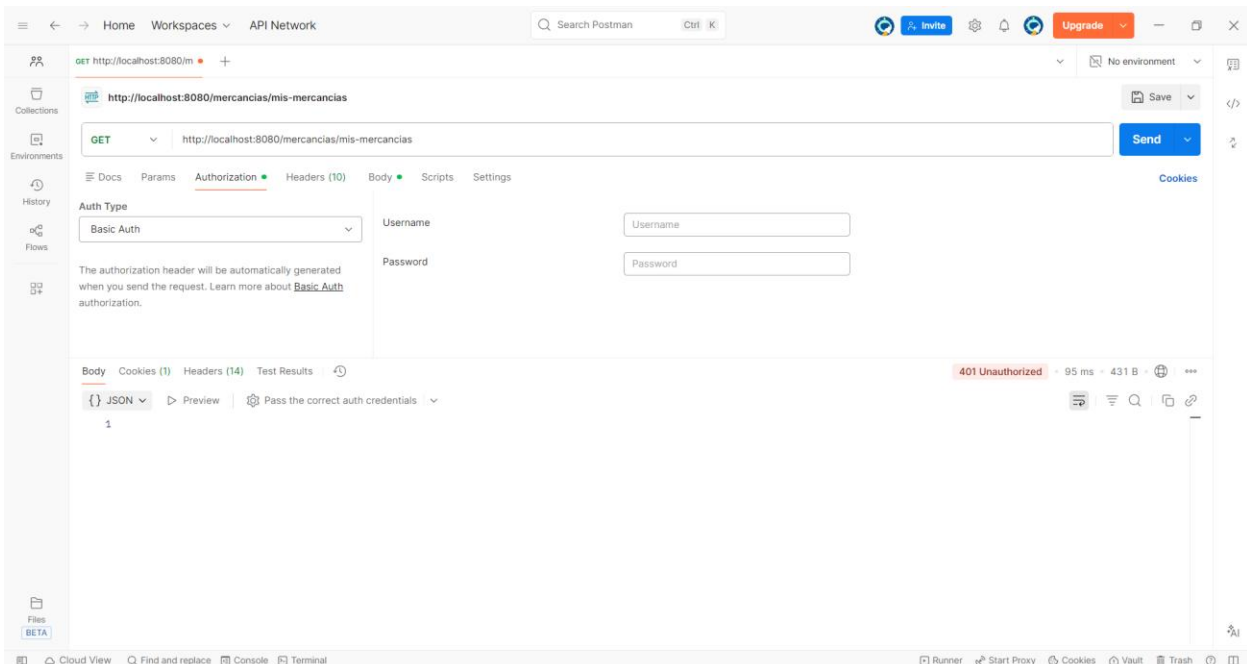

Metiendo empresa2:

The screenshot shows the Postman interface with a GET request to `http://localhost:8080/mercancias/mis-mercancias`. The Authorization tab is selected, showing Basic Auth with Username `empresa2` and Password `password123`. The response is a 403 Forbidden status with a 9 ms response time and 544 B body. The JSON body contains an error message:


```
{
  "timestamp": "2026-01-22T18:46:11.604+00:00",
  "status": 403,
  "error": "Forbidden",
  "path": "/mercancias/mis-mercancias"
}
```

Comprobamos las mercancías del conductor1:

The screenshot shows the Postman interface with a GET request to `http://localhost:8080/mercancias/mis-mercancias`. The Authorization tab is selected, showing Basic Auth with Username `conductor1` and Password `password123`. The response is a 200 OK status with a 18 ms response time and 608 B body. The JSON body contains item details:


```
{
  "id": "697265891295593bafa913d2",
  "description": "Mercancia de prueba",
  "origen": "Madrid",
  "destino": "Barcelona",
  "pesoKg": 15000.0,
  "fechaEntregaEstimada": "2026-03-01",
  "estado": "ASIGNADA"
}
```

Comprobamos las mercancías de conductor2 (no tiene):

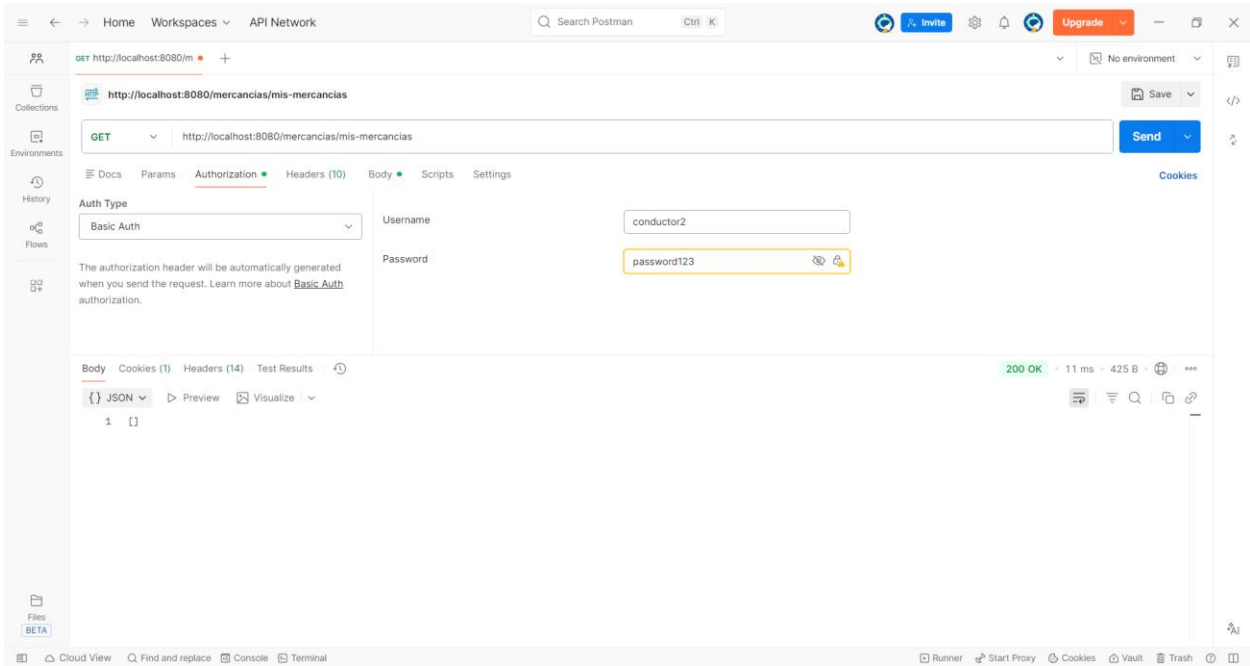

► **Obtener incidencias activas registradas por un conductor en el último mes.**

Metemos cualquier dato:

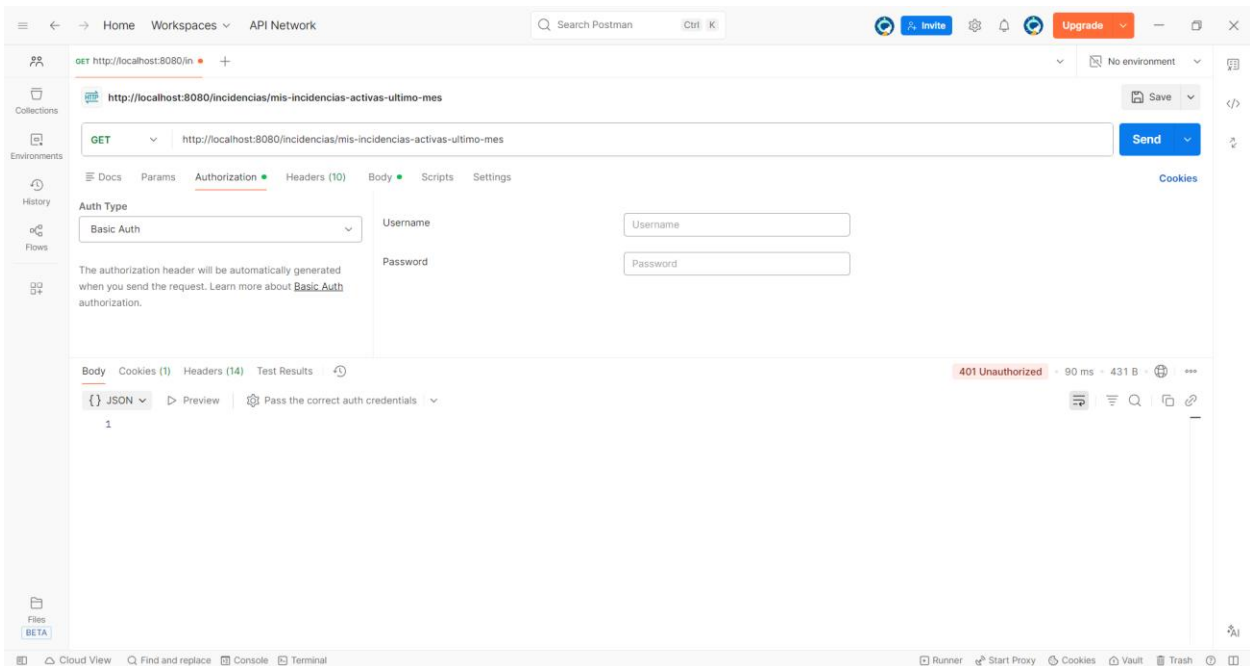

Metemos empresa1:

The screenshot shows the Postman interface for an API request. The URL is `http://localhost:8080/incidencias/mis-incidencias-activas-ultimo-mes`. The method is `GET`. The authentication is set to `Basic Auth` with the username `empresa1` and password `password123`. The response is `403 Forbidden` with a status of `403`, a message of `Forbidden`, and a path of `/incidencias/mis-incidencias-activas-ultimo-mes`.

```
{
  "timestamp": "2026-01-22T20:38:38.698+00:00",
  "status": 403,
  "error": "Forbidden",
  "path": "/incidencias/mis-incidencias-activas-ultimo-mes"
}
```

Comprobamos las incidencias del último mes de conductor1:

The screenshot shows the Postman interface for an API request. The URL is `http://localhost:8080/incidencias/mis-incidencias-activas-ultimo-mes`. The method is `GET`. The authentication is set to `Basic Auth` with the username `conductor1` and password `password123`. The response is `200 OK` with a status of `200`, a message of `OK`, and a path of `/incidencias/mis-incidencias-activas-ultimo-mes`.

```
[
  {
    "id": "697289091295593bafa913d4",
    "camionId": "69715dc15f9527d90801f629b",
    "descripcion": "Aveía en el motor",
    "fecha": "2026-01-22T21:31:05.625",
    "tipo": "MECANICA",
    "estado": "ABIERTA"
  }
]
```

Comprobamos las incidencias totales de conductor1:


The screenshot shows the Postman interface with a GET request to `http://localhost:8080/incidencias`. The request is configured with Basic Authentication, using the username `conductor1` and password `password123`. The response is a 200 OK status with a response time of 12 ms and a body size of 790 B. The response body is a JSON array containing two incident records.

```
{
  "id": "69715dca5f0527d90801f62a4",
  "camionId": "69715dc15f9527d90801f629c",
  "descripcion": "Problema con neumático trasero",
  "fecha": "2024-01-17T13:30:00",
  "tipo": "MECANICA",
  "estado": "ABIERTA"
},
{
  "id": "697289091295593bafa913d4",
  "camionId": "69715dc15f9527d90801f629b",
  "descripcion": "Avería en el motor",
  "fecha": "2026-01-22T21:31:05.625",
  "tipo": "MECANICA",
  "estado": "ABIERTA"
}
```


Así vemos que aparece un caso más antiguo que el último mes y por tanto filtra correctamente.

► Buscar mercancías por origen, destino o peso máximo.

Metemos cualquier dato:

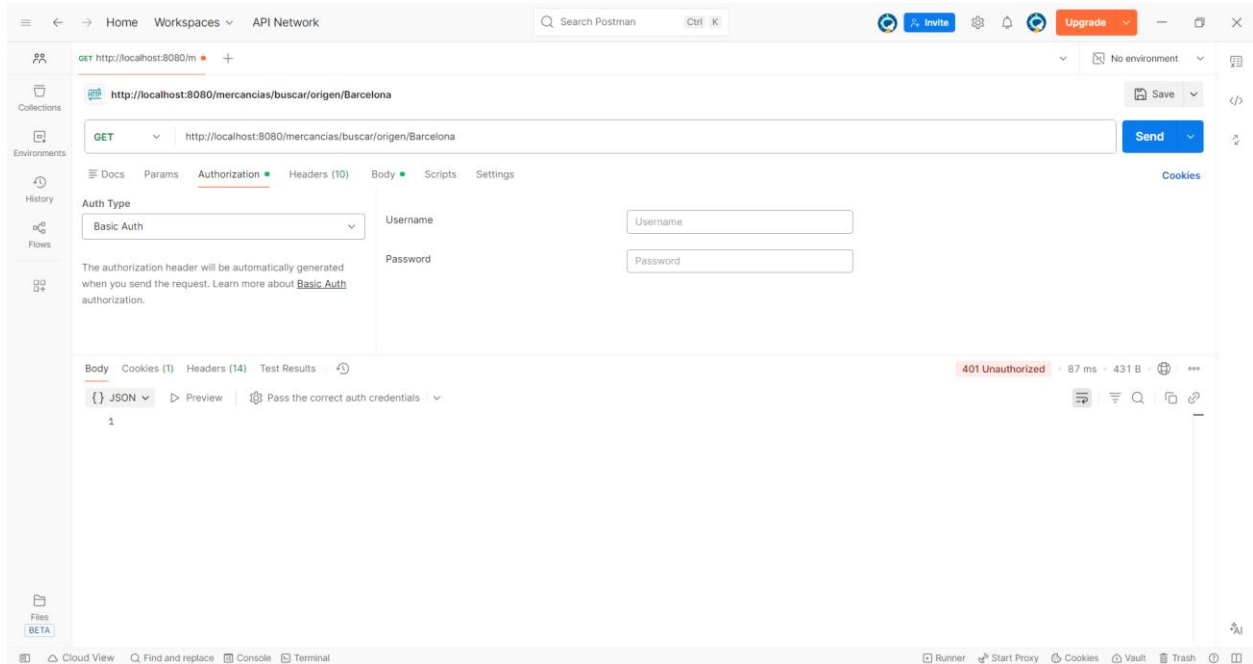

Metemos conductor1:

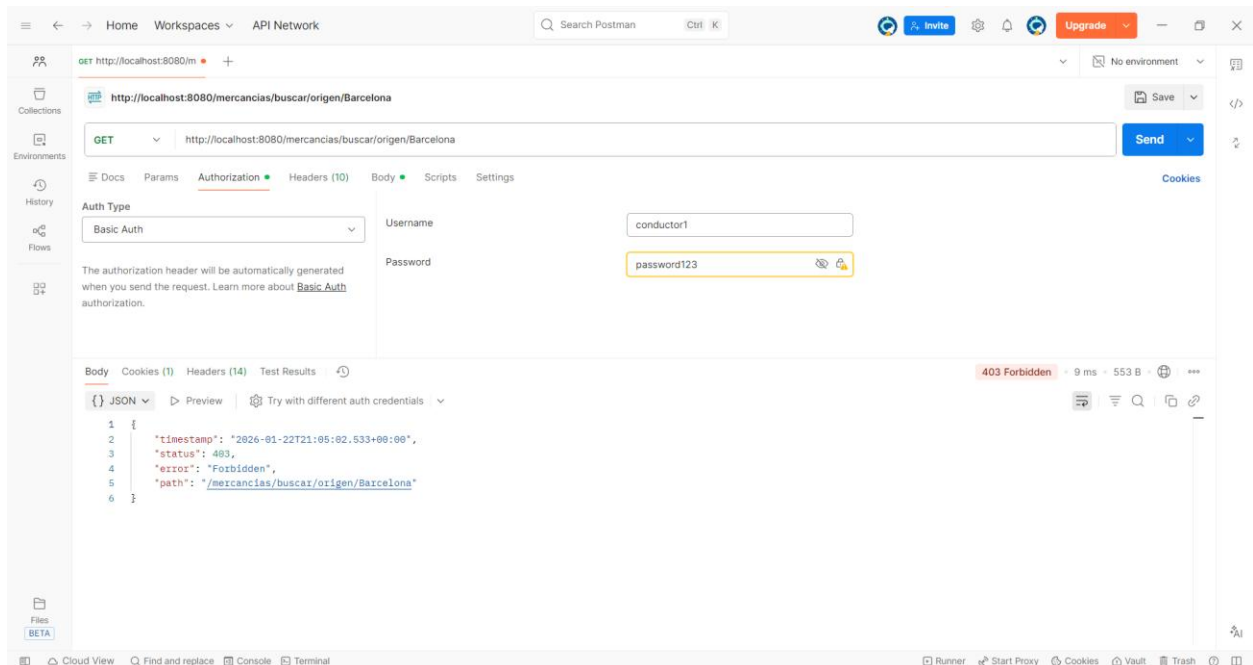

Buscamos por origen con empresa1:

GET http://localhost:8080/m +

http://localhost:8080/mercancias/buscar/origen/Barcelona

Auth Type: Basic Auth

Username: empresa1

Password: password123

Body: 200 OK - 14 ms - 605 B

```
1 [
2   {
3     "id": "69715ddd5f9527d9981f62af",
4     "descripcion": "Textiles y ropa",
5     "origen": "Barcelona",
6     "destino": "Valencia",
7     "pesoKg": 6000.0,
8     "fechaEntregaEstimada": "2026-01-22",
9     "estado": "ENTREGADA"
10  }
11 ]
```

GET http://localhost:8080/m +

http://localhost:8080/mercancias/buscar/origen/Madrid

Auth Type: Basic Auth


Username: empresa1

Password: password123


Body: 200 OK - 9 ms - 983 B

```
1 [
2   {
3     "id": "69715ddd5f9527d9981f62ab",
4     "descripcion": "Material de construcción",
5     "origen": "Madrid",
6     "destino": "Barcelona",
7     "pesoKg": 15000.0,
8     "fechaEntregaEstimada": "2026-02-15",
9     "estado": "PENDIENTE"
10  },
11  {
12     "id": "69715ddd5f0527d9981f62b0",
13     "descripcion": "Equipo deportivo",
14     "origen": "Madrid",
15     "destino": "Málaga",
16     "pesoKg": 4000.0
17  }
18 ]
```

Introducimos cualquier dato:

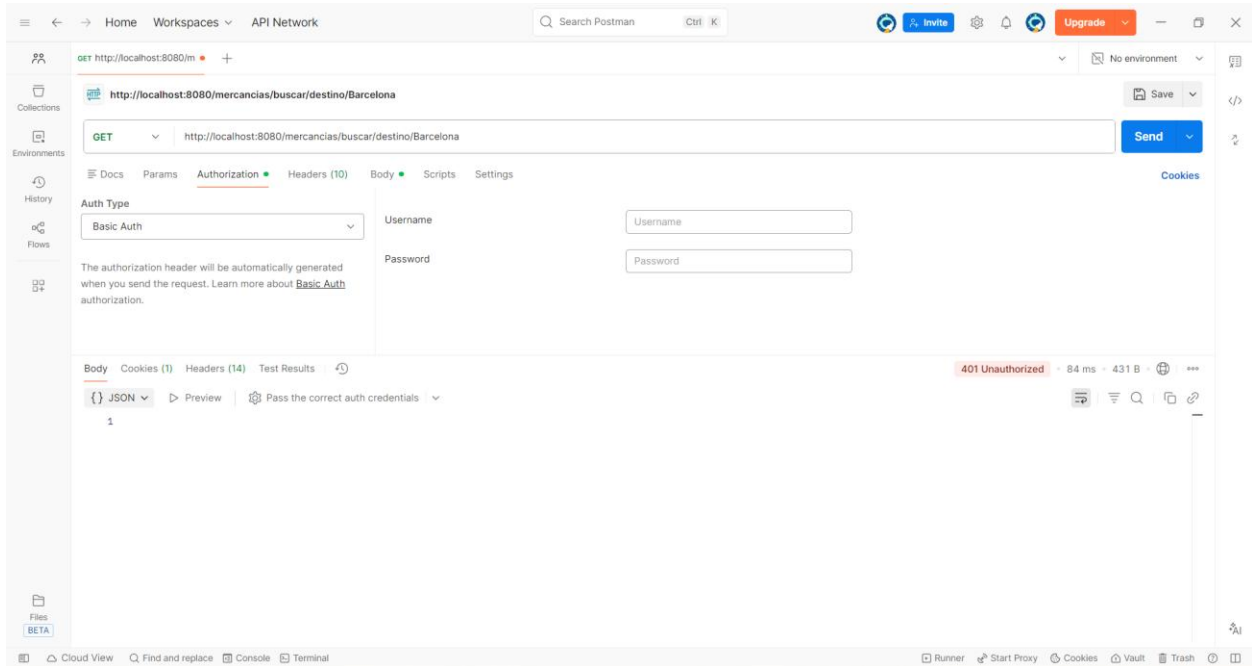

Buscamos con conductor2

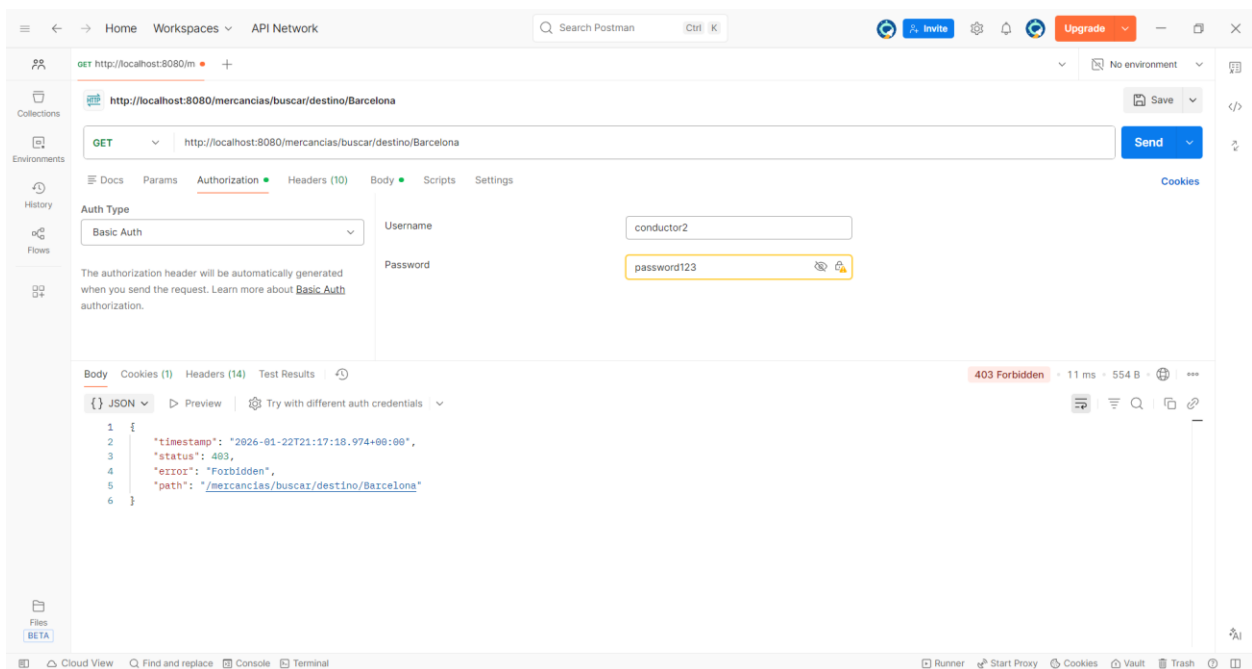

Buscamos por destino con empresa2:


Postman interface showing a GET request to `http://localhost:8080/mercancias/buscar/destino/Barcelona` using Basic Auth (Username: `empresa2`, Password: `password123`). The response is a 200 OK status with a JSON array of two items.

```
{
  "id": "69715dd5f9527d9981f62ab",
  "descripcion": "Material de construcción",
  "origen": "Madrid",
  "destino": "Barcelona",
  "pesoKg": 15000.0,
  "fechaEntregaEstimada": "2026-02-15",
  "estado": "PENDIENTE"
},
{
  "id": "697265891295593baf913d2",
  "descripcion": "Mercancia de prueba",
  "origen": "Madrid",
  "destino": "Barcelona",
  "pesoKg": 12000.0,
  "fechaEntregaEstimada": "2026-01-25",
  "estado": "ASIGNADA"
}
```


Postman interface showing a GET request to `http://localhost:8080/mercancias/buscar/destino/Madrid` using Basic Auth (Username: `empresa2`, Password: `password123`). The response is a 200 OK status with a JSON array of one item.

```
{
  "id": "69715dd5f9527d9981f62ae",
  "descripcion": "Alimentos perecederos",
  "origen": "Murcia",
  "destino": "Madrid",
  "pesoKg": 12000.0,
  "fechaEntregaEstimada": "2026-01-25",
  "estado": "ASIGNADA"
}
```

Introducimos cualquier dato:

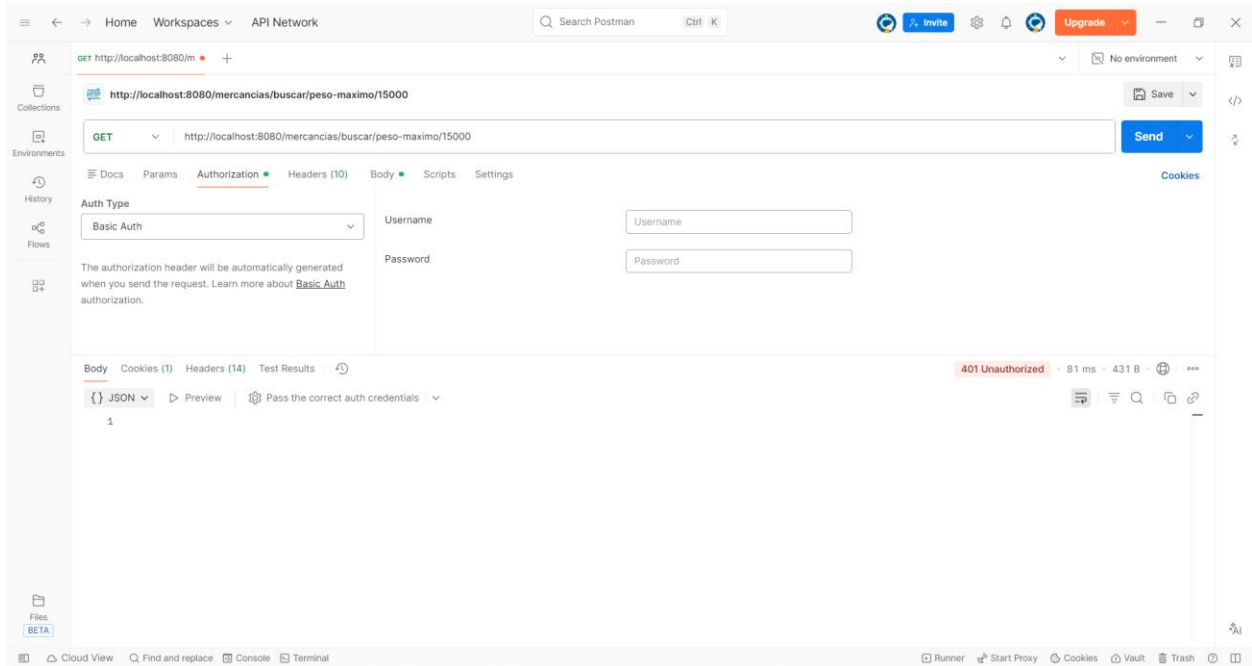

Introducimos conductor3:

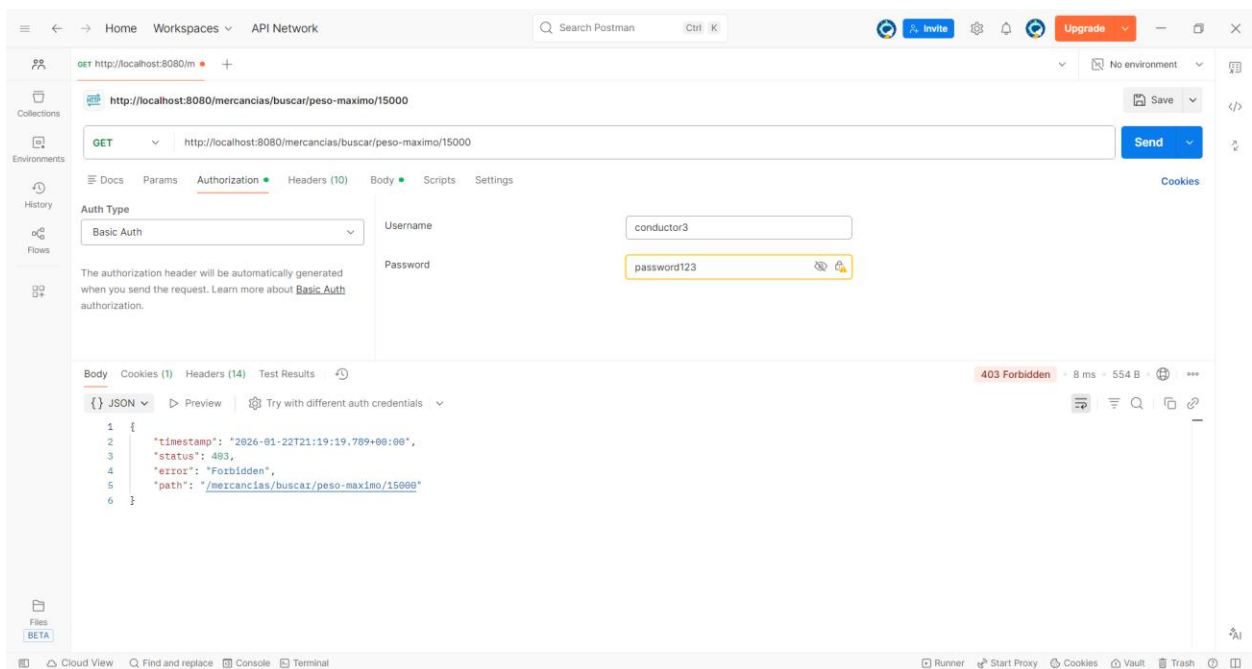

Buscamos por peso maximo con empresa1:

The screenshot shows the Postman interface for a REST client. The URL is `http://localhost:8080/mercancias/buscar/peso-maximo/15000`. The method is `GET`. The authorization is set to `Basic Auth` with username `empresa1` and password `password123`. The response is a `200 OK` with a JSON body containing two items:


```
1 [
2   {
3     "id": "69715ddd5f9527d9981f62ab",
4     "descripcion": "Material de construcción",
5     "origen": "Madrid",
6     "destino": "Barcelona",
7     "pesoKg": 15000.0,
8     "fechaEntregaEstimada": "2026-02-15",
9     "estado": "PENDIENTE"
10  },
11  {
12    "id": "69715ddd5f9527d9981f62ac",
13    "descripcion": "Productos electrónicos",
14    "origen": "Valencia",
15    "destino": "Sevilla",
16    "pesoKg": 6000.0,
17    "fechaEntregaEstimada": "2026-02-22",
18    "estado": "ENTREGADA"
19  }
20 ]
```

The screenshot shows the Postman interface for a REST client. The URL is `http://localhost:8080/mercancias/buscar/peso-maximo/7000`. The method is `GET`. The authorization is set to `Basic Auth` with username `empresa1` and password `password123`. The response is a `200 OK` with a JSON body containing two items:


```
1 [
2   {
3     "id": "69715ddd5f9527d9981f62af",
4     "descripcion": "Textiles y ropa",
5     "origen": "Barcelona",
6     "destino": "Valencia",
7     "pesoKg": 6000.0,
8     "fechaEntregaEstimada": "2026-01-22",
9     "estado": "ENTREGADA"
10  },
11  {
12    "id": "69715ddd5f9527d9981f62ab",
13    "descripcion": "Material de construcción",
14    "origen": "Madrid",
15    "destino": "Barcelona",
16    "pesoKg": 15000.0,
17    "fechaEntregaEstimada": "2026-02-15",
18    "estado": "PENDIENTE"
19  }
20 ]
```


Ejemplos de CRUD utilizados para completar las consultas requeridas:

POST /camiones con usuario conductor1

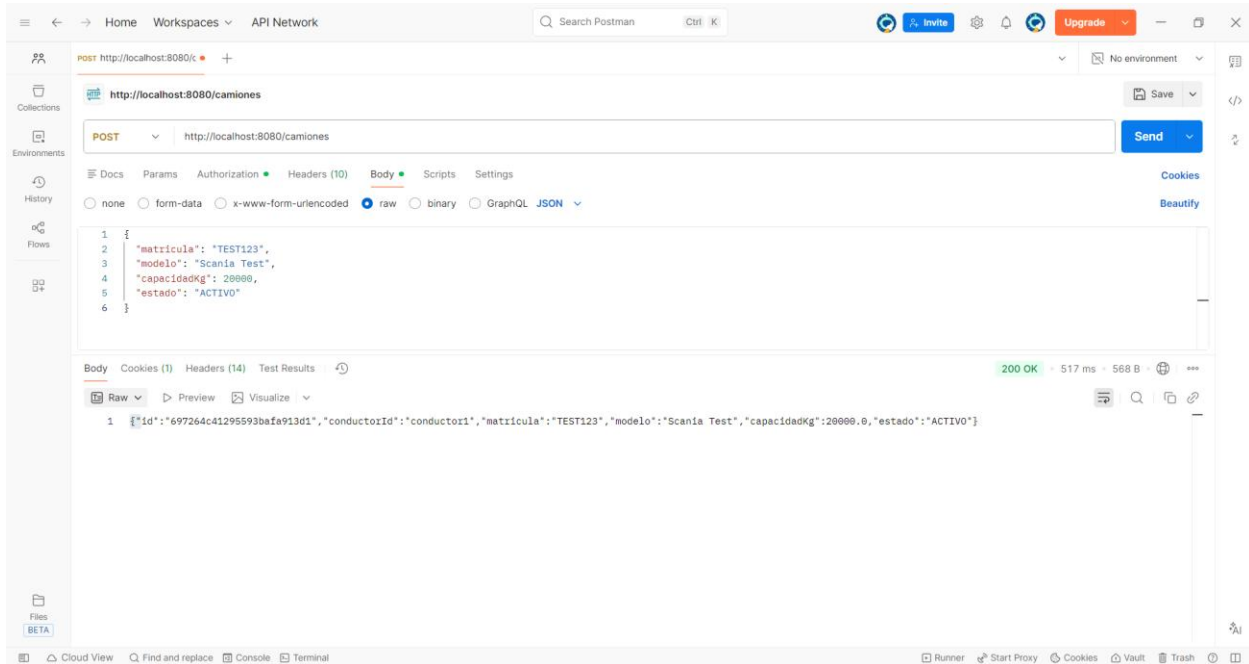

POST /mercancias con usuario empresa1

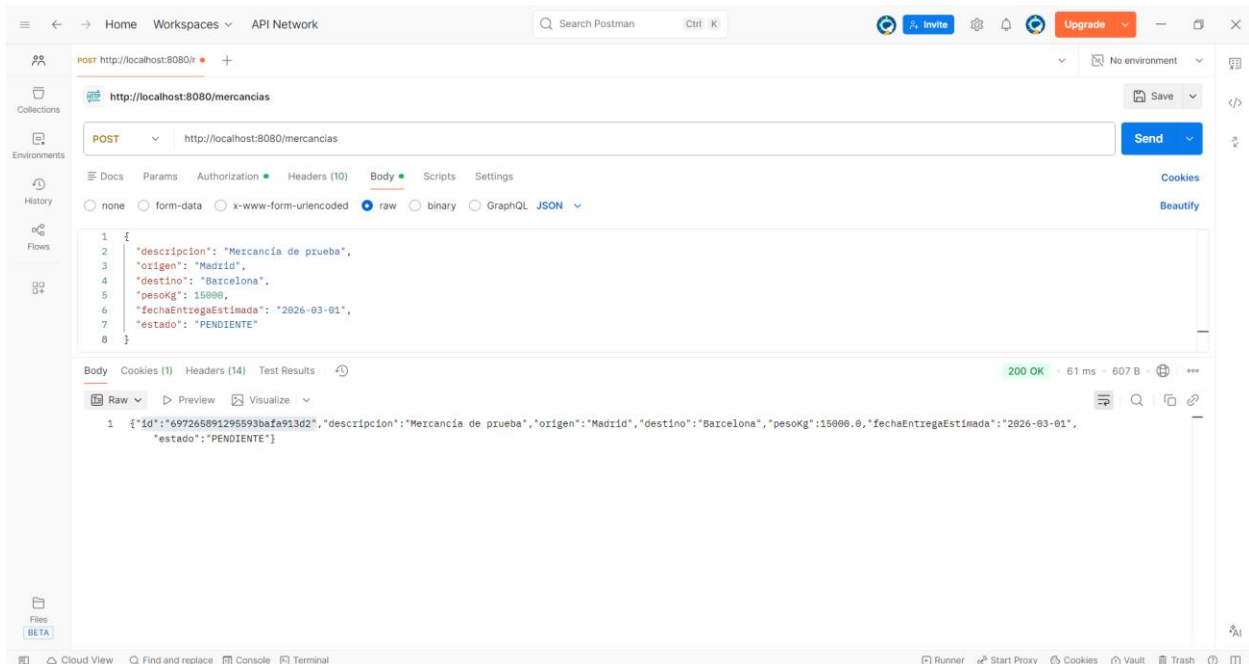

POST /inscripciones con usuario conductor1

The screenshot shows a Postman interface with a POST request to `http://localhost:8080/inscripciones`. The request body is a JSON object with the following structure:

```
1 {
2   "camionId": "697264c41295593bafa913d1",
3   "mercanciaId": "697264c41295593bafa913d1"
4 }
```

The response is a 200 OK status with a response time of 23 ms and a body size of 605 B. The response body is a JSON object:

```
1 {
2   "id": "6972687a1295593bafa913d3",
3   "camionId": "697264c41295593bafa913d1",
4   "mercanciaId": "697264c41295593bafa913d1",
5   "fechaInscripcion": "2026-01-22T19:12:10.7941483",
6   "estado": "PENDIENTE"
7 }
```

PUT /inscripciones/6972687a1295593bafa913d3 con usuario empresa1


The screenshot shows a Postman interface with a PUT request to `http://localhost:8080/inscripciones/6972687a1295593bafa913d3`. The request body is a JSON object with the following structure:

```
1 {
2   "camionId": "697264c41295593bafa913d1",
3   "mercanciaId": "697265891295593bafa913d2",
4   "estado": "ACEPTADA"
5 }
```


The response is a 200 OK status with a response time of 30 ms and a body size of 600 B. The response body is a JSON object:

```
1 {
2   "id": "6972687a1295593bafa913d3",
3   "camionId": "697264c41295593bafa913d1",
4   "mercanciaId": "697265891295593bafa913d2",
5   "fechaInscripcion": "2026-01-22T19:12:10.794",
6   "estado": "ACEPTADA"
7 }
```

POST /incidencias con usuario conductor1

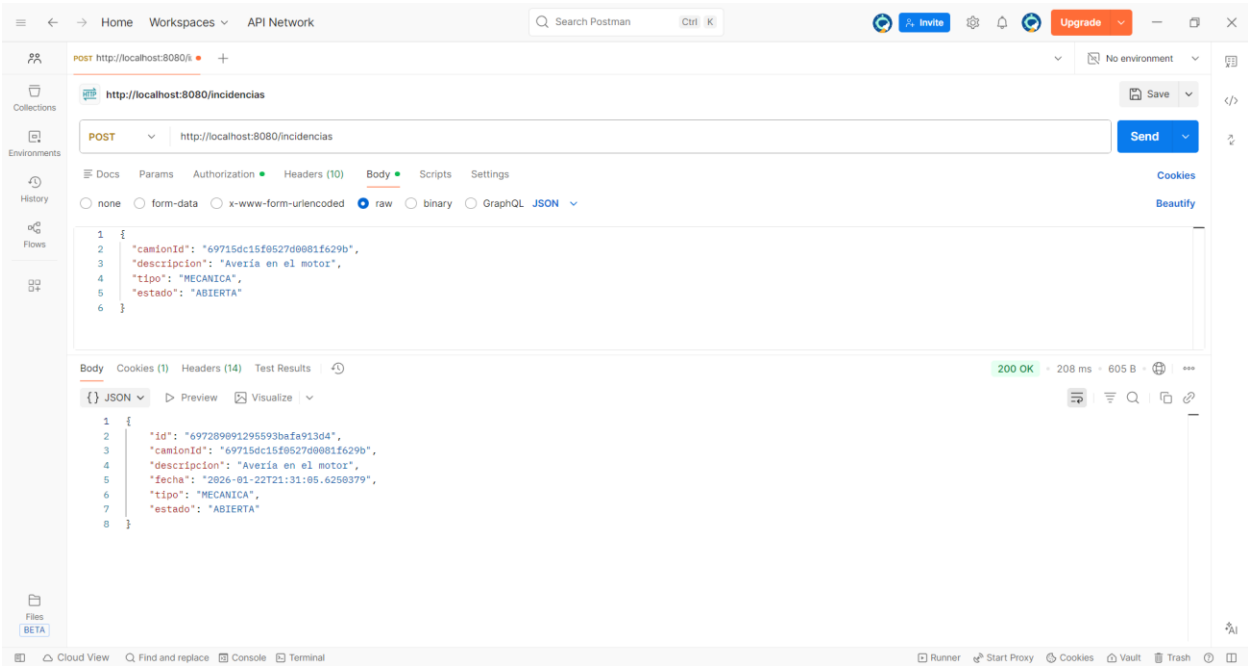

Resto de CRUD en `http://localhost:8080/swagger-ui/index.html`:

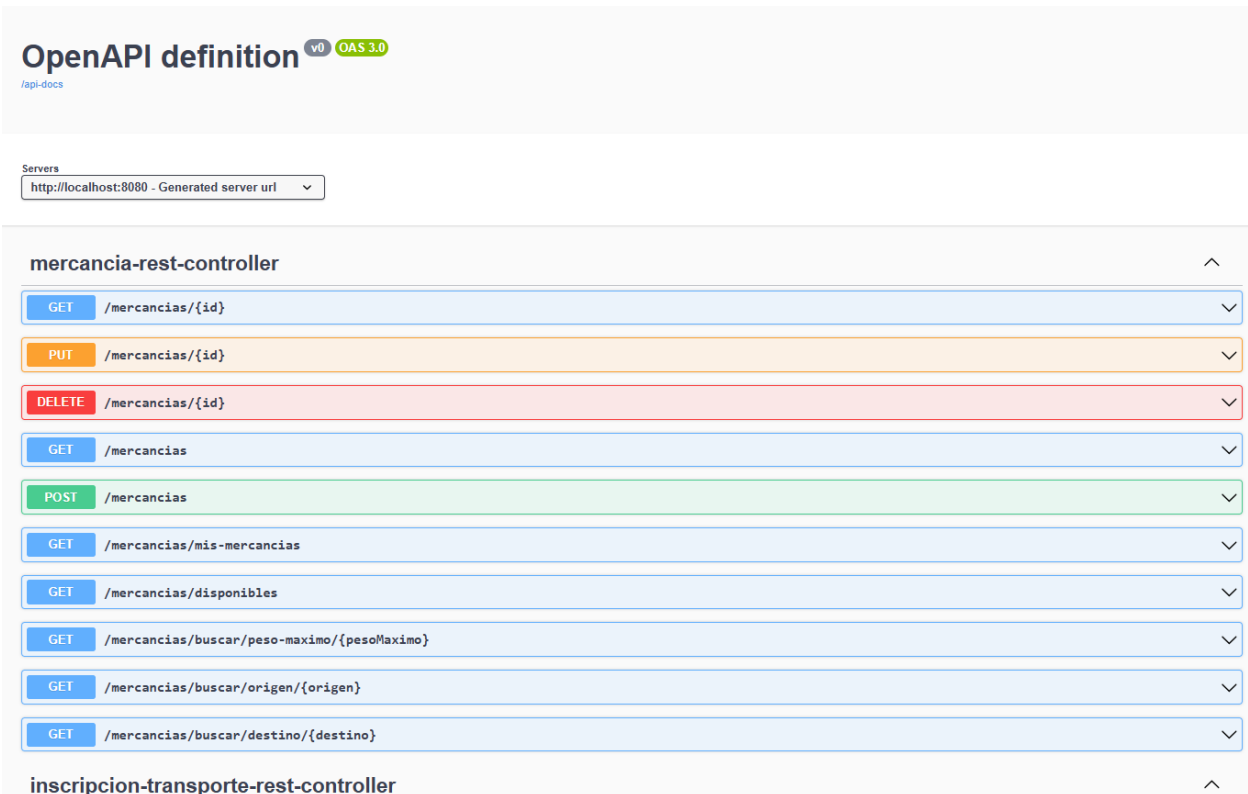

inscripcion-transporte-rest-controller

GET	/inscripciones/{id}	▼
PUT	/inscripciones/{id}	▼
DELETE	/inscripciones/{id}	▼
GET	/inscripciones	▼
POST	/inscripciones	▼
GET	/inscripciones/mercancia/{mercanciaId}	▼
GET	/inscripciones/camion/{camionId}	▼

incidencia-rest-controller

GET	/incidencias/{id}	▼
PUT	/incidencias/{id}	▼
DELETE	/incidencias/{id}	▼
GET	/incidencias	▼
POST	/incidencias	▼
GET	/incidencias/mis-incidencias-activas-ultimo-mes	▼
GET	/incidencias/camion/{camionId}	▼
GET	/incidencias/camion/{camionId}/activas-ultimo-mes	▼

camion-rest-controller

GET	/camiones/{id}	▼
PUT	/camiones/{id}	▼
DELETE	/camiones/{id}	▼
GET	/camiones	▼
POST	/camiones	▼
GET	/camiones/disponibles	▼

home-rest-controller

POST	/register	▼
GET	/	▼

Schemas

MercanciaDto >

InscripcionTransporteDto >

IncidenciaDto >

CamionDto >

UsuarioLoginDto >