

Higher-rank Polymorphism: Type Inference and Extensions

by

Ningning Xie
(谢宁宁)



A thesis submitted in partial fulfillment of the requirements for
the degree of Doctor of Philosophy
at The University of Hong Kong

February 2021

Abstract of thesis entitled
“Higher-rank Polymorphism: Type Inference and Extensions”

Submitted by
Ningning Xie

for the degree of Doctor of Philosophy
at The University of Hong Kong
in February 2021

Type inference, as implemented in various modern programming languages, reconstructs missing types in expressions and increases programmers’ productivity. Modern functional languages such as Haskell come with powerful forms of type inference. The global type-inference algorithms employed in those languages are derived from the Hindley-Milner type system, with multiple extensions. As the languages evolve, researchers also formalize the key aspects of type inference for the new extensions.

This dissertation studies *predicative implicit higher-rank polymorphism*, where polymorphic types can be arbitrarily nested, and monomorphic types can be inferred automatically. Predicative implicit higher-rank polymorphism is a common extension that has been studied extensively in the literature, and has been used pervasively in modern statically typed programming languages.

The goal of this dissertation is to explore the design space of type inference for implicit predicative higher-rank polymorphism, as well as to study its integration with other advanced type system features. The first contribution of this dissertation is a new type inference algorithm for implicit higher-rank polymorphism which can accept programs that many existing type inference algorithms cannot. The proposed *application* mode provides new insights for *bidirectional type checking*. The second contribution is the first combination of predicative implicit higher-rank polymorphism with *gradual typing*, which provides a step forward in gradualizing modern functional programming languages. The third contribution is an arguably simpler algorithmic implementation of *subtyping* for higher-rank polymorphism. The technique developed is then further applied to the *kind inference* problem for *datatypes*, which provides a first known formal model of datatype declarations in modern functional programming languages.

An abstract of 253 words

DECLARATION

I declare that this thesis represents my own work, except where due acknowledgment is made, and that it has not been previously included in a thesis, dissertation or report submitted to this University or to any other institution for a degree, diploma or other qualifications.

.....

Ningning Xie

February 2021

ACKNOWLEDGMENTS

CONTENTS

DECLARATION	I
ACKNOWLEDGMENTS	III
LIST OF FIGURES	XI
I PROLOGUE	1
1 INTRODUCTION	3
1.1 Preliminaries	3
1.1.1 Type Inference	3
1.1.2 The Hindley-Milner Type System	4
1.1.3 Higher-rank Polymorphism	5
1.1.4 Implicit Polymorphism	5
1.1.5 Predicativity	6
1.2 Contribution Overview	6
1.2.1 Type Inference for Predicative Implicit Higher-rank Polymorphism	6
1.2.2 Gradually Typed Higher-rank Polymorphism	7
1.2.3 Type Promotion and Kind Inference for Datatypes	9
1.3 Contributions	10
2 BACKGROUND	15
2.1 The Hindley-Milner Type System	15
2.1.1 Declarative System	15
2.1.2 Principal Type Scheme	17
2.1.3 Algorithmic Type System	18
2.2 The Odersky-Läufer Type System	18
2.2.1 Higher-rank Types	19
2.2.2 Declarative System	20
2.2.3 Relating to HM	22

2.3	The Dunfield-Krishnaswami Type System	22
2.3.1	Bidirectional Type Checking	23
2.3.2	Declarative System	24
2.3.3	Algorithmic Type System	27
II	BIDIRECTIONAL TYPE CHECKING WITH THE APPLICATION MODE	29
3	HIGHER-RANK POLYMORPHISM WITH THE APPLICATION MODE	31
3.1	Introduction and Motivation	31
3.1.1	Revisiting Bidirectional Type Checking	31
3.1.2	Type Checking with The Application Mode	32
3.1.3	Benefits of Information Flowing from Arguments to Functions . . .	35
3.1.4	Type Inference of Higher-rank Types	36
3.2	Declarative System	38
3.2.1	Syntax	39
3.2.2	Type System	39
3.2.3	Subtyping	43
3.3	Type-directed Translation	45
3.3.1	Target Language	45
3.3.2	Subtyping Coercions	46
3.3.3	Type-Directed Translation of Typing	49
3.3.4	Type Safety	49
3.3.5	Coherence	49
3.4	Type Inference Algorithm	51
3.5	Discussion	52
3.5.1	Combining Application and Checking Modes	52
3.5.2	Additional Constructs	53
3.5.3	More Expressive Type Applications	54
III	HIGHER-RANK POLYMORPHISM AND GRADUAL TYPING	57
4	GRADUALLY TYPED HIGHER-RANK POLYMORPHISM	59
4.1	Introduction and Motivation	59
4.1.1	Background: Gradual Typing	59
4.1.2	Motivation: Gradually Typed Higher-Rank Polymorphism	61
4.1.3	Application: Efficient (Partly) Typed Encodings of ADTs	62

4.2	Revisiting Consistent Subtyping	65
4.2.1	Consistency and Subtyping	66
4.2.2	Towards Consistent Subtyping	69
4.2.3	Abstracting Gradual Typing	71
4.2.4	Directed Consistency	72
4.2.5	Consistent Subtyping Without Existentials	73
4.3	Gradually Typed Implicit Polymorphism	75
4.3.1	Typing in Detail	75
4.3.2	Type-directed Translation	76
4.3.3	Correctness Criteria	80
4.4	Algorithmic Type System	83
4.4.1	Algorithmic Consistent Subtyping	85
4.4.2	Instantiation	87
4.4.3	Algorithmic Typing	89
4.4.4	Decidability	91
4.4.5	Context Extension	93
4.4.6	Soundness	93
4.4.7	Completeness	95
4.5	Simple Extensions and Variants	96
4.5.1	Top Types	96
4.5.2	A More Declarative Type System	97
5	RESTORING THE DYNAMIC GRADUAL GUARANTEE WITH TYPE PARAMETERS	101
5.1	Declarative Type System	101
5.2	Substitutions and Representative Translations	102
5.3	Dynamic Gradual Guarantee, Reloaded	105
5.4	Extended Algorithmic Type System	106
5.4.1	Extended Algorithmic Consistent Subtyping	107
5.4.2	Extended Instantiation	110
5.4.3	Algorithmic Typing and Metatheory	110
5.4.4	Discussion	112
5.5	Restricted Generalization	112

IV	TYPE INFERENCE WITH PROMOTION	115
6	HIGHER-RANK TYPE INFERENCE WITH TYPE PROMOTION	117
6.1	Introduction and Motivation	117
6.1.1	Background: Type Inference in Context	117
6.1.2	Our Approach: Type Promotion	119
6.1.3	Polymorphic Promotion	120
6.2	Unification for the Simply Typed Lambda Calculus	122
6.2.1	Declarative System	122
6.2.2	Algorithmic System	122
6.2.3	Soundness and Completeness	124
6.3	Subtyping for Higher-Rank Polymorphism	125
6.3.1	Declarative System	125
6.3.2	Algorithmic System	125
6.3.3	Soundness and Completeness	127
6.4	Discussion	129
6.4.1	Promoting Dependent Types	129
6.4.2	Promoting Gradual Types	130
7	KIND INFERENCE FOR DATATYPES	131
7.1	Introduction and Motivation	131
7.2	Overview	133
7.2.1	Kind Inference in Haskell98	133
7.2.2	Kind Inference in Modern GHC Haskell	134
7.2.3	Desirable Properties for Kind Inference	137
7.3	Datatypes in Haskell98	138
7.3.1	Groups and Dependency Analysis	138
7.3.2	Declarative Typing Rules	138
7.4	Kind Inference for Haskell98	140
7.4.1	Syntax	140
7.4.2	Algorithmic Typing Rules	140
7.4.3	Defaulting	142
7.4.4	Checking Datatype Declarations	143
7.4.5	Kinding	143
7.4.6	Unification	145
7.4.7	Soundness and Completeness	145

7.5	Type Parameters, Principal Kinds and Completeness in Haskell98	146
7.5.1	Type Parameters	147
7.5.2	Principal Kinds and Defaulting	147
7.5.3	Completeness	148
7.6	Declarative Syntax and Semantics of PolyKinds	148
7.6.1	Groups and Dependency Analysis	148
7.6.2	Checking Kinds	153
7.7	Kind Inference for PolyKinds	154
7.7.1	Algorithmic Program Typing	154
7.7.2	The Quantification Check	156
7.7.3	Kinding	158
7.7.4	Unification	158
7.7.5	Termination	160
7.7.6	Soundness, Completeness and Principality	163
7.8	Language Extensions	164
7.8.1	Higher-Rank Polymorphism	164
7.8.2	Generalized Algebraic Datatypes (GADTs)	165
7.8.3	Type Families	166
V	EPILOGUE	167
8	RELATED WORK	169
8.1	Type Inference for Higher-Rank Types	169
8.2	Bidirectional Type Checking	170
8.3	Gradual Typing	171
8.4	Gradual Type Systems with Explicit Polymorphism	172
8.5	Gradual Type Inference	173
8.6	Haskell and GHC	173
8.7	Unification with dependent types	174
9	SUMMARY AND FUTURE DIRECTIONS	177
9.1	Dependent Type Systems with Application mode	177
9.2	Type Inference for Intersection Type Systems	178
9.3	Gradualizing Type Classes	179
9.4	Generalized Algebraic Datatypes (GADTs)	180

BIBLIOGRAPHY	183
VI TECHNICAL APPENDIX	197
A FULL RULES FOR ALGORITHMIC AP	199
B THE EXTENDED ALGORITHMIC GPC	203
B.1 Syntax	203
B.2 Type System	203
C KIND INFERENCE FOR DATATYPES	207
C.1 Other Language Extensions	207
C.1.1 Visible Dependent Quantification	207
C.1.2 Datatype Promotion	208
C.1.3 Partial Type Signatures	208
C.2 Today’s GHC	209
C.2.1 Constraint-Based Type Inference	209
C.2.2 Contexts	209
C.2.3 Unification	210
C.2.4 Promotion	211
C.2.5 Complete User-Supplied Kinds	211
C.2.6 Dependency Analysis	212
C.2.7 Approach to Kind-Checking Datatypes	212
C.2.8 Polymorphic Recursion	213
C.2.9 The Quantification Check	214
C.2.10 ScopedSort	215
C.2.11 The “Forall-or-Nothing” Rule	216
C.3 Complete Set of Rules	216
C.3.1 Declarative Haskell98	216
C.3.2 Algorithmic Haskell98	217
C.3.3 Context Application in Haskell98	218
C.3.4 Context Extension in Haskell98	219
C.3.5 Declarative PolyKinds	219
C.3.6 Algorithmic PolyKinds	221
C.3.7 Context Application in PolyKinds	226
C.3.8 Context Extension in PolyKinds	227

LIST OF FIGURES

2.1	Syntax and static semantics of the Hindley-Milner type system.	16
2.2	Subtyping in the Hindley-Milner type system.	17
2.3	Syntax of the Odersky-Läufer type system.	20
2.4	Well-formedness of types in the Odersky-Läufer type system.	20
2.5	Static semantics of the Odersky-Läufer type system.	21
2.6	Syntax of the Dunfield-Krishnaswami Type System	24
2.7	Static semantics of the Dunfield-Krishnaswami type system.	25
3.1	Syntax of System AP.	39
3.2	Typing rules of System AP.	40
3.3	Syntax and typing rules of System F.	46
3.4	Subtyping translation rules of System AP.	47
3.5	Typing translation rules of System AP.	48
3.6	Type erasure and eta-id equality of System F.	50
4.1	Subtyping and type consistency in $\mathbf{FOb}_{<}^?$	60
4.2	Syntax of types, consistency, subtyping and well-formedness of types in declarative GPC.	67
4.3	Examples that break the original definition of consistent subtyping.	69
4.4	Observations of consistent subtyping	70
4.5	Example that is fixed by the new definition of consistent subtyping.	71
4.6	Consistent Subtyping for implicit polymorphism.	75
4.7	Syntax of expressions and declarative typing of declarative GPC	77
4.8	Less Precision	82
4.9	Syntax and well-formedness of the algorithmic GPC	84
4.10	Algorithmic consistent subtyping	86
4.11	Algorithmic instantiation	88
4.12	Algorithmic typing	90
4.13	Context extension	94

List of Figures

5.1	Syntax of types, and consistent subtyping in the extended declarative system.	102
5.2	Syntax of types, contexts and consistent subtyping in the extended algorithmic system.	106
5.3	Extended algorithmic consistent subtyping	108
5.4	Instantiation in the extended algorithmic system	111
6.1	Types, contexts, unification and promotion of algorithmic STLC	123
6.2	Types, contexts, subtyping and (polymorphic) promotion of the algorithmic system	126
7.1	Declarative specification of Haskell98 datatype declarations	139
7.2	Algorithmic program typing in Haskell98	141
7.3	Algorithmic kinding, unification and promotion in Haskell98.	144
7.4	Syntax of PolyKinds	149
7.5	Declarative specification of PolyKinds	150
7.6	Selected rules for declarative kind-checking in PolyKinds	151
7.7	Algorithmic syntax in PolyKinds	153
7.8	Algorithmic program typing in PolyKinds	155
7.9	Selected rules for algorithmic kinding in PolyKinds	157
7.10	Selected rules for unification, promotion, and moving in PolyKinds	159
7.11	Example of dependency graph	162

PART I

PROLOGUE

1 INTRODUCTION

Modern functional languages such as Haskell, ML, and OCaml come with powerful forms of type inference. The global type-inference algorithms employed in those languages are derived from the Hindley-Milner type system (HM) [Damas and Milner 1982; Hindley 1969], with multiple extensions. As the languages evolve, researchers also formalize the key aspects of type inference for the new extensions. One common extension of HM, which is also the central theme of this dissertation, is *higher-rank polymorphism* [Dunfield and Krishnaswami 2013; Odersky and Läufer 1996; Peyton Jones et al. 2007]. In particular, we are interested in *predicative implicit higher-rank polymorphism*, which extends type inference for functional programming languages in the presence of polymorphic types.

1.1 PRELIMINARIES

1.1.1 TYPE INFERENCE

In real world, many programming languages are typed, including C, Java, and most functional programming languages like Haskell. In those languages, numbers like 1, 2, 3 are given type **Int**, while `True` and `False` are given type **Bool**. With such type information, if we know that

```
add : Int → Int → Int
```

we can accept expressions like

```
add 1 2
```

while correctly rejecting programs like

```
add 1 True
```

Typed programs are more reliable, as they offer strong static guarantees. For example, if the program is type-checked, then we know for sure that expressions like `add 1 True` will never occur during runtime. Moreover, typed programs often have better performance at runtime since a compiler can apply optimizations according to the type information.

26 However, writing type annotations can be tedious, especially when the type annotations
 27 can be *inferred* from the context. Consider the definition of `add`, which uses the built-in
 28 primitive `+` : `Int` \rightarrow `Int` \rightarrow `Int`¹.

29 `add = \x:Int. \y:Int. x + y`

30 Here we have provided explicit type annotations for `x` and `y`. But we do not really have to:
 31 from the use of `+`, it is obvious that the type of these two variables are `Int`. What we really
 32 want to write is instead

33 `add2 = \x. \y. x + y`

34 We thus need *type inference*, which reconstructs missing types in expressions. In this case,
 35 with type inference, we would write `add2`, and type inference would automatically figure out
 36 the right type annotations, generating `add` for free. Such a facility eliminates a great deal of
 37 needless verbosity without losing the benefits of static guarantees. Moreover, it reduces the
 38 burden of programmers, as programs are now easier to read and write.

39 1.1.2 THE HINDLEY-MILNER TYPE SYSTEM

40 Most type inference systems used in practice are based on the Hindley-Milner (HM) type
 41 system [Damas and Milner 1982; Hindley 1969]. The HM system comes with a simple yet
 42 effective algorithm that can infer the most general, or *principal*, types for expressions without
 43 any type annotations.

44 For example, consider the expression

45 `id = \x. x`

46 There are many possible types we can give for `id`, including `Int` \rightarrow `Int`, and `Bool` \rightarrow `Bool`,
 47 etc. In this case, HM will derive the principal type for `id`: $\forall a. a \rightarrow a$. a *polymorphic* type
 48 with a universal quantifier over the type variable `a`. We call types without universal quan-
 49 tifiers, like `Int` \rightarrow `Int` and `Bool` \rightarrow `Bool`, *monomorphic types* (i.e., *monotypes*), and types
 50 like $\forall a. a \rightarrow a$ polymorphic types. For this example, from the principal type $\forall a. a \rightarrow a$,
 51 other types like `Int` \rightarrow `Int` and `Bool` \rightarrow `Bool` can be derived by instantiating `a` to `Int` and
 52 `Bool` respectively. With the principal type, we can use `id` as in the following program:

53 `let id = \x. x`
 54 `in (id 1, id True)`

¹The syntax `\` creates a *lambda* for defining functions. The definition is essentially equivalent to `add(Int x, Int y) {return x + y;}` in languages like Java.

55 1.1.3 HIGHER-RANK POLYMORPHISM

56 While elegant and expressive, the HM system comes with a restriction: universal quantifiers
57 in types are restricted to the top-level. For example,

58 $\forall a. a \rightarrow a$

59 is a valid type, while

60 $(\forall a. a \rightarrow a) \rightarrow \text{int}$

61 is not as \forall appears inside the \rightarrow constructor.

62 This is unfortunate, as modern programming often requires *higher-rank* polymorphism,
63 i.e., universal quantifiers can appear anywhere inside a type. For example, it is well-known
64 that *rank-2* polymorphic types (i.e., universal quantifier can appear one level *contravariantly*
65 deeper in \rightarrow) [Jones 1996; McCracken 1984] can be used for resource encapsulation. This
66 is a well-understood technique used in Haskell's state monad [Gill et al. 1993], which has a
67 function `runST` with the following type:

68 `runST : $\forall a. (\forall s. \text{ST } s \ a) \rightarrow a$`

69 The \forall in the rank-2 type ensures by construction that the internal state `s` used by the `ST s a`
70 computation is inaccessible to the rest of the program.

71 1.1.4 IMPLICIT POLYMORPHISM

72 System F [Girard 1986; Reynolds 1974] is the *polymorphic lambda calculus* with full power of
73 higher-rank polymorphism, where functions like `runST` can be defined easily. System F has
74 been used extensively in research on polymorphism, and has served as the basis for various
75 programming language designs.

76 In System F, type arguments are passed explicitly. For example, consider

77 `map :: $\forall a \ b. (a \rightarrow b) \rightarrow [a] \rightarrow [b]$`

78 `fst :: $\forall a \ b. (a, b) \rightarrow a$`

79 where `map` takes a function, and a list, and applies the function to every element in the list;
80 and `fst` takes out the first component from a tuple. We can use the functions as

81 `map (Int, Char) Int (fst Int Char) [(1, 'a'), (2, 'b')]`

82 `-- [(1, 2)]`

83 However, writing type arguments, much like writing type annotations, is quite tedious. In
84 this case, the type arguments are almost as large as the program itself!

1 Introduction

85 For systems with polymorphism, type inference enables *implicit polymorphism*, where
86 missing type arguments are reconstructed automatically. In this case, as types can be in-
87 ferred from the argument $[(1, 'a'), (2, 'b')]$, with type inference we could simply
88 write

```
89 map fst [(1, 'a'), (2, 'b')]
```

90 There has been lots of work in extending the HM type system with implicit higher-rank
91 polymorphism [Dunfield and Krishnaswami 2013; Le Botlan and Rémy 2003; Leijen 2009;
92 Peyton Jones et al. 2007; Serrano et al. 2020, 2018].

93 1.1.5 PREDICATIVITY

94 In a system with polymorphism, one important design decision to make is whether the sys-
95 tem is *predicative* or *impredicative*.

96 A system is predicative, if the type variable bound by a universal quantifier is only allowed
97 to be instantiated by a monotype; otherwise it is impredicative. For example, instantiating a
98 with \mathbf{Int} in $\forall a. a \rightarrow a$, generating $\mathbf{Int} \rightarrow \mathbf{Int}$, is predicative; while instantiating a with $\forall a. a \rightarrow \mathbf{Int}$
99 in $\forall a. a \rightarrow a$, generating $(\forall a. a \rightarrow \mathbf{Int}) \rightarrow (\forall a. a \rightarrow \mathbf{Int})$, is impredicative.
100 HM is an example of predicative polymorphic system, with universal quantifiers restricted to
101 the top-level, while System F is impredicative. It is well-known that general type inference for
102 impredicativity is undecidable [Wells 1999]. The most recent line of work in impredicativity
103 can be found in work by Serrano et al. [2020, 2018].

104 In this work, we focus on *predicative implicit higher-rank polymorphism* [Dunfield and
105 Krishnaswami 2013; Peyton Jones et al. 2007]. In the rest of this dissertation, whenever we
106 refer to *higher-rank polymorphism*, unless otherwise specified, it denotes predicative implicit
107 higher-rank polymorphism.

108 1.2 CONTRIBUTION OVERVIEW

109 The goal of this dissertation is to explore the design space of type inference for implicit pred-
110 icative higher-rank polymorphism, as well as to study the integration of techniques we have
111 developed into other advanced type system features including *gradual typing* [Siek and Taha
112 2007] and *kind inference*.

113 1.2.1 TYPE INFERENCE FOR PREDICATIVE IMPLICIT HIGHER-RANK POLYMORPHISM

114 There has been much work on type inference for higher-rank polymorphism [Dunfield and
115 Krishnaswami 2013; Odersky and Läufer 1996; Peyton Jones et al. 2007]. However, since

general type inference for higher-rank polymorphism is undecidable [Wells 1999], all work involves difference design tradeoffs. In particular, given $\text{id} : \forall a. a \rightarrow a$, consider:

$(\lambda f. (f\ 1, f\ 'a'))\ \text{id}$

Systems including Dunfield and Krishnaswami [2013]; Odersky and Läufer [1996]; Peyton Jones et al. [2007] fail to type-check this program, as they fail to infer a polymorphic type for f . However, much like we do not need to write type annotations in expressions like $\lambda x. \lambda y. x + y$, we should not be required to provide an explicit type annotation for f , given that we can derive this type information from the context: id has type $\forall a. a \rightarrow a$, which can serve as the type of f .

Bidirectional type checking, popularized by local type inference [Pierce and Turner 2000], exploits the idea of recovering type information from adjacent nodes in the syntax tree. For example, using bidirectional type checking, type information can be propagated inwards in programs like $(\lambda x. x + 1) : \text{Int} \rightarrow \text{Int}$. Several systems [Dunfield and Krishnaswami 2013; Peyton Jones et al. 2007] integrates bidirectional type checking into type inference for higher-rank polymorphism.

Unfortunately, traditional bidirectional typechecking is not working for this example. Specifically, traditional bidirectional checking does not make use of the type information from the *argument* (in this case, id) to infer the type of the function (in this case, $(\lambda f. (f\ 1, f\ 'a'))$).

The first contribution of this dissertation is a design of a variant of bidirectional type checking algorithm that, when applied to higher-rank polymorphism, is able to accept the above example without any additional type annotations. Like other systems, the design of this system involves different tradeoffs, and those difference tradeoffs provide new insights for designing bidirectional type checking algorithms. Besides illustrating the key idea, we also compare our system in detail with other systems with (bidirectional) type inference for higher-rank polymorphism.

1.2.2 GRADUALLY TYPED HIGHER-RANK POLYMORPHISM

Static typing enjoys many benefits. For example, it is guaranteed that ill-typed programs will be rejected at compile-time. Also, types serve as good documentation for programs, as well as to accelerate program execution when combined with type-based compiler optimization. So far we have only considered programs with static typing.

On the other hand, *dynamic typing*, where majority of its type checking is performed at run-time, has its own merits. Languages with dynamic typing, like Python and Javascript,

are generally considered to have less cognitive load, better expressiveness, as well as better support for fast prototyping.

Gradual typing [Siek and Taha 2006] is designed to enjoy the best of both worlds. Languages with gradual typing include Clojure [Bonnaire-Sergeant et al. 2016], Python [Lehtosalo et al. 2006; Vitousek et al. 2014], TypeScript [Bierman et al. 2014], etc. With gradual typing, programmers have fine-grained control over the static-to-dynamic spectrum: programs can be partially type-checked, where the type-checked part enjoys benefits from static typing, and the untype-checked part is dynamically type-checked. In particular, gradual typing also provides an explicit type annotation `?`, which indicates unknown types that should be type-checked during runtime. As an example, in the following program:

```
\x:Int. \y:?. (x + 1, not y)
```

`x` is statically type-checked and `y` is dynamically type-checked, so that the following program is rejected at compile-time:

```
(\x:Int. \y:?. (x + 1, not y)) 'a' False
```

while the following is only rejected at runtime:

```
(\x:Int. \y:?. (x + 1, not y)) 1 'a'
```

However, while gradual typing is increasingly popular in the programming language research community, the integration of gradual typing with advanced type features still largely remains unclear. This is not surprising though, as great care must be taken in the design of the interaction between static types features and the unknown type. Therefore, there has been more work in adding basic static typing support in dynamically typed languages, than gradualizing statically typed languages with advanced features.

The second contribution of this dissertation is the integration of gradual typing and higher-rank polymorphism. Higher-rank polymorphism, as we have shown, is pervasive in languages like Haskell. Therefore, our study provides a step forward in adding gradual types in modern static typing languages. In particular, with gradual typing, we are able to accept

```
(\f:?. (f 1, f 'a')) id
```

without providing explicitly the large type annotation for `f`.

Designing a gradually typed higher-rank polymorphic type system poses great challenges. First, it requires to integrate *subtyping* and *consistency*. Implicit polymorphism is often built on a *subtyping* relation, which implicitly converts a more general type (e.g., $\forall a. a \rightarrow a$) to a more specific one (e.g., $\text{Int} \rightarrow \text{Int}$) so that for example `id` can be used where an expression of type $\text{Int} \rightarrow \text{Int}$ is expected. On the other hand, gradual typing deals with the powerful unknown type, so that an expression with the unknown type can be used as an expression of any

183 type. We show that existing design of such integration [Siek and Taha 2007] is inadequate,
 184 and we provide a generalized design that is able to deal with higher-rank polymorphism. Sec-
 185 ond, we must ensure that our system is well-designed, by showing that our system satisfies
 186 the *correctness criteria* [Siek et al. 2015]. We will show that the *dynamic gradual guarantee* is
 187 particular tricky to deal with.

188 1.2.3 TYPE PROMOTION AND KIND INFERENCE FOR DATATYPES

189 An ideal type inference algorithm should enjoy various desired properties: *soundness*, *com-*
 190 *pleteness* and *inference of principal types*. An algorithm is sound and complete, if it accepts
 191 and only accepts programs that are well-typed in the *declarative* type system.

192 However, design of type inference algorithms is challenging, as it often involves low-level
 193 details, including *constraint solving*, *unification*, etc. In systems with advanced type features,
 194 like higher-rank polymorphism, the inference algorithm further needs to deal with the scop-
 195 ing and dependency issues between different kinds of variables. For example, consider the
 196 type $\forall a. \forall b. a \rightarrow b$ and $\forall c. c \rightarrow c$. Intuitively, we know that the first type is more gen-
 197 eral than the other, but how can show that algorithmically? We first need to *skolemize* c as a
 198 *type variable*, and then instantiate a , b with fresh *unification variables*, and finally show that
 199 we can *solve* those unification variables with c . Handling the scoping and dependency issues
 200 properly is tricky.

201 In the third part of the dissertation, we propose a novel *type promotion* process, which
 202 helps resolve the dependency between variables during type inference. We show that it leads
 203 to an arguably simpler type inference algorithm for higher-rank polymorphism, and can be
 204 easily applied to other advanced features like gradual typing.

205 Another advanced feature that involves more complicated scoping and dependency issues
 206 is *dependent types*. So far, we have only considered programs where expressions can depend
 207 on types, e.g., the term `2` has type `Int`. In dependently typed languages, types can depend
 208 on expressions, e.g., the type `Vec Int 2` may express a vector of integer of length 2. A vector
 209 with polymorphic length can then be expressed as $\forall n : \text{Int}. \text{Vec } \text{Int } n$. Note how the term n
 210 of type `Int` scopes over the body of the type.

211 In the second half of this part, as another application of promotion, we consider type infer-
 212 ence for dependent types in a practical setting; that is, *kind inference* for *datatypes*. Datatype
 213 declarations offer a way to define new types along with their constructors. For example,

214 `data Maybe a = Nothing | Just a`

215 defines a type `Maybe a` with two constructors, `Nothing`, and `Just` which has one field of type
 216 `a`. This datatype is useful to express optional types. For example, we can express a division

algorithm which, when the second argument is 0, returns `Nothing`, or otherwise wraps the result inside `Just`.

```
div : Int → Int → Maybe Int
div 42 2  -- Just 21
div 42 0  -- Nothing
```

Note that `Maybe` takes a type (e.g., `Int` in this case), and returns another type (e.g., `Maybe Int`). In the same sense as expressions are classified using *types*, types are classified using *kinds*. We say that primitive types like `Int` have kind `*`, and therefore `Maybe` has kind `* → *`. We call the process of inferring the kind of types *kind inference*.

In type systems with only simple types, kind inference for datatypes is straightforward. However, in recent years, languages have seen a dramatic surge of new features, and kind inference for datatypes has become non-trivial. For example, consider inferring the kind of the following datatype declarations:

```
data App f a = MkApp (f a)
data Fix f   = In (f (Fix f))
data T       = MkT1 (App Maybe Int) | MkT2 (App Fix Maybe)
```

which includes several complicated features: in the definition of `App`, the type of `f` and `a` can be polymorphic; in `T`, the type `Maybe` and `Fix` are both used in their unsaturated form (i.e., `Maybe` and `Fix` are not applied to any type arguments), and `App` is used polymorphically.

In the second half of this part, we study kind inference for datatypes in two systems: Haskell98, and a more advanced system we call `PolyKinds`, based on the extensions in modern Haskell, where the type and kind languages are *unified*, and *dependently typed*. We show that proper design of kind inference for datatypes is challenging, and *unification* between dependent types also poses a threat to termination. Both formulations are novel and without precedent, and thus this work can serve as a guide to language designers who wish to formalize their datatype declarations.

1.3 CONTRIBUTIONS

In particular, I offer the following specific contributions:

- Part II** • Chapter 3 presents an implicit higher-rank polymorphic type system `AP`, which infers higher-rank types, generalizes the `HM` type system, and has polymorphic `let` as syntactic sugar. As far as we are aware, no previous work enables an `HM`-style `let` construct to be expressed as syntactic sugar.

The system is defined based on a variant of *bidirectional type (checking)* [Pierce and Turner 2000] with a new *application* mode. The new variant preserves the advantage of bidirectional type checking, namely many redundant type annotations are removed, while certain programs can type check with even fewer annotations. We believe that, similarly to standard bidirectional type checking, bidirectional type checking with an application mode can be applied to a wide range of type systems.

Part III

- Chapter 4 integrates implicit higher-rank polymorphism with *gradual types* [Siek and Taha 2006], which is, as far as we are aware, the first work on bridging the gap between implicit higher-rank polymorphism and gradual typing.

We start by studying the gradually typed subtyping and *type consistency* [Siek and Taha 2006], the central concept for gradual typing, for implicit higher-rank polymorphism. To accomplish this, we first define a framework for *consistent subtyping* [Siek and Taha 2007] with

- a new definition of consistent subtyping that subsumes and generalizes that of Siek and Taha, and can deal with polymorphism and top types. Our new definition of consistent subtyping preserves the orthogonality between consistency and subtyping. To slightly rephrase Siek and Taha [2007], the motto of this framework is that: *Gradual typing and polymorphism are orthogonal and can be combined in a principled fashion.*²
- a syntax-directed version of consistent subtyping that is sound and complete with respect to our definition of consistent subtyping. The syntax-directed version of consistent subtyping is remarkably simple and well-behaved, and does not require the *restriction* operator of Siek and Taha [2007].

Based on consistent subtyping, we then present the design of GPC, which stands for Gradually Polymorphic Calculus: a (source-level) gradually typed calculus for predicative implicit higher-rank polymorphism that uses our new notion of consistent subtyping. We prove that our calculus satisfies the static aspects of the refined criteria for gradual typing [Siek et al. 2015], and is type-safe by a type-directed translation to λB [Ahmed et al. 2009]. We then give a sound and complete bidirectional algorithm for implementing the declarative system based on the design principle of Garcia and Cimini [2015].

²Note here that we borrow Siek and Taha’s motto mostly to talk about the static semantics. As Ahmed et al. [2009] show there are several non-trivial interactions between polymorphism and casts at the level of the dynamic semantics.

- 281 • Chapter 5 proposes an extension of GPC with type parameters [Garcia and Ci-

282 mini 2015] as a step towards restoring the *dynamic gradual guarantee* [Siek et al.

283 2015]. The extension significantly changes the algorithmic system. The new

284 algorithm features a novel use of existential variables with a different solution

285 space, which is a natural extension of the approach by Dunfield and Krishnaswami

286 [2013].

- 287 **Part IV** • Chapter 6 proposes an arguably simpler algorithmic subtyping of the type in-

288 ference algorithm for higher-rank implicit polymorphism, based on a new strat-

289 egy called *promotion* in the *type inference in context* [Dunfield and Krishnaswami

290 2013; Gundry et al. 2010] framework. Promotion helps resolve the dependency

291 between variables during solving, and can be naturally generalized to more com-

292 plicated types.

293 In this part, we first apply promotion to the unification algorithm for simply

294 typed lambda calculus, and then its polymorphic extension to the subtyping al-

295 gorithm for implicit predicative higher-rank polymorphism.

- 296 • Chapter 7 applies the design of promotion in the context of kind inference for

297 datatypes, and presents two kind inference systems for Haskell. The first sys-

298 tem, we believe, is the first formalization of this aspect of Haskell98, and the sec-

299 ond one models the challenging features for kind inference in modern Haskell.

300 Specifically,

 - 301 – We formalize Haskell98’s datatype declarations, providing both a declarative

302 specification and syntax-driven algorithm for kind inference. We prove that

303 the algorithm is sound and observe how Haskell98’s technique of *defaulting*

304 leads to incompleteness.

 - 305 – We then present a type and kind language that is unified and dependently

306 typed, modeling the challenging features for kind inference in modern Haskell.

307 We include both a declarative specification and a syntax-driven algorithm.

308 The algorithm is proved sound, and we observe where and why complete-

309 ness fails. In the design of our algorithm, we must choose between com-

310 pleteness and termination; we favor termination but conjecture that an al-

311 ternative design would regain completeness. Unlike other dependently typed

312 languages, we retain the ability to infer top-level kinds instead of relying on

313 compulsory annotations.

314 This thesis is largely based on the publications by the author [Xie et al. 2018, 2019a,c;
 315 Xie and Oliveira 2017, 2018], as indicated below. The metatheory of those works is mostly
 316 verified using the Coq proof assistant, including type safety, coherence, etc.

317 **Chapter 3:** Ningning Xie and Bruno C. d. S. Oliveira. 2018. “Let Arguments Go First”. In
 318 *European Symposium on Programming (ESOP)*³.

319 **Chapter 4:** Ningning Xie, Xuan Bi, and Bruno C. d. S. Oliveira. 2018. “Consistent Subtyping
 320 for All”. In *European Symposium on Programming (ESOP)*⁴.

321 **Chapter 5:** Ningning Xie, Xuan Bi, Bruno C. d. S. Oliveira, and Tom Schrijvers. 2019. “Con-
 322 sistent Subtyping for All”. In *ACM Transactions on Programming Languages and Sys-
 323 tems (TOPLAS)*⁵.

324 **Chapter 6:** Ningning Xie and Bruno C. d. S. Oliveira. 2017. “Towards Unification for De-
 325 pendent Types” (Extended abstract), In *Draft Proceedings of Trends in Functional Pro-
 326 gramming (TFP)*⁶.

327 **Chapter 7:** Ningning Xie, Richard Eisenberg and Bruno C. d. S. Oliveira. 2020. “Kind Infer-
 328 ence for Datatypes”. In *Symposium on Principles of Programming Languages (POPL)*⁷.

329

³Proofs in <https://bitbucket.org/ningningxie/let-arguments-go-first/src/master/>.

⁴Proofs in <https://github.com/xnning/Consistent-Subtyping-for-All>.

⁵Proofs in <https://github.com/xnning/Consistent-Subtyping-for-All>.

⁶Proofs in <https://xnning.github.io/papers/sanitized-type-inference-in-context.pdf>.

⁷Proofs in <https://arxiv.org/abs/1911.06153>.

2 BACKGROUND

This chapter sets the stage for type systems in later chapters. Section 2.1 reviews the Hindley-Milner type system [Damas and Milner 1982; Hindley 1969; Milner 1978], a classical type system for the lambda calculus with parametric polymorphism. Section 2.2 presents the Odersky-Läufer type system [Odersky and Läufer 1996], which extends upon the Hindley-Milner type system by putting higher-rank type annotations to work. Finally in Section 2.3 we introduce the Dunfield-Krishnaswami type system, a bidirectional higher-rank type system.

2.1 THE HINDLEY-MILNER TYPE SYSTEM

The global type-inference algorithms employed in modern functional languages such as ML, Haskell and OCaml, are derived from the Hindley-Milner type system. The Hindley-Milner type system, hereafter referred to as HM, is a polymorphic type discipline first discovered in Hindley [1969], later rediscovered by Milner [1978], and also closely formalized by Damas and Milner [1982]. In what follows, we first review its declarative specification, then discuss the property of principality, and finally talk briefly about its algorithmic system.

2.1.1 DECLARATIVE SYSTEM

The declarative system of HM is given in Figure 2.1.

SYNTAX. The expressions e include variables x , literals n , lambda abstractions $\lambda x. e$, applications $e_1 e_2$ and **let** $x = e_1$ **in** e_2 . Note here lambda abstractions have no type annotations, and the type information is to be reconstructed by the type system.

Types consist of polymorphic types σ and monomorphic types (monotypes) τ . A polymorphic type is a sequence of universal quantifications (which can be empty) followed by a monotype τ , which can be the integer type Int , type variables a and function types $\tau_1 \rightarrow \tau_2$.

A context Ψ tracks the type information for variables. We implicitly assume items in a context are distinct throughout the thesis.

2 Background

Expressions	$e ::= x \mid n \mid \lambda x. e \mid e_1 e_2 \mid \mathbf{let} x = e_1 \mathbf{in} e_2$
Types	$\sigma ::= \forall \bar{a}_i^i. \tau$
Monotypes	$\tau ::= \mathbf{Int} \mid a \mid \tau_1 \rightarrow \tau_2$
Contexts	$\Psi ::= \bullet \mid \Psi, x : \sigma$

$\Psi \vdash^{HM} e : \sigma$

(Typing)

$\frac{\text{HM-VAR} \quad (x : \sigma) \in \Psi}{\Psi \vdash^{HM} x : \sigma}$	$\frac{\text{HM-INT}}{\Psi \vdash^{HM} n : \mathbf{Int}}$	$\frac{\text{HM-LAM} \quad \Psi, x : \tau_1 \vdash^{HM} e : \tau_2}{\Psi \vdash^{HM} \lambda x. e : \tau_1 \rightarrow \tau_2}$
$\frac{\text{HM-APP} \quad \Psi \vdash^{HM} e_1 : \tau_1 \rightarrow \tau_2 \quad \Psi \vdash^{HM} e_2 : \tau_1}{\Psi \vdash^{HM} e_1 e_2 : \tau_2}$	$\frac{\text{HM-LET} \quad \Psi \vdash^{HM} e_1 : \sigma \quad \Psi, x : \sigma \vdash^{HM} e_2 : \tau}{\Psi \vdash^{HM} \mathbf{let} x = e_1 \mathbf{in} e_2 : \tau}$	
$\frac{\text{HM-GEN} \quad \bar{a}_i^i \notin \text{FV}(\Psi) \quad \Psi \vdash^{HM} e : \tau}{\Psi \vdash^{HM} e : \forall \bar{a}_i^i. \tau}$	$\frac{\text{HM-INST} \quad \Psi \vdash^{HM} e : \forall \bar{a}_i^i. \tau}{\Psi \vdash^{HM} e : \tau[\bar{a}_i \mapsto \bar{\tau}_i^i]}$	

Figure 2.1: Syntax and static semantics of the Hindley-Milner type system.

355 **TYPING.** The declarative typing judgment $\Psi \vdash^{HM} e : \sigma$ derives the type σ of the expression
 356 e under the context Ψ . Rule **HM-VAR** fetches a polymorphic type $x : \sigma$ from the context.
 357 Literals always have the integer type (rule **HM-INT**). For lambdas (rule **HM-LAM**), since there
 358 is no type given for the binder, the system *guesses* a *monotype* τ_1 as the type of x , and derives
 359 the type τ_2 for the body e , returning a function $\tau_1 \rightarrow \tau_2$. Function types are eliminated by
 360 applications. In rule **HM-APP**, the type of the argument must match the parameter's type τ_1 ,
 361 and the whole application returns type τ_2 .

362 Rule **HM-LET** is the key rule for flexibility in HM, where a *polymorphic* expression can be
 363 defined, and later instantiated with different types in the call sites. In this rule, the expression
 364 e_1 has a polymorphic type σ , and the rule adds $x : \sigma$ into the context to type-check e_2 .

365 Rule **HM-GEN** and rule **HM-INST** correspond to *generalization* and *instantiation* respec-
 366 tively. In rule **HM-GEN**, we can generalize over type variables \bar{a}_i^i which are not bound in
 367 the type context Ψ . In rule **HM-INST**, we can instantiate the type variables with arbitrary
 368 *monotypes*.

$$\boxed{\vdash^{HM} \sigma_1 <: \sigma_2} \quad (\text{Subtyping})$$

$$\begin{array}{c}
\text{HM-S-REFL} \\
\hline
\vdash^{HM} \tau <: \tau
\end{array}
\quad
\begin{array}{c}
\text{HM-S-FORALLR} \\
a \notin \text{FV}(\sigma_1) \quad \vdash^{HM} \sigma_1 <: \sigma_2 \\
\hline
\vdash^{HM} \sigma_1 <: \forall a. \sigma_2
\end{array}
\quad
\begin{array}{c}
\text{HM-S-FORALLL} \\
\vdash^{HM} \sigma_1[a \mapsto \tau] <: \sigma_2 \\
\hline
\vdash^{HM} \forall a. \sigma_1 <: \sigma_2
\end{array}$$

Figure 2.2: Subtyping in the Hindley-Milner type system.

2.1.2 PRINCIPAL TYPE SCHEME

One salient feature of HM is that the system enjoys the existence of *principal types*, without requiring any type annotations. Before we present the definition of principal types, let's first define the *subtyping* relation among types.

The judgment $\vdash^{HM} \sigma_1 <: \sigma_2$, given in Figure 2.2, reads that σ_1 is a subtype of σ_2 . The subtyping relation indicates that σ_1 is more *general* than σ_2 : for any instantiation of σ_2 , we can find an instantiation of σ_1 to make two types match. Rule **HM-S-REFL** is simply reflexive for monotypes. Rule **HM-S-FORALLR** has a polymorphic type $\forall a. \sigma_2$ on the right hand side. In order to prove the subtyping relation for *all* possible instantiations of a , we *skolemize* a , by making sure a does not appear in σ_1 (up to α -renaming). In this case, if σ_1 is still a subtype of σ_2 , we are sure then whatever a can be instantiated to, σ_1 can be instantiated to match σ_2 . In rule **HM-S-FORALLL**, by contrast, the a in $\forall a. \sigma_1$ can be instantiated to any monotype to match the right hand side. Here are some examples of the subtyping relation:

$$\begin{array}{c}
\vdash^{HM} \text{Int} \rightarrow \text{Int} <: \text{Int} \rightarrow \text{Int} \\
\vdash^{HM} \forall a. a \rightarrow a <: \text{Int} \rightarrow \text{Int}
\end{array}$$

Given the subtyping relation, now we can formally state that HM enjoys *principality*. That is, for every well-typed expression in HM, there exists one type for the expression, which is more general than any other types the expression can derive. Formally,

Theorem 2.1 (Principality for HM). *If $\Psi \vdash^{HM} e : \sigma$, then there exists σ' such that $\Psi \vdash^{HM} e : \sigma'$, and for all σ'' such that $\Psi \vdash^{HM} e : \sigma''$, we have $\vdash^{HM} \sigma' <: \sigma''$.*

Consider the expression $\lambda x. x$. It has a principal type $\forall a. a \rightarrow a$, which is more general than any other options, e.g., $\text{Int} \rightarrow \text{Int}$, $(\text{Int} \rightarrow \text{Int}) \rightarrow (\text{Int} \rightarrow \text{Int})$, etc.

2 Background

2.1.3 ALGORITHMIC TYPE SYSTEM

The declarative specification of HM given in Figure 2.1 does not directly lead to an algorithm. In particular, the system is not *syntax-directed*, and there are still many guesses in the system, such as in rule [HM-LAM](#).

SYNTAX-DIRECTED SYSTEM. A type system is *syntax-directed*, if the typing rules are completely driven by the syntax of expressions; in other words, there is exactly one typing rule for each syntactic form of expressions. However, in Figure 2.1, the rule for generalization (rule [HM-GEN](#)) and instantiation (rule [HM-INST](#)) can be applied anywhere.

A syntax-directed presentation of HM can be easily derived. In particular, from the typing rules we observe that, except for fetching a variable from the context (rule [HM-VAR](#)), the only place where a polymorphic type can be generated is for the let expressions (rule [HM-LET](#)). Thus, a syntax-directed system of HM can be presented as the original system, with instantiation applied to only variables, and generalization applied to only let expressions. Specifically,

$$\begin{array}{c}
 \text{HM-VAR-INST} \\
 \frac{(x : \forall \bar{a}_i^i. \tau) \in \Psi}{\Psi \vdash^{HM} x : \tau[\bar{a}_i \mapsto \bar{\tau}_i^i]}
 \end{array}
 \qquad
 \begin{array}{c}
 \text{HM-LET-GEN} \\
 \frac{\Psi \vdash^{HM} e_1 : \tau \quad \bar{a}_i^i = \text{FV}(\tau) - \text{FV}(\Psi) \quad \Psi, x : \forall \bar{a}_i^i. \tau \vdash^{HM} e_2 : \tau}{\Psi \vdash^{HM} \text{let } x = e_1 \text{ in } e_2 : \tau}
 \end{array}$$

TYPE INFERENCE. The guessing part of the system can be deterministically solved by the technique of *type inference*. There exists a sound and complete type inference algorithm for HM [Damas and Milner 1982], which has served as the basis for the type inference algorithm for many other systems [Odersky and Läufer 1996; Peyton Jones et al. 2007], including the system presented in Chapter 3. We will discuss more about it in Chapter 3.

2.2 THE ODERSKY-LÄUFER TYPE SYSTEM

The HM system is simple, flexible and powerful. Yet, since the type annotations in lambda abstractions are always missing, HM only derives polymorphic types of *rank 1*. That is, universal quantifiers only appear at the top level. Polymorphic types are of *higher-rank*, if universal quantifiers can appear anywhere in a type.

Essentially implicit higher-rank types enable much of the expressive power of System F, with the advantage of implicit polymorphism. Complete type inference for System F is known to be undecidable [Wells 1999]. Odersky and Läufer [1996] proposed a type sys-

tem, hereafter referred to as OL, which extends HM by allowing lambda abstractions to have explicit *higher-rank* types as type annotations. As a motivation, consider the following program¹:

```
(\f. (f 1, f 'a')) (\x. x)
```

which is not typeable under HM because it fails to infer the type of f : f is supposed to be polymorphic as it is applied to two arguments of different types. With OL we can add the type annotation for f :

```
(\f :  $\forall a. a \rightarrow a$ . (f 1, f 'a')) (\x. x)
```

Note that the first function now has a rank-2 type, as the polymorphic type $\forall a. a \rightarrow a$ appears in the argument position of a function:

```
(\f :  $\forall a. a \rightarrow a$ . (f 1, f 'a')) : ( $\forall a. a \rightarrow a$ )  $\rightarrow$  (Int, Char)
```

In the rest of this section, we first give the definition of the rank of a type, and then present the declarative specification of OL, and show that OL is a conservative extension of HM.

2.2.1 HIGHER-RANK TYPES

We define the rank of types as follows.

Definition 1 (Type rank). The *rank* of a type is the depth at which universal quantifiers appear contravariantly [Kfoury and Tiuryn 1992]. Formally,

$\text{rank}(\tau)$	$=$	0
$\text{rank}(\sigma_1 \rightarrow \sigma_2)$	$=$	$\max(\text{rank}(\sigma_1) + 1, \text{rank}(\sigma_2))$
$\text{rank}(\forall a. \sigma)$	$=$	$\max(1, \text{rank}(\sigma))$

Below we give some examples:

$\text{rank}(\text{Int} \rightarrow \text{Int})$	$=$	0
$\text{rank}(\forall a. a \rightarrow a)$	$=$	1
$\text{rank}(\text{Int} \rightarrow (\forall a. a \rightarrow a))$	$=$	1
$\text{rank}((\forall a. a \rightarrow a) \rightarrow \text{Int})$	$=$	2

From the definition, we can see that monotypes always have rank 0, and the polymorphic types in HM (σ in Figure 2.1) has at most rank 1.

¹For the purpose of illustration, we assume basic constructs like booleans and pairs in examples.

2 Background

Expressions	$e ::=$	$x \mid n \mid \lambda x : \sigma. e \mid \lambda x. e \mid e_1 e_2 \mid \text{let } x = e_1 \text{ in } e_2$
Types	$\sigma ::=$	$\text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma$
Monotypes	$\tau ::=$	$\text{Int} \mid a \mid \tau_1 \rightarrow \tau_2$
Contexts	$\Psi ::=$	$\bullet \mid \Psi, x : \sigma \mid \Psi, a$

Figure 2.3: Syntax of the Odersky-Läufer type system.

$\boxed{\Psi \vdash^{OL} \sigma}$	(Type Well-formedness)		
OL-WF-INT	OL-WF-TVAR	OL-WF-ARROW	OL-WF-FORALL
$\frac{}{\Psi \vdash^{OL} \text{Int}}$	$\frac{a \in \Psi}{\Psi \vdash^{OL} a}$	$\frac{\Psi \vdash^{OL} \sigma_1 \quad \Psi \vdash^{OL} \sigma_2}{\Psi \vdash^{OL} \sigma_1 \rightarrow \sigma_2}$	$\frac{\Psi, a \vdash^{OL} \sigma}{\Psi \vdash^{OL} \forall a. \sigma}$

Figure 2.4: Well-formedness of types in the Odersky-Läufer type system.

2.2.2 DECLARATIVE SYSTEM

SYNTAX. The syntax of OL is given in Figure 2.3. Comparing to HM, we observe the following differences.

First, expressions e include not only unannotated lambda abstractions $\lambda x. e$, but also annotated lambda abstractions $\lambda x : \sigma. e$, where the type annotation σ can be a polymorphic type. Thus unlike HM, the argument type for a function is not limited to a monotype.

Second, the polymorphic types σ now include the integer type Int , type variables a , functions $\sigma_1 \rightarrow \sigma_2$ and universal quantifications $\forall a. \sigma$. Since the argument type in a function can be polymorphic, we see that OL supports *arbitrary* rank of types. The definition of monotypes remains the same, with polymorphic types still subsuming monotypes.

Finally, in addition to variable types, the contexts Ψ now also keep track of type variables. Note that in the original work in Odersky and Läufer [1996], the system, much like HM, does not track type variables; instead, it explicitly checks that type variables are fresh with respect to a context or a type when needed. Here we include type variables in contexts, as it sets us well for the Dunfield-Krishnaswami type system to be introduced in the next section. Moreover, it provides a complete view of possible formalisms of contexts in a type system with generalization.

Now since the context tracks type variables, we define the notion of *well-formedness* of types, given in Figure 2.4. For a type to be well-formedness, it must have all its free variable bound in the context. All rules are straightforward.

TYPE SYSTEM. The typing rules for OL are given in Figure 2.5.

$\Psi \vdash^{OL} e : \sigma$

(Typing)

$$\begin{array}{c}
 \text{OL-VAR} \\
 \frac{(x : \sigma) \in \Psi}{\Psi \vdash^{OL} x : \sigma}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-INT} \\
 \frac{}{\Psi \vdash^{OL} n : \text{Int}}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-LAMANN} \\
 \frac{\Psi, x : \sigma_1 \vdash^{OL} e : \sigma_2}{\Psi \vdash^{OL} \lambda x : \sigma_1. e : \sigma_1 \rightarrow \sigma_2}
 \end{array}$$

$$\begin{array}{c}
 \text{OL-LAM} \\
 \frac{\Psi \vdash^{OL} \tau \quad \Psi, x : \tau \vdash^{OL} e : \sigma}{\Psi \vdash^{OL} \lambda x. e : \tau \rightarrow \sigma}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-APP} \\
 \frac{\Psi \vdash^{OL} e_1 : \sigma_1 \rightarrow \sigma_2 \quad \Psi \vdash^{OL} e_2 : \sigma_1}{\Psi \vdash^{OL} e_1 e_2 : \sigma_2}
 \end{array}$$

$$\begin{array}{c}
 \text{OL-LET} \\
 \frac{\Psi \vdash^{OL} e_1 : \sigma_1 \quad \Psi, x : \sigma_1 \vdash^{OL} e_2 : \sigma_2}{\Psi \vdash^{OL} \text{let } x = e_1 \text{ in } e_2 : \sigma_2}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-GEN} \\
 \frac{\Psi, a \vdash^{OL} e : \sigma}{\Psi \vdash^{OL} e : \forall a. \sigma}
 \end{array}$$

$$\begin{array}{c}
 \text{OL-SUB} \\
 \frac{\Psi \vdash^{OL} e : \sigma_1 \quad \Psi \vdash^{OL} \sigma_1 <: \sigma_2}{\Psi \vdash^{OL} e : \sigma_2}
 \end{array}$$

$\Psi \vdash^{OL} \sigma_1 <: \sigma_2$

(Subtyping)

$$\begin{array}{c}
 \text{OL-S-TVAR} \\
 \frac{a \in \Psi}{\Psi \vdash^{OL} a <: a}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-S-INT} \\
 \frac{}{\Psi \vdash^{OL} \text{Int} <: \text{Int}}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-S-ARROW} \\
 \frac{\Psi \vdash^{OL} \sigma_3 <: \sigma_1 \quad \Psi \vdash^{OL} \sigma_2 <: \sigma_4}{\Psi \vdash^{OL} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4}
 \end{array}$$

$$\begin{array}{c}
 \text{OL-S-FORALLL} \\
 \frac{\Psi \vdash^{OL} \tau \quad \Psi \vdash^{OL} \sigma[a \mapsto \tau] <: \sigma_2}{\Psi \vdash^{OL} \forall a. \sigma_1 <: \sigma_2}
 \end{array}
 \quad
 \begin{array}{c}
 \text{OL-S-FORALLR} \\
 \frac{\Psi, a \vdash^{OL} \sigma_1 <: \sigma_2}{\Psi \vdash^{OL} \sigma_1 <: \forall a. \sigma_2}
 \end{array}$$

Figure 2.5: Static semantics of the Odersky-Läufer type system.

2 Background

Rule **OL-VAR** and rule **OL-INT** are the same as that of HM. Rule **OL-LAMANN** type-checks annotated lambda abstractions, by simply putting $x : \sigma$ into the context to type the body. For unannotated lambda abstractions in rule **OL-LAM**, the system still guesses a mere monotype. That is, the system never guesses a polymorphic type for lambdas; instead, an explicit polymorphic type annotation is required. Rule **OL-APP** and rule **OL-LET** are similar as HM, except that polymorphic types may appear in return types. In the generalization rule **OL-GEN**, we put a fresh type variable a into the context, and the return type σ is then generalized over a , returning $\forall a. \sigma$.

The subsumption rule **OL-SUB** is crucial for OL, which allows an expression of type σ_1 to have type σ_2 with σ_1 being a subtype of σ_2 ($\Psi \vdash^{OL} \sigma_1 <: \sigma_2$). Note that the instantiation rule **HM-INST** in HM is a special case of rule **OL-SUB**, as we have $\forall \bar{a}_i^i. \tau <: \tau[\bar{a}_i \mapsto \bar{\tau}_i^i]$ by applying rule **HM-S-FORALL** repeatedly.

The subtyping relation of OL $\Psi \vdash^{OL} \sigma_1 <: \sigma_2$ also generalizes the subtyping relation of HM. In particular, in rule **OL-S-ARROW**, functions are *contravariant* on arguments, and *covariant* on return types. This rule allows us to compare higher-rank polymorphic types, rather than just polymorphic types with universal quantifiers only at the top level. For example,

$$\begin{array}{ll} \Psi \vdash^{OL} \forall a. a \rightarrow a & <: \text{Int} \rightarrow \text{Int} \\ \Psi \vdash^{OL} \text{Int} \rightarrow (\forall a. a \rightarrow a) & <: \text{Int} \rightarrow (\text{Int} \rightarrow \text{Int}) \\ \Psi \vdash^{OL} (\text{Int} \rightarrow \text{Int}) \rightarrow \text{Int} & <: (\forall a. a \rightarrow a) \rightarrow \text{Int} \end{array}$$

2.2.3 RELATING TO HM

It can be proved that OL is a conservative extension of HM. That is, every well-typed expression in HM is well-typed in OL, modulo the different representation of contexts.

Theorem 2.2 (Odersky-Läufer type system conservative over Hindley-Milner type system). *If $\Psi \vdash^{HM} e : \sigma$, suppose Ψ' is Ψ extended with type variables in Ψ and σ , then $\Psi' \vdash^{OL} e : \sigma$.*

Moreover, since OL is predicative and only guesses monotypes for unannotated lambda abstractions, its algorithmic system can be implemented as a direct extension of the one for HM.

2.3 THE DUNFIELD-KRISHNASWAMI TYPE SYSTEM

Both HM and OL derive only monotypes for unannotated lambda abstractions. OL improves on HM by allowing polymorphic lambda abstractions but requires the polymorphic

type annotations to be given explicitly. The Dunfield-Krishnaswami type system [Dunfield and Krishnaswami 2013], hereafter referred to as DK, give a *bidirectional* account of higher-rank polymorphism, where type information can be propagated through the syntax tree. Therefore, it is possible for a variable bound in a lambda abstraction without explicit type annotations to get a polymorphic type. In this section, we first review the idea of bidirectional type checking, and then present the declarative DK and discuss its algorithm.

2.3.1 BIDIRECTIONAL TYPE CHECKING

Bidirectional type checking has been known in the folklore of type systems for a long time. It was popularized by Pierce and Turner’s work on local type inference [Pierce and Turner 2000]. Local type inference was introduced as an alternative to HM type systems, which could easily deal with polymorphic languages with subtyping. The key idea in local type inference is simple. The “local” in local type inference comes from the fact that:

“... missing annotations are recovered using only information from adjacent nodes in the syntax tree, without long-distance constraints such as unification variables.”

Bidirectional type checking is one component of local type inference that, aided by some type annotations, enables type inference in an expressive language with polymorphism and subtyping. In its basic form typing is split into *inference* and *checking* modes. The most salient feature of a bidirectional type-checker is when information deduced from inference mode is used to guide checking of an expression in checking mode.

Since Pierce and Turner’s work, various other authors have proved the effectiveness of bidirectional type checking in several other settings, including many different systems with subtyping [Davies and Pfenning 2000; Dunfield and Pfenning 2004], systems with dependent types [Asperti et al. 2012; Coquand 1996; Löh et al. 2010; Xi and Pfenning 1999], etc.

In particular, bidirectional type checking has also been combined with HM-style techniques for providing type inference in the presence of higher-rank type, including DK and Peyton Jones et al. [2007]. Let’s revisit the example in Section 2.2:

```
(\f. (f 1, f 'a')) (\x. x)
```

which is not typeable in HM as it they fail to infer the type of *f*. In OL, it can be type-checked by adding a polymorphic type annotation on *f*. In DK, we can also add a polymorphic type annotation on *f*. But with bidirectional type checking, the type annotation can be propagated from somewhere else. For example, we can rewrite this program as:

```
((\f. (f 1, f 'c')) : (∀a. a → a) → (Int, Char)) (\x . x)
```

Expressions	e	$::=$	$x \mid n \mid \lambda x : \sigma. e \mid \lambda x. e \mid e_1 e_2 \mid e : \sigma$
Types	σ	$::=$	$\text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma$
Monotypes	τ	$::=$	$\text{Int} \mid a \mid \tau_1 \rightarrow \tau_2$
Contexts	Ψ	$::=$	$\bullet \mid \Psi, x : \sigma \mid \Psi, a$

Figure 2.6: Syntax of the Dunfield-Krishnaswami Type System

515 Here the type of `f` can be easily derived from the type signature using checking mode in
 516 bidirectional type checking.

517 2.3.2 DECLARATIVE SYSTEM

518 **SYNTAX.** The syntax of the DK is given in Figure 2.6. Comparing to OL, only the defini-
 519 tion of expressions slightly differs. First, the expressions e in DK have no let expressions.
 520 Dunfield and Krishnaswami [2013] omitted let-bindings from the formal development, but
 521 argued that restoring let-bindings is easy, as long as they get no special treatment incompat-
 522 ible with substitution (e.g., a syntax-directed HM does polymorphic generalization only at
 523 let-bindings). Second, DK has annotated expressions $e : \sigma$, in which the type annotation can
 524 be propagated into the expression, as we will see shortly.

525 The definitions of types and contexts are the same as in OL. Thus, DK also shares the
 526 same well-formedness definition as in OL (Figure 2.4). We thus omit the definitions, but use
 527 $\Psi \vdash^{DK} \sigma$ to denote the corresponding judgment in DK.

528 **TYPE SYSTEM.** Figure 2.7 presents the typing rules for DK. The system uses bidirectional
 529 type checking to accommodate polymorphism. Traditionally, two modes are employed in
 530 bidirectional systems: the inference mode $\Psi \vdash^{DK} e \Rightarrow \sigma$, which takes a term e and produces
 531 a type σ , similar to the judgment $\Psi \vdash^{HM} e : \sigma$ or $\Psi \vdash^{OL} e : \sigma$ in previous systems; the
 532 checking mode $\Psi \vdash^{DK} e \Leftarrow \sigma$, which takes a term e and a type σ as input, and ensures that
 533 the term e checks against σ . We first discuss rules in the inference mode.

534 **TYPE INFERENCE.** Rule **DK-INF-VAR** and rule **DK-INF-INT** are straightforward. To infer unan-
 535 notated lambdas, rule **DK-INF-LAM** guesses a monotype. For an application $e_1 e_2$, rule **DK-**
 536 **INF-APP** first infers the type σ of the expression e_1 . The *application judgment* (discussed
 537 shortly) then takes the type σ and the argument e_2 , and returns the final result type σ_2 . For
 538 an annotated expression $e : \sigma$, rule **DK-INF-ANNO** simply checks e against σ . Both rules
 539 (rule **DK-INF-APP** and rule **DK-INF-ANNO**) have mode switched from inference to checking.

$\boxed{\Psi \vdash^{DK} e \Rightarrow \sigma}$			(Type Inference)
$\frac{\text{DK-INF-VAR} \quad (x : \sigma) \in \Psi}{\Psi \vdash^{DK} x \Rightarrow \sigma}$	$\frac{\text{DK-INF-INT}}{\Psi \vdash^{DK} n \Rightarrow \text{Int}}$	$\frac{\text{DK-INF-LAM} \quad \Psi \vdash^{DK} \tau_1 \rightarrow \tau_2 \quad \Psi, x : \tau_1 \vdash^{DK} e \Rightarrow \tau_2}{\Psi \vdash^{DK} \lambda x. e \Rightarrow \tau_1 \rightarrow \tau_2}$	
$\frac{\text{DK-INF-APP} \quad \Psi \vdash^{DK} e_1 \Rightarrow \sigma \quad \Psi \vdash^{DK} \sigma \cdot e_2 \Rightarrow \sigma_2}{\Psi \vdash^{DK} e_1 e_2 \Rightarrow \sigma_2}$		$\frac{\text{DK-INF-ANNO} \quad \Psi \vdash^{DK} e \Leftarrow \sigma}{\Psi \vdash^{DK} e : \sigma \Rightarrow \sigma}$	
$\boxed{\Psi \vdash^{DK} e \Leftarrow \sigma}$			(Type Checking)
$\frac{\text{DK-CHK-INT}}{\Psi \vdash^{DK} n \Leftarrow \text{Int}}$	$\frac{\text{DK-CHK-LAM} \quad \Psi, x : \sigma_1 \vdash^{DK} e \Leftarrow \sigma_2}{\Psi \vdash^{DK} \lambda x. e \Leftarrow \sigma_1 \rightarrow \sigma_2}$	$\frac{\text{DK-CHK-GEN} \quad \Psi, a \vdash^{DK} e \Leftarrow \sigma}{\Psi \vdash^{DK} e \Leftarrow \forall a. \sigma}$	
$\frac{\text{DK-CHK-SUB} \quad \Psi \vdash^{DK} e \Rightarrow \sigma_1 \quad \Psi \vdash^{DK} \sigma_1 <: \sigma_2}{\Psi \vdash^{DK} e \Leftarrow \sigma_2}$			
$\boxed{\Psi \vdash^{DK} \sigma_1 \cdot e \Rightarrow \sigma_2}$			(Application judgment)
$\frac{\text{DK-APP-FORALL} \quad \Psi \vdash^{DK} \tau \quad \Psi \vdash^{DK} \sigma[a \mapsto \tau] \cdot e \Rightarrow \sigma_1 \rightarrow \sigma_2}{\Psi \vdash^{DK} \forall a. \sigma \cdot e \Rightarrow \sigma_1 \rightarrow \sigma_2}$	$\frac{\text{DK-APP-ARR} \quad \Psi \vdash^{DK} e \Leftarrow \sigma_1}{\Psi \vdash^{DK} \sigma_1 \rightarrow \sigma_2 \cdot e \Rightarrow \sigma_2}$		

Figure 2.7: Static semantics of the Dunfield-Krishnaswami type system.

2 Background

540 TYPE CHECKING. Now we turn to the checking mode. When an expression is checked
541 against a type, the expression is expected to have that type. More importantly, the checking
542 mode allows us to push the type information into the expressions.

543 Rule **DK-CHK-INT** checks literals against the integer type `Int`. Rule **DK-CHK-LAM** is where
544 the system benefits from bidirectional type checking: the type information gets pushed in-
545 side an lambda. For an unannotated lambda abstraction $\lambda x. e$, recall that in the inference
546 mode, we can only guess a monotype for x . With the checking mode, when $\lambda x. e$ is checked
547 against $\sigma_1 \rightarrow \sigma_2$, we do not need to guess any type. Instead, x gets directly the (possibly
548 polymorphic) argument type σ_1 . Then the rule proceeds by checking e with σ_2 , allowing the
549 type information to be pushed further inside. Note how rule **DK-CHK-LAM** improves over
550 HM and OL, by allowing lambda abstractions to have a polymorphic argument type without
551 requiring type annotations.

552 Rule **DK-CHK-GEN** deals with a polymorphic type $\forall a. \sigma$, by putting the (fresh) type variable
553 a into the context to check e against σ . Rule **DK-CHK-SUB** switches the mode from checking
554 to inference: an expression e can be checked against σ_2 , if e infers the type σ_1 and σ_1 is a
555 subtype of σ_2 .

556 APPLICATION JUDGMENT. The application judgment $\Psi \vdash^{DK} \sigma_1 \cdot e \Rightarrow \sigma_2$ is interpreted
557 as, when we apply an expression of type σ_1 to the expression e , we get a return type σ_2 .
558 For a polymorphic type (rule **DK-APP-FORALL**), we instantiate the universal quantifier with a
559 monotype, until the type becomes a function type (rule **DK-APP-ARR**). In the function type
560 case, since the function expects an argument of type σ_1 , the rule proceeds by checking e_2
561 against σ_1 .

562 In some other type systems [Garcia and Cimini 2015; Xie et al. 2018, 2019a], the appli-
563 cation judgment is replaced by *matching*. Using matching, rule **DK-INF-APP** is replaced by
564 rule **DK-INF-APP2**.

$$\begin{array}{c}
 \text{DK-INF-APP2} \\
 \frac{\Psi \vdash^{DK} e_1 \Rightarrow \sigma \quad \Psi \vdash^{DK} \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \quad \Psi \vdash^{DK} e_2 \Leftarrow \sigma_1}{\Psi \vdash^{DK} e_1 e_2 \Rightarrow \sigma_2}
 \end{array}$$

565

566 In rule **DK-INF-APP2**, we first derive that e_1 has type σ . But e_1 must have a function type so
567 that it can be applied to an argument. We thus use the *matching* judgment to instantiate σ
568 into a function $\sigma_1 \rightarrow \sigma_2$, and proceed by checking e_2 against σ_1 , and return the final result
569 σ_2 . The definition of matching is given below.

$$\boxed{\Psi \vdash^{DK} \sigma_1 \triangleright \sigma_2} \qquad (\text{Matching})$$

570

$$\begin{array}{c}
\text{DK-M-FORALL} \\
\frac{\Psi \vdash^{DK} \tau \quad \Psi \vdash^{DK} \sigma[a \mapsto \tau] \triangleright \sigma_1 \rightarrow \sigma_2}{\Psi \vdash^{DK} \forall a. \sigma \triangleright \sigma_1 \rightarrow \sigma_2} \\
571
\end{array}
\qquad
\begin{array}{c}
\text{DK-M-ARR} \\
\frac{}{\Psi \vdash^{DK} \sigma_1 \rightarrow \sigma_2 \triangleright \sigma_1 \rightarrow \sigma_2}
\end{array}$$

572 Matching has two straightforward rules: rule [DK-M-FORALL](#) instantiates a polymorphic
573 type, by substituting a with a well-formed monotype τ , and continues matching on $\sigma[a \mapsto \tau]$;
574 rule [DK-M-ARR](#) returns the function type directly.

575 It can be easily shown that the presentation of rule [DK-INF-APP](#) with the application judg-
576 ment is equivalent to that of rule [DK-INF-APP2](#) with matching. Essentially, they both make
577 sure that the expression being applied has an arrow type $\sigma_1 \rightarrow \sigma_2$, and then check the ar-
578 gument against σ_1 . We sometimes use the presentation of rule [DK-INF-APP2](#) with matching,
579 as matching is a simple and independent process whose purpose is clear. In contrast, it is
580 relatively less comprehensible with rule [DK-INF-APP](#) and the application judgment, where all
581 three forms of the judgment (inference, checking, application) are mutually dependent.

582 **SUBTYPING.** DK shares the same subtyping relation as of OL. We thus omit the definition
583 and use $\Psi \vdash^{DK} \sigma_1 <: \sigma_2$ to denote the subtyping relation in DK.

584 2.3.3 ALGORITHMIC TYPE SYSTEM

585 Dunfield and Krishnaswami [2013] also presented a sound and complete bidirectional algo-
586 rithmic type system. The key idea of the algorithm is using *ordered* algorithmic contexts for
587 storing existential variables and their solutions. Comparing to the algorithm for HM, they
588 argued that their algorithm is remarkably simple. The algorithm is later discussed and used
589 in Part [III](#) and Part [IV](#). We will discuss more about it there.

PART II

BIDIRECTIONAL TYPE CHECKING WITH THE APPLICATION MODE

3

HIGHER-RANK POLYMORPHISM WITH THE APPLICATION MODE

We have seen in Section 2.3 that bidirectional type checking is a useful and versatile tool for type checking and type inference. In traditional bidirectional type-checking, type information flows from functions to arguments (e.g., rule `DK-IN-APP` in Section 2.3.2). In this section, we present a novel variant of bidirectional type checking where the type information flows from arguments to functions. This variant retains the inference mode, but adds a so-called *application* mode. Such design can remove annotations that basic bidirectional type checking cannot, and is useful when type information from arguments is required to type-check the functions being applied.

We illustrate our novel design of bidirectional type-checking using System AP, a lambda calculus with implicit higher-rank polymorphism. This section first presents the declarative, syntax-directed type system of System AP in Section 3.2. The interesting aspects about the new type system are: 1) the typing rules, which employ a combination of the inference mode and the *application* mode; 2) the novel subtyping relation under an application context. Later, we prove our type system is type-safe by a type-directed translation to System F in Section 3.3. An algorithmic type system is discussed in Section 3.4.

3.1 INTRODUCTION AND MOTIVATION

3.1.1 REVISITING BIDIRECTIONAL TYPE CHECKING

Traditional type checking rules can be heavyweight on annotations, in the sense that lambda-bound variables always need explicit annotations. As we have seen in Section 2.3, bidirectional type checking provides an alternative, which allows types to propagate downward the syntax tree. For example, in the expression $(\lambda f : \text{Int} \rightarrow \text{Int}. f) (\lambda y. y)$, the type of y is provided by the type annotation on f . This is supported by the bidirectional typing rule `DK-INF-APP` for applications:

$$\frac{\text{DK-INF-APP} \quad \Psi \vdash^{DK} e_1 \Rightarrow \sigma \quad \Psi \vdash^{DK} \sigma \cdot e_2 \Rightarrow \sigma_2}{\Psi \vdash^{DK} e_1 e_2 \Rightarrow \sigma_2}$$

Specifically, if we know that the type of e_1 is a function from $\sigma_1 \rightarrow \sigma_2$, we can check that e_2 has type σ_1 . Notice that here the type information flows from functions to arguments.

One guideline for designing bidirectional type checking rules [Dunfield and Pfenning 2004] is to distinguish introduction rules from elimination rules. Constructs which correspond to introduction forms are *checked* against a given type, while constructs corresponding to elimination forms *infer* (or synthesize) their types. For instance, under this design principle, the introduction rule for literals is supposed to be in the checking mode, as in the rule [DK-CHK-INT](#):

$$\frac{\text{DK-CHK-INT}}{\Psi \vdash^{DK} n \Leftarrow \text{Int}}$$

Unfortunately, this means that the trivial program 1 cannot type-check, which in this case has to be rewritten to $1 : \text{Int}$.

In this particular case, bidirectional type checking goes against its original intention of removing burden from programmers, since a seemingly unnecessary annotation is needed. Therefore, in practice, bidirectional type systems do not strictly follow the guideline, and usually have additional inference rules for the introduction form of constructs. For literals, the corresponding rule is rule [DK-INF-INT](#).

$$\frac{\text{DK-INF-INT}}{\Psi \vdash^{DK} n \Rightarrow \text{Int}}$$

Now we can type check 1, but the price to pay is that two typing rules for literals are needed. Worse still, the same criticism applies to other constructs (e.g., pairs). This shows one drawback of bidirectional type checking: often to minimize annotations, many rules are duplicated for having both the inference mode and the checking mode, which scales up with the typing rules in a type system.

3.1.2 TYPE CHECKING WITH THE APPLICATION MODE

We propose a variant of bidirectional type checking with a new *application mode* (unrelated to the application judgment in DK). The application mode preserves the advantage of bidirectional type checking, namely many redundant annotations are removed, while certain

639 programs can type check with even fewer annotations. Also, with our proposal, the infer-
 640 ence mode is a special case of the application mode, so it does not produce duplications of
 641 rules in the type system. Additionally, the checking mode can still be *easily* combined into
 642 the system. The essential idea of the application mode is to enable the type information
 643 flow in applications to propagate from arguments to functions (instead of from functions to
 644 arguments as in traditional bidirectional type checking).

645 To motivate the design of bidirectional type checking with an application mode, consider
 646 the simple expression

647 $(\lambda x. x) 1$

648 This expression cannot type check in traditional bidirectional type checking, because unan-
 649 notated abstractions, as a construct which correspond to introduction forms, only have a
 650 checking mode, so annotations are required¹. For example, $((\lambda x. x) : \mathbf{Int} \rightarrow \mathbf{Int}) 1$.

651 In this example we can observe that if the type of the argument is accounted for in inferring
 652 the type of $\lambda x. x$, then it is actually possible to deduce that the lambda expression has type
 653 $\mathbf{Int} \rightarrow \mathbf{Int}$, from the argument 1.

THE APPLICATION MODE. If types flow from the arguments to the function, an alternative
 idea is to push the type of the arguments into the typing of the function, as follows,

$$\text{APP} \quad \frac{\Psi \vdash e_2 \Rightarrow \sigma_1 \quad \Psi; \Sigma, \sigma_1 \vdash e_1 \Rightarrow \sigma \rightarrow \sigma_2}{\Psi; \Sigma \vdash e_1 e_2 \Rightarrow \sigma_2}$$

654 In this rule, there are two kinds of judgments. The first judgment is just the usual infer-
 655 ence mode, which is used to infer the type of the argument e_2 . The second judgment, the
 656 application mode, is similar to the inference mode, but it has an additional context Σ . The
 657 context Σ is a stack that tracks the types of the arguments of outer applications. In the rule
 658 for application, the type of the argument e_2 synthesizes its type σ_1 , which then is pushed
 659 into the application context Σ for inferring the type of e_1 . Applications are themselves in the
 660 application mode, since they can be in the context of an outer application.

¹It type-checks in DK, because in DK rules for lambdas are duplicated for having both the inference (integrated with type inference techniques) and the checking mode.

Lambda expressions can now make use of the application context, leading to the following rule:

$$\text{LAM} \quad \frac{\Psi, x : \sigma; \Sigma \vdash e \Rightarrow \sigma_2}{\Psi; \Sigma, \sigma \vdash \lambda x. e \Rightarrow \sigma \rightarrow \sigma_2}$$

661 The type σ that appears last in the application context serves as the type for x , and type check-
 662 ing continues with a smaller application context and $x : \sigma$ in the typing context. Therefore,
 663 using the rule [APP](#) and rule [LAM](#), the expression $(\lambda x. x) 1$ can type-check without an-
 664 notations, since the type Int of the argument 1 is used as the type of the binding x .

665 Note that, since the examples so far are based on simple types, obviously they can be solved
 666 by integrating type inference and relying on techniques like unification or constraint solving
 667 (as in DK). However, here the point is that the application mode helps to reduce the number
 668 of annotations *without requiring such sophisticated techniques*. Also, the application mode
 669 helps with situations where those techniques cannot be easily applied, such as type systems
 670 with subtyping.

671 **INTERPRETATION OF THE APPLICATION MODE.** As we have seen, the guideline for design-
 672 ing bidirectional type checking [Dunfield and Pfenning 2004], based on introduction and
 673 elimination rules, is often not enough in practice. This leads to extra introduction rules in
 674 the inference mode. The application mode does not distinguish between introduction rules
 675 and elimination rules. Instead, to decide whether a rule should be in the inference or the
 676 application mode, we need to think whether the expression can be applied or not. Variables,
 677 lambda expressions and applications are all examples of expressions that can be applied, and
 678 they should have application mode rules. However literals or pairs cannot be applied and
 679 should have inference rules. For example, type checking pairs would simply have the infer-
 680 ence mode. Nevertheless elimination rules of pairs could have non-empty application con-
 681 texts (see Section 3.5.2 for details). In the application mode, arguments are always inferred
 682 first in applications and propagated through application contexts. An empty application con-
 683 text means that an expression is not being applied to anything, which allows us to model the
 684 inference mode as a particular case².

685 **PARTIAL TYPE CHECKING.** The inference mode synthesizes the type of an expression, and
 686 the checking mode checks an expression against some type. A natural question is how do

²Although the application mode generalizes the inference mode, we refer to them as two different modes. Thus the variant of bidirectional type checking in this work is interpreted as a type system with both *inference* and *application* modes.

these modes compare to the application mode. An answer is that, in some sense: the application mode is stronger than the inference mode, but weaker than the checking mode. Specifically, the inference mode means that we know nothing about the type of an expression before hand. The checking mode means that the whole type of the expression is already known before hand. With the application mode we know some partial type information about the type of an expression: we know some of its argument types (since it must be a function type when the application context is non-empty), but not the return type.

Instead of nothing or all, this partialness gives us a finer grain notion on how much we know about the type of an expression. For example, assume $e : \sigma_1 \rightarrow \sigma_2 \rightarrow \sigma_3$. In the inference mode, we only have e . In the checking mode, we have both e and $\sigma_1 \rightarrow \sigma_2 \rightarrow \sigma_3$. In the application mode, we have e , and maybe an empty context (which degenerates into the inference mode), or an application context σ_1 (we know the type of first argument), or an application context σ_1, σ_2 (we know the type of both arguments).

TRADE-OFFS. Note that the application mode is *not* conservative over traditional bidirectional type checking due to the different information flow. However, it provides a new design choice for type inference/checking algorithms, especially for those where the information about arguments is useful. Therefore we next discuss some benefits of the application mode for two interesting cases where functions are either variables; or lambda (or type) abstractions.

3.1.3 BENEFITS OF INFORMATION FLOWING FROM ARGUMENTS TO FUNCTIONS

LOCAL CONSTRAINT SOLVER FOR FUNCTION VARIABLES. Many type systems, including type systems with *implicit polymorphism* and/or *static overloading*, need information about the types of the arguments when type checking function variables. For example, in conventional functional languages with implicit polymorphism, function calls such as (id 1) where $\text{id} : \forall a. (a \rightarrow a)$, are *pervasive*. In such a function call the type system must instantiate a to Int . Dealing with such implicit instantiation gets trickier in systems with *higher-rank types*. For example, Peyton Jones et al. [2007] require additional syntactic forms and relations, whereas DK adds a special-purpose application judgment.

With the application mode, all the type information about the arguments being applied is available in the application context and can be used to solve instantiation constraints. To exploit such information, the type system employs a special subtyping judgment called *application subtyping*, with the form $\Sigma \vdash \sigma_1 <: \sigma_2$. Unlike conventional subtyping, computationally Σ and σ_1 are interpreted as inputs and σ_2 as output. In the example above, we have that $\text{Int} \vdash \forall a. a \rightarrow a <: \sigma$ and we can determine that $a = \text{Int}$ and $\sigma = \text{Int} \rightarrow \text{Int}$.

In this way, the type system is able to solve the constraints *locally* according to the application context since we no longer need to propagate the instantiation constraints to the typing process.

DECLARATION DESUGARING FOR LAMBDA ABSTRACTIONS. An interesting consequence of the usage of an application mode is that it enables the following **let** sugar:

$$\mathbf{let} \ x = e_1 \ \mathbf{in} \ e_2 \rightsquigarrow (\lambda x. e_2) e_1$$

Such syntactic sugar for **let** is, of course, standard. However, in the context of implementations of typed languages it normally requires extra type annotations or a more sophisticated type-directed translation. Type checking $(\lambda x. e_2) e_1$ would normally require annotations (for example a higher-rank type annotation for x as in OL and DK), or otherwise such annotation should be inferred first. Nevertheless, with the application mode no extra annotations/inference is required, since from the type of the argument e_1 it is possible to deduce the type of x . Generally speaking, with the application mode *annotations are never needed for applied lambdas*. Thus **let** can be the usual sugar from the untyped lambda calculus, including HM-style **let** expression and even type declarations.

3.1.4 TYPE INFERENCE OF HIGHER-RANK TYPES

We believe the application mode can be integrated into many traditional bidirectional type systems. In this chapter, we focus on integrating the application mode into a bidirectional type system with higher-rank types. Our paper [Xie and Oliveira 2018] includes another application to System F.

Consider again the motivation example used in Section 2.2:

$(\backslash f. (f \ 1, f \ \text{'a'})) (\backslash x. x)$

which is not typeable in HM, but can be rewritten to include type annotations in OL and DK. For example, both in OL and DK we can write:

$(\backslash f: (\forall a. a \rightarrow a). (f \ 1, f \ \text{'c'})) (\backslash x. x)$

However, although some redundant annotations are removed by bidirectional type checking, the burden of inferring higher-rank types is still carried by programmers: they are forced to add polymorphic annotations to help with the type derivation of higher-rank types. For the above example, the type annotation is still *provided by programmers*, even though the necessary type information can be derived intuitively without any annotations: f is applied to $\backslash x. x$, which is of type $\forall a. a \rightarrow a$.

751 TYPE INFERENCE FOR HIGHER-RANK TYPES WITH THE APPLICATION MODE. Using our
 752 bidirectional type system with an application mode, the original expression can type check
 753 without annotations or rewrites: $(\lambda f. (f\ 1, f\ 'c')) (\lambda x. x)$.

754 This result comes naturally if we allow type information flow from arguments to functions.
 755 For inferring polymorphic types for arguments, we use *generalization*. In the above example,
 756 we first infer the type $\forall a. a \rightarrow a$ for the argument, then pass the type to the function. A nice
 757 consequence of such an approach is that, as mentioned before, HM-style polymorphic **let**
 758 expressions are simply regarded as syntactic sugar to a combination of lambda/application:

$$\text{let } x = e_1 \text{ in } e_2 \rightsquigarrow (\lambda x. e_2) e_1$$

759 With this approach, nested lets can lead to types which are *more general* than HM. For ex-
 760 ample, consider the following expression:

761 **let** $s = \lambda x. x$ **in** **let** $t = \lambda y. s$ **in** e

762 The type of s is $\forall a. a \rightarrow a$ after generalization. Because t returns s as a result, we might
 763 expect $t: \forall b. b \rightarrow (\forall a. a \rightarrow a)$, which is what our system will return. However, HM
 764 will return type $t: \forall b. \forall a. b \rightarrow (a \rightarrow a)$, as it can only return rank 1 types, which is less
 765 general than the previous one according to the subtyping relation for polymorphic types in
 766 OL (Figure 2.5).

767 CONSERVATIVITY OVER THE HINDLEY-MILNER TYPE SYSTEM. Our type system is a conser-
 768 vative extension over HM, in the sense that every program that can type-check in HM is
 769 accepted in our type system. This result is not surprising: after desugaring **let** into a lambda
 770 and an application, programs remain typeable.

771 COMPARING PREDICATIVE HIGHER-RANK TYPE INFERENCE SYSTEMS. We will give a full
 772 discussion and comparison of related work in Section 8. Among those works, we believe DK
 773 and the work by Peyton Jones et al. [2007] are the most closely related work to our system.
 774 Both their systems and ours are based on a *predicative* type system: universal quantifiers can
 775 only be instantiated by monotypes. So we would like to emphasize our system's properties in
 776 relation to those works. In particular, here we discuss two interesting differences, and also
 777 briefly (and informally) discuss how the works compare in terms of expressiveness.

778 1) Inference of higher-rank types. In both works, every polymorphic type inferred by
 779 the system must correspond to one annotation provided by the programmer. However, in
 780 our system, some higher-rank types can be inferred from the expression itself without any
 781 annotation. The motivating expression above provides an example of this.

2) Where are annotations needed? Since type annotations are useful for inferring higher rank types, a clear answer to the question where annotations are needed is necessary so that programmers know when they are required to write annotations. To this question, previous systems give a concrete answer: only on the bindings of polymorphic types. Our answer is slightly different: only on the bindings of polymorphic types in abstractions *that are not applied to arguments*. Roughly speaking this means that our system ends up with fewer or smaller annotations.

3) Expressiveness. Based on these two answers, it may seem that our system should accept all expressions that are typeable in their system. However, this is not true because the application mode is *not* conservative over traditional bidirectional type checking. Consider the expression:

$$(\lambda f : (\forall a. a \rightarrow a) \rightarrow (\text{nat}, \text{char}). f) (\lambda g. (g\ 1, g\ 'a'))$$

which is typeable in their system. In this case, even if g is a polymorphic binding without a type annotation the expression can still type-check. This is because the original application rule propagates the information from the outer binding into the inner expressions. Note that the fact that such expression type-checks does not contradict their guideline of providing type annotations for every polymorphic binder. Programmers that strictly follow their guideline can still add a polymorphic type annotation for g . However it does mean that it is a little harder to understand where annotations for polymorphic binders can be *omitted* in their system. This requires understanding how the applications in the checking mode operate.

In our system the above expression is not typeable, as a consequence of the information flow in the application mode. However, following our guideline for annotations leads to a program that can be type-checked with a smaller annotation:

$$(\lambda f. f) (\lambda g : (\forall a. a \rightarrow a). (g\ 1, g\ 'a')).$$

This means that our work is not conservative over their work, which is due to the design choice of the application typing rule. Nevertheless, we can always rewrite programs using our guideline, which often leads to fewer/smaller annotations.

3.2 DECLARATIVE SYSTEM

This section presents the declarative, *syntax-directed* specification of AP. As mentioned before, the interesting aspects about the new type system are: 1) the typing rules, which employ a combination of inference and application modes; 2) the novel subtyping relation under an application context.

Expressions	$e ::= x \mid n \mid \lambda x : \sigma. e \mid \lambda x. e \mid e_1 e_2$
Types	$\sigma ::= \text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma$
Monotypes	$\tau ::= \text{Int} \mid a \mid \tau_1 \rightarrow \tau_2$
Contexts	$\Psi ::= \bullet \mid \Psi, x : \sigma$
Application Contexts	$\Sigma ::= \bullet \mid \Sigma, \sigma$

Figure 3.1: Syntax of System AP.

815 3.2.1 SYNTAX

816 The syntax of the language is given in Figure 3.1.

817 **EXPRESSIONS.** The definition of expressions e include variables (x), integers (n), annotated
818 lambda abstractions ($\lambda x : \sigma. e$), lambda abstractions ($\lambda x. e$), and applications ($e_1 e_2$). No-
819 tably, the syntax does not include a **let** expression (**let** $x = e_1$ **in** e_2). Let expressions can be
820 regarded as the standard syntax sugar $(\lambda x. e_2) e_1$, as illustrated in more detail later.

821 **TYPES.** Types include the integer type Int , type variables (a), functions ($\sigma_1 \rightarrow \sigma_2$) and
822 polymorphic types ($\forall a. \sigma$). Monotypes are types without universal quantifiers.

823 **CONTEXTS.** Typing contexts Ψ are standard: they map a term variable x to its type σ . In
824 this system, the context is modeled as the HM-style context (Section 2.1), which does not
825 track type variables. Again, we implicitly assume that all variables in Ψ are distinct.

826 The key novelty lies in the *application contexts* Σ , which are the main data structure needed
827 to allow types to flow from arguments to functions. Application contexts are modeled as
828 a stack. The stack collects the types of arguments in applications. The context is a stack
829 because if a type is pushed last then it will be popped first. For example, inferring expression
830 e under application context (a, Int) , means e is now being applied to two arguments e_1, e_2 ,
831 with $e_1 : \text{Int}$, $e_2 : a$, so e should be of type $\text{Int} \rightarrow a \rightarrow \sigma$ for some σ .

832 3.2.2 TYPE SYSTEM

833 The top part of Figure 3.2 gives the typing rules for our language. The judgment $\Psi; \Sigma \vdash^{AP}$
834 $e \Rightarrow \sigma$ is read as: under typing context Ψ , and application context Σ , e has type σ . The
835 standard inference mode $\Psi \vdash^{AP} e \Rightarrow \sigma$ can be regarded as a special case when the application
836 context is empty. Note that the variable names are assumed to be fresh enough when new
837 variables are added into the typing context, or when generating new type variables.

3 Higher-Rank Polymorphism with the Application Mode

$\boxed{\Psi \vdash^{AP} e \Rightarrow \sigma}$			(Typing Inference)
$\frac{\text{AP-INF-INT}}{\Psi \vdash^{AP} n \Rightarrow \text{Int}}$	$\frac{\text{AP-INF-LAM}}{\Psi \vdash^{AP} \lambda x. e \Rightarrow \tau \rightarrow \sigma}$	$\frac{\text{AP-INF-LAMANN}}{\Psi \vdash^{AP} \lambda x : \sigma_1. e \Rightarrow \sigma_1 \rightarrow \sigma_2}$	
$\boxed{\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma}$			(Typing Application Mode)
$\frac{\text{AP-APP-VAR}}{(x : \sigma_1) \in \Psi \quad \Sigma \vdash^{AP} \sigma_1 <: \sigma_2}{\Psi; \Sigma \vdash^{AP} x \Rightarrow \sigma_2}$	$\frac{\text{AP-APP-LAM}}{\Psi; \Sigma, \sigma_1 \vdash^{AP} \lambda x. e \Rightarrow \sigma_1 \rightarrow \sigma_2}$	$\frac{\text{AP-APP-LAMANN}}{\Psi; \Sigma, \sigma_2 \vdash^{AP} \lambda x : \sigma_1. e \Rightarrow \sigma_2 \rightarrow \sigma_3}$	
$\frac{\text{AP-APP-APP}}{\Psi \vdash^{AP} e_2 \Rightarrow \sigma_1 \quad \bar{a}_i^i = \text{FV}(\sigma_1) - \text{FV}(\Psi) \quad \sigma_2 = \forall \bar{a}_i^i. \sigma_1 \quad \Psi; \Sigma, \sigma_2 \vdash^{AP} e_1 \Rightarrow \sigma_2 \rightarrow \sigma_3}{\Psi; \Sigma \vdash^{AP} e_1 e_2 \Rightarrow \sigma_3}$			
$\boxed{\vdash^{AP} \sigma_1 <: \sigma_2}$			(Subtyping)
$\frac{\text{AP-S-TVAR}}{\vdash^{AP} a <: a}$	$\frac{\text{AP-S-INT}}{\vdash^{AP} \text{Int} <: \text{Int}}$	$\frac{\text{AP-S-ARROW}}{\vdash^{AP} \sigma_3 <: \sigma_1 \quad \vdash^{AP} \sigma_2 <: \sigma_4}{\vdash^{AP} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4}$	
$\frac{\text{AP-S-FORALLL}}{\vdash^{AP} \sigma_1[a \mapsto \tau] <: \sigma_2}{\vdash^{AP} \forall a. \sigma_1 <: \sigma_2}$	$\frac{\text{AP-S-FORALLR}}{a \notin \text{FV}(\sigma_1) \quad \vdash^{AP} \sigma_1 <: \sigma_2}{\vdash^{AP} \sigma_1 <: \forall a. \sigma_2}$		
$\boxed{\Sigma \vdash^{AP} \sigma_1 <: \sigma_2}$			(Application Subtyping)
$\frac{\text{AP-AS-EMPTY}}{\bullet \vdash^{AP} \sigma <: \sigma}$	$\frac{\text{AP-AS-FORALL}}{\Sigma, \sigma_3 \vdash^{AP} \sigma_1[a \mapsto \tau] <: \sigma_2}{\Sigma, \sigma_3 \vdash^{AP} \forall a. \sigma_1 <: \sigma_2}$	$\frac{\text{AP-AS-ARROW}}{\vdash^{AP} \sigma_3 <: \sigma_1 \quad \Sigma \vdash^{AP} \sigma_2 <: \sigma_4}{\Sigma, \sigma_3 \vdash^{AP} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4}$	

Figure 3.2: Typing rules of System AP.

We discuss the rules when the application context is empty first. Those rules are unsurprising. Rule **AP-INF-INT** shows that integer literals are only inferred to have type `Int` under an empty application context. This is obvious since an integer cannot accept any arguments. Rule **AP-INF-LAM** deals with lambda abstractions when the application context is empty. In this situation, a monotype τ is *guessed* for the argument, just like in previous calculi. Rule **AP-INF-LAMANN** also works as expected: a new variable x is put with its type σ into the typing context, and inference continues on the abstraction body.

Now we turn to the cases when the application context is not empty. Rule **AP-APP-VAR** says that if $x : \sigma_1$ is in the typing context, and σ_1 is a subtype of σ_2 under application context Σ , then x has type σ_2 . It depends on the subtyping rules that are explained in Section 3.2.3.

Rule **AP-APP-LAM** shows the strength of application contexts. It states that, without annotations, if the application context is non-empty, a type can be popped from the application context to serve as the type for x . Inference of the body then continues with the rest of the application context. This is possible, because the expression $\lambda x. e$ is being applied to an argument of type σ_1 , which is the type at the top of the application context stack.

For lambda abstraction with annotations $\lambda x : \sigma_1. e$, if the application context has type σ_2 , then rule **AP-APP-LAMANN** first checks that σ_2 is a subtype of σ_1 before putting $x : \sigma_1$ in the typing context. However, note that it is always possible to remove annotations in an abstraction if it has been applied to some arguments.

Rule **AP-APP-APP** pushes types into the application context. The application rule first infers the type of the argument e_2 with type σ_1 . Then the type σ_1 is generalized in the same way as the HM type system. The resulting generalized type is σ_2 . Thus the type of e_1 is now inferred under an application context extended with type σ_2 . The generalization step is important to infer higher-rank types: since σ_2 is a possibly polymorphic type, which is the argument type of e_1 , then e_1 is of possibly a higher-rank type.

LET EXPRESSIONS. The language does not have built-in let expressions, but instead supports **let** as syntactic sugar. Recall the syntactic-directed typing rule (rule **HM-LET-GEN**) for let expressions with generalization in the HM system. With some slight reformatting to match AP, we get (without the gray-shaded parts):

$$\frac{\Psi \vdash e_1 \Rightarrow \sigma_1 \quad \overline{a_i}^i = \text{FV}(\tau) - \text{FV}(\Psi) \quad \sigma_2 = \forall \overline{a_i}^i. \sigma_1 \quad \Psi, x : \sigma_2; \Sigma \vdash e_2 \Rightarrow \sigma_3}{\Psi; \Sigma \vdash \text{let } x = e_1 \text{ in } e_2 \Rightarrow \sigma_3}$$

where we do generalization on the type of e_1 , which is then assigned as the type of x while inferring e_2 . Adapting this rule to our system with application contexts would result in the

gray-shaded parts, where the application context is only used for e_2 , because e_2 is the expression being applied. If we desugar the let expression $(\text{let } x = e_1 \text{ in } e_2)$ to $(\lambda x. e_2) e_1$, we have the following derivation:

$$\frac{\Psi \vdash e_1 \Rightarrow \sigma_1 \quad \bar{a}_i^i = \text{FV}(\sigma_1) - \text{FV}(\Psi) \quad \sigma_2 = \forall \bar{a}_i^i. \sigma_1 \quad \frac{\Psi, x : \sigma_2; \Sigma \vdash e_2 \Rightarrow \sigma_3}{\Psi; \Sigma, \sigma_2 \vdash \lambda x. e_2 \Rightarrow \sigma_2 \rightarrow \sigma_3}}{\Psi; \Sigma \vdash (\lambda x. e_2) e_1 \Rightarrow \sigma_3}$$

The type σ_2 is now pushed into application context in rule **AP-APP-APP**, and then assigned to x in rule **AP-APP-LAM**. Comparing this with the typing derivations for let expressions, we now have the same preconditions. Thus we can see that the rules in Figure 3.2 are sufficient to express an HM-style polymorphic let construct.

METATHEORY. The type system enjoys several interesting properties, especially lemmas about application contexts. Before we present those lemmas, we need a helper definition of what it means to use arrows on application contexts.

Definition 2 ($\Sigma \rightarrow \sigma$). If $\Sigma = \sigma_1, \sigma_2, \dots, \sigma_n$, then $\Sigma \rightarrow \sigma$ means the function type $\sigma_n \rightarrow \dots \rightarrow \sigma_2 \rightarrow \sigma_1 \rightarrow \sigma$.

Such definition is useful to reason about the typing result with application contexts. One specific property is that the application context determines the form of the typing result.

Lemma 3.1 (Σ Coincides with Typing Results). *If $\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma$, then for some σ' , we have $\sigma = \Sigma \rightarrow \sigma'$.*

Having this lemma, we can always use the judgment $\Psi; \Sigma \vdash^{AP} e \Rightarrow \Sigma \rightarrow \sigma'$ instead of $\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma$.

In traditional bidirectional type checking, we often have one rule that transfers between the inference and the checking mode, which states that if an expression can be inferred to some type, then it can be checked with this type (e.g., rule **DK-CHK-SUB** in DK). In our system, we regard the normal inference mode $\Psi \vdash^{AP} e \Rightarrow \sigma$ as a special case, when the application context is empty. We can also turn from the normal inference mode into the application mode with an application context.

Lemma 3.2 ($\Psi \vdash^{AP} e \Rightarrow \text{to } \Psi; \Sigma \vdash^{AP} e \Rightarrow$). *If $\Psi \vdash^{AP} e \Rightarrow \Sigma \rightarrow \sigma$, then $\Psi; \Sigma \vdash^{AP} e \Rightarrow \Sigma \rightarrow \sigma$.*

This lemma is actually a special case for the following one:

Lemma 3.3 (Generalized $\Psi \vdash^{AP} e \Rightarrow \text{to } \Psi; \Sigma \vdash^{AP} e \Rightarrow$). *If $\Psi; \Sigma_1 \vdash^{AP} e \Rightarrow \Sigma_1 \rightarrow \Sigma_2 \rightarrow \sigma$, then $\Psi; \Sigma_2, \Sigma_1 \vdash^{AP} e \Rightarrow \Sigma_1 \rightarrow \Sigma_2 \rightarrow \sigma$.*

897 The relationship between our system and standard Hindley Milner type system (HM) can
 898 be established through the desugaring of let expressions. Namely, if e is typeable in HM, then
 899 the desugared expression e' is typeable in our system, with a more general typing result.

900 **Lemma 3.4** (AP Conservative over HM). *If $\Psi \vdash^{HM} e : \sigma$, and desugaring let expression in e
 901 gives back e' , then for some σ' , we have $\Psi \vdash^{AP} e' \Rightarrow \sigma'$, and $\sigma' <: \sigma$.*

902 3.2.3 SUBTYPING

903 We present our subtyping rules at the bottom of Figure 3.2. Interestingly, our subtyping has
 904 two different forms.

905 **SUBTYPING.** The first subtyping judgment $\vdash^{AP} \sigma_1 <: \sigma_2$ follows OL, but in HM-style; that
 906 is, without tracking type variables. Rule **AP-S-FORALLR** states σ_1 is subtype of $\forall a. \sigma_2$ only
 907 if σ_1 is a subtype of σ_2 , with the assumption a is a fresh variable. Rule **AP-S-FORALLL** says
 908 $\forall a. \sigma_1$ is a subtype of σ_2 if we can instantiate it with some τ and show the result is a subtype
 909 of σ_2 .

910 **APPLICATION SUBTYPING.** The typing rule **AP-APP-VAR** uses the second subtyping judg-
 911 ment $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2$. To motivate this new kind of judgment, consider the expression `id 1`
 912 for example, whose derivation is stuck at rule **AP-APP-VAR** (here we assume $\text{id} : \forall a. a \rightarrow a \in \Psi$):
 913 Ψ):

$$\frac{\Psi \vdash^{AP} 1 \Rightarrow \text{Int} \quad \emptyset = \text{FV}(\text{Int}) - \text{FV}(\Psi) \quad \frac{\text{id} : \forall a. a \rightarrow a \in \Psi \quad ???}{\Psi; \text{Int} \vdash^{AP} \text{id} \Rightarrow ?} \text{AP-APP-VAR}}{\Psi \vdash^{AP} \text{id } 1 \Rightarrow ?} \text{AP-APP-APP}$$

914 Here we know that $\text{id} : \forall a. a \rightarrow a$ and also, from the application context, that `id` is applied
 915 to an argument of type `Int`. Thus we need a mechanism for solving the instantiation $a = \text{Int}$
 916 and returning a supertype $\text{Int} \rightarrow \text{Int}$ as the type of `id`. This is precisely what the application
 917 subtyping achieves: resolving instantiation constraints according to the application context.
 918 Notice that unlike existing works (Peyton Jones et al. [2007] or DK), application subtyping
 919 provides a way to solve instantiation more *locally*, since it does not mutually depend on typ-
 920 ing.

921 Back to the rules in Figure 3.2, one way to understand the judgment $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2$ from
 922 a computational point-of-view is that the type σ_2 is a *computed* output, rather than an input.
 923 In other words σ_2 is determined from Σ and σ_1 . This is unlike the judgment $\vdash^{AP} \sigma_1 <: \sigma_2$,

where both σ_1 and σ_2 would be computationally interpreted as inputs. Therefore it is not possible to view $\vdash^{AP} \sigma_1 <: \sigma_2$ as a special case of $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2$ where Σ is empty.

There are three rules dealing with application contexts. Rule **AP-AS-EMPTY** is for case when the application context is empty. Because it is empty, we have no constraints on the type, so we return it back unchanged. Note that this is where HM-style systems (also Peyton Jones et al. [2007]) would normally use an instantiation rule (e.g. rule **HM-INST** in HM) to remove top-level quantifiers. Our system does not need the instantiation rule, because in applications, type information flows from arguments to the function, instead of function to arguments. In the latter case, the instantiation rule is needed because a function type is wanted instead of a polymorphic type. In our approach, instantiation of type variables is avoided unless necessary.

The two remaining rules apply when the application context is non-empty, for polymorphic and function types respectively. Note that we only need to deal with these two cases because `Int` or type variables a cannot have a non-empty application context. In rule **AP-AS-FORALL**, we instantiate the polymorphic type with some τ , and continue. This instantiation is forced by the application context. In rule **AP-AS-ARROW**, one function of type $\sigma_1 \rightarrow \sigma_2$ is now being applied to an argument of type σ_3 . So we check $\vdash^{AP} \sigma_3 <: \sigma_1$. Then we continue with σ_2 and the rest application context, and return $\sigma_3 \rightarrow \sigma_4$ as the result type of the function.

METATHEORY. Application subtyping is novel in our system, and it enjoys some interesting properties. For example, As with typing, the application context decides the form of the supertype.

Lemma 3.5 (Σ Coincides with Subtyping Results). *If $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2$, then for some σ_3 , $\sigma_2 = \Sigma \rightarrow \sigma_3$.*

Therefore we can always use the judgment $\Sigma \vdash^{AP} \sigma_1 <: \Sigma \rightarrow \sigma_2$, instead of $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2$. Application subtyping is also reflexive and transitive. Interestingly, in those lemmas, if we remove all applications contexts, they are exactly the reflexivity and transitivity of traditional subtyping.

Lemma 3.6 (Reflexivity of Application Subtyping). $\Sigma \vdash^{AP} \Sigma \rightarrow \sigma <: \Sigma \rightarrow \sigma$.

Lemma 3.7 (Transitivity of Application Subtyping). *If $\Sigma_1 \vdash^{AP} \sigma_1 <: \Sigma_1 \rightarrow \sigma_2$, and $\Sigma_2 \vdash^{AP} \sigma_2 <: \Sigma_2 \rightarrow \sigma_3$, then $\Sigma_2, \Sigma_1 \vdash^{AP} \sigma_1 <: \Sigma_1 \rightarrow \Sigma_2 \rightarrow \sigma_3$.*

Finally, we can convert between subtyping and application subtyping. We can remove the application context and still get a subtyping relation:

957 **Lemma 3.8** ($\Sigma \vdash^{AP} <: \text{to } \vdash^{AP} <:$). If $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2$, then $\vdash^{AP} \sigma_1 <: \sigma_2$.

958 Transferring from subtyping to application subtyping will result in a more general type.

959 **Lemma 3.9** ($\vdash^{AP} <: \text{to } \Sigma \vdash^{AP} <:$). If $\vdash^{AP} \sigma_1 <: \Sigma \rightarrow \sigma_2$, then for some σ_3 , we have $\Sigma \vdash^{AP}$
 960 $\sigma_1 <: \Sigma \rightarrow \sigma_3$, and $\vdash^{AP} \sigma_3 <: \sigma_2$.

961 This lemma may not seem intuitive at first glance. Consider a concrete example. Consider
 962 the derivation for $\vdash^{AP} \text{Int} \rightarrow \forall a. a <: \text{Int} \rightarrow \text{Int}$:

$$\frac{\frac{\vdash^{AP} \text{Int} <: \text{Int} \quad \text{AP-S-INT} \quad \frac{\vdash^{AP} \text{Int} <: \text{Int} \quad \text{AP-S-INT}}{\vdash^{AP} \forall a. a <: \text{Int}} \quad \text{AP-S-FORALLL}}{\vdash^{AP} \text{Int} \rightarrow \forall a. a <: \text{Int} \rightarrow \text{Int}} \quad \text{AP-S-ARROW}$$

963 and for $\text{Int} \vdash^{AP} \text{Int} \rightarrow \forall a. a <: \text{Int} \rightarrow \forall a. a$:

$$\frac{\frac{\vdash^{AP} \text{Int} <: \text{Int} \quad \text{AP-S-INT}}{\text{Int} \vdash^{AP} \text{Int} \rightarrow \forall a. a <: \text{Int} \rightarrow \forall a. a} \quad \frac{\vdash^{AP} \forall a. a <: \forall a. a \quad \text{AP-AS-EMPTY}}{\text{Int} \vdash^{AP} \text{Int} \rightarrow \forall a. a <: \text{Int} \rightarrow \forall a. a} \quad \text{AP-AS-ARROW}$$

964 The former one, holds because we have $\vdash^{AP} \forall a. a <: \text{Int}$ in the return type. But in the latter
 965 one, after Int is consumed from application context, we eventually reach rule **AP-AS-EMPTY**,
 966 which always returns the original type back.

967 3.3 TYPE-DIRECTED TRANSLATION

968 This section discusses the type-directed translation of System AP into a variant of System F
 969 that is also used in Peyton Jones et al. [2007]. The translation is shown to be coherent and
 970 type safe. The later result implies the type-safety of the source language. To prove coherency,
 971 we need to decide when two translated terms are the same using *η -id equality*, and show that
 972 the translation is unique up to this definition.

973 3.3.1 TARGET LANGUAGE

974 The syntax and typing rules of our target language are given in Figure 3.3.

975 Expressions include variables x , integers n , annotated abstractions $\lambda x : \sigma. s$, type-level
 976 abstractions $\Lambda a. s$, and $s_1 s_2$ for term application, and $s \sigma$ for type application. The types
 977 and the typing contexts are the same as our system, where typing contexts do not track type

Expressions	$s, f ::= x \mid n \mid \lambda x : \sigma. s \mid \Lambda a. s \mid s_1 s_2 \mid s \sigma$
Types	$\sigma ::= \text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma$
Contexts	$\Psi ::= \bullet \mid \Psi, x : \sigma$

$\Psi \vdash^F s : \sigma$

(Typing)

$\frac{\text{F-VAR} \quad (x : \sigma) \in \Psi}{\Psi \vdash^F x : \sigma}$	$\frac{\text{F-INT}}{\Psi \vdash^F n : \text{Int}}$	$\frac{\text{F-LAMANN} \quad \Psi, x : \sigma_1 \vdash^F s : \sigma_2}{\Psi \vdash^F \lambda x : \sigma_1. s : \sigma_1 \rightarrow \sigma_2}$
$\frac{\text{F-APP} \quad \Psi \vdash^F s_1 : \sigma_1 \rightarrow \sigma_2 \quad \Psi \vdash^F s_2 : \sigma_1}{\Psi \vdash^F s_1 s_2 : \sigma_2}$	$\frac{\text{F-TABS} \quad \Psi \vdash^F s : \sigma \quad a \notin \text{FV}(\Psi)}{\Psi \vdash^F \Lambda a. s : \forall a. \sigma}$	
$\frac{\text{F-TAPP} \quad \Psi \vdash^F s : \forall a. \sigma_1}{\Psi \vdash^F s \sigma_2 : \sigma_1[a \mapsto \sigma_2]}$		

Figure 3.3: Syntax and typing rules of System F.

variables. In translation, we use f to refer to the coercion function produced by the subtyping translation, and s to refer to the translated term in System F.

Most typing rules are straightforward. Rule **F-TABS** types a type abstraction with explicit generalization, while rule **F-TAPP** types a type application with explicit instantiation.

3.3.2 SUBTYPING COERCIONS

The type-directed translation of subtyping is shown in Figure 3.4. The translation follows the subtyping relations from Figure 3.2, but adds a new component. The judgment $\vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f$ is read as: if $\vdash^{AP} \sigma_1 <: \sigma_2$ holds, it can be translated to a coercion function f in System F. The coercion function produced by subtyping is used to transform values from one type to another, so we should have $\bullet \vdash^F f : \sigma_1 \rightarrow \sigma_2$.

Rule **AP-S-INT** and rule **AP-S-TVAR** produce identity functions, since the source type and target type are the same. In rule **AP-S-ARROW**, the coercion function f_1 of type $\sigma_3 \rightarrow \sigma_1$ is applied to y to get a value of type σ_1 . Then the resulting value becomes an argument to x , and a value of type σ_2 is obtained. Finally we apply f_2 to the value of type σ_2 , so that a value of type σ_4 is computed. In rule **A-PS-FORALLL**, the input argument is a polymorphic type, so we feed the type τ to it and apply the coercion function f from the precondition. Rule **AP-S-**

$\boxed{\vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f}$		(Subtyping Translation)
$\text{AP-S-TVAR} \quad \frac{}{\vdash^{AP} a <: a \rightsquigarrow \lambda x : a. x}$	$\text{AP-S-INT} \quad \frac{}{\vdash^{AP} \text{Int} <: \text{Int} \rightsquigarrow \lambda x : \text{Int}. x}$	
$\text{AP-S-ARROW} \quad \frac{\vdash^{AP} \sigma_3 <: \sigma_1 \rightsquigarrow f_1 \quad \vdash^{AP} \sigma_2 <: \sigma_4 \rightsquigarrow f_2}{\vdash^{AP} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4 \rightsquigarrow \lambda x : \sigma_1 \rightarrow \sigma_2. \lambda y : \sigma_3. f_2(x(f_1 y))}$		
$\text{AP-S-FORALLL} \quad \frac{\vdash^{AP} \sigma_1[a \mapsto \tau] <: \sigma_2 \rightsquigarrow f}{\vdash^{AP} \forall a. \sigma_1 <: \sigma_2 \rightsquigarrow \lambda x : \forall a. \sigma_1. f(x\tau)}$	$\text{AP-S-FORALLR} \quad \frac{a \notin \text{FV}(\sigma_1) \quad \vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f}{\vdash^{AP} \sigma_1 <: \forall a. \sigma_2 \rightsquigarrow \lambda x : \sigma_1. \Lambda a. f x}$	
$\boxed{\Sigma \vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f}$		(Application Subtyping)
$\text{AP-AS-EMPTY} \quad \frac{}{\bullet \vdash^{AP} \sigma <: \sigma \rightsquigarrow \lambda x : \sigma. x}$	$\text{AP-AS-FORALL} \quad \frac{\Sigma, \sigma_3 \vdash^{AP} \sigma_1[a \mapsto \tau] <: \sigma_2 \rightsquigarrow f}{\Sigma, \sigma_3 \vdash^{AP} \forall a. \sigma_1 <: \sigma_2 \rightsquigarrow \lambda x : \forall a. \sigma_1. f(x\tau)}$	
$\text{AP-AS-ARROW} \quad \frac{\vdash^{AP} \sigma_3 <: \sigma_1 \rightsquigarrow f_1 \quad \Sigma \vdash^{AP} \sigma_2 <: \sigma_4 \rightsquigarrow f_2}{\Sigma, \sigma_3 \vdash^{AP} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4 \rightsquigarrow \lambda x : \sigma_1 \rightarrow \sigma_2. \lambda y : \sigma_3. f_2(x(f_1 y))}$		

Figure 3.4: Subtyping translation rules of System AP.

$\Psi \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s$

(Typing Inference)

$$\frac{\text{AP-INF-INT}}{\Psi \vdash^{AP} n \Rightarrow \text{Int} \rightsquigarrow n}$$

$$\frac{\text{AP-INF-LAM} \quad \Psi, x : \tau \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s}{\Psi \vdash^{AP} \lambda x. e \Rightarrow \tau \rightarrow \sigma \rightsquigarrow \lambda x : \tau. s}$$

$$\frac{\text{AP-INF-LAMANN} \quad \Psi, x : \sigma_1 \vdash^{AP} e \Rightarrow \sigma_2 \rightsquigarrow s}{\Psi \vdash^{AP} \lambda x : \sigma_1. e \Rightarrow \sigma_1 \rightarrow \sigma_2 \rightsquigarrow \lambda x : \sigma_1. s}$$

$\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s$

(Typing Application Mode)

$$\frac{\text{AP-APP-VAR} \quad (x : \sigma_1) \in \Psi \quad \Sigma \vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f}{\Psi; \Sigma \vdash^{AP} x \Rightarrow \sigma_2 \rightsquigarrow f x}$$

$$\frac{\text{AP-APP-LAM} \quad \Psi, x : \sigma_1 \vdash^{AP} e \Rightarrow \sigma_2 \rightsquigarrow s}{\Psi; \Sigma, \sigma_1 \vdash^{AP} \lambda x. e \Rightarrow \sigma_1 \rightarrow \sigma_2 \rightsquigarrow \lambda x : \sigma_1. s}$$

$$\frac{\text{AP-APP-LAMANN} \quad \vdash^{AP} \sigma_2 <: \sigma_1 \rightsquigarrow f \quad \Psi, x : \sigma_1 \vdash^{AP} e \Rightarrow \sigma_3 \rightsquigarrow s}{\Psi; \Sigma, \sigma_2 \vdash^{AP} \lambda x : \sigma_1. e \Rightarrow \sigma_2 \rightarrow \sigma_3 \rightsquigarrow \lambda y : \sigma_2. (\lambda x : \sigma_1. s) (f y)}$$

$$\frac{\text{AP-APP-APP} \quad \Psi \vdash^{AP} e_2 \Rightarrow \sigma_1 \rightsquigarrow s_2 \quad \overline{a_i}^i = \text{FV}(\sigma_1) - \text{FV}(\Psi) \quad \sigma_2 = \forall \overline{a_i}^i. \sigma_1 \quad \Psi; \Sigma, \sigma_2 \vdash^{AP} e_1 \Rightarrow \sigma_2 \rightarrow \sigma_3 \rightsquigarrow s_1}{\Psi; \Sigma \vdash^{AP} e_1 e_2 \Rightarrow \sigma_3 \rightsquigarrow s_1 (\Lambda \overline{a_i}^i. s_2)}$$

Figure 3.5: Typing translation rules of System AP.

994 **FORALLR** uses the coercion f and, in order to produce a polymorphic type, we add one type
 995 abstraction to turn it into a coercion of type $\sigma_1 \rightarrow \forall a. \sigma_2$.

996 The second part of the subtyping translation deals with coercions generated by application
 997 subtyping. The judgment $\Sigma \vdash^{AP} \sigma <: \sigma_2 \rightsquigarrow f$ is read as: if $\Sigma \vdash^{AP} \sigma <: \sigma_2$ holds, it can
 998 be translated to a coercion function f in System F. If we compare two parts, we can see
 999 application contexts play no role in the generation of the coercion. Notice the similarity
 1000 between rule **AP-S-TVAR** and rule **AP-AS-EMPTY**, between rule **AP-S-FORALLR** and rule **AP-**
 1001 **AS-FORALL**, and between rule **AP-S-ARROW** and rule **AP-AS-ARROW**. We therefore omit more
 1002 explanations.

1003 3.3.3 TYPE-DIRECTED TRANSLATION OF TYPING

1004 The type directed translation of typing is shown in the Figure 3.5, which extends the rules in
 1005 Figure 3.1. The judgment $\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s$ is read as: if $\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma$ holds, the
 1006 expression can be translated to term s in System F. The judgment $\Psi \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s$ is the
 1007 special case when the application context is empty.

1008 Most translation rules are straightforward. In rule **AP-APP-VAR**, x is translated to $f x$,
 1009 where f is the coercion function generated from subtyping. Rule **AP-APP-LAMANN** applies
 1010 the coercion function f to y , then feeds y to the function generated from the abstraction.
 1011 When generalizing over a type, rule **AP-APP-APP** generate type-level abstractions.

1012 3.3.4 TYPE SAFETY

1013 We prove that our system is type safe by proving that the translation produces well-typed
 1014 terms.

1015 **Lemma 3.10** (Soundness of Typing Translation). *If $\Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s$, then $\Psi \vdash^F s : \sigma$.*

1016 The lemma relies on the translation of subtyping to produce type-correct coercions.

1017 **Lemma 3.11** (Soundness of Subtyping Translation).

- 1018 1. *If $\vdash^{AP} \sigma <: \sigma_2 \rightsquigarrow f$, then $\bullet \vdash^F f : \sigma \rightarrow \sigma_2$.*
- 1019 2. *If $\Sigma \vdash^{AP} \sigma <: \sigma_2 \rightsquigarrow f$, then $\bullet \vdash^F f : \sigma \rightarrow \sigma_2$.*

1020 3.3.5 COHERENCE

1021 One problem with the translation is that there are multiple targets corresponding to one ex-
 1022 pression. This is because in original system there are multiple choices when instantiating a

3 Higher-Rank Polymorphism with the Application Mode

$ x $	$=$	$ x $	$ \Lambda a. s $	$=$	$ s $
$ n $	$=$	$ n $	$ s_1 s_2 $	$=$	$ s_1 s_2 $
$ \lambda x : \sigma. s $	$=$	$\lambda x. s $	$ s \sigma $	$=$	$ s $

$f_1 =_{\eta id} f_2$

(Eta-id Equality)

$\frac{\text{ETA-REDUCE} \quad x \notin \text{FV}(f)}{\lambda x. f x =_{\eta id} f}$	$\frac{\text{ETA-ID}}{(\lambda x. x) f =_{\eta id} f}$	$\frac{\text{ETA-APP} \quad f_1 =_{\eta id} f'_1 \quad f_2 =_{\eta id} f'_2}{f_1 f_2 =_{\eta id} f'_1 f'_2}$
$\frac{\text{ETA-LAM} \quad f =_{\eta id} f'}{\lambda x. f =_{\eta id} \lambda x. f'}$	$\frac{\text{ETA-REFL}}{f =_{\eta id} f}$	$\frac{\text{ETA-SYMM} \quad f =_{\eta id} f'}{f' =_{\eta id} f}$
$\frac{\text{ETA-TRANS} \quad f_1 =_{\eta id} f_2 \quad f_2 =_{\eta id} f_3}{f_1 =_{\eta id} f_3}$		

Figure 3.6: Type erasure and eta-id equality of System F.

polymorphic type, or guessing the annotation for unannotated lambda abstraction (rule **AP-INF-LAM**). For each choice, the corresponding target will be different. For example, expression $\lambda x. x$ can be type checked with $\text{Int} \rightarrow \text{Int}$, or $a \rightarrow a$, and the corresponding targets are $\lambda x : \text{Int}. x$, and $\lambda x : a. x$.

Therefore, in order to prove the translation is coherent, we turn to prove that all the translations have the same operational semantics. There are two steps towards the goal: type erasure, and considering η expansion and identity functions.

TYPE ERASURE. Since type information is useless after type-checking, we erase the type information of the targets for comparison. The erasure process is given at the top of Figure 3.6.

The erasure process is standard, where we erase the type annotation in abstractions, and remove type abstractions and type applications. The calculus after erasure is the untyped lambda calculus.

ETA-ID EQUALITY. However, even if we have type erasure, multiple targets for one expression can still be syntactically different. The problem is that we can insert more coercion functions in one translation than another, since an expression can have a more polymorphic type in one derivation than another one. So we need a more refined definition of equality instead of syntactic equality.

We use a similar definition of eta-id equality as in Chen [2003], given in Figure 3.6. In $=_{\eta id}$ equality, two expressions are regarded as equivalent if they can turn into the same expression

through η -reduction or removal of redundant identity functions. The $=_{\eta id}$ relation is reflexive, symmetrical, and transitive. As a small example, we can show that $\lambda x. (\lambda y. y) f x =_{\eta id} f$.

$$\frac{\frac{\frac{}{f =_{\eta id} f} \text{ETA-REFL}}{(\lambda y. y) f =_{\eta id} f} \text{ETA-ID}}{\lambda x. (\lambda y. y) f x =_{\eta id} f} \text{ETA-REDUCE}$$

Now we first prove that the erasure of the translation result of subtyping is always $=_{\eta id}$ to an identity function.

Lemma 3.12 (Subtyping Coercions eta-id equal to id).

- if $\vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f$, then $|f| =_{\eta id} \lambda x. x$.
- if $\Sigma \vdash^{AP} \sigma_1 <: \sigma_2 \rightsquigarrow f$, then $|f| =_{\eta id} \lambda x. x$.

We then prove that our translation actually generates a *unique* target:

Lemma 3.13 (Coherence). If $\Psi_1; \Sigma_1 \vdash^{AP} e \Rightarrow \sigma \rightsquigarrow s_1$, and $\Psi_2; \Sigma_2 \vdash^{AP} e \Rightarrow \sigma_2 \rightsquigarrow s_2$, then $|s_1| =_{\eta id} |s_2|$.

3.4 TYPE INFERENCE ALGORITHM

Even though our specification is syntax-directed, it does not directly lead to an algorithm, because there are still many guesses in the system, such as in rule **AP-INF-LAM**. This subsection presents a brief introduction of the algorithm, which closely follows the approach by Peyton Jones et al. [2007]. The full rules of the algorithm can be found in Appendix A.

Instead of guessing, the algorithm creates *meta* type variables $\hat{\alpha}, \hat{\beta}$ which are waiting to be solved. The judgment for the algorithmic type system is

$$(S_1, N_1); \Psi \vdash^{AP} e \Rightarrow \sigma \hookrightarrow (S_2, N_2)$$

Here we use N as name supply, from which we can always extract new names. Also, every time a meta type variable is solved, we need to record its solution. We use S as a notation for the substitution that maps meta type variables to their solutions. For example, rule **AP-INF-LAM** becomes

$$\frac{\text{AP-A-INF-LAM} \quad (S_0, N_0); \Psi, x : \hat{\beta} \vdash^{AP} e \Rightarrow \sigma \hookrightarrow (S_1, N_1)}{(S_0, N_0 \hat{\beta}); \Psi \vdash^{AP} \lambda x. e \Rightarrow \hat{\beta} \rightarrow \sigma \hookrightarrow (S_1, N_1)}$$

1063 Comparing it to rule **AP-INF-LAM**, τ is replaced by a new meta type variable $\widehat{\beta}$ from name
 1064 supply $N_0\widehat{\beta}$. But despite of the name supply and substitution, the rule retains the structure
 1065 of rule **AP-INF-LAM**.

1066 Having the name supply and substitutions, the algorithmic system is a direct extension of
 1067 the specification in Figure 3.2, with a process to do unifications that solve meta type variables.
 1068 Such unification process is quite standard and similar to the one used in the Hindley-Milner
 1069 system. We proved our algorithm is sound and complete with respect to the specification.

1070 **Theorem 3.14** (Soundness). *If $([], N_0); \Psi \vdash^{AP} e \Rightarrow \sigma \hookrightarrow (S_1, N_1)$, then for any substitution*
 1071 *V with $\text{dom}(V) = \text{fv}(S_1\Psi, S_1\sigma)$, we have $V S_1\Psi \vdash^{AP} e \Rightarrow V S_1\sigma$.*

1072 **Theorem 3.15** (Completeness). *If $\Psi \vdash^{AP} e \Rightarrow \sigma$, then for a fresh N_0 , we have $([], N_0); \Psi \vdash^{AP}$*
 1073 *$e \Rightarrow \sigma_2 \hookrightarrow (S_1, N_1)$, and for some S_2 , if $\overline{a_i}^i = \text{FV}(\Psi) - \text{FV}(S_2 S_1 \sigma_2)$, and $\overline{b_i}^i = \text{FV}(\Psi) -$*
 1074 *$\text{FV}(\sigma)$, we have $\vdash^{AP} \forall \overline{a_i}^i. S_2 S_1 \sigma_2 <: \forall \overline{b_i}^i. \sigma$.*

1075 3.5 DISCUSSION

1076 3.5.1 COMBINING APPLICATION AND CHECKING MODES

1077 Although the application mode provides us with alternative design choices in a bidirectional
 1078 type system, a checking mode can still be *easily* added. One motivation for the checking
 1079 mode would be annotated expressions $e : \sigma$, where the type of the expression is known and
 1080 is therefore used to check the expression, as in DK.

1081 Consider adding $e : \sigma$ for introducing the checking mode for the language. Notice that,
 1082 since the checking mode is stronger than the application mode, when entering the checking
 1083 mode the application context is no longer useful. Instead we use application subtyping to
 1084 satisfy the application context requirements. A possible typing rule for annotated expressions
 1085 is:

$$\frac{\text{AP-APP-ANNO} \quad \Psi \vdash^{AP} e \Leftarrow \sigma_1 \quad \Sigma \vdash^{AP} \sigma_1 <: \sigma_2}{\Psi; \Sigma \vdash^{AP} e : \sigma_1 \Rightarrow \sigma_2}$$

1086 Here, e is checked using its annotation σ_1 , and then we instantiate σ_1 to σ_2 using application
 1087 subtyping with the application context Σ .

1088 Now we can have a rule set of the checking mode for all expressions, much like those
 1089 checking rules in DK. For example, one useful rule for abstractions in the checking mode

could be rule [AP-CHK-LAM](#), where the parameter type σ_1 serves as the type of x , and typing checks the body with σ_2 .

$$\frac{\text{AP-CHK-LAM} \quad \Psi, x : \sigma_1 \vdash^{AP} e \Leftarrow \sigma_2}{\Psi \vdash^{AP} \lambda x. e \Leftarrow \sigma_1 \rightarrow \sigma_2}$$

Moreover, combined with the information flow, the checking rule for application checks the function with the full type.

$$\frac{\text{AP-CHK-APP} \quad \Psi \vdash^{AP} e_2 \Rightarrow \sigma_1 \quad \Psi \vdash^{AP} e_1 \Leftarrow \sigma_1 \rightarrow \sigma_2}{\Psi \vdash^{AP} e_1 e_2 \Leftarrow \sigma_2}$$

Note that adding annotated expressions might bring convenience for programmers, since annotations can be more freely placed in a program. For example, $(\lambda x. x \ 1) : (\text{Int} \rightarrow \text{Int}) \rightarrow \text{Int}$ becomes valid. However this does not add any expressive power, since annotated expressions that are typeable would remain typeable after moving the annotations to bindings. For example the previous program is equivalent to $(\lambda x : \text{Int} \rightarrow \text{Int}. x \ 1)$.

This discussion is a sketch. We have not defined the corresponding declarative system nor algorithm. However we believe that the addition of the checking mode will *not* bring surprises to the meta-theory.

3.5.2 ADDITIONAL CONSTRUCTS

In this section, we show that the application mode is compatible with other constructs, by discussing how to add support for pairs in the language. A similar methodology would apply to other constructs like sum types, data types, if-then-else expressions and so on.

The introduction rule for pairs must be in the inference mode with an empty application context. Also, the subtyping rule for pairs is as expected.

$$\frac{\text{AP-INF-PAIR} \quad \Psi \vdash^{AP} e_1 \Rightarrow \sigma_1 \quad \Psi \vdash^{AP} e_2 \Rightarrow \sigma_2}{\Psi \vdash^{AP} (e_1, e_2) \Rightarrow (\sigma_1, \sigma_2)}$$

$$\frac{\text{AP-S-PAIR} \quad \vdash^{AP} \sigma_1 <: \sigma_3 \quad \vdash^{AP} \sigma_2 <: \sigma_4}{\vdash^{AP} (\sigma_1, \sigma_2) <: (\sigma_3, \sigma_4)}$$

The application mode can apply to the elimination constructs of pairs. If one component of the pair is a function, for example, $\text{fst } (\lambda x. x, 1) \ 2$, then it is possible to have a judgment

3 Higher-Rank Polymorphism with the Application Mode

with a non-empty application context. Therefore, we can use the application subtyping to account for the application contexts:

$$\begin{array}{c}
 \text{AP-APP-FST} \\
 \frac{\Psi \vdash^{AP} e \Rightarrow (\sigma_1, \sigma_2) \quad \Sigma \vdash^{AP} \sigma_1 <: \sigma_3}{\Psi; \Sigma \vdash^{AP} \mathbf{fst} e \Rightarrow \sigma_3} \\
 \\
 \text{AP-APP-SND} \\
 \frac{\Psi \vdash^{AP} e \Rightarrow (\sigma_1, \sigma_2) \quad \Sigma \vdash^{AP} \sigma_2 <: \sigma_3}{\Psi; \Sigma \vdash^{AP} \mathbf{snd} e \Rightarrow \sigma_3}
 \end{array}$$

However, in polymorphic type systems, we need to take the subsumption rule into consideration. For example, in the expression $(\lambda x : \forall a. (a, b). \mathbf{fst} x)$, \mathbf{fst} is applied to a polymorphic type. Interestingly, instead of a non-deterministic subsumption rule, having polymorphic types actually leads to a simpler solution. According to the philosophy of the application mode, the types of the arguments always flow into the functions. Therefore, instead of regarding $\mathbf{fst} e$ as an expression form, where e is itself an argument, we could regard \mathbf{fst} as a function on its own, whose type is $\forall a. \forall b. (a, b) \rightarrow a$. Then as in the variable case, we use the subtyping rule to deal with application contexts. Thus the typing rules for \mathbf{fst} and \mathbf{snd} can be modeled as:

$$\begin{array}{c}
 \text{AP-APP-FST-VAR} \\
 \frac{\Sigma \vdash^{AP} \forall a. \forall b. (a, b) \rightarrow a <: \sigma}{\Psi; \Sigma \vdash^{AP} \mathbf{fst} \Rightarrow \sigma} \\
 \\
 \text{AP-APP-SND-VAR} \\
 \frac{\Sigma \vdash^{AP} \forall a. \forall b. (a, b) \rightarrow b <: \sigma}{\Psi; \Sigma \vdash^{AP} \mathbf{snd} \Rightarrow \sigma}
 \end{array}$$

1106 Note that another way to model those two rules would be to simply have an initial typing
 1107 environment $\Psi_{init} \equiv \mathbf{fst} : \forall a. \forall b. (a, b) \rightarrow a, \mathbf{snd} : \forall a. \forall b. (a, b) \rightarrow b$. In this case the
 1108 elimination of pairs be dealt directly by the rule for variables.

1109 An extended version of the calculus extended with rules for pairs (rule [AP-INF-PAIR](#), rule [AP-](#)
 1110 [S-PAIR](#), rule [AP-APP-FST-VAR](#) and rule [AP-APP-SND-VAR](#)), has been formally studied. All the
 1111 theorems presented before hold with the extension of pairs.

1112 3.5.3 MORE EXPRESSIVE TYPE APPLICATIONS

1113 The design choice of propagating arguments to functions was subject to consideration in
 1114 the original work on local type inference [Pierce and Turner 2000], but was rejected due to
 1115 possible non-determinism introduced by explicit type applications:

1116 *“It is possible, of course, to come up with examples where it would be beneficial to*
 1117 *synthesize the argument types first and then use the resulting information to avoid*

1118 *type annotations in the function part of an application expression....Unfortunately*
 1119 *this refinement does not help infer the type of polymorphic functions. For example,*
 1120 *we cannot uniquely determine the type of x in the expression $(\text{fun}[X](x) e) [\text{Int}] 3$."*

1121 As a response to this challenge, we also present an application of the application mode to a
 1122 variant of System F [Xie and Oliveira 2018]. The development of the calculus shows that the
 1123 application mode can actually work well with calculi with explicit type applications. Here
 1124 we explain the key ideas of the design of the system, but refer to Xie and Oliveira [2018] for
 1125 more details.

1126 To explain the new design, consider the expression:

$$(\Lambda a. \lambda x : a. x + 1) \text{Int}$$

1127 which is not typeable in the traditional type system for System F. In System F the lambda
 1128 abstractions do not account for the context of possible function applications. Therefore when
 1129 type checking the inner body of the lambda abstraction, the expression $x + 1$ is ill-typed,
 1130 because all that is known is that x has the (abstract) type a .

If we are allowed to propagate type information from arguments to functions, then we can
 verify that $a = \text{Int}$ and $x + 1$ is well-typed. The key insight in the new type system is to use
 contexts to track type equalities induced by type applications. This enables us to type check
 expressions such as the body of the lambda above ($x + 1$). The key rules for type abstractions
 and type applications are:

$$\frac{\Psi; \Sigma, [[\Psi]\sigma_1] \vdash^{AP} e \Rightarrow \sigma_2}{\Psi; \Sigma \vdash^{AP} e \sigma_1 \Rightarrow \sigma_2} \text{AP-APP-TAPP} \qquad \frac{\Psi, a = \sigma_1; \Sigma \vdash^{AP} e \Rightarrow \sigma_2}{\Psi; \Sigma, [\sigma_1] \vdash^{AP} \Lambda a. e \Rightarrow \sigma_2} \text{AP-APP-TLAM}$$

1131 For type applications, rule **AP-APP-TAPP** stores the type argument σ_1 into the application
 1132 context. Since Ψ tracks type equalities, we apply Ψ as a type substitution to σ_1 (i.e., $[\Psi]\sigma_1$)
 1133 Moreover, to distinguish between type arguments and types of term arguments, we put type
 1134 arguments in brackets (i.e., $[[\Psi]\sigma_1]$). For type abstractions (rule **AP-APP-TLAM**), if the appli-
 1135 cation context is non-empty, we put a new type equality between the type variable a and the
 1136 type argument σ_1 into the context.

1137 Now, back to the problematic expression $(\text{fun}[X](x) e) [\text{Int}] 3$, the type of x can be inferred
 1138 as either X or Int since they are actually equivalent.

1139 **SUGAR FOR TYPE SYNONYMS.** In the same way that we can regard **let** expressions as syntactic
 1140 sugar, in the new type system we further *gain built-in type synonyms for free*. A *type synonym*

1141 is a new name for an existing type. Type synonyms are common in languages such as Haskell.
 1142 In our calculus a simple form of type synonyms can be desugared as follows:

$$\mathbf{type} \ a = \sigma \ \mathbf{in} \ e \rightsquigarrow (\Lambda a. e) \sigma$$

1143 One practical benefit of such syntactic sugar is that it enables a direct encoding of a System F-
 1144 like language with declarations (including type-synonyms). Although declarations are often
 1145 viewed as a routine extension to a calculus, and are not formally studied, they are highly
 1146 relevant in practice. Therefore, a more realistic formalization of a programming language
 1147 should directly account for declarations. By providing a way to encode declarations, our
 1148 new calculus enables a simple way to formalize declarations.

1149 **TYPE ABSTRACTION.** The type equalities introduced by type applications may seem like
 1150 we are breaking System F type abstraction. However, we argue that *type abstraction* is still
 1151 supported by our System F variant. For example:

$$\mathbf{let} \ inc = \Lambda a. \lambda x : a. x + 1 \ \mathbf{in} \ inc \ \mathbf{Int} \ 1$$

1152 (after desugaring) does *not* type-check, as in a System-F like language. In our type system
 1153 lambda abstractions that are immediately applied to an argument, and unapplied lambda
 1154 abstractions behave differently. Unapplied lambda abstractions are just like System F ab-
 1155 stractions and retain type abstraction. The example above illustrates this. In contrast the
 1156 typeable example $(\Lambda a. \lambda x : a. x + 1) \ \mathbf{Int}$, which uses a lambda abstraction directly applied to
 1157 an argument, can be regarded as the desugared expression for $\mathbf{type} \ a = \mathbf{Int} \ \mathbf{in} \ \lambda x : a. x + 1$.

PART III

HIGHER-RANK POLYMORPHISM AND GRADUAL TYPING

4 GRADUALLY TYPED HIGHER-RANK POLYMORPHISM

Consistent subtyping is employed in some gradual type systems to validate type conversions. The original definition by Siek and Taha [2007] serves as a guideline for designing gradual type systems with subtyping. Polymorphic types à la System F also induce a subtyping relation that relates polymorphic types to their instantiations. However Siek and Taha’s definition is not adequate for polymorphic subtyping. This section first proposes a generalization of consistent subtyping (Section 4.2) that is adequate for polymorphic subtyping, and subsumes the original definition by Siek and Taha. The new definition of consistent subtyping provides novel insights with respect to previous polymorphic gradual type systems, which did not employ consistent subtyping.

We then present GPC, a gradually typed calculus for implicit higher-rank polymorphism that uses our new notion of consistent subtyping. We develop both declarative (Section 4.3) and bidirectional algorithmic versions (Section 4.4) for the type system. The algorithmic version employs techniques developed by DK [Dunfield and Krishnaswami 2013] for higher-rank polymorphism to deal with instantiation.

4.1 INTRODUCTION AND MOTIVATION

4.1.1 BACKGROUND: GRADUAL TYPING

Gradual typing [Siek and Taha 2006] is an increasingly popular topic in both programming language practice and theory. On the practical side there is a growing number of programming languages adopting gradual typing. Those languages include Clojure [Bonnaire-Sergeant et al. 2016], Python [Lehtosalo et al. 2006; Vitousek et al. 2014], TypeScript [Bierman et al. 2014], Hack [Verlaguet 2013], and the addition of Dynamic to C# [Bierman et al. 2010], to name a few. On the theoretical side, recent years have seen a large body of research that defines the foundations of gradual typing [Cimini and Siek 2016, 2017; Garcia et al. 2016], explores their use for both functional and object-oriented programming [Siek

$$\begin{array}{c}
 \boxed{\sigma_1 <: \sigma_2} \qquad \qquad \qquad \text{(Subtyping)} \\
 \\
 \begin{array}{cccc}
 \overline{\text{Int} <: \text{Int}} & \overline{\text{Bool} <: \text{Bool}} & \overline{\text{Float} <: \text{Float}} & \overline{\text{Int} <: \text{Float}} \\
 \\
 \frac{\sigma_3 <: \sigma_1 \quad \sigma_2 <: \sigma_4}{\sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4} & \frac{\overline{\sigma_i <: \sigma_i'^i}}{[\overline{l_i : \sigma_i^i}] <: [\overline{l_i : \sigma_i'^i}]} & & \overline{? <: ?}
 \end{array} \\
 \\
 \boxed{\sigma_1 \sim \sigma_2} \qquad \qquad \qquad \text{(Type Consistency)} \\
 \\
 \begin{array}{cccc}
 \overline{\sigma \sim \sigma} & \overline{\sigma \sim ?} & \overline{? \sim \sigma} & \frac{\sigma_1 \sim \sigma_3 \quad \sigma_2 \sim \sigma_4}{\sigma_1 \rightarrow \sigma_2 \sim \sigma_3 \rightarrow \sigma_4} \\
 & & & \frac{\overline{\sigma_i \sim \sigma_i'^i}}{[\overline{l_i : \sigma_i^i}] \sim [\overline{l_i : \sigma_i'^i}]}
 \end{array}
 \end{array}$$

 Figure 4.1: Subtyping and type consistency in $\mathbf{FOb}_{<}^?$.

and Taha 2006, 2007], as well as its applications to many other areas [Bañados Schwerter et al. 2014; Castagna and Lanvin 2017; Jafery and Dunfield 2017].

Siek and Taha [2007] developed a gradual type system for object-oriented languages that they call $\mathbf{FOb}_{<}^?$. A key concept in gradual type systems is the concept of *consistency* (written \sim) between gradual types. Consistency weakens type equality to allow for the presence of *unknown* types $?$. The intuition is that consistency relaxes the structure of a type system to tolerate unknown positions in a gradual type. They also defined the subtyping relation in a way that static type safety is preserved. Their key insight is that the unknown type $?$ is neutral to subtyping, with only $? <: ?$. Both relations are defined in Figure 4.1. A primary contribution of their work is to show that consistency and subtyping are orthogonal. As Siek and Taha [2007] put it, this shows that “gradual typing and subtyping are orthogonal and can be combined in a principled fashion”.

However, the orthogonality of consistency and subtyping does not lead to a deterministic relation. Thus Siek and Taha defined *consistent subtyping* (written \lesssim) based on a *restriction operator*, written $\sigma_1|_{\sigma_2}$ that “masks off” the parts of type σ_1 that are unknown in type σ_2 . For example,

$$\begin{array}{lcl}
 \text{Int} \rightarrow \text{Int}|_{\text{Bool} \rightarrow \text{Bool}} & = & \text{Int} \rightarrow ? \\
 \text{Bool} \rightarrow ?|_{\text{Int} \rightarrow \text{Int}} & = & \text{Bool} \rightarrow ?
 \end{array}$$

The definition of the restriction operator is given below:

$$\begin{aligned}
\sigma|_{\sigma'} &= \text{case } (\sigma, \sigma') \text{ of} \\
&| (_, ?) \Rightarrow ? \\
&| (\sigma_1 \rightarrow \sigma_2, \sigma'_1 \rightarrow \sigma'_2) \Rightarrow \sigma_1|_{\sigma'_1} \rightarrow \sigma_2|_{\sigma'_2} \\
&| ([l_1 : \sigma_1, \dots, l_n : \sigma_n], [l_1 : \sigma'_1, \dots, l_m : \sigma'_m]) \text{ if } n \leq m \Rightarrow [l_1 : \sigma_1|_{\sigma'_1}, \dots, l_n : \sigma_n|_{\sigma'_n}] \\
&| ([l_1 : \sigma_1, \dots, l_n : \sigma_n], [l_1 : \sigma'_1, \dots, l_m : \sigma'_m]) \text{ if } n > m \Rightarrow [l_1 : \sigma_1|_{\sigma'_1}, \dots, l_m : \sigma_m|_{\sigma'_m}, \dots, l_n : \sigma_n] \\
&| (_, _) \Rightarrow \sigma
\end{aligned}$$

1202

1203 With the restriction operator, consistent subtyping is simply defined as:

1204 **Definition 3** (Algorithmic Consistent Subtyping of Siek and Taha [2007]). $\sigma_1 \lesssim \sigma_2 \equiv$
1205 $\sigma_1|_{\sigma_2} <: \sigma_2|_{\sigma_1}$.

1206 Later they show a proposition that consistent subtyping is equivalent to two declarative
1207 definitions, which we refer to as the strawman for *declarative* consistent subtyping because it
1208 serves as a good guideline on superimposing consistency and subtyping. Both definitions
1209 are non-deterministic because of the intermediate type σ_3 .

1210 **Definition 4** (Strawman for Declarative Consistent Subtyping). The following two are equiv-
1211 alent:

- 1212 1. $\sigma_1 \lesssim \sigma_2$ if and only if $\sigma_1 \sim \sigma_3$ and $\sigma_3 <: \sigma_2$ for some σ_3 .
- 1213 2. $\sigma_1 \lesssim \sigma_2$ if and only if $\sigma_1 <: \sigma_3$ and $\sigma_3 \sim \sigma_2$ for some σ_3 .

1214 In our later discussion, it will always be clear which definition we are referring to. For
1215 example, we focus more on Definition 4 in Section 4.2.2, and more on Definition 3 in Sec-
1216 tion 4.2.5.

1217 4.1.2 MOTIVATION: GRADUALLY TYPED HIGHER-RANK POLYMORPHISM

1218 Our work combines implicit (higher-rank) polymorphism with gradual typing. As is well
1219 known, a gradually typed language supports both fully static and fully dynamic checking
1220 of program properties, as well as the continuum between these two extremes. It also offers
1221 programmers fine-grained control over the static-to-dynamic spectrum, i.e., a program can
1222 be evolved by introducing more or less precise types as needed [Garcia et al. 2016].

1223 Haskell is a language renowned for its advanced type system, but it does not feature gradual
1224 typing. Of particular interest to us is its support for implicit higher-rank polymorphism,

1225 which is supported via explicit type annotations. In Haskell some programs that are safe at
 1226 run-time may be rejected due to the conservativity of the type system. For example, consider
 1227 again the example from Section 2.2:

```
1228   (\f. (f 1, f 'a')) (\x. x)
```

1229 This program is rejected by Haskell’s type checker because Haskell implements the HM
 1230 rule that a lambda-bound argument (such as f) can only have a monotype, i.e., the type
 1231 checker can only assign f the type $\text{Int} \rightarrow \text{Int}$, or $\text{Char} \rightarrow \text{Char}$, but not $\forall a. a \rightarrow a$. Find-
 1232 ing such manual polymorphic annotations can be non-trivial, especially when the program
 1233 scales up and the annotation is long and complicated.

1234 Instead of rejecting the program outright, due to missing type annotations, gradual typ-
 1235 ing provides a simple alternative by giving f the unknown type $?$. With this type the same
 1236 program type-checks and produces $(1, 'a')$. By running the program, programmers can
 1237 gain more insight about its run-time behaviour. Then, with this insight, they can also give f a
 1238 more precise type $(\forall a. a \rightarrow a)$ a posteriori so that the program continues to type-check via
 1239 implicit polymorphism and also grants more static safety. In this paper, we envision such a
 1240 language that combines the benefits of both implicit higher-rank polymorphism and gradual
 1241 typing.

1242 4.1.3 APPLICATION: EFFICIENT (PARTLY) TYPED ENCODINGS OF ADTs

1243 We illustrate two concrete applications of gradually typed higher-rank polymorphism related
 1244 to algebraic datatypes. The first application shows how gradual typing helps in defining Scott
 1245 encodings of algebraic datatypes [Curry et al. 1958; Parigot 1992], which are impossible to
 1246 encode in plain System F. The second application shows how gradual typing makes it easy to
 1247 model and use heterogeneous containers.

1248 Our calculus does not provide built-in support for algebraic datatypes (ADTs). Neverthe-
 1249 less, the calculus is expressive enough to support efficient function-based encodings of (op-
 1250 tionally polymorphic) ADTs¹. This offers an immediate way to model algebraic datatypes in
 1251 our calculus without requiring extensions to our calculus or, more importantly, to its target—
 1252 the polymorphic blame calculus. While we believe that such extensions are possible, they
 1253 would likely require non-trivial extensions to the polymorphic blame calculus. Thus the al-
 1254 ternative of being able to model algebraic datatypes without extending λB is appealing. The
 1255 encoding also paves the way to provide built-in support for algebraic datatypes in the source
 1256 language, while elaborating them via the encoding into λB .

¹In a type system with impure features, such as non-termination or exceptions, the encoded types can have valid inhabitants with side-effects, which means we only get the *lazy* version of those datatypes.

1257 CHURCH AND SCOTT ENCODINGS. It is well-known that polymorphic calculi such as Sys-
 1258 tem F can encode datatypes via Church encodings. However these encodings have well-
 1259 known drawbacks. In particular, some operations are hard to define, and they can have
 1260 a time complexity that is greater than that of the corresponding functions for built-in al-
 1261 gebraic datatypes. A well-known example is the definition of the predecessor function for
 1262 Church numerals [Church 1941]. Its definition requires significant ingenuity (while it is triv-
 1263 ial with built-in algebraic datatypes), and it has *linear* time complexity (versus the *constant*
 1264 time complexity for a definition using built-in algebraic datatypes).

1265 An alternative to Church encodings are the so-called Scott encodings [Curry et al. 1958].
 1266 They address the two drawbacks of Church encodings: they allow simple definitions that
 1267 directly correspond to programs implemented with built-in algebraic datatypes, and those
 1268 definitions have the same time complexity to programs using algebraic datatypes.

1269 Unfortunately, Scott encodings, or more precisely, their typed variant [Parigot 1992], can-
 1270 not be expressed in System F: in the general case they require recursive types, which System
 1271 F does not support. However, with gradual typing, we can remove the need for recursive
 1272 types, thus enabling Scott encodings in our calculus.

A SCOTT ENCODING OF PARAMETRIC LISTS. Consider for instance the typed Scott encoding
 of parametric lists in a system with implicit polymorphism:

$$\begin{aligned} \text{List } a &\triangleq \mu L. \forall b. b \rightarrow (a \rightarrow L \rightarrow b) \rightarrow b \\ \text{nil} &\triangleq \mathbf{fold}_{\text{List } a} (\lambda m. \lambda c. m) : \forall a. \text{List } a \\ \text{cons} &\triangleq \lambda x. \lambda xs. \mathbf{fold}_{\text{List } a} (\lambda m. \lambda c. c \ x \ xs) : \forall a. a \rightarrow \text{List } a \rightarrow \text{List } a \end{aligned}$$

This encoding requires both polymorphic and recursive types². Like System F, our calculus
 only supports the former, but not the latter. Nevertheless, gradual types still allow us to use
 the Scott encoding in a partially typed fashion. The trick is to omit the recursive type binder
 μL and replace the recursive occurrence of L by the unknown type $?$:

$$\text{List}_? a \triangleq \forall b. b \rightarrow (a \rightarrow ? \rightarrow b) \rightarrow b$$

²Here we use iso-recursive types, but equi-recursive types can be used too.

As a consequence, we need to replace the term-level witnesses of the iso-recursion by explicit type annotations to respectively forget or recover the type structure of the recursive occurrences:

$$\begin{aligned}\mathbf{fold}_{\text{List}_? a} &\triangleq \lambda x. x : (\forall b. b \rightarrow (a \rightarrow \text{List}_? a \rightarrow b) \rightarrow b) \rightarrow \text{List}_? a \\ \mathbf{unfold}_{\text{List}_? a} &\triangleq \lambda x. x : \text{List}_? a \rightarrow (\forall b. b \rightarrow (a \rightarrow \text{List}_? a \rightarrow b) \rightarrow b)\end{aligned}$$

1273 With the reinterpretation of **fold** and **unfold** as functions instead of built-in primitives, we
1274 have exactly the same definitions of $\text{nil}_?$ and $\text{cons}_?$.

1275 Note that when we elaborate our calculus into the polymorphic blame calculus, the above
1276 type annotations give rise to explicit casts. For instance, after elaboration $\mathbf{fold}_{\text{List}_? a} e$ results
1277 in the cast $\langle (\forall b. b \rightarrow (a \rightarrow \text{List}_? a \rightarrow b) \rightarrow b) \hookrightarrow \text{List}_? a \rangle s$ where s is the elaboration of e .

In order to perform recursive traversals on lists, e.g., to compute their length, we need a fixpoint combinator like the Y combinator. Unfortunately, this combinator cannot be assigned a type in the simply typed lambda calculus or System F. Yet, we can still provide a gradual type for it in our system.

$$\mathbf{fix} \triangleq \lambda f. (\lambda x : ?. f(x x)) (\lambda x : ?. f(x x)) : \forall a. (a \rightarrow a) \rightarrow a$$

This allows us for instance to compute the length of a list.

$$\mathbf{length} \triangleq \mathbf{fix} (\lambda \text{len}. \lambda l. \text{zero}_? (\lambda xs. \text{succ}_? (\text{len } xs)))$$

1278 Here $\text{zero}_? : \text{Int}_? \rightarrow \text{Int}_?$ and $\text{succ}_? : \text{Int}_? \rightarrow \text{Int}_?$ are the encodings of the constructors for natural
1279 numbers $\text{Int}_?$. In practice, for performance reasons, we could extend our language with a
1280 **letrec** construct in a standard way to support general recursion, instead of defining a fixpoint
1281 combinator.

1282 Observe that the gradual typing of lists still enforces that all elements in the list are of the
1283 same type. For instance, a heterogeneous list like $\text{cons}_? \text{zero}_? (\text{cons}_? \text{true}_? \text{nil}_?)$, is rejected
1284 because $\text{zero}_? : \text{Int}_?$ and $\text{true}_? : \text{Bool}_?$ have different types.

1285 **HETEROGENEOUS CONTAINERS.** Heterogeneous containers are datatypes that can store data
1286 of different types, which is very useful in various scenarios. One typical application is that
1287 an XML element is heterogeneously typed. Moreover, the result of a SQL query contains
1288 heterogeneous rows.

1289 In statically typed languages, there are several ways to obtain heterogeneous lists. For ex-
1290 ample, in Haskell, one option is to use *dynamic types*. Haskell's library **Data.Dynamic** pro-

vides the special type **Dynamic** along with its injection **toDyn** and projection **fromDyn**. The drawback is that the code is littered with **toDyn** and **fromDyn**, which obscures the program logic. One can also use the **HList** library [Kiselyov et al. 2004], which provides strongly typed data structures for heterogeneous collections. The library requires several Haskell extensions, such as multi-parameter classes [Peyton Jones et al. 1997] and functional dependencies [Jones 2000]. With fake dependent types [McBride 2002], heterogeneous vectors are also possible with type-level constructors.

In our type system, with explicit type annotations that set the element types to the unknown type, we can disable the homogeneous typing discipline for the elements and get gradually typed heterogeneous lists³. Such gradually typed heterogeneous lists are akin to Haskell’s approach with Dynamic types, but much more convenient to use since no injections and projections are needed, and the `?` type is built-in and natural to use.

An example of such gradually typed heterogeneous collections is:

$$l \triangleq \text{cons}_? (\text{zero}_? : ?) (\text{cons}_? (\text{true}_? : ?) \text{nil}_?)$$

Here we annotate each element with type annotation `?` and the type system is happy to type-check that $l : \text{List}_? ?$. Note that we are being meticulous about the syntax, but with proper implementation of the source language, we could write more succinct programs akin to Haskell’s syntax, such as `[0, True]`.

4.2 REVISITING CONSISTENT SUBTYPING

In this section we explore the design space of consistent subtyping. We start with the definitions of consistency and subtyping for polymorphic types, and compare with some relevant work. We then discuss the design decisions involved in our new definition of consistent subtyping, and justify the new definition by demonstrating its equivalence with that of Siek and Taha [2007] and the AGT approach [Garcia et al. 2016] on simple types.

The syntax of types is given at the top of Figure 4.2. Types σ are either the integer type `Int`, type variables a , function types $\sigma_1 \rightarrow \sigma_2$, universal quantification $\forall a. \sigma$, or the unknown type `?`. Note that monotypes τ contain all types other than the universal quantifier and the unknown type `?`. We will discuss this restriction when we present the subtyping rules. Contexts Ψ are *ordered* lists of type variable declarations and term variables.

³This argument is based on the extended type system in Chapter 5.

1319 4.2.1 CONSISTENCY AND SUBTYPING

1320 We start by giving the definitions of consistency and subtyping for polymorphic types, and
 1321 comparing our definitions with the compatibility relation by Ahmed et al. [2009] and type
 1322 consistency by Igarashi et al. [2017].

1323 **CONSISTENCY.** The key observation here is that consistency is mostly a structural relation,
 1324 except that the unknown type $?$ can be regarded as any type. In other words, consistency is an
 1325 equivalence relation lifted from static types to gradual types [Garcia et al. 2016]. Following
 1326 this observation, we naturally extend the definition from Figure 4.1 with polymorphic types,
 1327 as shown in the middle of Figure 4.2. In particular a polymorphic type $\forall a. \sigma$ is consistent
 1328 with another polymorphic type $\forall a. \sigma_2$ if σ is consistent with σ_2 .

1329 **SUBTYPING.** We express the fact that one type is a polymorphic generalization of another
 1330 by means of the subtyping judgment $\Psi \vdash^G \sigma <: \sigma_2$. Compared with the subtyping rules
 1331 of Odersky and Läufer [1996] in Figure 2.5, the only addition is the neutral subtyping of $?$.
 1332 Notice that, in rule **GPC-S-FORALL**, the universal quantifier is only allowed to be instantiated
 1333 with a *monotype*. The judgment $\Psi \vdash^G \sigma$ checks whether all the type variables in σ are
 1334 bound in the context Ψ . According to the syntax in Figure 4.2, monotypes do not include
 1335 the unknown type $?$. This is because if we were to allow the unknown type to be used for
 1336 instantiation, we could have $\forall a. a \rightarrow a <: ? \rightarrow ?$ by instantiating a with $?$. Since $? \rightarrow ?$ is
 1337 consistent with any functions $\sigma_1 \rightarrow \sigma_2$, for instance, $\text{Int} \rightarrow \text{Bool}$, this means that we could
 1338 provide an expression of type $\forall a. a \rightarrow a$ to a function where the input type is supposed to be
 1339 $\text{Int} \rightarrow \text{Bool}$. However, as we know, $\forall a. a \rightarrow a$ is definitely not compatible with $\text{Int} \rightarrow \text{Bool}$.
 1340 Indeed, this does not hold in any polymorphic type systems without gradual typing. So the
 1341 gradual type system should not accept it either. (This is the *conservative extension* property
 1342 that will be made precise in Section 4.3.3.)

1343 Importantly there is a subtle distinction between a type variable and the unknown type,
 1344 although they both represent a kind of “arbitrary” type. The unknown type stands for the
 1345 absence of type information: it could be *any type at any instance*. Therefore, the unknown
 1346 type is consistent with any type, and additional type-checks have to be performed at runtime.
 1347 On the other hand, a type variable indicates *parametricity*. In other words, a type variable can
 1348 only be instantiated to a single type. For example, in the type $\forall a. a \rightarrow a$, the two occurrences
 1349 of a represent an arbitrary but single type (e.g., $\text{Int} \rightarrow \text{Int}$, $\text{Bool} \rightarrow \text{Bool}$), while $? \rightarrow ?$ could
 1350 be an arbitrary function (e.g., $\text{Int} \rightarrow \text{Bool}$) at runtime.

Types	σ	$::=$	$\text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma \mid ?$
Monotypes	τ	$::=$	$\text{Int} \mid a \mid \tau_1 \rightarrow \tau_2$
Contexts	Ψ	$::=$	$\bullet \mid \Psi, x : \sigma \mid \Psi, a$

$\sigma \sim \sigma_2$

(Type Consistency)

$\sigma \sim \sigma$

$\sigma \sim ?$

$? \sim \sigma$

$\frac{\sigma_1 \sim \sigma_3 \quad \sigma_2 \sim \sigma_4}{\sigma_1 \rightarrow \sigma_2 \sim \sigma_3 \rightarrow \sigma_4}$

$\frac{\sigma \sim \sigma_2}{\forall a. \sigma \sim \forall a. \sigma_2}$

$\Psi \vdash^G \sigma <: \sigma_2$

(Subtyping)

$\frac{a \in \Psi}{\Psi \vdash^G a <: a}$ GPC-S-TVAR

$\frac{}{\Psi \vdash^G \text{Int} <: \text{Int}}$ GPC-S-INT

$\frac{\Psi \vdash^G \sigma_3 <: \sigma_1 \quad \Psi \vdash^G \sigma_2 <: \sigma_4}{\Psi \vdash^G \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4}$ GPC-S-ARROW

$\frac{\Psi \vdash^G \tau \quad \Psi \vdash^G \sigma[a \mapsto \tau] <: \sigma_2}{\Psi \vdash^G \forall a. \sigma <: \sigma_2}$ GPC-S-FORALLL

$\frac{\Psi, a \vdash^G \sigma <: \sigma_2}{\Psi \vdash^G \sigma <: \forall a. \sigma_2}$ GPC-S-FORALLR

$\frac{}{\Psi \vdash^G ? <: ?}$ GPC-S-UNKNOWN

$\Psi \vdash^G \sigma$

(Well-formedness of types)

$\frac{}{\Psi \vdash^G \text{Int}}$

$\frac{}{\Psi \vdash^G ?}$

$\frac{a \in \Psi}{\Psi \vdash^G a}$

$\frac{\Psi \vdash^G \sigma \quad \Psi \vdash^G \sigma_2}{\Psi \vdash^G \sigma \rightarrow \sigma_2}$

$\frac{\Psi, a \vdash^G \sigma}{\Psi \vdash^G \forall a. \sigma}$

Figure 4.2: Syntax of types, consistency, subtyping and well-formedness of types in declarative GPC.

COMPARISON WITH OTHER RELATIONS. In other polymorphic gradual calculi, consistency and subtyping are often mixed up to some extent. In λB [Ahmed et al. 2009], the compatibility relation for polymorphic types is defined as follows:

$$\frac{\sigma_1 \prec \sigma_2}{\sigma_1 \prec \forall a. \sigma_2} \text{ COMP-ALLR} \qquad \frac{\sigma_1[a \mapsto ?] \prec \sigma_2}{\forall a. \sigma_1 \prec \sigma_2} \text{ COMP-ALLL}$$

1351 Notice that, in rule **COMP-ALLL**, the universal quantifier is *always* instantiated to $?$. How-
 1352 ever, this way, λB allows $\forall a. a \rightarrow a \prec \text{Int} \rightarrow \text{Bool}$, which as we discussed before might
 1353 not be what we expect. Indeed λB relies on sophisticated runtime checks to rule out such
 1354 instances of the compatibility relation a posteriori.

Igarashi et al. [2017] introduced the so-called *quasi-polymorphic* types for types that may be used where a \forall -type is expected, which is important for their purpose of conservativity over System F. Their type consistency relation, involving polymorphism, is defined as follows⁴:

$$\frac{\sigma \sim \sigma_2}{\forall a. \sigma \sim \forall a. \sigma_2} \qquad \frac{\sigma \sim \sigma_2 \quad \sigma_2 \neq \forall a. \sigma'_2 \quad ? \in \text{Types}(\sigma_2)}{\forall a. \sigma \sim \sigma_2}$$

1355 Compared with our consistency definition in Figure 4.2, their first rule is the same as ours.
 1356 The second rule says that a non \forall -type can be consistent with a \forall -type only if it contains $?$.
 1357 In this way, their type system is able to reject $\forall a. a \rightarrow a \sim \text{Int} \rightarrow \text{Bool}$. However, in order
 1358 to keep conservativity, they also reject $\forall a. a \rightarrow a \sim \text{Int} \rightarrow \text{Int}$, which is perfectly sensible
 1359 in their setting of explicit polymorphism. However with implicit polymorphism, we would
 1360 expect $\forall a. a \rightarrow a$ to be related with $\text{Int} \rightarrow \text{Int}$, since a can be instantiated to Int .

1361 Nonetheless, when it comes to interactions between dynamically typed and polymorphi-
 1362 cally typed terms, both relations allow $\forall a. a \rightarrow \text{Int}$ to be related with $? \rightarrow \text{Int}$ for example,
 1363 which in our view, is a kind of (implicit) polymorphic subtyping combined with type consis-
 1364 tency, and that should be derivable by the more primitive notions in the type system (instead
 1365 of inventing new relations). One of our design principles is that subtyping and consistency
 1366 are *orthogonal*, and can be naturally superimposed, echoing the opinion of Siek and Taha
 1367 [2007].

⁴This is a simplified version. These two rules are presented in Section 3.1 in their paper as one of the key ideas of the design of type consistency, which are later amended with *labels*.

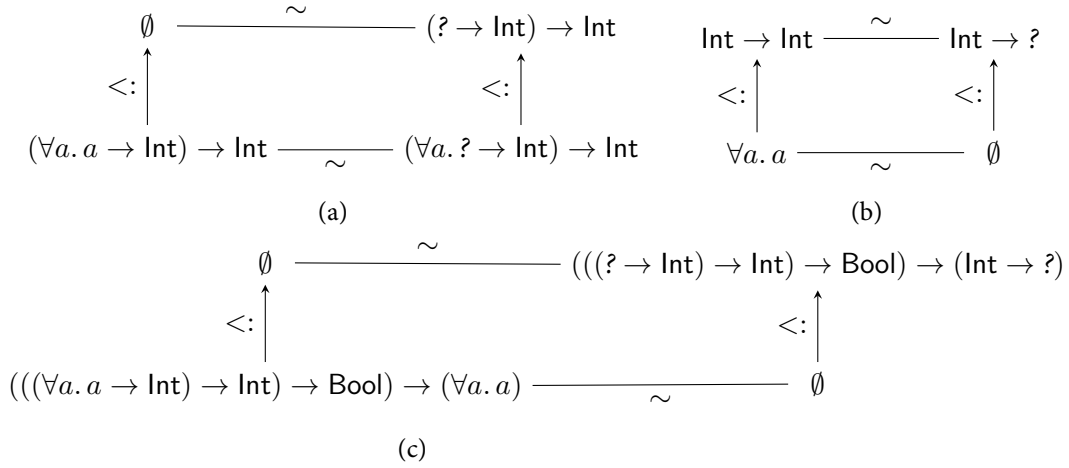


Figure 4.3: Examples that break the original definition of consistent subtyping.

1368 4.2.2 TOWARDS CONSISTENT SUBTYPING

1369 With the definitions of consistency and subtyping, the question now is how to compose the
 1370 two relations so that two types can be compared in a way that takes both relations into ac-
 1371 count.

1372 Unfortunately, the strawman version of consistent subtyping (Definition 4) does not work
 1373 well with our definitions of consistency and subtyping for polymorphic types. Consider two
 1374 types: $(\forall a. a \rightarrow \text{Int}) \rightarrow \text{Int}$, and $(? \rightarrow \text{Int}) \rightarrow \text{Int}$. The first type can only reach the second
 1375 type in one way (first by applying consistency, then subtyping), but not the other way, as
 1376 shown in Figure 4.3a. We use \emptyset to mean that we cannot find such a type. Similarly, there are
 1377 situations where the first type can only reach the second type by the other way (first applying
 1378 subtyping, and then consistency), as shown in Figure 4.3b.

1379 What is worse, if those two examples are composed in a way that those types all appear
 1380 co-variantly, then the resulting types cannot reach each other in either way. For example,
 1381 Figure 4.3c shows two such types by putting a Bool type in the middle, and neither definition
 1382 of consistent subtyping works.

1383 **OBSERVATIONS ON CONSISTENT SUBTYPING BASED ON INFORMATION PROPAGATION.** In
 1384 order to develop a correct definition of consistent subtyping for polymorphic types, we need
 1385 to understand how consistent subtyping works. We first review two important properties
 1386 of subtyping: (1) subtyping induces the subsumption rule: if $\sigma_1 <: \sigma_2$, then an expression
 1387 of type σ_1 can be used where σ_2 is expected; (2) subtyping is transitive: if $\sigma_1 <: \sigma_2$, and
 1388 $\sigma_2 <: \sigma_3$, then $\sigma_1 <: \sigma_3$. Though consistent subtyping takes the unknown type into consid-

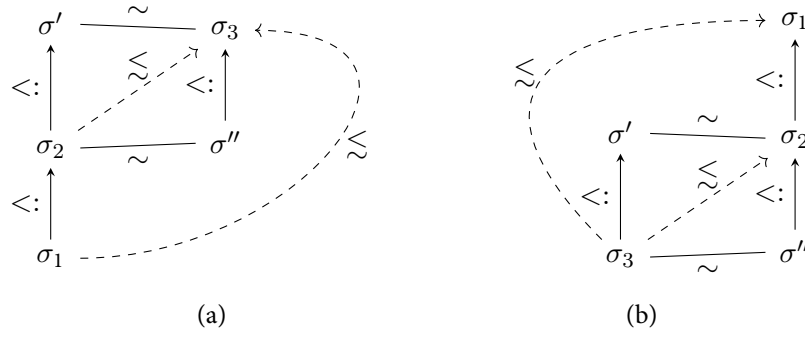


Figure 4.4: Observations of consistent subtyping

1389 eration, the subsumption rule should also apply: if $\sigma_1 \lesssim \sigma_2$, then an expression of type σ_1
 1390 can also be used where σ_2 is expected, given that there might be some information lost by
 1391 consistency. A crucial difference from subtyping is that consistent subtyping is *not* transitive
 1392 because information can only be lost once (otherwise, any two types are a consistent subtype
 1393 of each other). Now consider a situation where we have both $\sigma_1 <: \sigma_2$, and $\sigma_2 \lesssim \sigma_3$, this
 1394 means that σ_1 can be used where σ_2 is expected, and σ_2 can be used where σ_3 is expected,
 1395 with possibly some loss of information. In other words, we should expect that σ_1 can be used
 1396 where σ_3 is expected, since there is at most one-time loss of information.

1397 **Observation 1.** If $\sigma_3 \lesssim \sigma_2$, and $\sigma_2 <: \sigma_1$, then $\sigma_3 \lesssim \sigma_1$.


1398 This is reflected in Figure 4.4a. A symmetrical observation is given in Figure 4.4b:

1399 **Observation 2.** If $\sigma_3 \lesssim \sigma_2$, and $\sigma_2 <: \sigma$, then $\sigma_3 \lesssim \sigma$.

1400 From the above observations, we see what the problem is with the original definition.
 1401 In Figure 4.4a, if σ_2 can reach σ_3 by σ' , then by subtyping transitivity, σ_1 can reach σ_3 by
 1402 σ' . However, if σ_2 can only reach σ_3 by σ'' , then σ cannot reach σ_3 through the original
 1403 definition. A similar problem is shown in Figure 4.4b.

1404 It turns out that these two problems can be fixed using the same strategy: instead of taking
 1405 one-step subtyping and one-step consistency, our definition of consistent subtyping allows
 1406 types to take *one subtyping step, one consistency step, and one more step of subtyping*. Specif-
 1407 ically, $\sigma_1 <: \sigma_2 \sim \sigma'' <: \sigma_3$ (in Figure 4.4a) and $\sigma_3 <: \sigma' \sim \sigma_2 <: \sigma_1$ (in Figure 4.4b) have
 1408 the same relation chain: subtyping, consistency, and subtyping.

1409 **DEFINITION OF CONSISTENT SUBTYPING.** From the above discussion, we are ready to mod-
 1410 ify Definition 4, and adapt it to our notation:



$$\begin{aligned}
\sigma_1 &= (((\forall a. a \rightarrow \text{Int}) \rightarrow \text{Int}) \rightarrow \text{Bool}) \rightarrow (\forall a. a) \\
\sigma_2 &= (((\forall a. a \rightarrow \text{Int}) \rightarrow \text{Int}) \rightarrow \text{Bool}) \rightarrow (\text{Int} \rightarrow \text{Int}) \\
\sigma_3 &= (((\forall a. ? \rightarrow \text{Int}) \rightarrow \text{Int}) \rightarrow \text{Bool}) \rightarrow (\text{Int} \rightarrow ?) \\
D &= (((? \rightarrow \text{Int}) \rightarrow \text{Int}) \rightarrow \text{Bool}) \rightarrow (\text{Int} \rightarrow ?)
\end{aligned}$$

Figure 4.5: Example that is fixed by the new definition of consistent subtyping.

1411 **Definition 5** (Consistent Subtyping). $\Psi \vdash^G \sigma_1 \lesssim \sigma_2$ if and only if $\Psi \vdash^G \sigma_1 <: \sigma'$, $\sigma' \sim \sigma''$
 1412 and $\Psi \vdash^G \sigma'' <: \sigma_2$ for some σ' and σ'' .

1413 With Definition 5, Figure 4.5 illustrates the correct relation chain for the broken example
 1414 shown in Figure 4.3c.

1415 At first sight, Definition 5 seems worse than the original: we need to guess *two* types!
 1416 It turns out that Definition 5 is a generalization of Definition 4, and they are equivalent in
 1417 the system of Siek and Taha [2007]. However, more generally, Definition 5 is compatible
 1418 with polymorphic types. Furthermore, as we shall see in Section 4.5.1, this definition is also
 1419 compatible with top types (which are also problematic with the original definition).

1420 **Proposition 4.1** (Generalization of Declarative Consistent Subtyping).

- 1421 • *Definition 5 subsumes Definition 4.*
 1422 In Definition 5, by choosing $\sigma'' = \sigma_2$, we have $\sigma_1 <: \sigma'$ and $\sigma' \sim \sigma_2$; by choosing
 1423 $\sigma' = \sigma_1$, we have $\sigma_1 \sim \sigma''$, and $\sigma'' <: \sigma_2$.
- 1424 • *Definition 4 is equivalent to Definition 5 in the system of Siek and Taha.*
 1425 If $\sigma_1 <: \sigma'$, $\sigma' \sim \sigma''$, and $\sigma'' <: \sigma_2$, by Definition 4, $\sigma_1 \sim \sigma_3$, $\sigma_3 <: \sigma''$ for some σ_3 .
 1426 By subtyping transitivity, $\sigma_3 <: \sigma_2$. So $\sigma_1 \lesssim \sigma_2$ by $\sigma_1 \sim \sigma_3$ and $\sigma_3 <: \sigma_2$.

1427 4.2.3 ABSTRACTING GRADUAL TYPING

1428 Garcia et al. [2016] presented a new foundation for gradual typing that they call the *Abstract-*
 1429 *ing Gradual Typing* (AGT) approach. In the AGT approach, gradual types are interpreted as
 1430 sets of static types, where static types refer to types containing no unknown types. In this
 1431 interpretation, predicates and functions on static types can then be lifted to apply to gradual

types. Central to their approach is the so-called *concretization* function. For simple types, a concretization γ from gradual types to a set of static types is defined as follows:

Definition 6 (Concretization).

$$\begin{aligned} \gamma(\text{Int}) &= \{\text{Int}\} \\ \gamma(\sigma_1 \rightarrow \sigma_2) &= \{\sigma'_1 \rightarrow \sigma'_2 \mid \sigma'_1 \in \gamma(\sigma_1), \sigma'_2 \in \gamma(\sigma_2)\} \\ \gamma(?) &= \{\text{All static types}\} \end{aligned}$$

Based on the concretization function, subtyping between static types can be lifted to gradual types, resulting in the consistent subtyping relation:

Definition 7 (Consistent Subtyping in AGT). $\sigma_1 \widetilde{<} \sigma_2$ if and only if $\sigma'_1 < \sigma'_2$ for some *static types* σ'_1 and σ'_2 such that $\sigma'_1 \in \gamma(\sigma_1)$ and $\sigma'_2 \in \gamma(\sigma_2)$.

Later they proved that this definition of consistent subtyping coincides with that of Definition 4. By Proposition 4.1, we can directly conclude that our definition coincides with AGT:

Corollary 4.2 (Equivalence to AGT on Simple Types). $\sigma_1 \lesssim \sigma_2$ if and only if $\sigma_1 \widetilde{<} \sigma_2$.

However, AGT does not show how to deal with polymorphism (e.g. the interpretation of type variables) yet. Still, as noted by Garcia et al. [2016], this is a promising line of future work for AGT, and the question remains whether our definition would coincide with it.

Another note related to AGT is that the definition is later adopted by Castagna and Lanvin [2017] in a gradual type system with union and intersection types, where the static types σ'_1, σ'_2 in Definition 7 can be algorithmically computed by also accounting for top and bottom types.

4.2.4 DIRECTED CONSISTENCY

Directed consistency [Jafery and Dunfield 2017] is defined in terms of precision and subtyping:

$$\frac{\sigma'_1 \sqsubseteq \sigma_1 \quad \sigma_1 < \sigma_2 \quad \sigma'_2 \sqsubseteq \sigma_2}{\sigma'_1 \lesssim \sigma'_2}$$

The judgment $\sigma_1 \sqsubseteq \sigma_2$ is read “ σ_1 is less precise than σ_2 ”.⁵ In their setting, precision is first defined for type constructors and then lifted to gradual types, and subtyping is defined

⁵Jafery and Dunfield actually read $\sigma_1 \sqsubseteq \sigma_2$ as “ σ_1 is *more precise* than σ_2 ”. We, however, use the “less precise” notation (which is also adopted by Cimini and Siek [2016]) throughout this work. The full rules can be found in Figure 4.8.

for gradual types. If we interpret this definition from the AGT point of view, finding a more precise static type has the same effect as concretization. Namely, $\sigma'_1 \sqsubseteq \sigma_1$ implies $\sigma_1 \in \gamma(\sigma'_1)$ and $\sigma'_2 \sqsubseteq \sigma_2$ implies $\sigma_2 \in \gamma(\sigma'_2)$ if σ_1 and σ_2 are static types. Therefore we consider this definition as AGT-style. From this perspective, this definition naturally coincides with Definition 7, and by Corollary 4.2, it coincides with Definition 5.

The value of their definition is that consistent subtyping is derived compositionally from *gradual subtyping* and *precision*. Arguably, gradual types play a role in both definitions, which is different from Definition 5 where subtyping is neutral to unknown types. Still, the definition is interesting as it takes precision into consideration, rather than consistency. Then a question arises as to *how are consistency and precision related*.

CONSISTENCY AND PRECISION. Precision is a partial order (anti-symmetric and transitive), while consistency is symmetric but not transitive. Recall that consistency is in fact an equivalence relation lifted from static types to gradual types [Garcia et al. 2016], which embodies the key role of gradual types in typing. Therefore defining consistency independently is straightforward, and it is theoretically viable to validate the definition of consistency directly. On the other hand, precision is usually connected with the gradual criteria [Siek et al. 2015], and finding a correct partial order that adheres to the criteria is not always an easy task. For example, Igarashi et al. [2017] argued that term precision for gradual System F is actually nontrivial, leaving the gradual guarantee of the semantics as a conjecture. Thus precision can be difficult to extend to more sophisticated type systems, e.g. dependent types.

Nonetheless, in our system, precision and consistency can be related by the following lemma:

Lemma 4.3 (Consistency and Precision).

- If $\sigma_1 \sim \sigma_2$, then there exists (static) σ_3 , such that $\sigma_1 \sqsubseteq \sigma_3$, and $\sigma_2 \sqsubseteq \sigma_3$.
- If for some (static) σ_3 , we have $\sigma_1 \sqsubseteq \sigma_3$, and $\sigma_2 \sqsubseteq \sigma_3$, then we have $\sigma_1 \sim \sigma_2$.

4.2.5 CONSISTENT SUBTYPING WITHOUT EXISTENTIALS

Definition 5 serves as a fine specification of how consistent subtyping should behave in general. But it is inherently non-deterministic because of the two intermediate types σ' and σ'' . As Definition 3, we need a combined relation to directly compare two types. A natural attempt is to try to extend the restriction operator for polymorphic types. Unfortunately, as we show below, this does not work. However it is possible to devise an equivalent inductive definition instead.

1488 **ATTEMPT TO EXTEND THE RESTRICTION OPERATOR.** Suppose that we try to extend Def-
 1489 inition 3 to account for polymorphic types. The original restriction operator is structural,
 1490 meaning that it works for types of similar structures. But for polymorphic types, two in-
 1491 put types could have different structures due to universal quantifiers, e.g., $\forall a. a \rightarrow \text{Int}$ and
 1492 $(\text{Int} \rightarrow ?) \rightarrow \text{Int}$. If we try to mask the first type using the second, it seems hard to maintain
 1493 the information that a should be instantiated to a function while ensuring that the return
 1494 type is masked. There seems to be no satisfactory way to extend the restriction operator in
 1495 order to support this kind of non-structural masking.

1496 **INTERPRETATION OF THE RESTRICTION OPERATOR AND CONSISTENT SUBTYPING.** If the re-
 1497 striction operator cannot be extended naturally, it is useful to take a step back and revisit what
 1498 the restriction operator actually does. For consistent subtyping, two input types could have
 1499 unknown types in different positions, but we only care about the known parts. What the
 1500 restriction operator does is (1) erase the type information in one type if the corresponding
 1501 position in the other type is the unknown type; and (2) compare the resulting types using
 1502 the normal subtyping relation. The example below shows the masking-off procedure for the
 1503 types $\text{Int} \rightarrow ? \rightarrow \text{Bool}$ and $\text{Int} \rightarrow \text{Int} \rightarrow ?$. Since the known parts have the relation that
 1504 $\text{Int} \rightarrow ? \rightarrow ? <: \text{Int} \rightarrow ? \rightarrow ?$, we conclude that $\text{Int} \rightarrow ? \rightarrow \text{Bool} \lesssim \text{Int} \rightarrow \text{Int} \rightarrow ?$.

$$\begin{array}{l} \text{Int} \rightarrow \boxed{?} \rightarrow \boxed{\text{Bool}} \\ \text{Int} \rightarrow \boxed{\text{Int}} \rightarrow \boxed{?} \end{array} \left. \begin{array}{l} | \text{Int} \rightarrow \text{Int} \rightarrow ? = \text{Int} \rightarrow ? \rightarrow ? \\ | \text{Int} \rightarrow ? \rightarrow \text{Bool} = \text{Int} \rightarrow ? \rightarrow ? \end{array} \right) <: \quad \left. \begin{array}{l} \text{Int} \rightarrow ? \rightarrow ? \\ \text{Int} \rightarrow ? \rightarrow ? \end{array} \right) <:$$

1506 Here differences of the types in boxes are erased because of the restriction operator. Now if we
 1507 compare the types in boxes directly instead of through the lens of the restriction operator, we
 1508 can observe that the *consistent subtyping relation always holds between the unknown type and*
 1509 *an arbitrary type*. We can interpret this observation directly from Definition 5: the unknown
 1510 type is neutral to subtyping ($? <: ?$), the unknown type is consistent with any type ($? \sim \sigma$),
 1511 and subtyping is reflexive ($\sigma <: \sigma$). Therefore, *the unknown type is a consistent subtype of*
 1512 *any type* ($? \lesssim \sigma$), *and vice versa* ($\sigma \lesssim ?$). Note that this interpretation provides a general
 1513 recipe for lifting a (static) subtyping relation to a (gradual) consistent subtyping relation, as
 1514 discussed below.

1515 **DEFINING CONSISTENT SUBTYPING DIRECTLY.** From the above discussion, we can define
 1516 the consistent subtyping relation directly, *without* resorting to subtyping or consistency at
 1517 all. The key idea is that we replace $<:$ with \lesssim in Figure 4.2, get rid of rule **GPC-S-UNKNOWN**
 1518 and add two extra rules concerning $?$, resulting in the rules of consistent subtyping in Fig-
 1519 ure 4.6. Of particular interest are the rules **GPC-CS-UNKNOWNL** and **GPC-CS-UNKNOWNR**,

$\boxed{\Psi \vdash^G \sigma_1 \lesssim \sigma_2}$				(Consistent Subtyping)
$\frac{\text{GPC-CS-TVAR}}{a \in \Psi} \quad \Psi \vdash^G a \lesssim a$	$\frac{\text{GPC-CS-INT}}{\Psi \vdash^G \text{Int} \lesssim \text{Int}}$	$\frac{\text{GPC-CS-ARROW}}{\Psi \vdash^G \sigma_3 \lesssim \sigma_1 \quad \Psi \vdash^G \sigma_2 \lesssim \sigma_4} \quad \Psi \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \sigma_3 \rightarrow \sigma_4$	$\frac{\text{GPC-CS-FORALLR}}{\Psi, a \vdash^G \sigma_1 \lesssim \sigma_2} \quad \Psi \vdash^G \sigma_1 \lesssim \forall a. \sigma_2$	
$\frac{\text{GPC-CS-FORALLL}}{\Psi \vdash^G \tau \quad \Psi \vdash^G \sigma_1[a \mapsto \tau] \lesssim \sigma_2} \quad \Psi \vdash^G \forall a. \sigma_1 \lesssim \sigma_2$	$\frac{\text{GPC-CS-UNKNOWNL}}{\Psi \vdash^G ? \lesssim \sigma}$	$\frac{\text{GPC-CS-UNKNOWNR}}{\Psi \vdash^G \sigma \lesssim ?}$		

Figure 4.6: Consistent Subtyping for implicit polymorphism.

both of which correspond to what we just said: the unknown type is a consistent subtype of any type, and vice versa.

From now on, we use the symbol \lesssim to refer to the consistent subtyping relation in Figure 4.6. What is more, we can prove that the two definitions are equivalent.

Theorem 4.4. $\Psi \vdash^G \sigma_1 \lesssim \sigma_2 \Leftrightarrow \Psi \vdash^G \sigma_1 <: \sigma', \sigma' \sim \sigma'', \Psi \vdash^G \sigma'' <: \sigma_2$ for some σ', σ'' .

4.3 GRADUALLY TYPED IMPLICIT POLYMORPHISM

In Section 4.2 we introduced our consistent subtyping relation that accommodates polymorphic types. In this section we continue with the development by giving a declarative type system for predicative implicit polymorphism, GPC, that employs the consistent subtyping relation. The declarative system itself is already quite interesting as it is equipped with both higher-rank polymorphism and the unknown type.

The syntax of expressions in the declarative system is given at the top of Figure 4.7. The definition of expressions are the same as of OL in Figure 2.3. Meta-variable e ranges over expressions. Expressions include variables x , integers n , annotated lambda abstractions $\lambda x : \sigma. e$, un-annotated lambda abstractions $\lambda x. e$, applications $e_1 e_2$, and let expressions **let** $x = e_1$ **in** e_2 .

4.3.1 TYPING IN DETAIL

Figure 4.7 gives the typing rules for our declarative system (the reader is advised to ignore the gray-shaded parts for now). Rule **GPC-VAR** extracts the type of the variable from the typing context. Rule **GPC-INT** always infers integer types. Rule **GPC-LAMANN** puts x with type annotation σ into the context, and continues type checking the body e . Rule **GPC-LAM** assigns a monotype τ to x , and continues type checking the body e . Gradual types and polymorphic

types are introduced via explicit annotations. Rule **GPC-GEN** puts a fresh type variable a into the type context and generalizes the typing result σ to $\forall a. \sigma$. Rule **GPC-LET** infers the type σ of e_1 , then puts $x : \sigma$ in the context to infer the type of e_2 . Rule **GPC-APP** first infers the type of e_1 , then the matching judgment $\Psi \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2$ extracts the domain type σ_1 and the codomain type σ_2 from type σ . The type σ_3 of the argument e_2 is then compared with σ_1 using the consistent subtyping judgment.

MATCHING. The matching judgment of Siek et al. [2015] is extended to polymorphic types naturally, resulting in $\Psi \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2$. Note that the matching rules generalize that of DK in Section 2.3.2 with the unknown type. In rule **GPC-M-FORALL**, a monotype τ is guessed to instantiate the universal quantifier a . If σ is a polymorphic type, the judgment works by guessing instantiations until it reaches an arrow type. Rule **GPC-M-ARR** returns the domain type σ_1 and range type σ_2 as expected. If the input is $?$, then rule **GPC-M-UNKNOWN** returns $?$ as both the type for the domain and the range.

Note that in GPC, matching saves us from having a subsumption rule (rule **OL-SUB** in Figure 2.5). The subsumption rule is incompatible with consistent subtyping, since the latter is not transitive. A discussion of a subsumption rule based on normal subtyping can be found in Section 4.5.2.

4.3.2 TYPE-DIRECTED TRANSLATION

We give the dynamic semantics of our language by translating it to λB [Ahmed et al. 2009]. Below we show a subset of the terms in λB that are used in the translation:

$$\lambda B \text{ Terms } \quad s ::= x \mid n \mid \lambda x : \sigma. s \mid \Lambda a. s \mid s_1 s_2 \mid \langle \sigma_1 \hookrightarrow \sigma_2 \rangle s$$

A cast $\langle \sigma_1 \hookrightarrow \sigma_2 \rangle s$ converts the value of term s from type σ_1 to type σ_2 . A cast from σ_1 to σ_2 is permitted only if the types are *compatible*, written $\sigma_1 \prec \sigma_2$, as briefly mentioned in Section 4.2.1. The syntax of types in λB is the same as ours.

The translation is given in the gray-shaded parts in Figure 4.7. The only interesting case here is to insert explicit casts in the application rule. Note that there is no need to translate matching or consistent subtyping. Instead we insert the source and target types of a cast directly in the translated expressions, thanks to the following two lemmas:

Lemma 4.5 (\triangleright to \prec). *If $\Psi \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2$, then $\sigma \prec \sigma_1 \rightarrow \sigma_2$.*

Lemma 4.6 (\lesssim to \prec). *If $\Psi \vdash^G \sigma_1 \lesssim \sigma_2$, then $\sigma_1 \prec \sigma_2$.*

Expressions

$e ::= x \mid n \mid \lambda x : \sigma. e \mid \lambda x. e \mid e_1 e_2 \mid \text{let } x = e_1 \text{ in } e_2$

$\Psi \vdash^G e : \sigma \rightsquigarrow s$

(Typing)

GPC-VAR

$$\frac{(x : \sigma) \in \Psi}{\Psi \vdash^G x : \sigma \rightsquigarrow x}$$

GPC-INT

$$\frac{}{\Psi \vdash^G n : \text{Int} \rightsquigarrow n}$$

GPC-GEN

$$\frac{\Psi, a \vdash^G e : \sigma \rightsquigarrow s}{\Psi \vdash^G e : \forall a. \sigma \rightsquigarrow \Lambda a. s}$$

GPC-LAMANN

$$\frac{\Psi, x : \sigma \vdash^G e : \sigma_2 \rightsquigarrow s}{\Psi \vdash^G \lambda x : \sigma. e : \sigma \rightarrow \sigma_2 \rightsquigarrow \lambda x : \sigma. s}$$

GPC-LAM

$$\frac{\Psi, x : \tau \vdash^G e : \sigma_2 \rightsquigarrow s}{\Psi \vdash^G \lambda x. e : \tau \rightarrow \sigma_2 \rightsquigarrow \lambda x : \tau. s}$$

GPC-LET

$$\frac{\Psi \vdash^G e_1 : \sigma \rightsquigarrow s_1 \quad \Psi, x : \sigma \vdash^G e_2 : \sigma_2 \rightsquigarrow s_2}{\Psi \vdash^G \text{let } x = e_1 \text{ in } e_2 : \sigma_2 \rightsquigarrow (\lambda x : \sigma. s_2) s_1}$$

GPC-APP

$$\frac{\Psi \vdash^G e_1 : \sigma \rightsquigarrow s_1 \quad \Psi \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \quad \Psi \vdash^G e_2 : \sigma_3 \rightsquigarrow s_2 \quad \Psi \vdash^G \sigma_3 \lesssim \sigma_1}{\Psi \vdash^G e_1 e_2 : \sigma_2 \rightsquigarrow (\langle \sigma \hookrightarrow \sigma_1 \rightarrow \sigma_2 \rangle s_1) (\langle \sigma_3 \hookrightarrow \sigma_1 \rangle s_2)}$$

$\Psi \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2$

(Matching)

GPC-M-FORALL

$$\frac{\Psi \vdash^G \tau \quad \Psi \vdash^G \sigma[a \mapsto \tau] \triangleright \sigma_1 \rightarrow \sigma_2}{\Psi \vdash^G \forall a. \sigma \triangleright \sigma_1 \rightarrow \sigma_2}$$

GPC-M-ARR

$$\frac{}{\Psi \vdash^G \sigma_1 \rightarrow \sigma_2 \triangleright \sigma_1 \rightarrow \sigma_2}$$

GPC-M-UNKNOWN

$$\frac{}{\Psi \vdash^G ? \triangleright ? \rightarrow ?}$$

Figure 4.7: Syntax of expressions and declarative typing of declarative GPC

1572 In order to show the correctness of the translation, we prove that our translation always
 1573 produces well-typed expressions in λB . By Lemmas 4.5 and 4.6, we have the following the-
 1574 orem:

1575 **Theorem 4.7** (Type Safety). *If $\Psi \vdash^G e : \sigma \rightsquigarrow s$, then $\Psi \vdash^B s : \sigma$.*

1576 **PARAMETRICITY.** An important semantic property of polymorphic types is *relational para-*
 1577 *metricity* [Reynolds 1983]. The parametricity property says that all instances of a poly-
 1578 morphic function should behave *uniformly*. A classic example is a function with the type
 1579 $\forall a. a \rightarrow a$. The parametricity property guarantees that a value of this type must be either
 1580 the identity function (i.e., $\lambda x. x$) or the undefined function (one which never returns a value).
 1581 However, with the addition of the unknown type $?$, careful measures are to be taken to ensure
 1582 parametricity. Our translation target λB is taken from Ahmed et al. [2009], where relational
 1583 parametricity is enforced by dynamic sealing [Matthews and Ahmed 2008; Neis et al. 2009],
 1584 but there is no rigorous proof. Later, Ahmed et al. [2009] imposed a syntactic restriction on
 1585 terms of λB , where all type abstractions must have *values* as their body. With this invari-
 1586 ant, they proved that the restricted λB satisfies relational parametricity. It remains to see if
 1587 our translation process can be adjusted to target restricted λB . One possibility is to impose
 1588 similar restriction to the rule **GPC-GEN**:

$$\frac{\Psi, a \vdash^G e : \sigma \rightsquigarrow v}{\Psi \vdash^G e : \forall a. \sigma \rightsquigarrow \Lambda a. v} \text{GPC-GEN2}$$

1589 where we only generate type abstractions if the inner body is a value. However, the type
 1590 system with this rule is a weaker calculus, which is not a conservative extension of the OL
 1591 type system.

AMBIGUITY FROM CASTS. The translation does not always produce a unique target expres-
 sion. This is because when guessing some monotype τ in rule **GPC-M-FORALL** and rule **GPC-**
CS-FORALLL, we could have many choices, which inevitably leads to different types. This is
 usually not a problem for (non-gradual) System F-like systems [Dunfield and Krishnaswami
 2013; Peyton Jones et al. 2007] because they adopt a type-erasure semantics [Pierce 2002].
 However, in our case, the choice of monotypes may affect the runtime behaviour of translated
 programs, since they could appear inside the explicit casts. For instance, the following ex-

ample shows two possible translations for the same source expression $(\lambda x : ?.fx) : ? \rightarrow \text{Int}$, where the type of f is instantiated to $\text{Int} \rightarrow \text{Int}$ and $\text{Bool} \rightarrow \text{Int}$, respectively:

$$\begin{aligned}
 f : \forall a. a \rightarrow \text{Int} &\vdash^G (\lambda x : ?.fx) : ? \rightarrow \text{Int} \\
 &\rightsquigarrow (\lambda x : ?. (\langle \forall a. a \rightarrow \text{Int} \hookrightarrow \text{Int} \rightarrow \text{Int} \rangle f)) (\langle ? \hookrightarrow \text{Int} \rangle x) \\
 f : \forall a. a \rightarrow \text{Int} &\vdash^G (\lambda x : ?.fx) : ? \rightarrow \text{Int} \\
 &\rightsquigarrow (\lambda x : ?. (\langle \forall a. a \rightarrow \text{Int} \hookrightarrow \text{Bool} \rightarrow \text{Int} \rangle f)) (\langle ? \hookrightarrow \text{Bool} \rangle x)
 \end{aligned}$$

1592 If we apply $\lambda x : ?.fx$ to 3, which is fine since the function can take any input, the first
 1593 translation runs smoothly in λB , while the second one will raise a cast error (Int cannot be
 1594 cast to Bool). Similarly, if we apply it to `true`, then the second succeeds while the first fails.
 1595 The culprit lies in the highlighted parts where the instantiation of a appears in the explicit
 1596 cast. More generally, any choice introduces an explicit cast to that type in the translation,
 1597 which causes a runtime cast error if the function is applied to a value whose type does not
 1598 match the guessed type. Note that this does not compromise the type safety of the translated
 1599 expressions, since cast errors are part of the type safety guarantees.

1600 The semantic discrepancy is due to the guessing nature of the *declarative* system. As far
 1601 as the static semantics is concerned, both $\text{Int} \rightarrow \text{Int}$ and $\text{Bool} \rightarrow \text{Int}$ are equally acceptable.
 1602 But this is not the case at runtime. The astute reader may have found that the *only* appro-
 1603 priate choice is to instantiate the type of f to $? \rightarrow \text{Int}$ in the matching judgment. However,
 1604 as specified by rule [GPC-M-FORALL](#) in Figure 4.7, we can only instantiate type variables to
 1605 monotypes, but $?$ is *not* a monotype! We will get back to this issue in Chapter 5.

1606 **COHERENCE.** The ambiguity of translation seems to imply that the declarative system is
 1607 *incoherent*. A semantics is coherent if distinct typing derivations of the same typing judgment
 1608 possess the same meaning [Reynolds 1991]. We argue that the declarative system is *coherent*
 1609 *up to cast errors* in the sense that a well-typed program produces a unique value, or results
 1610 in a cast error. In the above example, suppose f is defined as $(\lambda x. 1)$, then whatever the
 1611 translation might be, applying $(\lambda x : ?.fx)$ to 3 either results in a cast error, or produces 1,
 1612 nothing else.

1613 We defined contextual equivalence [Morris Jr 1969] to formally characterize that two open
 1614 expressions have the same behavior. The definition of contextual equivalence requires a no-
 1615 tion of well-typed expression contexts \mathcal{C} , written $\mathcal{C} : (\Psi \vdash^B \sigma) \rightsquigarrow (\Psi' \vdash^B \sigma')$. The defini-
 1616 tions of contexts and context typing are standard and thus omitted. We first define contextual
 1617 approximation in a conventional way. In our setting, we need to relax the notion of contex-
 1618 tual approximation of λB [Ahmed et al. 2009] to also take into consideration of cast errors.

We write $\Psi \vdash s_1 \preceq_{ctx} s_2 : \sigma$ to say that s_2 mimics the behaviour of s_1 at type σ in the sense that whenever a program containing s_1 reduces to an integer, replacing it with s_2 either reduces to the same integer, or emits a cast error. We restrict the program results to integers to eliminate the role of types in values. If it is not an integer, it is always possible to embed it into another context that reduces to an integer. Then we write $\Psi \vdash s_1 \simeq_{ctx} s_2 : \sigma$ to say s_1 and s_2 are contextually equivalent, that is, they approximate each other.

Definition 8 (Contextual Approximation and Equivalence up to Cast Errors).

$$\begin{aligned} \Psi \vdash s_1 \preceq_{ctx} s_2 : \sigma &\triangleq \Psi \vdash^B s_1 : \sigma \wedge \Psi \vdash^B s_2 : \sigma \wedge \\ &\text{for all } C. C : (\Psi \vdash^B \sigma) \rightsquigarrow (\bullet \vdash^B \text{Int}) \implies \\ &C\{s_1\} \Downarrow n \implies (C\{s_2\} \Downarrow n \vee C\{s_2\} \Downarrow \text{blame}) \\ \Psi \vdash s_1 \simeq_{ctx} s_2 : \sigma &\triangleq \Psi \vdash s_1 \preceq_{ctx} s_2 : \sigma \wedge \Psi \vdash s_2 \preceq_{ctx} s_1 : \sigma \end{aligned}$$

Before presenting the formal definition of coherence, first we observe that after erasing types and casts, all translations of the same expression are exactly the same. This is easy to see by examining each elaboration rule. We use $[s]$ to denote an expression in λB after erasure.

Lemma 4.8. *If $\Psi \vdash^G e : \sigma \rightsquigarrow s_1$, and $\Psi \vdash^G e : \sigma \rightsquigarrow s_2$, then $[s_1] \equiv_\alpha [s_2]$.*

Second, at runtime, the only role of types and casts is to emit cast errors caused by type mismatch. Therefore, By Lemma 4.8 coherence follows as a corollary:

Lemma 4.9 (Coherence up to cast errors). *For any expression e such that $\Psi \vdash^G e : \sigma \rightsquigarrow s_1$ and $\Psi \vdash^G e : \sigma \rightsquigarrow s_2$, we have $\Psi \vdash s_1 \simeq_{ctx} s_2 : \sigma$.*

4.3.3 CORRECTNESS CRITERIA

Siek et al. [2015] present a set of properties, the *refined criteria*, that a well-designed gradual typing calculus must have. Among all the criteria, those related to the static aspects of gradual typing are well summarized by Cimini and Siek [2016]. Here we review those criteria and adapt them to our notation. We have proved in Coq that our type system satisfies all these criteria.

Lemma 4.10 (Correctness Criteria).

- **Conservative extension:** for all static Ψ , e , and σ_1 ,
 - if $\Psi \vdash^{OL} e : \sigma_1$, then there exists σ_2 , such that $\Psi \vdash^G e : \sigma_2$, and $\Psi \vdash^G \sigma_2 <: \sigma_1$.
 - if $\Psi \vdash^G e : \sigma$, then $\Psi \vdash^{OL} e : \sigma$

- 1646 • **Monotonicity w.r.t. precision:** for all Ψ, e, e', σ_1 , if $\Psi \vdash^G e : \sigma_1$, and $e' \sqsubseteq e$, then
1647 $\Psi \vdash^G e' : \sigma_2$, and $\sigma_2 \sqsubseteq \sigma_1$ for some σ_2 .
- 1648 • **Type Preservation of cast insertion:** for all Ψ, e, σ , if $\Psi \vdash^G e : \sigma$, then $\Psi \vdash^G e : \sigma \rightsquigarrow s$,
1649 and $\Psi \vdash^B s : \sigma$ for some s .
- 1650 • **Monotonicity of cast insertion:** for all $\Psi, e_1, e_2, s_1, s_2, \sigma$, if $\Psi \vdash^G e_1 : \sigma \rightsquigarrow s_1$, and
1651 $\Psi \vdash^G e_2 : \sigma \rightsquigarrow s_2$, and $e_1 \sqsubseteq e_2$, then $\Psi \vdash s_1 \sqsubseteq^B s_2$.

1652 The first criterion states that the gradual type system should be a conservative extension
1653 of the original system. In other words, a *static* program is typeable in the OL type system if
1654 and only if it is typeable in the gradual type system. A static program is one that does not
1655 contain any type $?$ ⁶. However since our gradual type system does not have the subsumption
1656 rule, it produces more general types.

1657 The second criterion states that if a typeable expression loses some type information, it
1658 remains typeable. This criterion depends on the definition of the precision relation, written
1659 $\sigma_1 \sqsubseteq \sigma_2$, which is given in Figure 4.8. The relation intuitively captures a notion of types con-
1660 taining more or less unknown types (?). The precision relation over types lifts to programs,
1661 i.e., $e_1 \sqsubseteq e_2$ means that e_1 and e_2 are the same program except that e_1 has more unknown
1662 types.

1663 The first two criteria are fundamental to gradual typing. They explain for example why
1664 these two programs $\lambda x : \text{Int}. x + 1$ and $\lambda x : ?. x + 1$ are typeable, as the former is typeable in
1665 the OL type system and the latter is a less-precise version of it.

1666 The last two criteria relate the compilation to the cast calculus. The third criterion is es-
1667 sentially the same as Theorem 4.7, given that a target expression should always exist, which
1668 can be easily seen from Figure 4.7. The last criterion ensures that the translation must be
1669 monotonic over the precision relation \sqsubseteq . Ahmed et al. [2009] does not include a formal
1670 definition of precision, but an *approximation* definition and a *simulation relation*. Here we
1671 adapt the simulation relation as the precision, and a subset of it that is used in our system is
1672 given at the bottom of Figure 4.8.

1673 **THE DYNAMIC GRADUAL GUARANTEE.** Besides the static criteria, there is also a criterion
1674 concerning the dynamic semantics, known as *the dynamic gradual guarantee* [Siek et al.
1675 2015].

1676 **Definition 9** (Dynamic Gradual Guarantee). Suppose $e' \sqsubseteq e$, and $\bullet \vdash^G e : \sigma \rightsquigarrow s$ and
1677 $\bullet \vdash^G e' : \sigma' \rightsquigarrow s'$,

⁶Note that the term *static* has appeared several times with different meanings.

$\sigma_1 \sqsubseteq \sigma_2$

(Type Precision)

<p>GPC-L-UNKNOWN</p> $\frac{}{? \sqsubseteq \sigma}$	<p>GPC-L-INT</p> $\frac{}{\text{Int} \sqsubseteq \text{Int}}$	<p>GPC-L-ARROW</p> $\frac{\sigma_1 \sqsubseteq \sigma_3 \quad \sigma_2 \sqsubseteq \sigma_4}{\sigma_1 \rightarrow \sigma_2 \sqsubseteq \sigma_3 \rightarrow \sigma_4}$	<p>GPC-L-TVAR</p> $\frac{}{a \sqsubseteq a}$
<p>GPC-L-FORALL</p> $\frac{\sigma_1 \sqsubseteq \sigma_2}{\forall a. \sigma_1 \sqsubseteq \forall a. \sigma_2}$			

$e_1 \sqsubseteq e_2$

(Term Precision)

<p>GPC-LE-REFL</p> $\frac{}{e \sqsubseteq e}$	<p>GPC-LE-LAMANN</p> $\frac{\sigma_1 \sqsubseteq \sigma_2 \quad e_1 \sqsubseteq e_2}{\lambda x : \sigma_1. e_1 \sqsubseteq \lambda x : \sigma_2. e_2}$	<p>GPC-LE-APP</p> $\frac{e_1 \sqsubseteq e_3 \quad e_2 \sqsubseteq e_4}{e_1 e_2 \sqsubseteq e_3 e_4}$
---	--	---

$s_1 \sqsubseteq s_2$

(Term Precision in λB)

<p>B-LE-VAR</p> $\frac{}{x \sqsubseteq x}$	<p>B-LE-NAT</p> $\frac{}{n \sqsubseteq n}$	<p>B-LE-LAMANN</p> $\frac{\sigma_1 \sqsubseteq \sigma_2 \quad s_1 \sqsubseteq s_2}{\lambda x : \sigma_1. s_1 \sqsubseteq \lambda x : \sigma_2. s_2}$	<p>B-LE-TABS</p> $\frac{s_1 \sqsubseteq s_2}{\Lambda a. s_1 \sqsubseteq \Lambda a. s_2}$
<p>B-LE-APP</p> $\frac{s_1 \sqsubseteq s_3 \quad s_2 \sqsubseteq s_4}{s_1 s_2 \sqsubseteq s_3 s_4}$	<p>B-LE-CAST</p> $\frac{\sigma_1 \sqsubseteq \sigma_3 \quad \sigma_2 \sqsubseteq \sigma_4 \quad s_1 \sqsubseteq s_2}{\langle \sigma_1 \hookrightarrow \sigma_2 \rangle s_1 \sqsubseteq \langle \sigma_3 \hookrightarrow \sigma_4 \rangle s_2}$		

Figure 4.8: Less Precision

- 1678 • if $s \Downarrow v$, then $s' \Downarrow v'$ and $v' \sqsubseteq v$. If $s \Uparrow$ then $s' \Uparrow$.
- 1679 • if $s' \Downarrow v'$, then $s \Downarrow v$ where $v' \sqsubseteq v$, or $s \Downarrow \text{blame}$. If $s' \Uparrow$ then $s \Uparrow$ or $s \Downarrow \text{blame}$.

The first part of the dynamic gradual guarantee says that if a gradually typed program evaluates to a value, then making type annotations less precise always produces a program that evaluates to an less precise value. Unfortunately, coherence up to cast errors in the declarative system breaks the dynamic gradual guarantee. For instance:

$$(\lambda f : \forall a. a \rightarrow \text{Int}. \lambda x : \text{Int}. f x) (\lambda x. 1) 3 \quad (\lambda f : \forall a. a \rightarrow \text{Int}. \lambda x : ?. f x) (\lambda x. 1) 3$$

1680 The left one evaluates to 1, whereas its less precise version (right) will give a cast error if a is
 1681 instantiated to `Bool` for example. In Chapter 5, we will present an extension of the declarative
 1682 system that will alleviate the issue.

1683 4.4 ALGORITHMIC TYPE SYSTEM

1684 In this section we give a bidirectional account of the algorithmic type system that implements
 1685 the declarative specification. The algorithm is largely inspired by the algorithmic bidirec-
 1686 tional system of DK [Dunfield and Krishnaswami 2013]. However our algorithmic system
 1687 differs from theirs in three aspects: (1) the addition of the unknown type `?`; (2) the use of the
 1688 matching judgment; and 3) the approach of *gradual inference only producing static types* [Gar-
 1689 cia and Cimini 2015]. We then prove that our algorithm is both sound and complete with
 1690 respect to the declarative type system. We also provide an implementation.

1691 **ALGORITHMIC CONTEXTS.** The top of Figure 4.9 shows the syntax of the algorithmic sys-
 1692 tem. A noticeable difference are the algorithmic contexts Γ , which are represented as an *or-*
 1693 *dered* list containing declarations of type variables a and term variables $x : \sigma$. Unlike declar-
 1694 ative contexts, algorithmic contexts also contain declarations of existential type variables $\hat{\alpha}$,
 1695 which can be either unsolved (written $\hat{\alpha}$) or solved to some monotype (written $\hat{\alpha} = \tau$).
 1696 Finally, algorithmic contexts include a *marker* $\blacktriangleright_{\hat{\alpha}}$ (read “marker $\hat{\alpha}$ ”), which is used to de-
 1697 lineate existential variables created by the algorithm. We will have more to say about markers
 1698 when we examine the rules. Complete contexts Ω are the same as contexts, except that they
 1699 contain no unsolved variables.

1700 Apart from expressions in the declarative system, we add annotated expressions $e : \sigma$. The
 1701 well-formedness judgments for types and contexts are shown in Figure 4.9.

Expressions	$e ::= x \mid n \mid \lambda x : \sigma. e \mid \lambda x. e \mid e_1 e_2 \mid e : \sigma \mid \mathbf{let} x = e_1 \mathbf{in} e_2$
Types	$\sigma ::= \mathbf{Int} \mid a \mid \hat{\alpha} \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma \mid ?$
Monotypes	$\tau ::= \mathbf{Int} \mid a \mid \hat{\alpha} \mid \tau_1 \rightarrow \tau_2$
Algorithmic Contexts	$\Gamma, \Delta, \Theta ::= \bullet \mid \Gamma, x : \sigma \mid \Gamma, a \mid \Gamma, \hat{\alpha} \mid \Gamma, \hat{\alpha} = \tau \mid \Gamma, \blacktriangleright_{\hat{\alpha}}$
Complete Contexts	$\Omega ::= \bullet \mid \Omega, x : \sigma \mid \Omega, a \mid \Omega, \hat{\alpha} = \tau \mid \Omega, \blacktriangleright_{\hat{\alpha}}$

$\boxed{\Gamma \vdash^G \sigma}$ (Well-formedness of types)

GPC-AD-INT

$\overline{\Gamma \vdash^G \mathbf{Int}}$

GPC-AD-UNKNOWN

$\overline{\Gamma \vdash^G ?}$

GPC-AD-TVAR

$\overline{\Gamma[a] \vdash^G a}$

GPC-AD-EVAR

$\overline{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha}}$

GPC-AD-SOLVED

$\overline{\Gamma[\hat{\alpha} = \tau] \vdash^G \hat{\alpha}}$

GPC-AD-ARROW

$\frac{\Gamma \vdash^G \sigma_1 \quad \Gamma \vdash^G \sigma_2}{\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2}$

GPC-AD-FORALL

$\frac{\Gamma, a \vdash^G \sigma}{\Gamma \vdash^G \forall a. \sigma}$

$\boxed{\vdash^G \Gamma}$ (Well-formedness of algorithmic contexts)

GPC-WF-EMPTY

$\overline{\vdash^G \bullet}$

GPC-WF-VAR

$\frac{\vdash^G \Gamma \quad x \notin \mathbf{FV}(\Gamma) \quad \Gamma \vdash^G \sigma}{\vdash^G \Gamma, x : \sigma}$

GPC-WF-TVAR

$\frac{\vdash^G \Gamma \quad a \notin \mathbf{FV}(\Gamma)}{\vdash^G \Gamma, a}$

GPC-WF-EVAR

$\frac{\vdash^G \Gamma \quad \hat{\alpha} \notin \mathbf{FV}(\Gamma)}{\vdash^G \Gamma, \hat{\alpha}}$

GPC-WF-SOLVED

$\frac{\vdash^G \Gamma \quad \hat{\alpha} \notin \mathbf{FV}(\Gamma) \quad \Gamma \vdash^G \tau}{\vdash^G \Gamma, \hat{\alpha} = \tau}$

GPC-WF-MARKER

$\frac{\vdash^G \Gamma \quad \blacktriangleright_{\hat{\alpha}} \notin \mathbf{FV}(\Gamma)}{\vdash^G \Gamma, \blacktriangleright_{\hat{\alpha}}}$

Figure 4.9: Syntax and well-formedness of the algorithmic GPC

1702 NOTATIONAL CONVENIENCE. Following DK's system, we use contexts as substitutions on
 1703 types. We write $[\Gamma]\sigma$ to mean Γ applied as a substitution to type σ . We also use a hole
 1704 notation, which is useful when manipulating contexts by inserting and replacing declarations
 1705 in the middle. The hole notation is used extensively in proving soundness and completeness.
 1706 For example, $\Gamma[\Theta]$ means Γ has the form $\Gamma_L, \Theta, \Gamma_R$; if we have $\Gamma[\hat{\alpha}] = (\Gamma_L, \hat{\alpha}, \Gamma_R)$, then
 1707 $\Gamma[\hat{\alpha} = \tau] = (\Gamma_L, \hat{\alpha} = \tau, \Gamma_R)$. Occasionally, we will see a context with two *ordered* holes,
 1708 e.g., $\Gamma = \Gamma_0[\Theta_1][\Theta_2]$ means Γ has the form $\Gamma_L, \Theta_1, \Gamma_M, \Theta_2, \Gamma_R$.

1709 INPUT AND OUTPUT CONTEXTS. The algorithmic system, compared with the declarative
 1710 system, includes similar judgment forms, except that we replace the declarative context Ψ
 1711 with an algorithmic context Γ (the *input context*), and add an *output context* Δ after a back-
 1712 ward turnstile, e.g., $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$ is the judgment form for the algorithmic consistent
 1713 subtyping. All algorithmic rules manipulate input and output contexts in a way that is con-
 1714 sistent with the notion of *context extension*, which will be described in Section 4.4.5.

1715 We start with the explanation of the algorithmic consistent subtyping as it involves ma-
 1716 nipulating existential type variables explicitly (and solving them if possible).

1717 4.4.1 ALGORITHMIC CONSISTENT SUBTYPING

1718 Figure 4.10 presents the rules of algorithmic consistent subtyping $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$, which
 1719 says that under input context Γ , σ_1 is a consistent subtype of σ_2 , with output context Δ . The
 1720 first five rules do not manipulate contexts, but illustrate how contexts are propagated.

1721 Rule [GPC-AS-TVAR](#) and rule [GPC-AS-INT](#) do not involve existential variables, so the output
 1722 contexts remain unchanged. Rule [GPC-AS-EVAR](#) says that any unsolved existential variable is a
 1723 consistent subtype of itself. The output is still the same as the input context as the rule gives no
 1724 clue as to what is the solution of that existential variable. Rules [GPC-AS-UNKNOWNL](#) and [AS-](#)
 1725 [UNKNOWNR](#) are the counterparts of rule [GPC-CS-UNKNOWNL](#) and rule [GPC-CS-UNKNOWNR](#).

1726 Rule [GPC-AS-ARROW](#) is a natural extension of its declarative counterpart. The output con-
 1727 text of the first premise is used by the second premise, and the output context of the second
 1728 premise is the output context of the conclusion. Note that we do not simply check $\sigma_2 \lesssim \sigma_4$,
 1729 but apply Θ (the input context of the second premise) to both types (e.g., $[\Theta]\sigma_2$). This is to
 1730 maintain an important invariant: whenever $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$ holds, the types σ_1 and σ_2
 1731 are fully applied under input context Γ (they contain no existential variables already solved
 1732 in Γ). The same invariant applies to every algorithmic judgment.

1733 Rule [GPC-AS-FORALLR](#), similar to the declarative rule [GPC-CS-FORALLR](#), adds a to the input
 1734 context. Note that the output context of the premise allows additional existential variables
 1735 to appear after the type variable a , in a trailing context Θ . These existential variables could

<div style="border: 1px solid black; display: inline-block; padding: 2px 5px; margin-right: 10px;"> $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$ </div> <i>(Under input context Γ, σ_1 is a consistent subtype of σ_2, with output context Δ)</i>		
<small>GPC-AS-TVAR</small> $\overline{\Gamma[a] \vdash^G a \lesssim a \dashv \Gamma[a]}$	<small>GPC-AS-INT</small> $\overline{\Gamma \vdash^G \text{Int} \lesssim \text{Int} \dashv \Gamma}$	<small>GPC-AS-EVAR</small> $\overline{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \hat{\alpha} \dashv \Gamma[\hat{\alpha}]}$
<small>GPC-AS-UNKNOWNL</small> $\overline{\Gamma \vdash^G ? \lesssim \sigma \dashv \Gamma}$		<small>GPC-AS-UNKNOWNR</small> $\overline{\Gamma \vdash^G \sigma \lesssim ? \dashv \Gamma}$
<small>GPC-AS-ARROW</small> $\frac{\Gamma \vdash^G \sigma_3 \lesssim \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta]\sigma_2 \lesssim [\Theta]\sigma_4 \dashv \Delta}{\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \sigma_3 \rightarrow \sigma_4 \dashv \Delta}$		<small>GPC-AS-FORALLR</small> $\frac{\Gamma, a \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta, a, \Theta}{\Gamma \vdash^G \sigma_1 \lesssim \forall a. \sigma_2 \dashv \Delta}$
<small>GPC-AS-FORALLL</small> $\frac{\Gamma, \blacktriangleright_{\hat{\alpha}}, \hat{\alpha} \vdash^G \sigma_1[a \mapsto \hat{\alpha}] \lesssim \sigma_2 \dashv \Delta, \blacktriangleright_{\hat{\alpha}}, \Theta}{\Gamma \vdash^G \forall a. \sigma_1 \lesssim \sigma_2 \dashv \Delta}$		<small>GPC-AS-INSTL</small> $\frac{\hat{\alpha} \notin \text{FV}(\sigma) \quad \Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}$
<small>GPC-AS-INSTR</small> $\frac{\hat{\alpha} \notin \text{FV}(\sigma) \quad \Gamma[\hat{\alpha}] \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}$		

Figure 4.10: Algorithmic consistent subtyping

depend on a ; since a goes out of scope in the conclusion, we need to drop them from the concluding output, resulting in Δ . The next rule is essential to eliminating the guessing work. Instead of guessing a monotype τ out of thin air, rule **GPC-AS-FORALLL** generates a fresh existential variable $\hat{\alpha}$, and replaces a with $\hat{\alpha}$ in the body σ . The new existential variable $\hat{\alpha}$ is then added to the input context, just before the marker $\blacktriangleright_{\hat{\alpha}}$. The output context $(\Delta, \blacktriangleright_{\hat{\alpha}}, \Theta)$ allows additional existential variables to appear after $\blacktriangleright_{\hat{\alpha}}$ in Θ . For the same reasons as in rule **GPC-AS-FORALLR**, we drop them from the output context. A central idea behind these two rules is that we defer the decision of picking a monotype for a type variable, and hope that it could be solved later when we have more information at hand. As a side note, when both types are universal quantifiers, then either rule **GPC-AS-FORALLR** or rule **GPC-AS-FORALLL** applies. In practice, one can apply rule **GPC-AS-FORALLR** eagerly as it is invertible.

The last two rules (rule **GPC-AS-INSTL** and rule **GPC-AS-INSTR**) are specific to the algorithm, thus having no counterparts in the declarative version. They both check consistent subtyping with an unsolved existential variable on one side and an arbitrary type on the other side. Apart from checking that the existential variable does not occur in the type σ , both rules do not directly solve the existential variables, but leave the real work to the instantiation judgment.

4.4.2 INSTANTIATION

Two symmetric judgments $\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta$ and $\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta$, defined in Figure 4.11, instantiate unsolved existential variables. They read “under input context Γ , instantiate $\hat{\alpha}$ to a consistent subtype (or supertype) of σ , with output context Δ ”. The judgments are extended naturally from DK system, whose original inspiration comes from Cardelli [1993]. Since these two judgments are mutually defined, we discuss them together.

Rule **GPC-INSTL-SOLVE** is the simplest one – when an existential variable meets a monotype – where we simply set the solution of $\hat{\alpha}$ to the monotype τ in the output context. We also need to check that the monotype τ is well-formed under the prefix context Γ .

Rule **GPC-INSTL-SOLVEU** is similar to rule **GPC-AS-UNKNOWNR** in that we put no constraint⁷ on $\hat{\alpha}$ when it meets the unknown type $?$. This design decision reflects the point that type inference only produces static types [Garcia and Cimini 2015].

Rule **GPC-INSTL-REACH** deals with the situation where two existential variables meet. Recall that $\Gamma[\hat{\alpha}][\hat{\beta}]$ denotes a context where some unsolved existential variable $\hat{\alpha}$ is declared before $\hat{\beta}$. In this situation, the only logical thing we can do is to set the solution of one existential variable to the other one, depending on which one is declared before. For example, in

⁷As we will see in Chapter 5 where we present a more refined system, the “no constraint” statement is not entirely true.

$\boxed{\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}$
 (Under input context Γ , instantiate $\hat{\alpha}$ such that $\hat{\alpha} \lesssim \sigma$, with output context Δ)

$$\begin{array}{c}
 \text{GPC-INSTL-SOLVE} \\
 \frac{\Gamma \vdash^G \tau}{\Gamma, \hat{\alpha}, \Gamma' \vdash^G \hat{\alpha} \lesssim \tau \dashv \Gamma, \hat{\alpha} = \tau, \Gamma'} \\
 \\
 \text{GPC-INSTL-SOLVEU} \\
 \frac{}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim ? \dashv \Gamma[\hat{\alpha}]} \\
 \\
 \text{GPC-INSTL-REACH} \\
 \frac{}{\Gamma[\hat{\alpha}][\hat{\beta}] \vdash^G \hat{\alpha} \lesssim \hat{\beta} \dashv \Gamma[\hat{\alpha}][\hat{\beta} = \hat{\alpha}]} \\
 \\
 \text{GPC-INSTL-FORALLR} \\
 \frac{\Gamma[\hat{\alpha}], b \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta, b, \Theta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \forall b. \sigma \dashv \Delta} \\
 \\
 \text{GPC-INSTL-ARR} \\
 \frac{\Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \sigma_1 \lesssim \hat{\alpha}_1 \dashv \Theta \quad \Theta \vdash^G \hat{\alpha}_2 \lesssim [\Theta]\sigma_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma_1 \rightarrow \sigma_2 \dashv \Delta}
 \end{array}$$

$\boxed{\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}$
 (Under input context Γ , instantiate $\hat{\alpha}$ such that $\sigma \lesssim \hat{\alpha}$, with output context Δ)

$$\begin{array}{c}
 \text{GPC-INSTR-SOLVE} \\
 \frac{\Gamma \vdash^G \tau}{\Gamma, \hat{\alpha}, \Gamma' \vdash^G \tau \lesssim \hat{\alpha} \dashv \Gamma, \hat{\alpha} = \tau, \Gamma'} \\
 \\
 \text{GPC-INSTR-SOLVEU} \\
 \frac{}{\Gamma[\hat{\alpha}] \vdash^G ? \lesssim \hat{\alpha} \dashv \Gamma[\hat{\alpha}]} \\
 \\
 \text{GPC-INSTR-REACH} \\
 \frac{}{\Gamma[\hat{\alpha}][\hat{\beta}] \vdash^G \hat{\beta} \lesssim \hat{\alpha} \dashv \Gamma[\hat{\alpha}][\hat{\beta} = \hat{\alpha}]} \\
 \\
 \text{GPC-INSTR-FORALLL} \\
 \frac{\Gamma[\hat{\alpha}], \blacktriangleright_{\hat{\beta}}, \hat{\beta} \vdash^G \sigma[b \mapsto \hat{\beta}] \lesssim \hat{\alpha} \dashv \Delta, \blacktriangleright_{\hat{\beta}}, \Theta}{\Gamma[\hat{\alpha}] \vdash^G \forall b. \sigma \lesssim \hat{\alpha} \dashv \Delta} \\
 \\
 \text{GPC-INSTR-ARR} \\
 \frac{\Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \hat{\alpha}_1 \lesssim \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta]\sigma_2 \lesssim \hat{\alpha}_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \hat{\alpha} \dashv \Delta}
 \end{array}$$

Figure 4.11: Algorithmic instantiation

1769 the output context of rule **GPC-INSTL-REACH**, we have $\hat{\beta} = \hat{\alpha}$ because in the input context, $\hat{\alpha}$
 1770 is declared before $\hat{\beta}$.

1771 Rule **GPC-INSTL-FORALLR** is the instantiation version of rule **GPC-AS-FORALLR**. Since our
 1772 system is predicative, $\hat{\alpha}$ cannot be instantiated to $\forall b. \sigma$, but we can decompose $\forall b. \sigma$ in the
 1773 same way as in rule **GPC-AS-FORALLR**. Rule **GPC-INSTL-FORALLL** is the instantiation version
 1774 of rule **GPC-AS-FORALLL**.

1775 Rule **GPC-INSTL-ARR** applies when $\hat{\alpha}$ meets an arrow type. It follows that the solution
 1776 must also be an arrow type. This is why, in the first premise, we generate two fresh existential
 1777 variables $\hat{\alpha}_1$ and $\hat{\alpha}_2$, and insert them just before $\hat{\alpha}$ in the input context, so that we can solve
 1778 $\hat{\alpha}$ to $\hat{\alpha}_1 \rightarrow \hat{\alpha}_2$. Note that the first premise $\sigma_1 \approx \hat{\alpha}_1$ switches to the other instantiation
 1779 judgment.

1780 4.4.3 ALGORITHMIC TYPING

1781 We now turn to the algorithmic typing rules in Figure 4.12. Because general type infer-
 1782 ence for System F is undecidable [Wells 1999], our algorithmic system uses bidirectional
 1783 type checking to accommodate (first-class) polymorphism. Traditionally, two modes are
 1784 employed in bidirectional systems: the checking mode $\Gamma \vdash^G e \Leftarrow \sigma \dashv \Theta$, which takes a
 1785 term e and a type σ as input, and ensures that the term e checks against σ ; the inference
 1786 mode $\Gamma \vdash^G e \Rightarrow \sigma \dashv \Theta$, which takes a term e and produces a type σ . We first discuss rules
 1787 in the inference mode.

1788 Rule **GPC-INF-VAR** and rule **GPC-INF-INT** do not generate any new information and sim-
 1789 ply propagate the input context. Rule **GPC-INF-ANNO** is standard, switching to the checking
 1790 mode in the premise.

1791 In rule **GPC-INF-LAMANN**, we generate a fresh existential variable $\hat{\beta}$ for the function codomain,
 1792 and check the function body against $\hat{\beta}$. Note that it is tempting to write $\Gamma, x : \sigma \vdash^G e \Rightarrow$
 1793 $\sigma_2 \dashv \Delta, x : \sigma, \Theta$ as the premise (in the hope of better matching its declarative counterpart
 1794 rule **GPC-LAMANN**), which has a subtle consequence. Consider the expression $\lambda x : \text{Int}. \lambda y. y$.
 1795 Under the new premise, this is untypable because of $\bullet \vdash^G \lambda x : \text{Int}. \lambda y. y \Rightarrow \text{Int} \rightarrow \hat{\alpha} \rightarrow \hat{\alpha} \dashv$
 1796 \bullet where $\hat{\alpha}$ is not found in the output context. This explains why we put $\hat{\beta}$ before $x : \sigma$ so that
 1797 it remains in the output context Δ . Rule **GPC-INF-LAM**, which corresponds to rule **GPC-LAM**,
 1798 one of the guessing rules, is similar to rule **GPC-INF-LAMANN**. As with the other algorithmic
 1799 rules that eliminate guessing, we create new existential variables $\hat{\alpha}$ (for function domain)
 1800 and $\hat{\beta}$ (for function codomain) and check the function body against $\hat{\beta}$. Rule **GPC-INF-LET** is
 1801 similar to rule **GPC-INF-LAMANN**.

$\boxed{\Gamma \vdash^G e \Rightarrow \sigma \dashv \Delta}$ (Under input context Γ , e infers output type σ , with output context Δ)

$$\begin{array}{c}
 \text{GPC-INF-VAR} \\
 \frac{(x : \sigma) \in \Gamma}{\Gamma \vdash^G x \Rightarrow \sigma \dashv \Gamma} \\
 \\
 \text{GPC-INF-INT} \\
 \frac{}{\Gamma \vdash^G n \Rightarrow \text{Int} \dashv \Gamma} \\
 \\
 \text{GPC-INF-ANNO} \\
 \frac{\Gamma \vdash^G \sigma \quad \Gamma \vdash^G e \Leftarrow \sigma \dashv \Delta}{\Gamma \vdash^G e : \sigma \Rightarrow \sigma \dashv \Delta} \\
 \\
 \text{GPC-INF-LAMANN} \\
 \frac{\Gamma \vdash^G \sigma \quad \Gamma, \widehat{\beta}, x : \sigma \vdash^G e \Leftarrow \widehat{\beta} \dashv \Delta, x : \sigma, \Theta}{\Gamma \vdash^G \lambda x : \sigma. e \Rightarrow \sigma \rightarrow \widehat{\beta} \dashv \Delta} \\
 \\
 \text{GPC-INF-LAM} \\
 \frac{\Gamma, \widehat{\alpha}, \widehat{\beta}, x : \widehat{\alpha} \vdash^G e \Leftarrow \widehat{\beta} \dashv \Delta, x : \widehat{\alpha}, \Theta}{\Gamma \vdash^G \lambda x. e \Rightarrow \widehat{\alpha} \rightarrow \widehat{\beta} \dashv \Delta} \\
 \\
 \text{GPC-INF-LET} \\
 \frac{\Gamma \vdash^G e_1 \Rightarrow \sigma \dashv \Theta_1 \quad \Theta_1, \widehat{\alpha}, x : \sigma \vdash^G e_2 \Leftarrow \widehat{\alpha} \dashv \Delta, x : \sigma, \Theta_2}{\Gamma \vdash^G \text{let } x = e_1 \text{ in } e_2 \Rightarrow \widehat{\alpha} \dashv \Delta} \\
 \\
 \text{GPC-INF-APP} \\
 \frac{\Gamma \vdash^G e_1 \Rightarrow \sigma \dashv \Theta_1 \quad \Theta_1 \vdash^G [\Theta_1] \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Theta_2 \quad \Theta_2 \vdash^G e_2 \Leftarrow [\Theta_2] \sigma_1 \dashv \Delta}{\Gamma \vdash^G e_1 e_2 \Rightarrow \sigma_2 \dashv \Delta}
 \end{array}$$

$\boxed{\Gamma \vdash^G e \Leftarrow \sigma \dashv \Delta}$ (Under input context Γ , e checks against input type σ , with output context Δ)

$$\begin{array}{c}
 \text{GPC-CHK-LAM} \\
 \frac{\Gamma, x : \sigma_1 \vdash^G e \Leftarrow \sigma_2 \dashv \Delta, x : \sigma_1, \Theta}{\Gamma \vdash^G \lambda x. e \Leftarrow \sigma_1 \rightarrow \sigma_2 \dashv \Delta} \\
 \\
 \text{GPC-CHK-GEN} \\
 \frac{\Gamma, a \vdash^G e \Leftarrow \sigma \dashv \Delta, a, \Theta}{\Gamma \vdash^G e \Leftarrow \forall a. \sigma \dashv \Delta} \\
 \\
 \text{GPC-CHK-SUB} \\
 \frac{\Gamma \vdash^G e \Rightarrow \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta] \sigma_1 \lesssim [\Theta] \sigma_2 \dashv \Delta}{\Gamma \vdash^G e \Leftarrow \sigma_2 \dashv \Delta}
 \end{array}$$

$\boxed{\Gamma \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta}$ (Under input context Γ , σ matches output type $\sigma_1 \rightarrow \sigma_2$, with output context Δ)

$$\begin{array}{c}
 \text{GPC-AM-FORALL} \\
 \frac{\Gamma, \widehat{\alpha} \vdash^G \sigma[a \mapsto \widehat{\alpha}] \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta}{\Gamma \vdash^G \forall a. \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta} \\
 \\
 \text{GPC-AM-ARR} \\
 \frac{}{\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2 \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Gamma} \\
 \\
 \text{GPC-AM-UNKNOWN} \\
 \frac{}{\Gamma \vdash^G ? \triangleright ? \rightarrow ? \dashv \Gamma} \\
 \\
 \text{GPC-AM-VAR} \\
 \frac{}{\Gamma[\widehat{\alpha}] \vdash^G \widehat{\alpha} \triangleright \widehat{\alpha}_1 \rightarrow \widehat{\alpha}_2 \dashv \Gamma[\widehat{\alpha}_1, \widehat{\alpha}_2, \widehat{\alpha} = \widehat{\alpha}_1 \rightarrow \widehat{\alpha}_2]}
 \end{array}$$

Figure 4.12: Algorithmic typing

1802 **ALGORITHMIC MATCHING.** Rule **GPC-INF-APP** deserves attention. It relies on the algorithmic matching judgment $\Gamma \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta$. The matching judgment algorithmically
 1803 synthesizes an arrow type from an arbitrary type. Rule **GPC-AM-FORALL** replaces a with a
 1804 fresh existential variable $\hat{\alpha}$, thus eliminating guessing. Rule **GPC-AM-ARR** and rule **GPC-AM-**
 1805 **UNKNOWN** correspond directly to the declarative rules. Rule **GPC-AM-VAR**, which has no cor-
 1806 responding declarative version, is similar to rule **GPC-INSTL-ARR**/**GPC-INSTR-ARR**: we create
 1807 $\hat{\alpha}_1$ and $\hat{\alpha}_2$ and solve $\hat{\alpha}$ to $\hat{\alpha}_1 \rightarrow \hat{\alpha}_2$ in the output context.

1809 Back to the rule **GPC-INF-APP**. This rule first infers the type of e_1 , producing an output
 1810 context Θ_1 . Then it applies Θ_1 to A and goes into the matching judgment, which delivers an
 1811 arrow type $\sigma_1 \rightarrow \sigma_2$ and another output context Θ_2 . Θ_2 is used as the input context when
 1812 checking e_2 against $[\Theta_2]\sigma_1$, where we go into the checking mode.

1813 Rules in the checking mode are quite standard. Rule **GPC-CHK-LAM** checks against $\sigma_1 \rightarrow$
 1814 σ_2 . Rule **GPC-CHK-GEN**, like the declarative rule **GPC-GEN**, adds a type variable a to the input
 1815 context. Rule **GPC-CHK-SUB** uses the algorithmic consistent subtyping judgment.

1816 4.4.4 DECIDABILITY

1817 Our algorithmic system is decidable. It is not at all obvious to see why this is the case, as many
 1818 rules are not strictly structural (e.g., many rules have $[\Gamma]\sigma$ in the premises). This implies
 1819 that we need a more sophisticated measure to support the argument. Since the typing rules
 1820 (Figure 4.12) depend on the consistent subtyping rules (Figure 4.10), which in turn depends
 1821 on the instantiation rules (Figure 4.11), to show the decidability of the typing judgment, we
 1822 need to show that the instantiation and consistent subtyping judgments are decidable. The
 1823 proof strategy mostly follows that of the DK system. Here only highlights of the proofs are
 1824 given.

1825 **DECIDABILITY OF INSTANTIATION.** The basic idea is that we need to show σ in the instan-
 1826 tiation judgments $\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta$ and $\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta$ always gets smaller. Most of the
 1827 rules are structural and thus easy to verify (e.g., rule **INSTL-FORALLR**); the non-trivial cases
 1828 are rule **INSTL-ARR** and rule **INSTR-ARR** where context applications appear in the premises.
 1829 The key observation there is that the instantiation rules preserve the size of (substituted)
 1830 types. The formal statement of decidability of instantiation needs a few pre-conditions: as-
 1831 suming $\hat{\alpha}$ is unsolved in the input context Γ , that σ is well-formed under the context Γ , that
 1832 σ is fully applied under the input context Γ ($[\Gamma]\sigma = \sigma$), and that $\hat{\alpha}$ does not occur in σ .
 1833 Those conditions are actually met when instantiation is invoked: rule **CHK-SUB** applies the
 1834 input context, and the subtyping rules apply input context when needed.

1835 **Theorem 4.11** (Decidability of Instantiation). *If $\Gamma = \Gamma_0[\hat{\alpha}]$ and $\Gamma \vdash^G \sigma$ such that $[\Gamma]\sigma = \sigma$
1836 and $\hat{\alpha} \notin \text{FV}(\sigma)$ then:*

- 1837 1. *Either there exists Δ such that $\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta$, or not.*
- 1838 2. *Either there exists Δ such that $\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta$, or not.*

1839 **DECIDABILITY OF ALGORITHMIC CONSISTENT SUBTYPING.** Proving decidability of algo-
1840 rithmic consistent subtyping is a bit more involved, as the induction measure consists of
1841 several parts. We measure the judgment $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$ lexicographically by

1842 (M1) the number of \forall -quantifiers in σ_1 and σ_2 ;

1843 (M2) the number of unknown types in σ_1 and σ_2 ;

1844 (M3) $|\text{UNSOLVED}(\Gamma)|$: the number of unsolved existential variables in Γ ;

1845 (M4) $|\Gamma \vdash^G \sigma_1| + |\Gamma \vdash^G \sigma_2|$.

1846 Notice that because of our gradual setting, we also need to measure the number of unknown
1847 types (M2). This is a key difference from the DK system. For (M4), we use *contextual size*—
1848 the size of well-formed types under certain contexts, which penalizes solved variables (*).

1849 **Definition 10** (Contextual Size).

$$\begin{aligned}
 |\Gamma \vdash^G \text{Int}| &= 1 \\
 |\Gamma \vdash^G ?| &= 1 \\
 |\Gamma \vdash^G a| &= 1 \\
 1850 \quad |\Gamma \vdash^G \hat{\alpha}| &= 1 \\
 |\Gamma[\hat{\alpha} = \tau] \vdash^G \hat{\alpha}| &= 1 + |\Gamma[\hat{\alpha} = \tau] \vdash^G \tau| \quad (*) \\
 |\Gamma \vdash^G \forall a. \sigma| &= 1 + |\Gamma, a \vdash^G \sigma| \\
 |\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2| &= 1 + |\Gamma \vdash^G \sigma_1| + |\Gamma \vdash^G \sigma_2|
 \end{aligned}$$

1851 **Theorem 4.12** (Decidability of Algorithmic Consistent Subtyping). *Given a context Γ and
1852 types σ_1, σ_2 such that $\Gamma \vdash^G \sigma_1$ and $\Gamma \vdash^G \sigma_2$ and $[\Gamma]\sigma_1 = \sigma_1$ and $[\Gamma]\sigma_2 = \sigma_2$, it is decidable
1853 whether there exists Δ such that $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$.*

1854 **DECIDABILITY OF ALGORITHMIC TYPING.** Similar to proving decidability of algorithmic
1855 consistent subtyping, the key is to come up with a correct measure. Since the typing rules
1856 depend on the matching judgment, we first show decidability of the algorithmic matching.

Lemma 4.13 (Decidability of Algorithmic Matching). *Given a context Γ and a type σ it is decidable whether there exist types σ_1, σ_2 and a context Δ such that $\Gamma \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta$.*

Now we are ready to show decidability of typing. The proof is obtained by induction on the lexicographically ordered triple: size of e , typing judgment (where the inference mode \Rightarrow is considered smaller than the checking mode \Leftarrow) and contextual size.

$$\left\langle e, \begin{array}{c} \Rightarrow \\ \Leftarrow \end{array}, |\Gamma \vdash^G \sigma| \right\rangle$$

The above measure is much simpler than the corresponding one in the DK system, where they also need to consider the application judgment together with the inference and checking judgments. This shows another benefit (besides the independence from typing) of adopting the matching judgment.

Theorem 4.14 (Decidability of Algorithmic Typing).

1. *Inference: Given a context Γ and a term e , it is decidable whether there exist a type σ and a context Δ such that $\Gamma \vdash^G e \Rightarrow \sigma \dashv \Delta$.*
2. *Checking: Given a context Γ , a term e and a type σ such that $\Gamma \vdash^G \sigma$, it is decidable whether there exists a context Δ such that $\Gamma \vdash^G e \Leftarrow \sigma \dashv \Delta$.*

4.4.5 CONTEXT EXTENSION

To be confident that our algorithmic type system and the declarative type system agree with each other, we need to prove that the algorithmic rules are sound and complete with respect to the declarative specification. Before we give the formal statements of the soundness and completeness theorems, we need a meta-theoretical device, called *context extension* [Dunfield and Krishnaswami 2013], to capture a notion of information increase from input contexts to output contexts.

A context extension judgment $\Gamma \longrightarrow \Delta$ reads “ Γ is extended by Δ ”. Intuitively, this judgment says that Δ has at least as much information as Γ : some unsolved existential variables in Γ may be solved in Δ . The full inductive definition can be found Figure 4.13.

4.4.6 SOUNDNESS

Roughly speaking, soundness of the algorithmic system says that given a derivation of an algorithmic judgment with input context Γ , output context Δ , and a complete context Ω that extends Δ , applying Ω throughout the given algorithmic judgment should yield a derivable declarative judgment. For example, let us consider an algorithmic typing judgment $\bullet \vdash^G$

$\boxed{\Gamma \longrightarrow \Delta}$				(Context extension)
GPC-EXT-ID $\frac{}{\bullet \longrightarrow \bullet}$	GPC-EXT-VAR $\frac{\Gamma \longrightarrow \Delta \quad [\Delta]\sigma = [\Delta]\sigma'}{\Gamma, x : \sigma \longrightarrow \Delta, x : \sigma'}$	GPC-EXT-TVAR $\frac{\Gamma \longrightarrow \Delta}{\Gamma, a \longrightarrow \Delta, a}$	GPC-EXT-EVAR $\frac{\Gamma \longrightarrow \Delta}{\Gamma, \hat{\alpha} \longrightarrow \Delta, \hat{\alpha}}$	
GPC-EXT-SOLVED $\frac{\Gamma \longrightarrow \Delta \quad [\Delta]\tau = [\Delta]\tau'}{\Gamma, \hat{\alpha} = \tau \longrightarrow \Delta, \hat{\alpha} = \tau'}$	GPC-EXT-SOLVE $\frac{\Gamma \longrightarrow \Delta}{\Gamma, \hat{\alpha} \longrightarrow \Delta, \hat{\alpha} = \tau}$	GPC-EXT-ADD $\frac{\Gamma \longrightarrow \Delta}{\Gamma \longrightarrow \Delta, \hat{\alpha}}$		
	GPC-EXT-ADDSOLVE $\frac{\Gamma \longrightarrow \Delta}{\Gamma \longrightarrow \Delta, \hat{\alpha} = \tau}$	GPC-EXT-MARKER $\frac{\Gamma \longrightarrow \Delta}{\Gamma, \blacktriangleright_{\hat{\alpha}} \longrightarrow \Delta, \blacktriangleright_{\hat{\alpha}}}$		

Figure 4.13: Context extension

1887 $\lambda x. x \Rightarrow \hat{\alpha} \rightarrow \hat{\alpha} \dashv \hat{\alpha}$, and any complete context, say, $\Omega = (\hat{\alpha} = \text{Int})$, then applying Ω to the
 1888 above judgment yields $\bullet \vdash^G \lambda x. x : \text{Int} \rightarrow \text{Int}$, which is derivable in the declarative system.

1889 However there is one complication: applying Ω to the algorithmic expression does not
 1890 necessarily yield a typable declarative expression. For example, by rule [GPC-CHK-LAM](#) we
 1891 have $\lambda x. x \Leftarrow (\forall a. a \rightarrow a) \rightarrow (\forall a. a \rightarrow a)$, but $\lambda x. x$ itself cannot have type $(\forall a. a \rightarrow$
 1892 $a) \rightarrow (\forall a. a \rightarrow a)$ in the declarative system. To circumvent that, we add an annotation to
 1893 the lambda abstraction, resulting in $\lambda x : (\forall a. a \rightarrow a). x$, which is typeable in the declarative
 1894 system with the same type. To relate $\lambda x. x$ and $\lambda x : (\forall a. a \rightarrow a). x$, we erase all annotations
 1895 on both expressions.

1896 **Definition 11** (Type annotation erasure). The erasure function is denoted as $|\cdot|$, and defined
 1897 as follows:

$$\begin{array}{ll}
 |x| = x & |n| = n \\
 |\lambda x : \sigma. e| = \lambda x. |e| & |\lambda x. e| = \lambda x. |e| \\
 |e_1 e_2| = |e_1| |e_2| & |e : \sigma| = |e|
 \end{array}$$

1899 **Theorem 4.15** (Instantiation Soundness). Given $\Delta \longrightarrow \Omega$ and $[\Gamma]\sigma = \sigma$ and $\hat{\alpha} \notin \text{FV}(\sigma)$:

- 1900 1. If $\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta$ then $[\Omega]\Delta \vdash^G [\Omega]\hat{\alpha} \lesssim [\Omega]\sigma$.
- 1901 2. If $\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta$ then $[\Omega]\Delta \vdash^G [\Omega]\sigma \lesssim [\Omega]\hat{\alpha}$.

1902 Notice that the declarative judgment uses $[\Omega]\Delta$, an operation that applies a complete con-
 1903 text Ω to the algorithmic context Δ , essentially plugging in all known solutions and removing

all declarations of existential variables (both solved and unsolved), resulting in a declarative context.

With instantiation soundness, next we show that the algorithmic consistent subtyping is sound:

Theorem 4.16 (Soundness of Algorithmic Consistent Subtyping). *If $\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$ where $[\Gamma]\sigma_1 = \sigma_1$ and $[\Gamma]\sigma_2 = \sigma_2$ and $\Delta \longrightarrow \Omega$ then $[\Omega]\Delta \vdash^G [\Omega]\sigma_1 \lesssim [\Omega]\sigma_2$.*

Finally the soundness theorem of algorithmic typing is:

Theorem 4.17 (Soundness of Algorithmic Typing). *Given $\Delta \longrightarrow \Omega$:*

1. *If $\Gamma \vdash^G e \Rightarrow \sigma \dashv \Delta$ then $\exists e'$ such that $[\Omega]\Delta \vdash^G e' : [\Omega]\sigma$ and $|e| = |e'|$.*
2. *If $\Gamma \vdash^G e \Leftarrow \sigma \dashv \Delta$ then $\exists e'$ such that $[\Omega]\Delta \vdash^G e' : [\Omega]\sigma$ and $|e| = |e'|$.*

4.4.7 COMPLETENESS

Completeness of the algorithmic system is the reverse of soundness: given a declarative judgment of the form $[\Omega]\Gamma \vdash^G [\Omega] \dots$, we want to get an algorithmic derivation of $\Gamma \vdash^G \dots \dashv \Delta$. It turns out that completeness is a bit trickier to state in that the algorithmic rules generate existential variables on the fly, so Δ could contain unsolved existential variables that are not found in Γ , nor in Ω . Therefore the completeness proof must produce another complete context Ω' that extends both the output context Δ , and the given complete context Ω . As with soundness, we need erasure to relate both expressions.

Theorem 4.18 (Instantiation Completeness). *Given $\Gamma \longrightarrow \Omega$ and $\sigma = [\Gamma]\sigma$ and $\hat{\alpha} \in \text{UNSOLVED}(\Gamma)$ and $\hat{\alpha} \notin \text{FV}(\sigma)$:*

1. *If $[\Omega]\Gamma \vdash^G [\Omega]\hat{\alpha} \lesssim [\Omega]\sigma$ then there are Δ, Ω' such that $\Omega \longrightarrow \Omega'$ and $\Delta \longrightarrow \Omega'$ and $\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta$.*
2. *If $[\Omega]\Gamma \vdash^G [\Omega]\sigma \lesssim [\Omega]\hat{\alpha}$ then there are Δ, Ω' such that $\Omega \longrightarrow \Omega'$ and $\Delta \longrightarrow \Omega'$ and $\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta$.*

Next is the completeness of consistent subtyping:

Theorem 4.19 (Generalized Completeness of Consistent Subtyping). *If $\Gamma \longrightarrow \Omega$ and $\Gamma \vdash^G \sigma_1$ and $\Gamma \vdash^G \sigma_2$ and $[\Omega]\Gamma \vdash^G [\Omega]\sigma_1 \lesssim [\Omega]\sigma_2$ then there exist Δ and Ω' such that $\Delta \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\Gamma \vdash^G [\Gamma]\sigma_1 \lesssim [\Gamma]\sigma_2 \dashv \Delta$.*

We prove that the algorithmic matching is complete with respect to the declarative matching:

Theorem 4.20 (Matching Completeness). *Given $\Gamma \longrightarrow \Omega$ and $\Gamma \vdash^G \sigma$, if $[\Omega]\Gamma \vdash^G [\Omega]\sigma \triangleright \sigma_1 \rightarrow \sigma_2$ then there exist $\Delta, \Omega', \sigma'_1$ and σ'_2 such that $\Gamma \vdash^G [\Gamma]\sigma \triangleright \sigma'_1 \rightarrow \sigma'_2 \dashv \Delta$ and $\Delta \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\sigma_1 = [\Omega']\sigma'_1$ and $\sigma_2 = [\Omega']\sigma'_2$.*

Finally here is the completeness theorem of the algorithmic typing:

Theorem 4.21 (Completeness of Algorithmic Typing). *Given $\Gamma \longrightarrow \Omega$ and $\Gamma \vdash^G \sigma$, if $[\Omega]\Gamma \vdash^G e : \sigma$ then there exist Δ, Ω', σ' and e' such that $\Delta \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\Gamma \vdash^G e' \Rightarrow \sigma' \dashv \Delta$ and $\sigma = [\Omega']\sigma'$ and $|e| = |e'|$.*

4.5 SIMPLE EXTENSIONS AND VARIANTS

This section considers two simple variations of the presented system. The first variation extends the system with a top type, while the second variation considers a more declarative formulation using a subsumption rule.

4.5.1 TOP TYPES

We argued that our definition of consistent subtyping (Definition 5) generalizes the original definition by Siek and Taha [2007]. We have shown its applicability to polymorphic types, for which Siek and Taha [2007] approach cannot be extended naturally. To strengthen our argument, we show how to extend our approach to \top types, which is also not supported by Siek and Taha [2007] approach.

CONSISTENT SUBTYPING WITH \top . In order to preserve the orthogonality between subtyping and consistency, we require \top to be a common supertype of all static types, as shown in rule [GPC-S-TOP](#). This rule might seem strange at first glance, since even if we remove the requirement σ static, the rule still seems reasonable. However, an important point is that, because of the orthogonality between subtyping and consistency, subtyping itself should not contain a potential information loss! Therefore, subtyping instances such as $? <: \top$ are not allowed. For consistency, we add the rule that \top is consistent with \top , which is actually included in the original reflexive rule $\sigma \sim \sigma$. For consistent subtyping, every type is a consistent subtype of \top , for example, $\text{Int} \rightarrow ? \lesssim \top$.

$$\frac{\sigma \text{ static}}{\Psi \vdash^G \sigma <: \top} \text{GPC-S-TOP} \qquad \frac{}{\top \sim \top} \qquad \frac{}{\Psi \vdash^G \sigma \lesssim \top} \text{GPC-CS-TOP}$$


It is easy to verify that Definition 5 is still equivalent to that in Figure 4.6 extended with rule **GPC-CS-TOP**. That is, Theorem 4.4 holds:

Proposition 4.22 (Extension with \top). $\Psi \vdash^G \sigma_1 \lesssim \sigma_2 \Leftrightarrow \Psi \vdash^G \sigma_1 <: \sigma', \sigma' \sim \sigma'', \Psi \vdash^G \sigma'' <: \sigma_2$ for some σ', σ'' .

We extend the definition of concretization (Definition 6) with \top by adding another equation $\gamma(\top) = \{\top\}$. Note that Castagna and Lanvin [2017] also have this equation in their calculus. It is easy to verify that Corollary 4.2 still holds:

Proposition 4.23 (Equivalence to AGT on \top). $\sigma_1 \lesssim \sigma_2$ if and only if $\sigma_1 \widetilde{<} \sigma_2$.

SIEK AND TAHA'S DEFINITION OF CONSISTENT SUBTYPING DOES NOT WORK FOR \top . As with the analysis in Section 4.2.2, $\text{Int} \rightarrow ? \lesssim \top$ only holds when we first apply consistency, then subtyping. However we cannot find a type σ such that $\text{Int} \rightarrow ? <: \sigma$ and $\sigma \sim \top$. The following diagram depicts the situation:



Additionally we have a similar problem in extending the restriction operator: *non-structural* masking between $\text{Int} \rightarrow ?$ and \top cannot be easily achieved.

Note that both the top and universally quantified types can be seen as special cases of intersection types. Indeed, top is the intersection of the empty set, while a universally quantified type is the intersection of the infinite set of its instantiations [Davies and Pfenning 2000]. Recall from Section 4.2.3 that Castagna and Lanvin [2017] shows that consistent subtyping from AGT works well for intersection types, and our definition coincides with AGT (Corollary 4.2 and Proposition 4.23). We thus believe that our definition is compatible with conventional binary intersection types as well. Yet, a rigorous formalization would be needed to substantiate this belief.

4.5.2 A MORE DECLARATIVE TYPE SYSTEM

In Section 4.3 we present our declarative system in terms of the matching and consistent subtyping judgments. The rationale behind this design choice is that the resulting declarative system combines subtyping and type consistency in the application rule, thus making

1987 it easier to design an algorithmic system accordingly. Still, one may wonder if it is possible
 1988 to design a more declarative specification. For example, even though we mentioned that the
 1989 subsumption rule is incompatible with consistent subtyping, it might be possible to accom-
 1990 modate a subsumption rule for normal subtyping (instead of consistent subtyping). In this
 1991 section, we discuss an alternative for the design of the declarative system.

1992 **WRONG DESIGN.** A naive design that does not work is to replace rule **GPC-APP** in Figure 4.7
 1993 with the following two rules:

$$\begin{array}{c}
 \text{GPC-V-SUB} \\
 \frac{\Psi \vdash^G e : \sigma \quad \sigma <: \sigma_2}{\Psi \vdash^G e : \sigma_2}
 \end{array}
 \qquad
 \begin{array}{c}
 \text{GPC-V-APP1} \\
 \frac{\Psi \vdash^G e_1 : \sigma \quad \Psi \vdash^G e_2 : \sigma_1 \quad \sigma \sim \sigma_1 \rightarrow \sigma_2}{\Psi \vdash^G e_1 e_2 : \sigma_2}
 \end{array}$$

1994 Rule **GPC-V-SUB** is the standard subsumption rule: if an expression e has type σ , then it
 1995 can be assigned some type σ_2 that is a supertype of σ . Rule **GPC-V-APP1** first infers that e_1
 1996 has type σ , and e_2 has type σ_1 , then it finds some σ_2 so that σ is consistent with $\sigma_1 \rightarrow \sigma_2$.

1997 There would be two obvious benefits of this variant if it did work: firstly this approach
 1998 closely resembles the traditional declarative type systems for calculi with subtyping; secondly
 1999 it saves us from discussing various forms of σ in rule **GPC-V-APP1**, leaving the job to the
 2000 consistency judgment.

2001 The design is wrong because of the information loss caused by the choice of σ_2 in rule **GPC-**
 2002 **V-APP1**. Suppose we have $\Psi \vdash^G \text{plus} : \text{Int} \rightarrow \text{Int} \rightarrow \text{Int}$, then we can apply it to 1 to get

$$\frac{\Psi \vdash^G \text{plus} : \text{Int} \rightarrow \text{Int} \rightarrow \text{Int} \quad \Psi \vdash^G 1 : \text{Int} \quad \text{Int} \rightarrow \text{Int} \rightarrow \text{Int} \sim \text{Int} \rightarrow ? \rightarrow \text{Int}}{\Psi \vdash \text{plus } 1 : ? \rightarrow \text{Int}} \text{GPC-V-APP1}$$

2003 Further applying it to true we get

$$\frac{\Psi \vdash^G \text{plus } 1 : ? \rightarrow \text{Int} \quad \Psi \vdash^G \text{true} : \text{Bool} \quad ? \rightarrow \text{Int} \sim \text{Bool} \rightarrow \text{Int}}{\Psi \vdash \text{plus } 1 \text{ true} : \text{Int}} \text{GPC-V-APP1}$$

2004 which is obviously wrong! The type consistency in rule **GPC-V-APP1** causes information loss
 2005 for both the argument type σ_1 and the return type σ_2 . The problem is that information of
 2006 σ_2 can get lost again if it appears in further applications. The moral of the story is that we

should be very careful when using type consistency. We hypothesize that it is inevitable to do case analysis for the type of the function in an application (i.e., σ in rule [GPC-V-APP1](#)).

PROPER DECLARATIVE DESIGN. The proper design refines the first variant by using a matching judgment to carefully distinguish two cases for the typing result of e_1 in rule [GPC-V-APP1](#): (1) when it is an arrow type, and (2) when it is an unknown type. This variant replaces rule [GPC-APP](#) in Figure 4.7 with the following rules:

$$\begin{array}{c}
 \text{GPC-V-SUB} \\
 \frac{\Psi \vdash^G e : \sigma \quad \sigma <: \sigma_2}{\Psi \vdash^G e : \sigma_2} \\
 \\
 \text{GPC-V-APP2} \\
 \frac{\Psi \vdash^G e : \sigma \quad \Psi \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \quad \Psi \vdash^G e_2 : \sigma_3 \quad \sigma_1 \sim \sigma_3}{\Psi \vdash^G e_1 e_2 : \sigma_2} \\
 \\
 \frac{}{\Psi \vdash^G \sigma_1 \rightarrow \sigma_2 \triangleright \sigma_1 \rightarrow \sigma_2} \qquad \frac{}{\Psi \vdash^G ? \triangleright ? \rightarrow ?}
 \end{array}$$

Rule [GPC-V-SUB](#) is the same as in the first variant. In rule [GPC-V-APP2](#), we infer that e_1 has type σ , and use the matching judgment to get an arrow type $\sigma_1 \rightarrow \sigma_2$. Then we need to ensure that the argument type σ_3 is *consistent with* (rather than a consistent subtype of) σ_1 , and use σ_2 as the result type of the application. The matching judgment only deals with two cases, as polymorphic types are handled by rule [GPC-V-SUB](#). These rules are closely related to the ones in Siek and Taha [2006] and Siek and Taha [2007].

The more declarative nature of this system also implies that it is highly non-syntax-directed, and it does not offer any insight into combining subtyping and consistency. We have proved in Coq the following lemmas to establish soundness and completeness of this system with respect to our original system (to avoid ambiguity, we use the notation \vdash_m^G to indicate the more declarative version):

Lemma 4.24 (Completeness of \vdash_m^G). *If $\Psi \vdash^G e : \sigma$, then $\Psi \vdash_m^G e : \sigma$.*

Lemma 4.25 (Soundness of \vdash_m^G). *If $\Psi \vdash_m^G e : \sigma_1$, then there exists some σ_2 , such that $\Psi \vdash^G e : \sigma_2$ and $\Psi \vdash^G \sigma_2 <: \sigma_1$.*

5

RESTORING THE DYNAMIC GRADUAL GUARANTEE WITH TYPE PARAMETERS

In Section 4.3.2 we have seen an example where a single source expression could produce two different target expressions with different runtime behaviors. As we explained, this is due to the guessing nature of the declarative system, and, from the (source) typing point of view, no guessed type is particularly better than any other. As a consequence, this breaks the dynamic gradual guarantee as discussed in Section 4.3.3.

To alleviate this situation, we introduce *static type parameters*, which are placeholders for monotypes, and *gradual type parameters*, which are placeholders for monotypes that are consistent with the unknown type. The concept of static type parameters and gradual type parameters in the context of gradual typing was first introduced by Garcia and Cimini [2015], and later played a central role in the work of Igarashi et al. [2017]. In our type system, type parameters mainly help capture the notion of *representative translations*, and should not appear in a source program. With them we are able to recast the dynamic gradual guarantee in terms of representative translations, and to prove that every well-typed source expression possesses at least one representative translation. With a coherence conjecture regarding representative translations, the dynamic gradual guarantee of our extended source language now can be reduced to that of λB .

5.1 DECLARATIVE TYPE SYSTEM

The new syntax of types is given at the top of Figure 5.1, with the differences highlighted. In addition to the types of Figure 4.2, we add *static type parameters* \mathcal{S} , and *gradual type parameters* \mathcal{G} . Both kinds of type parameters are monotypes. The addition of type parameters, however, leads to two new syntactic categories of types. *Castable types* \mathbb{C} represent types that can be cast from or to $?$. It includes all types, except those that contain static type parameters. *Castable monotypes* t are those castable types that are also monotypes.

CONSISTENT SUBTYPING. The new definition of consistent subtyping is given at the bottom of Figure 5.1, again with the differences highlighted. Now the unknown type is only a con-

Types	$\sigma ::= \text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma \mid ? \mid \mathcal{S} \mid \mathcal{G}$
Monotypes	$\tau ::= \text{Int} \mid a \mid \tau_1 \rightarrow \tau_2 \mid \mathcal{S} \mid \mathcal{G}$
Castable Types	$\mathbb{C} ::= \text{Int} \mid a \mid \mathbb{C}_1 \rightarrow \mathbb{C}_2 \mid \forall a. \mathbb{C} \mid ? \mid \mathcal{G}$
Castable Monotypes	$t ::= \text{Int} \mid a \mid t_1 \rightarrow t_2 \mid \mathcal{G}$

$\Psi \vdash^G \sigma_1 \lesssim \sigma_2$

(Consistent Subtyping)

$\frac{\text{GPC-CS-TVAR} \quad a \in \Psi}{\Psi \vdash^G a \lesssim a}$	$\frac{\text{GPC-CS-INT}}{\Psi \vdash^G \text{Int} \lesssim \text{Int}}$	$\frac{\text{GPC-CS-ARROW} \quad \Psi \vdash^G \sigma_3 \lesssim \sigma_1 \quad \Psi \vdash^G \sigma_2 \lesssim \sigma_4}{\Psi \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \sigma_3 \rightarrow \sigma_4}$
$\frac{\text{GPC-CS-FORALLR} \quad \Psi, a \vdash^G \sigma_1 \lesssim \sigma_2}{\Psi \vdash^G \sigma_1 \lesssim \forall a. \sigma_2}$	$\frac{\text{GPC-CS-FORALLL} \quad \Psi \vdash^G \tau \quad \Psi \vdash^G \sigma_1[a \mapsto \tau] \lesssim \sigma_2}{\Psi \vdash^G \forall a. \sigma_1 \lesssim \sigma_2}$	$\frac{\text{GPC-CS-UNKNOWNLL}}{\Psi \vdash^G ? \lesssim \mathbb{C}}$
$\frac{\text{GPC-CS-UNKNOWNRR}}{\Psi \vdash^G \mathbb{C} \lesssim ?}$	$\frac{\text{GPC-CS-SPAR}}{\Psi \vdash^G \mathcal{S} \lesssim \mathcal{S}}$	$\frac{\text{GPC-CS-GPAR}}{\Psi \vdash^G \mathcal{G} \lesssim \mathcal{G}}$

Figure 5.1: Syntax of types, and consistent subtyping in the extended declarative system.

sistent subtype of all castable types, rather than of all types (rule [GPC-CS-UNKNOWNLL](#)), and vice versa (rule [GPC-CS-UNKNOWNRR](#)). Moreover, the static type parameter \mathcal{S} is a consistent subtype of itself (rule [GPC-CS-SPAR](#)), and similarly for the gradual type parameter (rule [GPC-CS-GPAR](#)). From this definition it follows immediately that $?$ is incomparable with types that contain static type parameters \mathcal{S} , such as $\mathcal{S} \rightarrow \text{Int}$.

TYPING AND TRANSLATION. Given these extensions to types and consistent subtyping, the typing process remains the same as in Figure 4.7. To account for the changes in the translation, if we extend λB with type parameters as in Garcia and Cimini [2015], then the translation remains the same as well.

5.2 SUBSTITUTIONS AND REPRESENTATIVE TRANSLATIONS

As we mentioned, type parameters serve as placeholders for monotypes. As a consequence, wherever a type parameter is used, any *suitable* monotype could appear just as well. To formalize this observation, we define substitutions for type parameters as follows:

Definition 12 (Substitution). Substitutions for type parameters are defined as:

- 2068 1. Let $S^S : \mathcal{S} \rightarrow \tau$ be a total function mapping static type parameters to monotypes.
- 2069 2. Let $S^G : \mathcal{G} \rightarrow t$ be a total function mapping gradual type parameters to castable
2070 monotypes.
- 2071 3. Let $S^P = S^G \cup S^S$ be a union of S^S and S^G mapping static and gradual type param-
2072 eters accordingly.

2073 Note that since \mathcal{G} might be compared with $?$, only castable monotypes are suitable substitutes,
2074 whereas \mathcal{S} can be replaced by any monotypes. Therefore, we can substitute \mathcal{G} for \mathcal{S} , but not
2075 the other way around.

Let us go back to our example and its two translations in Section 4.3.2. The problem with those translations is that neither $\text{Int} \rightarrow \text{Int}$ nor $\text{Bool} \rightarrow \text{Int}$ is general enough. With type parameters, however, we can state a more *general* translation that covers both through substitution:

$$f : \forall a. a \rightarrow \text{Int} \vdash^G (\lambda x : ?.fx) : ? \rightarrow \text{Int} \\ \rightsquigarrow (\lambda x : ?. (\forall a. a \rightarrow \text{Int} \hookrightarrow \mathcal{G} \rightarrow \text{Int})f)(\langle ? \hookrightarrow \mathcal{G} \rangle x)$$

2076 The advantage of type parameters is that they help reasoning about the dynamic semantics.
2077 Now we are not limited to a particular choice, such as $\text{Int} \rightarrow \text{Int}$ or $\text{Bool} \rightarrow \text{Int}$, which might
2078 or might not emit a cast error at runtime. Instead we have a general choice $\mathcal{G} \rightarrow \text{Int}$.

2079 What does the more general choice with type parameters tell us? First, we know that in
2080 this case, there is no concrete constraint on a , so we can instantiate it with a type parameter.
2081 Second, the fact that the general choice uses \mathcal{G} rather than \mathcal{S} indicates that any chosen
2082 instantiation needs to be a castable type. It follows that any concrete instantiation will have
2083 an impact on the runtime behavior; therefore it is best to instantiate a with $?$. However, type
2084 inference cannot instantiate a with $?$, and substitution cannot replace \mathcal{G} with $?$ either. This
2085 means that we need a syntactic refinement process of the translated programs in order to
2086 replace type parameters with allowed gradual types.

2087 **SYNTACTIC REFINEMENT.** We define syntactic refinement of the translated expressions as
2088 follows. As \mathcal{S} denotes no constraints at all, substituting it with any monotype would work.
2089 Here we arbitrarily use Int . We interpret \mathcal{G} as $?$ since any monotype could possibly lead to a
2090 cast error.

2091 **Definition 13** (Syntactic Refinement). The syntactic refinement of a translated expression s
2092 is denoted by $\lceil s \rceil$, and defined as follows:

	$\boxed{\text{Int}}$	=	Int
	\boxed{a}	=	a
	$\boxed{\sigma_1 \rightarrow \sigma_2}$	=	$\boxed{\sigma_1} \rightarrow \boxed{\sigma_2}$
2093	$\boxed{\forall a. \sigma}$	=	$\forall a. \boxed{\sigma}$
	$\boxed{?}$	=	$?$
	$\boxed{\mathcal{S}}$	=	Int
	$\boxed{\mathcal{G}}$	=	$?$

2094 Applying the syntactic refinement to the translated expression, we get

$$(\lambda x : ?. (\langle \forall a. a \rightarrow \text{Int} \hookrightarrow \boxed{?} \rightarrow \text{Int} \rangle f) (\langle ? \hookrightarrow \boxed{?} \rangle x))$$

2095 where two \mathcal{G} are refined by $?$ as highlighted. It is easy to verify that both applying this expres-
2096 sion to 3 and to *true* now results in a translation that evaluates to a value.

2097 **REPRESENTATIVE TRANSLATIONS.** To decide whether one translation is more general than
2098 the other, we define a preorder between translations.

2099 **Definition 14** (Translation Pre-order). Suppose $\Psi \vdash^G e : \sigma \rightsquigarrow \boxed{s_1}$ and $\Psi \vdash^G e : \sigma \rightsquigarrow \boxed{s_2}$,
2100 we define $s_1 \leq s_2$ to mean $s_2 \equiv_\alpha S^P(s_1)$ for some S^P .

2101 **Proposition 5.1.** If $s_1 \leq s_2$ and $s_2 \leq s_1$, then s_1 and s_2 are α -equivalent (i.e., equivalent up
2102 to renaming of type parameters).

2103 The preorder between translations gives rise to a notion of what we call *representative*
2104 *translations*:

2105 **Definition 15** (Representative Translation). A translation s is said to be a representative
2106 translation of a typing derivation $\Psi \vdash^G e : \sigma \rightsquigarrow s$ if and only if for any other translation
2107 $\Psi \vdash^G e : \sigma \rightsquigarrow s'$ such that $s' \leq s$, we have $s \leq s'$. From now on we use r to denote a
2108 representative translation.

2109 An important property of representative translations, which we conjecture for the lack
2110 of rigorous proof, is that if there exists any translation of an expression that (after syntac-
2111 tic refinement) can reduce to a value, so can a representative translation of that expression.
2112 Conversely, if a representative translation runs into a blame, then no translation of that ex-
2113 pression can reduce to a value.

2114 **Conjecture 5.2** (Property of Representative Translations). For any expression e such that
2115 $\Psi \vdash^G e : \sigma \rightsquigarrow \boxed{s}$ and $\Psi \vdash^G e : \sigma \rightsquigarrow \boxed{r}$ and $\forall C. C : (\Psi \vdash^B \sigma) \rightsquigarrow (\bullet \vdash^B \text{Int})$, we have

2116 • If $\mathcal{C}\{\lceil s \rceil\} \Downarrow n$, then $\mathcal{C}\{\lceil r \rceil\} \Downarrow n$.

2117 • If $\mathcal{C}\{\lceil r \rceil\} \Downarrow \text{blame}$, then $\mathcal{C}\{\lceil s \rceil\} \Downarrow \text{blame}$.

2118 Given this conjecture, we can state a stricter coherence property (without the “up to casts”
2119 part) between any two representative translations. We first strengthen Definition 8 following
2120 Ahmed et al. [2009]:

2121 **Definition 16** (Contextual Approximation à la Ahmed et al. [2009]).

$$\begin{aligned} \Psi \vdash s_1 \preceq_{ctx} s_2 : \sigma &\triangleq \Psi \vdash^B s_1 : \sigma \wedge \Psi \vdash^B s_2 : \sigma \wedge \\ &\text{for all } \mathcal{C}. \mathcal{C} : (\Psi \vdash^B \sigma) \rightsquigarrow (\bullet \vdash^B \text{Int}) \implies \\ &(\mathcal{C}\{\lceil s_1 \rceil\} \Downarrow n \implies \mathcal{C}\{\lceil s_2 \rceil\} \Downarrow n) \wedge \\ &(\mathcal{C}\{\lceil s_1 \rceil\} \Downarrow \text{blame} \implies \mathcal{C}\{\lceil s_2 \rceil\} \Downarrow \text{blame}) \end{aligned}$$

2123 The only difference is that now when a program containing s_1 reduces to a value, so does
2124 one containing s_2 .

2125 From Conjecture 5.2, it follows that coherence holds between two representative transla-
2126 tions of the same expression.

2127 **Corollary 5.3** (Coherence for Representative Translations). *For any expression e such that*
2128 *$\Psi \vdash^G e : \sigma \rightsquigarrow r_1$ and $\Psi \vdash^G e : \sigma \rightsquigarrow r_2$, we have $\Psi \vdash r_1 \preceq_{ctx} r_2 : \sigma$.*

2129 We have proved that for every typing derivation, at least one representative translation
2130 exists.

2131 **Lemma 5.4** (Representative Translation for Typing). *For any typing derivation $\Psi \vdash^G e : \sigma$*
2132 *there exists at least one representative translation r such that $\Psi \vdash^G e : \sigma \rightsquigarrow r$.*

2133 For our example, $(\lambda x : ?. (\forall a. a \rightarrow \text{Int} \hookrightarrow \mathcal{G} \rightarrow \text{Int})f) (\langle ? \hookrightarrow \mathcal{G} \rangle x)$ is a representative
2134 translation, while the other two are not.

2135 5.3 DYNAMIC GRADUAL GUARANTEE, RELOADED

2136 Given the above propositions, we are ready to revisit the dynamic gradual guarantee. The
2137 nice thing about representative translations is that the dynamic gradual guarantee of our
2138 source language is essentially that of λB , our target language. However, the dynamic gradual
2139 guarantee for λB is still an open question. According to Igarashi et al. [2017], the difficulty
2140 lies in the definition of term precision that preserves the semantics. We leave it here as a
2141 conjecture as well. From a declarative point of view, we cannot prevent the system from
2142 picking undesirable instantiations, but we know that some choices are better than the others,
2143 so we can restrict the discussion of dynamic gradual guarantee to representative translations.

Types	$\sigma ::= \text{Int} \mid a \mid \hat{\alpha} \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma \mid ? \mid \mathcal{S} \mid \mathcal{G}$
Monotypes	$\tau ::= \text{Int} \mid a \mid \hat{\alpha} \mid \tau_1 \rightarrow \tau_2 \mid \mathcal{S} \mid \mathcal{G}$
Existential variables	$\hat{\alpha} ::= \hat{\alpha}_S \mid \hat{\alpha}_G$
Castable Types	$\mathbb{C} ::= \text{Int} \mid a \mid \hat{\alpha} \mid \mathbb{C}_1 \rightarrow \mathbb{C}_2 \mid \forall a. \mathbb{C} \mid ? \mid \mathcal{G}$
Castable Monotypes	$t ::= \text{Int} \mid a \mid \hat{\alpha} \mid t_1 \rightarrow t_2 \mid \mathcal{G}$
Algorithmic Contexts	$\Gamma, \Delta, \Theta ::= \bullet \mid \Gamma, x : \sigma \mid \Gamma, a \mid \Gamma, \hat{\alpha} \mid \Gamma, \hat{\alpha}_S = \tau \mid \Gamma, \hat{\alpha}_G = t \mid \Gamma, \blacktriangleright_{\hat{\alpha}}$
Complete Contexts	$\Omega ::= \bullet \mid \Omega, x : \sigma \mid \Omega, a \mid \Omega, \hat{\alpha}_S = \tau \mid \Omega, \hat{\alpha}_G = t \mid \Omega, \blacktriangleright_{\hat{\alpha}}$

Figure 5.2: Syntax of types, contexts and consistent subtyping in the extended algorithmic system.

2144 **Conjecture 5.5** (Dynamic Gradual Guarantee in terms of Representative Translations). *Sup-*
 2145 *pose* $e' \sqsubseteq e$,

- 2146 1. If $\bullet \vdash^G e : \sigma \rightsquigarrow r$, $\lceil r \rceil \Downarrow v$, then for some σ_2 and r' , we have $\bullet \vdash^G e' : \sigma_2 \rightsquigarrow r'$, and
 2147 $\sigma_2 \sqsubseteq \sigma$, and $\lceil r' \rceil \Downarrow v'$, and $v' \sqsubseteq v$.
- 2148 2. If $\bullet \vdash^G e' : \sigma_2 \rightsquigarrow r'$, $\lceil r' \rceil \Downarrow v'$, then for some σ and r , we have $\bullet \vdash^G e : \sigma \rightsquigarrow r$, and
 2149 $\sigma_2 \sqsubseteq \sigma$. Moreover, $\lceil r \rceil \Downarrow v$ and $v' \sqsubseteq v$, or $\lceil r \rceil \Downarrow \text{blame}$.

For the example in Section 4.3.3, now we know that the representative translation of the right one will evaluate to 1 as well.

$$(\lambda f : \forall a. a \rightarrow \text{Int}. \lambda x : \text{Int}. fx) (\lambda x : \text{Int}. 1) 3 \quad (\lambda f : \forall a. a \rightarrow \text{Int}. \lambda x : \text{Int}. fx) (\lambda x : ?. 1) 3$$

2150 More importantly, in what follows, we show that our extended algorithm is able to find
 2151 those representative translations.

2152 5.4 EXTENDED ALGORITHMIC TYPE SYSTEM

2153 To understand the design choices involved in the new algorithmic system, we consider the
 2154 following algorithmic typing example:

$$f : \forall a. a \rightarrow \text{Int}, x : ? \vdash^G fx : \text{Int} \dashv f : \forall a. a \rightarrow \text{Int}, x : ?, \hat{\alpha}$$

2155 Compared with declarative typing, where we have many choices (e.g., $\text{Int} \rightarrow \text{Int}$, $\text{Bool} \rightarrow \text{Int}$,
 2156 and so on) to instantiate $\forall a. a \rightarrow \text{Int}$, the algorithm computes the instantiation $\hat{\alpha} \rightarrow \text{Int}$ with
 2157 $\hat{\alpha}$ unsolved in the output context. What can we know from the algorithmic typing? First we
 2158 know that, here $\hat{\alpha}$ is *not constrained* by the typing problem. Second, and more importantly,

2159 $\hat{\alpha}$ has been compared with an unknown type (when typing (fx)). Therefore, it is possible to
 2160 make a more refined distinction between different kinds of existential variables:

- 2161 • the first kind of existential variables are those that indeed have no constraints at all, as
 2162 they do not affect the dynamic semantics;
- 2163 • the second kind (as in this example) are those where the only constraint is that *the*
 2164 *variable was once compared with an unknown type* [Garcia and Cimini 2015].

2165 The syntax of types is shown in Figure 5.2. A notable difference, apart from the addition
 2166 of static and gradual parameters, is that we further split existential variables $\hat{\alpha}$ into static
 2167 existential variables $\hat{\alpha}_S$ and gradual existential variables $\hat{\alpha}_G$. Depending on whether an ex-
 2168 istential variable has been compared with $?$ or not, its solution space changes. More specifi-
 2169 cally, static existential variables can be solved to a monotype τ , whereas gradual existential
 2170 variables can only be solved to a castable monotype t , as can be seen in the changes of algo-
 2171 rithmic contexts and complete contexts. As a result, the typing result for the above example
 2172 now becomes

$$f : \forall a. a \rightarrow \text{Int}, x : ? \vdash^G fx : \text{Int} \dashv f : \forall a. a \rightarrow \text{Int}, x : ?, \hat{\alpha}_G$$

2173 since we can solve any unconstrained $\hat{\alpha}_G$ to \mathcal{G} , it is easy to verify that the resulting translation
 2174 is indeed a representative translation.

2175 Our extended algorithm is novel in the following aspects. We naturally extend the concept
 2176 of existential variables [Dunfield and Krishnaswami 2013] to deal with comparisons between
 2177 existential variables and unknown types. Unlike Garcia and Cimini [2015], where they use
 2178 an extra set to store types that have been compared with unknown types, our two kinds of
 2179 existential variables emphasize the type distinction better, and correspond more closely to
 2180 the two kinds of type parameters, as we can solve $\hat{\alpha}_S$ to \mathcal{S} and $\hat{\alpha}_G$ to \mathcal{G} .

2181 5.4.1 EXTENDED ALGORITHMIC CONSISTENT SUBTYPING

2182 While the changes in the syntax seem negligible, the addition of static and gradual type pa-
 2183 rameters changes the algorithmic judgments in a significant way. We first discuss the al-
 2184 gorithmic consistent subtyping, which is shown in Figure 5.3. For notational convenience,
 2185 when static and gradual existential variables have the same rule form, we compress them into
 2186 one rule. For example, rule **GPC-AS-EVAR** is really two rules $\Gamma[\hat{\alpha}_S] \vdash^G \hat{\alpha}_S \lesssim \hat{\alpha}_S \dashv \Gamma[\hat{\alpha}_S]$
 2187 and $\Gamma[\hat{\alpha}_G] \vdash^G \hat{\alpha}_G \lesssim \hat{\alpha}_G \dashv \Gamma[\hat{\alpha}_G]$; same for rules **GPC-AS-INSTL** and **GPC-AS-INSTR**.

$\Gamma \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta$

(Algorithmic Consistent Subtyping)

GPC-AS-TVAR $\frac{}{\Gamma[a] \vdash^G a \lesssim a \dashv \Gamma[a]}$	GPC-AS-INT $\frac{}{\Gamma \vdash^G \text{Int} \lesssim \text{Int} \dashv \Gamma}$	GPC-AS-EVAR $\frac{}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \hat{\alpha} \dashv \Gamma[\hat{\alpha}]}$		
<div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc;"> GPC-AS-SPAR $\frac{}{\Gamma \vdash^G \mathcal{S} \lesssim \mathcal{S} \dashv \Gamma}$ </div>	<div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc;"> GPC-AS-GPAR $\frac{}{\Gamma \vdash^G \mathcal{G} \lesssim \mathcal{G} \dashv \Gamma}$ </div>			
<div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc; display: inline-block; width: 100%;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center; padding: 5px;"> GPC-AS-UNKNOWNLL $\frac{}{\Gamma \vdash^G ? \lesssim \mathbb{C} \dashv \text{contaminate}(\Gamma, \mathbb{C})}$ </td> <td style="width: 50%; text-align: center; padding: 5px;"> GPC-AS-UNKNOWNRR $\frac{}{\Gamma \vdash^G \mathbb{C} \lesssim ? \dashv \text{contaminate}(\Gamma, \mathbb{C})}$ </td> </tr> </table> </div>			GPC-AS-UNKNOWNLL $\frac{}{\Gamma \vdash^G ? \lesssim \mathbb{C} \dashv \text{contaminate}(\Gamma, \mathbb{C})}$	GPC-AS-UNKNOWNRR $\frac{}{\Gamma \vdash^G \mathbb{C} \lesssim ? \dashv \text{contaminate}(\Gamma, \mathbb{C})}$
GPC-AS-UNKNOWNLL $\frac{}{\Gamma \vdash^G ? \lesssim \mathbb{C} \dashv \text{contaminate}(\Gamma, \mathbb{C})}$	GPC-AS-UNKNOWNRR $\frac{}{\Gamma \vdash^G \mathbb{C} \lesssim ? \dashv \text{contaminate}(\Gamma, \mathbb{C})}$			
GPC-AS-ARROW $\frac{\Gamma \vdash^G \sigma_3 \lesssim \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta]\sigma_2 \lesssim [\Theta]\sigma_4 \dashv \Delta}{\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \sigma_3 \rightarrow \sigma_4 \dashv \Delta}$	GPC-AS-FORALLR $\frac{\Gamma, a \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta, a, \Theta}{\Gamma \vdash^G \sigma_1 \lesssim \forall a. \sigma_2 \dashv \Delta}$			
<div style="background-color: #f0f0f0; padding: 5px; border: 1px solid #ccc;"> GPC-AS-FORALLLL $\frac{\Gamma, \blacktriangleright_{\hat{a}_S}, \hat{\alpha}_S \vdash^G \sigma_1[a \mapsto \hat{\alpha}_S] \lesssim \sigma_2 \dashv \Delta, \blacktriangleright_{\hat{a}_S}, \Theta}{\Gamma \vdash^G \forall a. \sigma_1 \lesssim \sigma_2 \dashv \Delta}$ </div>				
GPC-AS-INSTL $\frac{\hat{\alpha} \notin \text{FV}(\sigma) \quad \Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}$	GPC-AS-INSTR $\frac{\hat{\alpha} \notin \text{FV}(\sigma) \quad \Gamma[\hat{\alpha}] \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}$			

Figure 5.3: Extended algorithmic consistent subtyping

Rules **GPC-AS-SPAR** and **GPC-AS-GPAR** are direct analogies of rules **GPC-CS-SPAR** and **GPC-CS-GPAR**. Though looking simple, rules **GPC-AS-UNKNOWNLL** and **GPC-AS-UNKNOWNRR** deserve much explanation. To understand what the output context $\text{contaminate}(\Gamma, \mathbb{C})$ is for, let us first see why this seemingly intuitive rule $\Gamma \vdash^G ? \lesssim \mathbb{C} \dashv \Gamma$ (like rule **GPC-AS-UNKNOWNL** in the original algorithmic system) is wrong. Consider the judgment $\hat{\alpha}_S \vdash^G ? \lesssim \hat{\alpha}_S \rightarrow \hat{\alpha}_S \dashv \hat{\alpha}_S$, which seems fine. If this holds, then – since $\hat{\alpha}_S$ is unsolved in the output context – we can solve it to \mathcal{S} for example (recall that $\hat{\alpha}_S$ can be solved to some monotype), resulting in $? \lesssim \mathcal{S} \rightarrow \mathcal{S}$. However, this is in direct conflict with rule **GPC-CS-UNKNOWNLL** in the declarative system precisely because $\mathcal{S} \rightarrow \mathcal{S}$ is not a castable type! A possible solution would be to transform all static existential variables to gradual existential variables within \mathbb{C} whenever it is being compared to $?$: while $\hat{\alpha}_S \vdash^G ? \lesssim \hat{\alpha}_S \rightarrow \hat{\alpha}_S \dashv \hat{\alpha}_S$ does not hold, $\hat{\alpha}_G \vdash^G ? \lesssim \hat{\alpha}_G \rightarrow \hat{\alpha}_G \dashv \hat{\alpha}_G$ does. While substituting static existential variables with gradual existential variables seems to be intuitively correct, it is rather hard to formulate—not only do we need to perform substitution in \mathbb{C} , we also need to substitute accordingly in both the input and output contexts in order to ensure that no existential variables become unbound. However, making such changes is at odds with the interpretation of input contexts: they are “input”, which evolve into output contexts with more variables solved. Therefore, in line with the use of input contexts, a simple solution is to generate a new gradual existential variable and solve the static existential variable to it in the output context, without touching \mathbb{C} at all. So we have $\hat{\alpha}_S \vdash^G ? \lesssim \hat{\alpha}_S \rightarrow \hat{\alpha}_S \dashv \hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G$.

Based on the above discussion, the following defines $\text{contaminate}(\Gamma, \sigma)$:

Definition 17. $\text{contaminate}(\Gamma, \sigma)$ is defined inductively as follows

	$\text{contaminate}(\bullet, \sigma)$	$=$	\bullet
	$\text{contaminate}((\Gamma, x : \sigma), \sigma)$	$=$	$\text{contaminate}(\Gamma, \sigma), x : \sigma$
	$\text{contaminate}((\Gamma, a), \sigma)$	$=$	$\text{contaminate}(\Gamma, \sigma), a$
	$\text{contaminate}((\Gamma, \hat{\alpha}_S), \sigma)$	$=$	$\text{contaminate}(\Gamma, \hat{\alpha}_G, \sigma), \hat{\alpha}_S = \hat{\alpha}_G$ if $\hat{\alpha}_S$ occurs in σ
2210	$\text{contaminate}((\Gamma, \hat{\alpha}_S), \sigma)$	$=$	$\text{contaminate}(\Gamma, \sigma), \hat{\alpha}_S$ if $\hat{\alpha}_S$ does not occur in σ
	$\text{contaminate}((\Gamma, \hat{\alpha}_G), \sigma)$	$=$	$\text{contaminate}(\Gamma, \sigma), \hat{\alpha}_G$
	$\text{contaminate}((\Gamma, \hat{\alpha} = \tau), \sigma)$	$=$	$\text{contaminate}(\Gamma, \sigma), \hat{\alpha} = \tau$
	$\text{contaminate}((\Gamma, \blacktriangleright_{\hat{\alpha}}), \sigma)$	$=$	$\text{contaminate}(\Gamma, \sigma), \blacktriangleright_{\hat{\alpha}}$

$\text{contaminate}(\Gamma, \sigma)$ solves all static existential variables found within σ to fresh gradual existential variables in Γ . Notice the case for $\text{contaminate}((\Gamma, \hat{\alpha}_S), \sigma)$ is exactly what we have just described.

Rule `GPC-AS-FORALLL` is slightly different from rule `GPC-AS-FORALL` in the original algorithmic system in that we replace a with a new static existential variable $\hat{\alpha}_S$. Note that $\hat{\alpha}_S$ might be solved to a gradual existential variable later. The rest of the rules are the same as those in the original system.

5.4.2 EXTENDED INSTANTIATION

The instantiation judgments shown in Figure 5.4 also change significantly. The complication comes from the fact that now we have two different kinds of existential variables, and the relative order that they appear in the context affects their solutions.

Rules `GPC-INSTL-SOLVES` and `GPC-INSTL-SOLVEG` are the refinement to rule `GPC-INSTL-SOLVE` in the original system. The next two rules deal with situations where one side is an existential variable and the other side is an unknown type. Rule `GPC-INSTL-SOLVEUS` is a special case of rule `GPC-AS-UNKNOWNRR` where we create a new gradual existential variable $\hat{\alpha}_G$ and set the solution of $\hat{\alpha}_S$ to be $\hat{\alpha}_G$ in the output context. Rule `GPC-INSTL-SOLVEUG` is the same as rule `GPC-INSTL-SOLVEU` in the original system and simply propagates the input context. The next two rules `GPC-INSTL-REACHSG1` and `GPC-INSTL-REACHSG2` are a bit involved, but they both answer to the same question: how to solve a gradual existential variable when it is declared after some static existential variable. More concretely, in rule `GPC-INSTL-REACHSG1`, we feel that we need to solve $\hat{\beta}_G$ to another existential variable. However, simply setting $\hat{\beta}_G = \hat{\alpha}_S$ and leaving $\hat{\alpha}_S$ untouched in the output context is wrong. The reason is that $\hat{\beta}_G$ could be a gradual existential variable created by rule `GPC-AS-UNKNOWNLL`/`GPC-AS-UNKNOWNRR` and solving $\hat{\beta}_G$ to a static existential variable would result in the same problem as we have discussed. Instead, we create another new gradual existential variable $\hat{\alpha}_G$ and set the solutions of both $\hat{\alpha}_S$ and $\hat{\beta}_G$ to it; similarly in rule `GPC-INSTL-REACHSG2`. Rule `GPC-INSTL-REACHOTHER` deals with the other cases (e.g., $\hat{\alpha}_S \lesssim \hat{\beta}_S$, $\hat{\alpha}_G \lesssim \hat{\beta}_G$ and so on). In those cases, we employ the same strategy as in the original system.

As for the other instantiation judgment, most of the rules are symmetric and thus omitted. The only interesting rule is `GPC-INSTL-FORALLL`, which is similar to what we did for rule `GPC-AS-FORALLL`.

5.4.3 ALGORITHMIC TYPING AND METATHEORY

Fortunately, the changes in the algorithmic bidirectional system are minimal: we replace every existential variable with a static existential variable. Furthermore, we proved that the extended algorithmic system is sound and complete with respect to the extended declarative system. The full extended algorithmic system can be found in Appendix B.

$$\boxed{\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}$$

(Instantiation I)

$$\frac{\text{GPC-INSTL-SOLVE}\mathbf{S} \quad \Gamma \vdash^G \tau}{\Gamma, \hat{\alpha}_S, \Gamma' \vdash^G \hat{\alpha}_S \lesssim \tau \dashv \Gamma, \hat{\alpha}_S = \tau, \Gamma'}$$

$$\frac{\text{GPC-INSTL-SOLVE}\mathbf{G} \quad \Gamma \vdash^G t}{\Gamma, \hat{\alpha}_G, \Gamma' \vdash^G \hat{\alpha}_G \lesssim t \dashv \Gamma, \hat{\alpha}_G = t, \Gamma'}$$

$$\frac{\text{GPC-INSTL-SOLVE}\mathbf{US}}{\Gamma[\hat{\alpha}_S] \vdash^G \hat{\alpha}_S \lesssim ? \dashv \Gamma[\hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G]}$$

$$\frac{\text{GPC-INSTL-SOLVE}\mathbf{UG}}{\Gamma[\hat{\alpha}_G] \vdash^G \hat{\alpha}_G \lesssim ? \dashv \Gamma[\hat{\alpha}_G]}$$

$$\frac{\text{GPC-INSTL-REACH}\mathbf{SG1}}{\Gamma[\hat{\alpha}_S][\hat{\beta}_G] \vdash^G \hat{\alpha}_S \lesssim \hat{\beta}_G \dashv \Gamma[\hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G][\hat{\beta}_G = \hat{\alpha}_G]}$$

$$\frac{\text{GPC-INSTL-REACH}\mathbf{SG2}}{\Gamma[\hat{\beta}_S][\hat{\alpha}_G] \vdash^G \hat{\alpha}_G \lesssim \hat{\beta}_S \dashv \Gamma[\hat{\beta}_G, \hat{\beta}_S = \hat{\beta}_G][\hat{\alpha}_G = \hat{\beta}_G]}$$

$$\frac{\text{GPC-INSTL-REACH}\mathbf{OTHER}}{\Gamma[\hat{\alpha}][\hat{\beta}] \vdash^G \hat{\alpha} \lesssim \hat{\beta} \dashv \Gamma[\hat{\alpha}][\hat{\beta} = \hat{\alpha}]}$$

$$\frac{\text{GPC-INSTL-FORALL}\mathbf{R} \quad \Gamma[\hat{\alpha}], b \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta, b, \Theta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \forall b. \sigma \dashv \Delta}$$

$$\frac{\text{GPC-INSTL-ARR} \quad \Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \sigma_1 \lesssim \hat{\alpha}_1 \dashv \Theta \quad \Theta \vdash^G \hat{\alpha}_2 \lesssim [\Theta]\sigma_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma_1 \rightarrow \sigma_2 \dashv \Delta}$$

$$\boxed{\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}$$

(Instantiation II, excerpt)

$$\frac{\text{GPC-INSTL-FORALL}\mathbf{LL} \quad \Gamma[\hat{\alpha}], \blacktriangleright_{\hat{b}_S}, \hat{\beta}_S \vdash^G \sigma[b \mapsto \hat{\beta}_S] \lesssim \hat{\alpha} \dashv \Delta, \blacktriangleright_{\hat{b}_S}, \Theta}{\Gamma[\hat{\alpha}] \vdash^G \forall b. \sigma \lesssim \hat{\alpha} \dashv \Delta}$$

Figure 5.4: Instantiation in the extended algorithmic system

2247 5.4.4 DISCUSSION

2248 DO WE REALLY NEED TYPE PARAMETERS IN THE ALGORITHMIC SYSTEM? As we mentioned
 2249 earlier, type parameters in the declarative system are merely an analysis tool, and in practice,
 2250 type parameters are inaccessible to programmers. For the sake of proving soundness and
 2251 completeness, we have to endow the algorithmic system with type parameters. However,
 2252 the algorithmic system already has static and gradual existential variables, which can serve
 2253 the same purpose. In that regard, we could directly solve every *unsolved* static and gradual
 2254 existential variable in the output context to `Int` and `?`, respectively.

2255 5.5 RESTRICTED GENERALIZATION

In Section 4.3.2, we discussed the issue that the translation produces multiple target expressions due to the different choices for instantiations, and those translations have different dynamic semantics. Besides that, there is another cause for multiple translations: redundant generalization during translation by rule `GEN`. Consider the simple expression $(\lambda x : \text{Int}. x) 1$, the following shows two possible translations:

- $\vdash (\lambda x : \text{Int}. x) 1 : \text{Int} \rightsquigarrow (\lambda x : \text{Int}. x) (\langle \text{Int} \hookrightarrow \text{Int} \rangle 1)$
- $\vdash (\lambda x : \text{Int}. x) 1 : \text{Int} \rightsquigarrow (\lambda x : \text{Int}. x) (\langle \forall a. \text{Int} \hookrightarrow \text{Int} \rangle (\Lambda a. 1))$

2256 The difference comes from the fact that in the second translation, we apply rule `GEN` while
 2257 typing `1` to get $\bullet \vdash 1 : \forall a. \text{Int}$. As a consequence, the translation of `1` is accompanied by a
 2258 cast from $\forall a. \text{Int}$ to `Int` since the former is a consistent subtype of the latter. This difference is
 2259 harmless, because obviously these two expressions will reduce to the same value in λB , thus
 2260 preserving coherence (up to cast error). While it is not going to break coherence, it does result
 2261 in multiple representative translations for one expression (e.g., the above two translations are
 2262 both the representative translations).

2263 There are several ways to make the translation process more deterministic. For example,
 2264 we can restrict generalization to happen only in `let` expressions and require `let` expressions
 2265 to include annotations, as `let $x : \sigma = e_1$ in e_2` . Another feasible option would be to give a
 2266 declarative, bidirectional system as the specification (instead of the type assignment one), in
 2267 the same spirit of DK [Dunfield and Krishnaswami 2013]. Then we can restrict generalization
 2268 to be performed through annotations in checking mode.

2269 With restricted generalization, we hypothesize that now each expression has exactly one
 2270 representative translation (up to renaming of fresh type parameters). Instead of calling it a

2271 *representative* translation, we can say it is a *principal* translation. Of course the above is only
2272 a sketch; we have not defined the corresponding rules, nor studied metatheory.

PART IV

TYPE INFERENCE WITH PROMOTION

6

HIGHER-RANK TYPE INFERENCE WITH TYPE PROMOTION

Gundry et al. [2010] proposed type inference in context as a general foundation for unification/type inference algorithms. The key idea is based on the notion of information increase. However, their semantic definition of information increase makes it hard to prove metatheory formally. Following their work, a more syntactic foundation for information increase is presented by DK (Dunfield and Krishnaswami [2013]) to deal with higher-rank polymorphism. However, the DK approach produces duplication and cannot be easily generalized to handle more complicated types.

In this chapter, we propose a strategy called *promotion* that helps resolve the dependency of existential variables in the framework of type inference in context. As an illustration, Section 6.2 applies promotion to the unification algorithm for the simply typed lambda calculus. Section 6.3 further proposes *polymorphic promotion* to deal with subtyping for higher-rank polymorphism. Finally, we briefly discuss how to promote dependent types and gradual types in Section 6.4. This chapter also sets up the stage for Chapter 7, where promotion is used in a more complex setting.

6.1 INTRODUCTION AND MOTIVATION

6.1.1 BACKGROUND: TYPE INFERENCE IN CONTEXT

Gundry et al. [2010] model unification and type inference from a general perspective of information increase. Specifically, they studied the unification and type inference problem for a ML-style polymorphic system, based on the requirement that types may depend only on earlier bindings in the type context. Besides contexts being ordered, a key insight of the approach lies in how to solve existential variables with other types. In particular, it requires to resolve the dependency between existential variables. Consider unifying $\hat{\alpha}$ with $\hat{\beta} \rightarrow \text{Int}$ under the context $\hat{\alpha}, \hat{\beta}$. Here we cannot simply set $\hat{\alpha}$ to $\hat{\beta} \rightarrow \text{Int}$, as $\hat{\beta}$ is out of the scope of $\hat{\alpha}$. The way Gundry et al. [2010] solve this problem is to examine variables in the context from the tail to the head, *moving segments of the context to the left if necessary*. The pro-

cess finishes when the existential variable being unified is found. In this case, Gundry et al. [2010] would return a solution context $\widehat{\beta}, \widehat{\alpha} = \widehat{\beta} \rightarrow \text{Int}$, where $\widehat{\beta}$ is moved to the front of $\widehat{\alpha}$. However, while moving type variables around is a feasible way to resolve the dependency between existential variables, the unpredictable context movements make the information increase hard to formalize and reason about. In their system, the information increase of contexts is defined in a semantic way: a context Γ_1 is more informative than another context Γ_2 , if there exists a substitution such that every item in Γ_2 is, after context substitution, well-formed under Γ_1 . This semantic definition makes it hard to prove metatheory formally, especially when advanced features are involved.

The Dunfield-Krishnaswami type system (DK) [Dunfield and Krishnaswami 2013] also uses ordered contexts as the input and output of the type inference algorithm for a higher-rank polymorphic type system (Section 2.3). Unlike Gundry et al. [2010], DK does it in a more syntactic way. In their type system, instantiation rules decompose type constructs so that unification between existential variables can only happen between single variables, which can then be solved by setting the one that appears later to the one that appears earlier. This way, the information increase of contexts is modeled as the intuitive and syntactic definition of *context extension* ($\Gamma \longrightarrow \Delta$), which allows for inductive reasoning and proofs. This approach is adopted in GPC (Chapter 4), so let us consider how DK works in terms of the instantiation rules in GPC. Specifically, consider the derivation of $\widehat{\alpha}, \widehat{\beta} \vdash^G \widehat{\alpha} \lesssim \widehat{\beta} \rightarrow \text{Int}$ in GPC:

$$\begin{array}{c}
 \Delta = \widehat{\alpha}_1, \widehat{\alpha}_2, \widehat{\alpha} = \widehat{\alpha}_1 \rightarrow \widehat{\alpha}_2, \widehat{\beta} \\
 \\
 \frac{\text{GPC-INSTL-REACH} \quad \frac{\Delta \vdash^G \widehat{\beta} \lesssim \widehat{\alpha}_1 \vdash \Delta[\widehat{\beta} = \widehat{\alpha}_1]}{\widehat{\alpha}, \widehat{\beta} \vdash^G \widehat{\alpha} \lesssim \widehat{\beta} \rightarrow \text{Int} \vdash \Delta[\widehat{\alpha}_2 = \text{Int}][\widehat{\beta} = \widehat{\alpha}_1]} \quad \text{GPC-INSTL-SOLVE} \quad \frac{\Delta[\widehat{\beta} = \widehat{\alpha}_1] \vdash^G \widehat{\alpha}_2 \lesssim \text{Int} \vdash \Delta[\widehat{\alpha}_2 = \text{Int}][\widehat{\beta} = \widehat{\alpha}_1]}{\widehat{\alpha}, \widehat{\beta} \vdash^G \widehat{\alpha} \lesssim \widehat{\beta} \rightarrow \text{Int} \vdash \Delta[\widehat{\alpha}_2 = \text{Int}][\widehat{\beta} = \widehat{\alpha}_1]} \text{GPC-INSTL-ARR}
 \end{array}$$

By rule **GPC-INSTL-ARR**, the variable $\widehat{\alpha}$ is solved by an arrow type $\widehat{\alpha}_1 \rightarrow \widehat{\alpha}_2$ consisting of two fresh existential variables. The two variables $\widehat{\alpha}_1$ and $\widehat{\alpha}_2$ are then instantiated with $\widehat{\beta}$ and Int , respectively. By rule **GPC-INSTL-REACH**, the variable $\widehat{\beta}$ is solved by $\widehat{\alpha}_1$, as $\widehat{\alpha}_1$ appears in the context before $\widehat{\beta}$, or otherwise we need to apply rule **GPC-INSTL-REACH** to set $\widehat{\alpha}_1$ to $\widehat{\beta}$ instead. The final solution context is $\Delta[\widehat{\alpha}_2 = \text{Int}][\widehat{\beta} = \widehat{\alpha}_1] = \widehat{\alpha}_1, \widehat{\alpha}_2 = \text{Int}, \widehat{\alpha} = \widehat{\alpha}_1 \rightarrow \widehat{\alpha}_2, \widehat{\beta} = \widehat{\alpha}_1$.

CHALLENGES. However, while the approach of decomposing type constructs works perfectly for DK and GPC, it has two drawbacks. First, it produces duplication: in order to deal with both cases, the instantiation rules are duplicated for when the existential variable appears on the left ($\Gamma \vdash^G \widehat{\alpha} \lesssim \sigma \vdash \Delta$ in Figure 4.11), and when it appears on the right

($\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta$ in Figure 4.11). For example, rule **GPC-INSTL-ARR** has its symmetric counterpart rule **GPC-INSTR-ARR**:

$$\begin{array}{c}
 \text{GPC-INSTL-ARR} \\
 \frac{\Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \sigma_1 \lesssim \hat{\alpha}_1 \dashv \Theta \quad \Theta \vdash^G \hat{\alpha}_2 \lesssim [\Theta]\sigma_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma_1 \rightarrow \sigma_2 \dashv \Delta} \\
 \\
 \text{GPC-INSTR-ARR} \\
 \frac{\Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \hat{\alpha}_1 \lesssim \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta]\sigma_2 \lesssim \hat{\alpha}_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \hat{\alpha} \dashv \Delta}
 \end{array}$$

Worse, this kind of “duplication” would scale up with the number of type constructs in the system.

Second, while decomposition works for function types, it may not work easily for more complicated types, e.g., dependent types. For example, consider that under the context $\hat{\alpha}, \hat{\beta}$, we want to instantiate $\hat{\alpha}$ with a dependent type $\Pi a : \hat{\beta}.a$. Here because $\hat{\beta}$ appears after $\hat{\alpha}$, we cannot directly set $\hat{\alpha} = \Pi a : \hat{\beta}.a$, which is ill-typed. However, if we try to decompose the type $\Pi a : \hat{\beta}.a$ like in rule **GPC-INSTL-ARR**, in which case we have $\hat{\alpha} = \Pi a : \hat{\alpha}_1.\hat{\alpha}_2$, it is obvious that $\hat{\alpha}_2$ should be solved by a . Then, in order to make the solution well typed, we need to put a in the front of $\hat{\alpha}_2$ in the context. However, this means that a would remain in the context, and it would be available for any later existential variables that should not have access to a .

6.1.2 OUR APPROACH: TYPE PROMOTION

We propose the *promotion* process, which helps resolve the dependency between existential variables. Promotion combines the advantages of Gundry et al. [2010] and DK: it is a simple and predictable process, so that information increase can still be modeled as the syntactic context extension; moreover, it does not cause any duplication.

To understand how promotion works, let us consider again the example $\hat{\alpha}, \hat{\beta} \vdash^G \hat{\alpha} \lesssim \hat{\beta} \rightarrow \text{Int}$. The problem here is that $\hat{\beta}$ is out of the scope of $\hat{\alpha}$ so we cannot directly set $\hat{\alpha} = \hat{\beta} \rightarrow \text{Int}$. Therefore, we first *promote* the type $\hat{\beta} \rightarrow \text{Int}$. At a high level, the promotion process looks for free existential variables in the type, and solves those out-of-scope existential variables with fresh ones added to the front of $\hat{\alpha}$, such that existential variables in the promoted type are all in the scope of $\hat{\alpha}$. In this case, we will solve $\hat{\beta}$ with a fresh variable $\hat{\alpha}_1$, producing the context $\hat{\alpha}_1, \hat{\alpha}, \hat{\beta} = \hat{\alpha}_1$. Notice that $\hat{\alpha}_1$ is inserted right before $\hat{\alpha}$. Now the instantiation example becomes $\hat{\alpha}_1, \hat{\alpha}, \hat{\beta} = \hat{\alpha}_1 \vdash^G \hat{\alpha} \lesssim \hat{\alpha}_1 \rightarrow \text{Int}$, and $\hat{\alpha}_1 \rightarrow \text{Int}$ is a valid solution for

2355 $\hat{\alpha}$. Therefore, we get a final solution context $\hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \text{Int}, \hat{\beta} = \hat{\alpha}_1$. Comparing the
 2356 result with the solution context we get from DK ($\hat{\alpha}_1, \hat{\alpha}_2 = \text{Int}, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2, \hat{\beta} = \hat{\alpha}_1$), it is
 2357 obvious that these two solutions are equivalent up to substitution.

2358 INTERPRETATION OF PROMOTION. The approach taken by Gundry et al. [2010] and the ap-
 2359 proach used by DK are based on the same observation: *the relative order between existential*
 2360 *variables does not matter for solving a constraint*. The promotion process captures precisely
 2361 this observation. Its task is to “move” existential variables to suitable positions *indirectly*, by
 2362 solving those out-of-scope existential variables with fresh in-scope ones.

2363 This seems to go against the design principle that the contexts are ordered. However, or-
 2364 dering is still important for variables whose order matters. For instance, for polymorphic
 2365 types, the order between existential variables $\hat{\alpha}$ and type variables a is important, so we can-
 2366 not set $\hat{\alpha}$ to a under the context $(\hat{\alpha}, a)$ as a is not in the scope of $\hat{\alpha}$. Moreover, ordering
 2367 prevents invalid cyclic contexts, e.g., $\hat{\alpha} = \hat{\beta} \rightarrow \text{Int}, \hat{\beta} = \hat{\alpha} \rightarrow \text{Int}$.

2368 UNIFICATION FOR THE SIMPLY TYPED LAMBDA CALCULUS. As a first illustration of the pro-
 2369 motion process, Section 6.2 recasts the unification process for the simply typed lambda cal-
 2370 culus (STLC) using the promotion process. This system illustrates the key idea of promotion.

2371 6.1.3 POLYMORPHIC PROMOTION

2372 Instead of unification, the instantiation relation in DK actually deals with the polymorphic
 2373 subtyping relation between existential variables and other types. The promotion process we
 2374 described above only works for unification. In this section, we discuss promotion for poly-
 2375 morphic subtyping.

2376 The difficulty of subtyping is that it needs to take unification into account at the same time.
 2377 For example, given that $\hat{\alpha}$ is a subtype of Int , the only possible solution is $\hat{\alpha} = \text{Int}$. Now
 2378 consider $\hat{\alpha} \vdash \forall a. a \rightarrow a <: \hat{\alpha}$. How can we promote the polymorphic type $\forall a. a \rightarrow a$ into a
 2379 monotype which can serve as a valid solution for $\hat{\alpha}$? One possible answer is to set $\hat{\alpha} = \text{Int} \rightarrow$
 2380 Int , or $\hat{\alpha} = \text{Bool} \rightarrow \text{Bool}$. In fact, the most general solution for this subtyping problem is
 2381 $\hat{\alpha} = \hat{\beta} \rightarrow \hat{\beta}$ with fresh $\hat{\beta}$. Namely, we remove the universal quantifier in $\forall a. a \rightarrow a$ and
 2382 replace the variable a with a fresh existential variable $\hat{\beta}$ added to the front of $\hat{\alpha}$, resulting in
 2383 the solution context $\hat{\beta}, \hat{\alpha} = \hat{\beta} \rightarrow \hat{\beta}$.

2384 On the other hand, how can we promote the type $\forall a. a \rightarrow a$ in $\hat{\alpha} \vdash \hat{\alpha} <: \forall a. a \rightarrow a$?
 2385 It turns out that this subtyping is actually unsolvable, as there is no monotype that can be a
 2386 subtype of $\forall a. a \rightarrow a$. Therefore, in this case, promoting $\forall a. a \rightarrow a$ will directly add the
 2387 type variable a to the tail of the context to promote $a \rightarrow a$. Since a is added to the tail, it

means that a is out of the scope of $\hat{\alpha}$ and promoting $a \rightarrow a$ would fail, which is exactly what we want. In fact, the promotion would succeed only if the universally quantified variable is not used in the body of the polymorphic type. For example, $\forall a. \text{Int} \rightarrow \text{Int}$ can be promoted to $\text{Int} \rightarrow \text{Int}$, which is a valid solution for $\hat{\alpha}$ in $\hat{\alpha} \vdash \hat{\alpha} <: \forall a. \text{Int} \rightarrow \text{Int}$.

From these observations, we extend promotion to *polymorphic promotion*, which is able to resolve the polymorphic subtyping relation for existential variables. Depending on whether the existential variable appears on the right or left, polymorphic promotion has two modes, which we call the *contravariant mode* and the *covariant mode* respectively.

The contravariant mode promotes types as $\forall a. a \rightarrow a$ in the case of $\hat{\alpha} \vdash \forall a. a \rightarrow a <: \hat{\alpha}$, where the universal quantifier is removed and the type variable a is replaced by a fresh existential variable added to front of the existential variable being solved. This corresponds to rule [GPC-ISTR-FORALLL](#), except that with promotion, the new existential variable $\hat{\beta}$ (in rule [GPC-ISTR-FORALLL](#)) will be added directly before $\hat{\alpha}$ and there is no need to create a marker or to discard the context after $\hat{\beta}$ anymore.

The covariant mode promotes types as $\forall a. a \rightarrow a$ in the case of $\hat{\alpha} \vdash \hat{\alpha} <: \forall a. a \rightarrow a$. In this case, promoting $\forall a. a \rightarrow a$ will directly add the type variable a to the tail of the context, which corresponds to rule [GPC-INSTL-FORALLR](#). Since the type variable is out of the scope of the existential variable being solved, and promotion will succeed only if the variable is not used in the body of the polymorphic type.

While promoting polymorphic types behaves differently according to the mode, the mode does not matter for monotypes, as in both $\hat{\alpha} <: \text{Int}$ and $\text{Int} <: \hat{\alpha}$, $\hat{\alpha} = \text{Int}$ would be the only solution. Since function types are contravariant in codomains and covariant in domains, promoting a function type under a certain mode proceeds to promote its codomain under the other mode and promote its domain under the original mode. For example, $\hat{\alpha} = (\hat{\beta} \rightarrow \hat{\beta}) \rightarrow (\text{Int} \rightarrow \text{Int})$ is a solution for $\hat{\alpha} \vdash \hat{\alpha} <: (\forall a. a \rightarrow a) \rightarrow (\forall a. \text{Int} \rightarrow \text{Int})$, where $(\forall a. a \rightarrow a) \rightarrow (\forall a. \text{Int} \rightarrow \text{Int})$ is promoted under the covariant mode, which means $\forall a. a \rightarrow a$ is promoted under the *contravariant* mode and $\forall a. \text{Int} \rightarrow \text{Int}$ is promoted under the original covariant mode.

POLYMORPHIC PROMOTION FOR SUBTYPING. We illustrate polymorphic promotion by showing that the original instantiation relationship in DK can be replaced by our polymorphic promotion process. Furthermore, we show that subtyping, which was built upon instantiation but now uses polymorphic promotion, remains sound and complete.

2420 6.2 UNIFICATION FOR THE SIMPLY TYPED LAMBDA CALCULUS

2421 This section first introduces the simply typed lambda calculus, and then presents a unification
2422 algorithm that uses the novel promotion mechanism.

2423 6.2.1 DECLARATIVE SYSTEM

2424 The definition of declarative types in STLC is given below. We have only monotypes τ , which
2425 includes the integer type Int and function types $\tau_1 \rightarrow \tau_2$. In this section, we focus on the
2426 unification process. Hence, we do not elaborate the details of expressions' syntax or typing
2427 rules.

$$2428 \quad \text{Monotypes } \tau ::= \text{Int} \mid \tau_1 \rightarrow \tau_2$$

2429 6.2.2 ALGORITHMIC SYSTEM

2430 The syntax of the algorithmic system is given in Figure 6.1. Following DK [Dunfield and
2431 Krishnaswami 2013] and GPC, algorithmic monotypes include existential type variables $\hat{\alpha}$.
2432 Algorithmic contexts also contain declarations of existential type variables, either unsolved
2433 ($\hat{\alpha}$) or solved ($\hat{\alpha} = \tau$). Complete contexts Ω contain only solved variables. We use the
2434 judgment $\Gamma \vdash^{\text{wf}} \tau$ to indicate that all existential variables in τ are well-scoped. Its definition
2435 is standard and thus omitted. We also use $\Gamma \longrightarrow \Delta$ for context extension, whose definition
2436 is essentially a simplified version of the one in GPC (Section 4.4.5).

2437 **UNIFICATION.** Figure 6.1 defines the unification process. The judgment $\Gamma \sqcup \tau_1 \approx \tau_2 \dashv \Delta$
2438 reads that under the input context Γ , unifying τ_1 with τ_2 results in the output context Δ .
2439 Rule **U-REFL** is our base case, and rule **U-ARROW** unifies the components of the arrow types.
2440 When unifying $\hat{\alpha} \approx \tau_1$ (rule **U-EVARL**), we cannot simply set $\hat{\alpha}$ to τ_1 , as τ_1 might include
2441 variables bound to the right of $\hat{\alpha}$. Instead, we need to *promote* ($\|\text{Pr}\rangle \tau_1$). After promoting τ_1 to
2442 τ_2 , we can directly set $\hat{\alpha} = \tau_2$. Rule **U-EVARR** is symmetric to rule **U-EVARL**. Note that when
2443 unifying $\hat{\alpha} \approx \hat{\beta}$, either rule **U-EVARL** and rule **U-EVARR** could be tried; an implementation
2444 can arbitrarily choose between them.

2445 **PROMOTION.** The promotion relation $\Gamma \vdash_{\hat{\alpha}}^{\text{Pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta$ given at the bottom of Figure 6.1
2446 reads that under the input context Δ , promoting type τ_1 yields type τ_2 , so that τ_2 is well-
2447 formed in the prefix context of $\hat{\alpha}$, while retaining $[\Delta]\tau_1 = [\Delta]\tau_2$. At a high-level, $\|\text{Pr}\rangle$ looks
2448 for free variables in τ_1 . Integers are always well-formed (rule **PR-INT**). Promoting a function
2449 recursively promotes its components (rule **PR-ARROW**). Variables bound to the left of $\hat{\alpha}$ in Γ

Monotypes	$\tau ::= \text{Int} \mid \tau_1 \rightarrow \tau_2 \mid \hat{\alpha}$
Algorithmic Contexts	$\Gamma, \Delta, \Theta ::= \bullet \mid \Gamma, \hat{\alpha} \mid \Gamma, \hat{\alpha} = \tau$
Complete Contexts	$\Omega ::= \bullet \mid \Omega, \hat{\alpha} = \tau$

$\Gamma \vdash^u \tau_1 \approx \tau_2 \dashv \Delta$

(Unification)

U-REFL

$$\frac{}{\Gamma \vdash^u \tau \approx \tau \dashv \Gamma}$$

U-ARROW

$$\frac{\Gamma \vdash^u \tau_1 \approx \tau_3 \dashv \Theta \quad \Theta \vdash^u [\Theta]\tau_2 \approx [\Theta]\tau_4 \dashv \Delta}{\Gamma \vdash^u \tau_1 \rightarrow \tau_2 \approx \tau_3 \rightarrow \tau_4 \dashv \Delta}$$

U-EVARL

$$\frac{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta[\hat{\alpha}]}{\Gamma \vdash^u \hat{\alpha} \approx \tau_1 \dashv \Delta[\hat{\alpha} = \tau_2]}$$

U-EVARR

$$\frac{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta[\hat{\alpha}]}{\Gamma \vdash^u \tau_1 \approx \hat{\alpha} \dashv \Delta[\hat{\alpha} = \tau_2]}$$

$\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta$

(Promotion)

PR-INT

$$\frac{}{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \text{Int} \rightsquigarrow \text{Int} \dashv \Gamma}$$

PR-ARROW

$$\frac{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_3 \dashv \Theta \quad \Theta \vdash_{\hat{\alpha}}^{\text{pr}} [\Theta]\tau_2 \rightsquigarrow \tau_4 \dashv \Delta}{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightarrow \tau_2 \rightsquigarrow \tau_3 \rightarrow \tau_4 \dashv \Delta}$$

PR-EVARL

$$\frac{}{\Gamma[\hat{\beta}][\hat{\alpha}] \vdash_{\hat{\alpha}}^{\text{pr}} \hat{\beta} \rightsquigarrow \hat{\beta} \dashv \Gamma[\hat{\beta}][\hat{\alpha}]}$$

PR-EVARR

$$\frac{}{\Gamma[\hat{\alpha}][\hat{\beta}] \vdash_{\hat{\alpha}}^{\text{pr}} \hat{\beta} \rightsquigarrow \hat{\beta}_1 \dashv \Gamma[\hat{\beta}_1, \hat{\alpha}][\hat{\beta} = \hat{\beta}_1]}$$

Figure 6.1: Types, contexts, unification and promotion of algorithmic STLC

are unaffected (rule **PR-EVARL**), as they are already well-formed. In rule **PR-EVARR**, a unification variable $\widehat{\beta}$ bound to the right of $\widehat{\alpha}$ in Γ is replaced by a fresh variable introduced to $\widehat{\alpha}$'s left. Promotion is a partial operation, as it requires $\widehat{\beta}$ either to be to the right or to the left of $\widehat{\alpha}$. There is yet another possibility: if $\widehat{\beta} = \widehat{\alpha}$, then no rule applies. This is a desired property, as the $\widehat{\beta} = \widehat{\alpha}$ case exactly corresponds to the “occurs-check” in a more typical presentation of unification. By preventing promoting $\widehat{\alpha}$ to the left of $\widehat{\alpha}$, we prevent the possibility of an infinite substitution when applying an algorithmic context. Note that rule **U-REFL** solves the unification case $\widehat{\alpha} \approx \widehat{\alpha}$.

EXAMPLE. Below we give the derivation of $\widehat{\alpha}, \widehat{\beta} \vdash^u \widehat{\alpha} \approx \widehat{\beta} \rightarrow \text{Int}$ discussed in Section 6.1.1.

$$\begin{array}{c}
 \text{PR-EVARL} \qquad \qquad \qquad \text{PR-INT} \\
 \hline
 \frac{\widehat{\alpha}, \widehat{\beta} \vdash_{\widehat{\alpha}}^{\text{pr}} \widehat{\beta} \rightsquigarrow \widehat{\alpha} \dashv \widehat{\alpha}_1, \widehat{\alpha}, \widehat{\beta} = \widehat{\alpha}_1}{\widehat{\alpha}, \widehat{\beta} \vdash_{\widehat{\alpha}}^{\text{pr}} \widehat{\beta} \rightarrow \text{Int} \rightsquigarrow \widehat{\alpha}_1 \rightarrow \text{Int} \dashv \widehat{\alpha}_1, \widehat{\alpha}, \widehat{\beta} = \widehat{\alpha}_1} \text{PR-ARROW} \\
 \hline
 \frac{\widehat{\alpha}, \widehat{\beta} \vdash_{\widehat{\alpha}}^{\text{pr}} \widehat{\beta} \rightarrow \text{Int} \rightsquigarrow \widehat{\alpha}_1 \rightarrow \text{Int} \dashv \widehat{\alpha}_1, \widehat{\alpha}, \widehat{\beta} = \widehat{\alpha}_1}{\widehat{\alpha}, \widehat{\beta} \vdash^u \widehat{\alpha} \approx \widehat{\beta} \rightarrow \text{Int} \dashv \widehat{\alpha}_1, \widehat{\alpha} = \widehat{\alpha}_1 \rightarrow \text{Int}, \widehat{\beta} = \widehat{\alpha}_1} \text{U-EVAL-R}
 \end{array}$$

6.2.3 SOUNDNESS AND COMPLETENESS

We prove that our type promotion strategy and the unification algorithm are sound. First, we show that except for resolving the order problem, promotion will not change the type. Namely, the input type and the output type are equivalent after substitution by the output context. Moreover, the promoted type is well-formed under the prefix context of $\widehat{\alpha}$.

Theorem 6.1 (Soundness of Promotion). *If $\Gamma \vdash_{\widehat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta$, then $[\Delta]\tau_1 = [\Delta]\tau_2$. Moreover, given $\Delta = \Delta_1, \widehat{\alpha}, \Delta_2$, we have $\Delta_1 \vdash^{\text{wf}} \tau_2$,*

With soundness of promotion, we can prove that the unification algorithm is also sound:

Theorem 6.2 (Soundness of Unification). *If $\Gamma \vdash^u \tau_1 \approx \tau_2 \dashv \Delta$, then $[\Delta]\tau_1 = [\Delta]\tau_2$.*

We can further prove that promotion is complete using the notion of context extension. Note that in the completeness statement we require $\widehat{\alpha} \notin \text{FV}(\tau_1)$, or otherwise promotion would fail.

Theorem 6.3 (Completeness of Promotion). *Given $\Gamma \longrightarrow \Omega$, and $\Gamma \vdash^{\text{wf}} \widehat{\alpha}$, and $\Gamma \vdash^{\text{wf}} \tau_1$, and $[\Gamma]\widehat{\alpha} = \widehat{\alpha}$, and $[\Gamma]\tau_1 = \tau_1$, if $\widehat{\alpha} \notin \text{FV}(\tau_1)$, there exist τ_2, Δ and Ω' such that $\Gamma \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\Gamma \vdash_{\widehat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta$.*

The completeness of unification is then built upon the completeness of promotion.

Theorem 6.4 (Completeness of Unification). *Given $\Gamma \longrightarrow \Omega$, and $\Gamma \vdash^{\text{wf}} \tau_1$, and $\Gamma \vdash^{\text{wf}} \tau_2$, and $[\Gamma]\tau_1 = \tau_1$, and $[\Gamma]\tau_2 = \tau_2$, if $[\Omega]\tau_1 = [\Omega]\tau_2$, there exist Δ and Ω' such that $\Gamma \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\Gamma \vdash \tau_1 \approx \tau_2 \dashv \Delta$.*

6.3 SUBTYPING FOR HIGHER-RANK POLYMORPHISM

In this section, we adopt the type promotion strategy to a higher-rank polymorphic type system from DK [Dunfield and Krishnaswami 2013]. We show that promotion can be further extended to polymorphic promotion to deal with subtyping, which can be used to replace the instantiation relation in the original DK system while preserving soundness and completeness.

6.3.1 DECLARATIVE SYSTEM

The definition of types in DK (Figure 2.6 in Section 2.3.2) is repeated below. Comparing to STLC, we have polymorphic types $\forall a. \sigma$ and type variables a . Again, we omit the details about expressions since we focus on types in this section. Recall that DK shares the same subtyping relation as of OL (Figure 2.5), and we use the judgment $\Psi \vdash^{DK} \sigma_1 <: \sigma_2$ to denote the subtyping relation in DK.

Types	σ	$::=$	$\text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma$
Monotypes	τ	$::=$	$\text{Int} \mid a \mid \tau_1 \rightarrow \tau_2$
Contexts	Ψ	$::=$	$\bullet \mid \Psi, x : \sigma \mid \Psi, a$

6.3.2 ALGORITHMIC SYSTEM

The syntax of the algorithmic system is given in Figure 6.2. The promotion mode \otimes is either covariant (+) or contravariant (-). We can use $-\otimes$ to flip the promotion mode. Specifically,

$$\begin{aligned} -(+) &= - \\ -(-) &= + \end{aligned}$$

SUBTYPING. Figure 6.2 also includes the subtyping judgment $\Gamma \vdash^{\text{sub}} \sigma_1 <: \sigma_2 \dashv \Delta$, which reads that, under the input context Γ , type σ_1 is a subtype of σ_2 , with the output context Δ . The rules except the last two are the same as the algorithmic subtyping rules in DK.

Rule **s-INSTL** and rule **INSTR** are specific to this system. Recall that in GPC (which follows DK), the consistent subtyping between $\hat{\alpha}$ and σ relies on the instantiation rules, which are duplicated for the case when $\hat{\alpha}$ is on the left and the case when $\hat{\alpha}$ is on the right. Here, instead

Types	$\sigma ::= \text{Int} \mid a \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma \mid \hat{\alpha}$
Monotypes	$\tau ::= \text{Int} \mid a \mid \hat{\alpha} \mid \tau_1 \rightarrow \tau_2$
Algorithmic Contexts	$\Gamma, \Delta, \Theta ::= \bullet \mid \Gamma, a \mid \Gamma, \hat{\alpha} \mid \Gamma, \hat{\alpha} = \tau$
Complete Contexts	$\Omega ::= \bullet \mid \Omega, a \mid \Omega, \hat{\alpha} = \tau$
Promotion Modes	$\otimes ::= + \mid -$

$\Gamma \vdash^{\text{sub}} \sigma_1 <: \sigma_2 \dashv \Delta$

(Subtyping)

<p>S-TVAR</p> $\frac{}{\Gamma[a] \vdash^{\text{sub}} a <: a \dashv \Gamma[a]}$	<p>S-INT</p> $\frac{}{\Gamma \vdash^{\text{sub}} \text{Int} <: \text{Int} \dashv \Gamma}$	<p>S-EVAR</p> $\frac{}{\Gamma[\hat{\alpha}] \vdash^{\text{sub}} \hat{\alpha} <: \hat{\alpha} \dashv \Gamma[\hat{\alpha}]}$
<p>S-ARROW</p> $\frac{\Gamma \vdash^{\text{sub}} \sigma_3 <: \sigma_1 \dashv \Theta \quad \Theta \vdash^{\text{sub}} [\Theta]\sigma_2 <: [\Theta]\sigma_4 \dashv \Delta}{\Gamma \vdash^{\text{sub}} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4 \dashv \Delta}$	<p>S-FORALLR</p> $\frac{\Gamma, a \vdash^{\text{sub}} \sigma_1 <: \sigma_2 \dashv \Delta, a, \Theta}{\Gamma \vdash^{\text{sub}} \sigma_1 <: \forall a. \sigma_2 \dashv \Delta}$	
<p>S-FORALLL</p> $\frac{\Gamma, \blacktriangleright_{\hat{\alpha}}, \hat{\alpha} \vdash^{\text{sub}} \sigma_1[a \mapsto \hat{\alpha}] <: \sigma_2 \dashv \Delta, \blacktriangleright_{\hat{\alpha}}, \Theta}{\Gamma \vdash^{\text{sub}} \forall a. \sigma_1 <: \sigma_2 \dashv \Delta}$	<p>S-INSTL</p> $\frac{\Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^+ \sigma \rightsquigarrow \tau \dashv \Delta[\hat{\alpha}]}{\Gamma[\hat{\alpha}] \vdash^{\text{sub}} \hat{\alpha} <: \sigma \dashv \Delta[\hat{\alpha} = \tau]}$	
<p>S-INSTR</p> $\frac{\Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^- \sigma \rightsquigarrow \tau \dashv \Delta[\hat{\alpha}]}{\Gamma[\hat{\alpha}] \vdash^{\text{sub}} \sigma <: \hat{\alpha} \dashv \Delta[\hat{\alpha} = \tau]}$		

$\Gamma \vdash_{\hat{\alpha}}^{\otimes} \sigma \rightsquigarrow \tau \dashv \Delta$

(Polymorphic Promotion)

<p>P-PR-FORALLL</p> $\frac{\Gamma[\hat{\beta}, \hat{\alpha}] \vdash_{\hat{\alpha}}^- \sigma[a \mapsto \hat{\beta}] \rightsquigarrow \tau \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^- \forall a. \sigma \rightsquigarrow \tau \dashv \Delta}$	<p>P-PR-FORALLR</p> $\frac{\Gamma, a \vdash_{\hat{\alpha}}^+ \sigma \rightsquigarrow \tau \dashv \Delta, a}{\Gamma \vdash_{\hat{\alpha}}^+ \forall a. \sigma \rightsquigarrow \tau \dashv \Delta}$
<p>P-PR-ARROW</p> $\frac{\Gamma \vdash_{\hat{\alpha}}^{\otimes} \sigma_1 \rightsquigarrow \tau_1 \dashv \Theta \quad \Theta \vdash_{\hat{\alpha}}^{\otimes} [\Theta]\sigma_2 \rightsquigarrow \tau_2 \dashv \Delta}{\Gamma \vdash_{\hat{\alpha}}^{\otimes} \sigma_1 \rightarrow \sigma_2 \rightsquigarrow \tau_1 \rightarrow \tau_2 \dashv \Delta}$	<p>P-PR-MONO</p> $\frac{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta}{\Gamma \vdash_{\hat{\alpha}}^{\otimes} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta}$

$\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta$

(Promotion)

PR-TVAR

$$\frac{}{\Gamma[a][\hat{\alpha}] \vdash_{\hat{\alpha}}^{\text{pr}} a \rightsquigarrow a \dashv \Gamma[a][\hat{\alpha}]}$$

Figure 6.2: Types, contexts, subtyping and (polymorphic) promotion of the algorithmic system

of instantiation, we directly use polymorphic promotion to promote the possibly polymorphic type σ into a monotype τ . Specifically, rule **S-INSTL** uses polymorphic promotion under the covariant mode (+) and rule **S-INSTR** uses polymorphic promotion under the contravariant mode (-). If promotion succeeds, we can directly set $\hat{\alpha}$ to τ .

POLYMORPHIC PROMOTION. The judgment $\Gamma \vdash_{\hat{\alpha}}^{\otimes} \sigma \rightsquigarrow \tau \dashv \Delta$ reads that under the input context Γ , promoting σ under promotion mode \otimes yields type τ , so that τ is well-formed in the prefix context of $\hat{\alpha}$.

The only difference between these two promotion modes is how to promote polymorphic types. Under the contravariant mode (rule **P-PR-FORALLL**), a monotype would make the final type more polymorphic. Therefore, we replace the universal binder a with a fresh existential variable $\hat{\alpha}$ and put it before $\hat{\alpha}$. Otherwise, in rule **P-PR-FORALLR**, we put a in the context and promote σ . Notice that since a is added to the tail of the context, it is not in the scope of $\hat{\alpha}$ and can actually never be used in σ or otherwise promotion would fail. This makes sense, as for a subtyping relation $\Gamma \vdash^{\text{sub}} \hat{\alpha} <: \forall a. \sigma$ to hold, a must not be used in σ . That means $\forall a. \sigma$ can only be types like $\forall a. \text{Int}$ or $\forall a. \text{Int} \rightarrow \text{Int}$, in which case $\hat{\alpha}$ can be promoted to Int or $\text{Int} \rightarrow \text{Int}$ respectively. In the conclusion of the rule, we discard a in the return context. Note that we can simplify the rule by directly requiring $a \notin \text{FV}(\sigma)$, as in rule **P-PR-FORALLRR** given below. This way we would not need to add a into the context and the rule would remain sound.

$$\frac{\text{P-PR-FORALLRR} \quad a \notin \text{FV}(\sigma) \quad \Gamma \vdash_{\hat{\alpha}}^+ \sigma \rightsquigarrow \tau \dashv \Delta}{\Gamma \vdash_{\hat{\alpha}}^+ \forall a. \sigma \rightsquigarrow \tau \dashv \Delta}$$

Rule **P-PR-ARROW** flips the mode for codomains, and uses the same mode for domains. When the type to be promoted is a monotype, rule **P-PR-MONO** uses the promotion judgment (\Vdash^{Pr}) directly. Note that for a monotype the mode does not matter, so rule **P-PR-MONO** applies in both modes.

PROMOTION. The promotion judgment is the same as before, and still only works for monotypes, except that now we have rule **PR-TVAR** for type variables a . Note again that promotion is a partial operation, as it requires a to be the left of $\hat{\alpha}$, since the order of variable matters.

6.3.3 SOUNDNESS AND COMPLETENESS

The statement of soundness of promotion remains the same as before.

Theorem 6.5 (Soundness of Promotion). *If $\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_2 \dashv \Delta$, and $\Delta = \Delta_1, \hat{\alpha}, \Delta_2$, then $\Delta_1 \vdash^{\text{wf}} \tau_2$, and $[\Delta]\tau_1 = [\Delta]\tau_2$.*

Based on soundness of promotion, we prove that after polymorphic promotion, the promoted type is also well-formed under the prefix context of $\hat{\alpha}$. Moreover, polymorphic promotion builds a subtyping relation according to the promotion mode: under the contravariant mode ($-$), the original type is a subtype of the promoted type; under the covariant mode ($+$), the promoted type is a subtype of the original type.

Theorem 6.6 (Soundness of Polymorphic Promotion). *If $\Gamma \vdash_{\hat{\alpha}}^{\otimes} \sigma \rightsquigarrow \tau \dashv \Delta$, and $\Delta = \Delta_1, \hat{\alpha}, \Delta_2$, then $\Delta_1 \vdash^{\text{wf}} \tau_2$. Moreover, given $\Delta \longrightarrow \Omega$,*

- *if $\otimes = -$, then $[\Omega]\Gamma \vdash^{DK} [\Omega]\sigma <: [\Omega]\tau$; and*
- *if $\otimes = +$, then $[\Omega]\Gamma \vdash^{DK} [\Omega]\tau <: [\Omega]\sigma$.*

With soundness of polymorphic promotion, next we show that the new subtyping judgment using polymorphic promotion instead of instantiation remains sound.

Theorem 6.7 (Soundness of Subtyping). *If $\Gamma \vdash^{\text{sub}} \sigma_1 <: \sigma_2 \dashv \Delta$, and $\Delta \longrightarrow \Omega$, then $[\Omega]\Gamma \vdash^{DK} [\Omega]\sigma_1 <: [\Omega]\sigma_2$.*

Now we turn to completeness. The completeness of promotion is the same as before.

Theorem 6.8 (Completeness of Promotion). *Given $\Gamma \longrightarrow \Omega$, and $\Gamma \vdash^{\text{wf}} \hat{\alpha}$, and $\Gamma \vdash^{\text{wf}} \tau$, and $[\Gamma]\hat{\alpha} = \hat{\alpha}$, and $[\Gamma]\tau = \tau$, if $\hat{\alpha} \notin \text{FV}(\tau)$, there exist τ_2, Δ and Ω' such that $\Gamma \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau \rightsquigarrow \tau_2 \dashv \Delta$.*

Completeness of polymorphic promotion has two parts. If the existential variable appears on the left, then we promote the type under the covariant mode ($+$), or otherwise the contravariant mode ($-$). Moreover, it also requires $\hat{\alpha} \notin \text{FV}(\sigma)$.

Theorem 6.9 (Completeness of Polymorphic Promotion). *Given $\Gamma \longrightarrow \Omega$, and $\Gamma \vdash^{\text{wf}} \hat{\alpha}$, and $\Gamma \vdash^{\text{wf}} \sigma$, and $[\Gamma]\hat{\alpha} = \hat{\alpha}$, and $[\Gamma]\tau = \sigma$, and $\hat{\alpha} \notin \text{FV}(\sigma)$,*

- *if $[\Omega]\Gamma \vdash^{DK} [\Omega]\hat{\alpha} <: [\Omega]\sigma$, then there exist τ, Δ and Ω' such that $\Gamma \vdash_{\hat{\alpha}}^+ \sigma \rightsquigarrow \tau \dashv \Delta$; and*
- *if $[\Omega]\Gamma \vdash^{DK} [\Omega]\sigma <: [\Omega]\hat{\alpha}$, then there exist τ, Δ and Ω' such that $\Gamma \vdash_{\hat{\alpha}}^- \sigma \rightsquigarrow \tau \dashv \Delta$.*

Finally, we prove that our subtyping is complete. With this, we have proved our claim that the original instantiation relation in DK can be replaced by the polymorphic promotion process, as the subtyping algorithm using polymorphic promotion remains sound and complete.

Theorem 6.10 (Completeness of Subtyping). *Given $\Gamma \longrightarrow \Omega$, and $\Gamma \vdash^{\text{wf}} \sigma_1$, and $\Gamma \vdash^{\text{wf}} \sigma_2$, if $[\Omega]\Gamma \vdash^{DK} [\Omega]\tau_1 <: [\Omega]\tau_2$, there exist Δ and Ω' such that $\Delta \longrightarrow \Omega'$ and $\Omega \longrightarrow \Omega'$ and $\Gamma \vdash^{\text{sub}} [\Gamma]\sigma_1 <: [\Gamma]\sigma_2 \dashv \Delta$.*

6.4 DISCUSSION

This section discusses two extensions of promotion. The first extension explores dependent types, while the second extension considers gradual types.

6.4.1 PROMOTING DEPENDENT TYPES

In Section 6.1.1 we mentioned the drawback of decomposing type constructs that it cannot be easily applied to more advanced types like dependent types. In this section, we discuss how we can apply promotion to dependent types.

Consider rule **PR-PI** given below that promotes a dependent type $\Pi a : \tau_1. \tau_2$.

$$\frac{\text{PR-PI} \quad \Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \tau_1 \rightsquigarrow \tau_3 \dashv \Theta \quad \Theta, a \vdash_{\hat{\alpha}}^{\text{pr}} [\Theta]\tau_2 \rightsquigarrow \tau_4 \dashv \Delta, a}{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} \Pi a : \tau_1. \tau_2 \rightarrow \text{Int} \rightsquigarrow \Pi a : \tau_3. \tau_4 \dashv \Delta}$$

Here we first promote τ_1 , returning τ_3 . Then we add a into the context to promote τ_2 . Finally, we return $\Pi a : \tau_3. \tau_4$ and discard a in the output context.

Unfortunately, this design does not work. In particular, consider promoting $\Pi a : \hat{\beta}. a$.

$$\frac{\text{PR-EVARL} \quad \overline{\hat{\beta}, \hat{\alpha} \vdash_{\hat{\alpha}}^{\text{pr}} \hat{\beta} \rightsquigarrow \hat{\beta} \dashv \hat{\beta}, \hat{\alpha}} \quad \text{PR-EVARL} \quad \overline{\hat{\beta}, \hat{\alpha}, a \Vdash_{\hat{\alpha}}^{\text{pr}} a \rightsquigarrow ???}}{\hat{\beta}, \hat{\alpha} \Vdash_{\hat{\alpha}}^{\text{pr}} \Pi a : \hat{\beta}. a \rightarrow \text{Int} \rightsquigarrow} \text{PR-PI}$$

We expect that the promotion would return $\Pi a : \hat{\beta}. a$. However, after we add a into the context to promote a , rule **PR-TVARR** does not apply, as a is out of the scope of $\hat{\alpha}$!

The issue can be fixed by changing rule **PR-TVARR** to rule **PR-TVARRR** to not consider the order of type variables.

$$\frac{\text{PR-TVARRR}}{\Gamma \vdash_{\hat{\alpha}}^{\text{pr}} a \rightsquigarrow a \dashv \Gamma}$$

Then, while promotion resolves the ordering of existential variables, since there is no constraint for type variables, it is not guaranteed anymore that the promoted type is well-formed

in the prefix context of $\hat{\alpha}$. Therefore, we need to adjust the rule of subtyping to check explicitly that the result is well-formed, i.e.,

$$\begin{array}{c}
 \text{S-INSTLL} \\
 \frac{\Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^+ \sigma \rightsquigarrow \tau \dashv \Delta_1, \hat{\alpha}, \Delta_2 \quad \Delta_1 \vdash^{\text{wf}} \tau}{\Gamma[\hat{\alpha}] \vdash^{\text{sub}} \hat{\alpha} <: \sigma \dashv \Delta_1, \hat{\alpha} = \tau, \Delta_2} \\
 \\
 \text{S-INSTRR} \\
 \frac{\Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^- \sigma \rightsquigarrow \tau \dashv \Delta_1, \hat{\alpha}, \Delta_2 \quad \Delta_1 \vdash^{\text{wf}} \tau}{\Gamma[\hat{\alpha}] \vdash^{\text{sub}} \sigma <: \hat{\alpha} \dashv \Delta_1, \hat{\alpha} = \tau, \Delta_2}
 \end{array}$$

2561 Xie and Oliveira [2017] include a more detailed discussion and formalization of applying
 2562 promotion to a dependently typed lambda calculus.

2563 6.4.2 PROMOTING GRADUAL TYPES

We have shown that polymorphic promotion works for DK. A natural extension is to also apply polymorphic promotion to GPC (Chapter 4). Then the key is to show how to promote the unknown type. Since comparing with the unknown type does not impose any constraints, we can simply replace it with a fresh existential variable:

$$\begin{array}{c}
 \text{P-PR-UNKNOWN} \\
 \hline
 \Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^{\otimes} ? \rightsquigarrow \hat{\beta} \dashv \Gamma[\hat{\beta}, \hat{\alpha}]
 \end{array}$$

2564 For example, we have $\hat{\alpha} \vdash_{\hat{\alpha}}^{\text{pr}} \text{Int} \rightarrow ? \rightsquigarrow \text{Int} \rightarrow \hat{\beta} \dashv \hat{\beta}, \hat{\alpha}$.

For the extended GPC which restores the dynamic guarantee (Chapter 5), we can replace the unknown type with a fresh gradual existential variables instead.

$$\begin{array}{c}
 \text{P-PR-UNKNOWNG} \\
 \hline
 \Gamma[\hat{\alpha}] \vdash_{\hat{\alpha}}^{\otimes} ? \rightsquigarrow \hat{\beta}_G \dashv \Gamma[\hat{\beta}_G, \hat{\alpha}]
 \end{array}$$

2565 With these rules it would be possible to apply polymorphic promotion to GPC. Note this
 2566 discussion is a sketch and we have not fully worked out the full algorithm yet.

2568 In recent years, languages like Haskell have seen a dramatic surge of new features that signif-
 2569 icantly extends the expressive power of their type systems. With these features, the challenge
 2570 of *kind inference* for datatype declarations has presented itself and become a worthy research
 2571 problem on its own.

2572 In this chapter, we apply promotion to kind inference for datatypes. Inspired by previous
 2573 research on type-inference, we offer declarative specifications for what datatype declarations
 2574 should be accepted, both for Haskell98 and for a more advanced system we call PolyKinds,
 2575 based on the extensions in modern Haskell, including a limited form of dependent types.
 2576 We believe these formulations to be novel and without precedent, even for Haskell98. These
 2577 specifications are complemented with implementable algorithmic versions. We study *sound-*
 2578 *ness*, *completeness* and the existence of *principal kinds* in these systems, proving the proper-
 2579 ties where they hold. This work can serve as a guide both to language designers who wish
 2580 to formalize their datatype declarations and also to implementors keen to have principled
 2581 inference of principal types.

2582 7.1 INTRODUCTION AND MOTIVATION

2583 The global type-inference algorithms employed in modern functional languages such as Haskell,
 2584 ML, and OCaml are derived from the Hindley-Milner type system (HM) [Damas and Milner
 2585 1982; Hindley 1969], with multiple extensions. Common extensions of HM include *higher-*
 2586 *ranked polymorphism* [Odersky and Läuffer 1996; Peyton Jones et al. 2007] and *type-inference*
 2587 *for GADTs* [Peyton Jones et al. 2006], which have both been formally studied thoroughly.

2588 Most research work for extensions of HM so far (including OL, DK, AP and GPC) has
 2589 focused on forms of polymorphism, where type variables all have the same kind. In these
 2590 systems, the type variables introduced by universal quantifiers and/or type declarations all
 2591 stand for proper types (i.e., they have kind \star). In such a simplified setting, datatype declara-
 2592 tions such as

2593 `data Maybe a = Nothing | Just a`

pose no problem at all for type inference: with only one possible kind for a , there is nothing to infer.

However, real-world implementations for languages like Haskell support a non-trivial kind language, including kinds other than \star . Haskell98 accepts *higher-kinded polymorphism* [Jones 1995], enabling datatype declarations such as

```
data ApplInt f = Mk (f Int)
```

The type of constructor Mk applies the type variable f to an argument Int . Accordingly, $ApplInt\ Bool$ would not work, as the type $Bool\ Int$ (in the instantiated type of Mk) is invalid. Instead, we must write something like $ApplInt\ Maybe$: the argument to $ApplInt$ must be suitable for applying to Int . In Haskell98, $ApplInt$ has kind $(\star \rightarrow \star) \rightarrow \star$. For Haskell98-style higher-kinded polymorphism, Jones [1995] presents one of the few extensions of HM that deals with a non-trivial language of kinds. His work addresses the related problem of inference for *constructor type classes*, although he does not show directly how to do inference for datatype declarations.

Modern Haskell¹ has a much richer type and kind language compared to Haskell98. In recent years, Haskell has seen a dramatic surge of new features that extend the expressive power of algebraic datatypes. Such features include *GADTs*, *kind polymorphism* [Yorgey et al. 2012] with *implicit kind arguments*, and *dependent kinds* [Weirich et al. 2013], among others. With great power comes great responsibility: now we must be able to infer these kinds, too. For instance, consider these datatype declarations:

```
data App f a = MkApp (f a)
data Fix f    = In (f (Fix f))
data T        = MkT1 (App Maybe Int)
               | MkT2 (App Fix Maybe)  -- accept or reject?
```

Should the declaration for T be accepted or rejected? In a Haskell98 setting, the kind of App is $(\star \rightarrow \star) \rightarrow \star \rightarrow \star$. Therefore T should be rejected, because in $MkT2$ the datatype App is applied to $Fix :: (\star \rightarrow \star) \rightarrow \star$ and $Maybe :: \star \rightarrow \star$, which do not match the expected kinds of App . However, with kind polymorphism, T is accepted, because App has the more general kind $\forall k. (k \rightarrow \star) \rightarrow k \rightarrow \star$. With this kind, both uses of App in T are valid.

The questions we ask in this section are these: *Which datatype declarations should be accepted? What kinds do accepted datatypes have?* Surprisingly, the literature is essentially silent on these questions—we are unaware of any formal treatment of kind inference for datatype declarations.

¹We consider the Glasgow Haskell Compiler’s implementation of Haskell, in version 8.8.

Inspired by previous research on type inference, we offer declarative specifications for two languages: Haskell98, as standardized [Peyton Jones 2003] (Section 7.3); and PolyKinds, a significant fragment of modern Haskell (Section 7.6). These specifications are complemented with algorithmic versions that can guide implementations (Sections 7.4 and 7.7). To relate the declarative and algorithmic formulations we study various properties, including *soundness*, *completeness*, and the existence of *principal kinds* (Sections 7.4.7, 7.5, and 7.7.6).

7.2 OVERVIEW

This section gives an overview of this work. We start by contrasting kind inference with type inference, and then summarize the key aspects of the two systems of datatypes that we develop.

7.2.1 KIND INFERENCE IN HASKELL98

Haskell98's kind language contains a constant (the kind \star) and kinds built from arrows ($k_1 \rightarrow k_2$). Kind inference for Haskell98 datatypes is thus closely related to type inference for the simply typed λ -calculus (STLC). For example, consider a term $+$:: $\text{Int} \rightarrow \text{Int} \rightarrow \text{Int}$ and a type constructor $(: + :) :: \star \rightarrow \star \rightarrow \star$. At the term level, we infer that $\text{add } a \ b = a + b$ yields $\text{add} :: \text{Int} \rightarrow \text{Int} \rightarrow \text{Int}$. Similarly, we can create a datatype

```
data Add a b = Add (a : + : b)
```

and infer $\text{Add} :: \star \rightarrow \star \rightarrow \star$.

NO PRINCIPAL TYPES. Consider now the function definition $k \ a = 1$. In the STLC, there are infinitely many (incomparable) types that can be assigned to k , including $k :: \text{Int} \rightarrow \text{Int}$ and $k :: (\text{Int} \rightarrow \text{Int}) \rightarrow \text{Int}$. Assuming that there are no type variables, the STLC accordingly has no *principal types*. An analogous datatype declaration is

```
data K a = K Int
```

As with k , there are infinitely many (incomparable) kinds that can be assigned to K , including $K :: \star \rightarrow \star$ and $K :: (\star \rightarrow \star) \rightarrow \star$.

DEFAULTING. Definitions like k (in STLC) or K (in Haskell98) do not have a principal type/kind, which raises the immediate question of what type/kind to infer. Haskell98 solves this problem by using a *defaulting* strategy: *if the kind of a type variable cannot be inferred,*

2655 then it is defaulted to \star . Therefore the kind of K in Haskell98 is $\star \rightarrow \star$. From the perspec-
 2656 tive of type inference, such defaulting strategy may seem somewhat ad-hoc, but due to the
 2657 role that \star plays at the type level it seems a defensible design for kind inference. Defaulting
 2658 brings complications in writing a declarative specification. We discuss this point further in
 2659 Section 7.4.3.

2660 7.2.2 KIND INFERENCE IN MODERN GHC HASKELL

2661 The type and kind languages for modern GHC are *unified* (i.e., types and kinds are indistin-
 2662 guishable), *dependently typed*, and the kind system includes the $\star :: \star$ axiom Cardelli [1986];
 2663 Weirich et al. [2013]. We informally use the word *type* or *kind* where we find it appropriate.
 2664 Unlike Haskell98’s datatypes, whose inference problem is quite closely related to the well-
 2665 studied inference problem for STLC, type inference for various features in modern Haskell
 2666 is not well-studied. While we are motivated concretely by Haskell, many of the challenges we
 2667 face would be present in any dependently typed language seeking principled type inference.
 2668 We use the term PolyKinds to refer to the fragment of modern Haskell that we model.² We
 2669 enumerate the key features of this fragment below.

2670 KIND POLYMORPHISM AND DEPENDENT TYPES Global type inference, in the style of Damas
 2671 and Milner [1982], allows polymorphic kinds to be assigned to datatype definitions. For
 2672 instance, reconsider

2673 `data K a = K Int`

2674 In PolyKinds, K can be given the kind $K :: \forall \{k\}. k \rightarrow \star$. This example shows one of the
 2675 interesting new features of PolyKinds over Haskell98: *kind polymorphism* [Yorgey et al. 2012].
 2676 The polymorphic kind is obtained via *generalization*, which is a standard feature in Damas-
 2677 Milner algorithms. Polymorphic types are helpful for recovering principal types, since they
 2678 generalize many otherwise incomparable monomorphic types.

2679 System-F-based languages do not have dependent types. In contrast, PolyKinds supports
 2680 dependent kinds such as

2681 `data D :: $\forall (k :: \star) (a :: k). K a \rightarrow \star$`

2682 There are two noteworthy aspects about the kind of D . Firstly, kind and type variables are
 2683 *typed*: different type variables may have different kinds. Secondly, the kinds of later variables

²Some of the features we model are slightly different in our presentation than they exist in GHC. Xie et al. [2019b] outlines the differences. These minor differences do not affect the applicability of our work to improving the GHC implementations, but they may affect the ability to test our examples in GHC.

can *depend* on earlier ones. In D , the kind of a depends on k . Both typed variables and dependent kinds bring technical complications that do not exist in many previous studies of type inference (e.g., Peyton Jones et al. [2007]; Vytiniotis et al. [2011]).

FIRST-ORDER UNIFICATION WITH DEPENDENT KINDS AND TYPED VARIABLES. Although PolyKinds is dependently typed, its unification problem is remarkably *first-order*. This is in contrast to many other dependently typed languages, where unification is usually *higher-order* [Andrews 1971; Huet 1973]. Since unification plays a central role in inference algorithms this is a crucial difference. Higher-order unification is well-known to be undecidable in the general case [Goldfarb 1981]. As a consequence, type-inference algorithms for most dependently typed languages make various trade-offs.

A key reason why unification can be kept as a first-order problem in PolyKinds is because the type language *does not include lambdas*. Type-level lambdas have been avoided since the start in Haskell, since they bring major challenges for (term-level) type inference [Jones 1995].

The unification problem for PolyKinds is still challenging, compared to unification for System-F-like languages: unification must be *kind-directed*, as first observed at the term level by Jones [1995]. Consider the following (contrived) example:

```
data X :: ∀a (b :: * → *). a b → *      -- accepted
data Y :: ∀(c :: Maybe Bool). X c → *    -- rejected
```

In X 's kind, we discover $a :: (* \rightarrow *) \rightarrow *$. When checking Y 's kind, we must infer how to instantiate X : that is, we must choose a and b so that $a b$ unifies with $Maybe\ Bool$, which is c 's kind. It is tempting to solve this with $a \mapsto Maybe$ and $b \mapsto Bool$, but doing so would be ill-kinded, as a and $Maybe$ have different kinds. Our unification thus features *heterogeneous constraints* Gundry [2013]. When solving a unification variable, we need to first unify the kinds on both sides.

Because unification recurs into kinds, and because types are undifferentiated from kinds, it might seem that unification might not terminate. In Section 7.7.4 we show that the first-order unification with heterogeneous constraints employed in PolyKinds is guaranteed to terminate.

MUTUAL AND POLYMORPHIC RECURSION. Recursion and mutual recursion are omnipresent in datatype declarations. In PolyKinds, mutually recursive definitions will be kinded together and then get generalized together. For example, both P and Q get kind $\forall(k :: *). k \rightarrow *$.

```

2716   data P a = MkP (Q a)
2717   data Q a = MkQ (P a)

```

2718 The recursion is simple here: all recursive occurrences are at the same type. In existing
 2719 type-inference algorithms, such recursive definitions are well understood and do not bring
 2720 considerable complexity to type inference. However, we must also consider *polymorphic re-*
 2721 *cursion* as in *Poly*:

```

2722   data Poly :: ∀k. k → ★
2723   data Poly k = C1 (Poly Int) | C2 (Poly Maybe)

```

2724 This example includes a *kind signature*, meaning that we must *check* the kind of the datatype,
 2725 not *infer* it. In the definition of *Poly*, the type *Poly Int* requires an instantiation $k \mapsto \star$,
 2726 while the type *Poly Maybe* requires an instantiation of $k \mapsto (\star \rightarrow \star)$. These differing
 2727 instantiations mean that the declaration employs polymorphic recursion.

2728 PolyKinds deals with such cases of polymorphic recursion, which also appear at the term
 2729 level—for example, when writing recursive functions over GADTs or nested datatypes [Bird
 2730 and Meertens 1998]. Polymorphic recursion is known to render type-inference undecid-
 2731 able [Henglein 1993]. Furthermore, most existing formalizations of type inference avoid
 2732 the question entirely, either by not modeling recursion at all or not allowing polymorphic
 2733 recursion. Our PolyKinds system has full support for polymorphic recursion, implemented
 2734 directly without the use of a *fix* operator. Polymorphic recursion is allowed only on datatypes
 2735 with a kind signature; other datatypes are treated as monomorphic during inference.

2736 **VISIBLE KIND APPLICATION** PolyKinds lifts *visible type application* (VTA) [Eisenberg et al.
 2737 2016], whereby we can explicitly instantiate a function call, as in *id @Bool True*, to kinds,
 2738 giving us *visible kind application* (VKA). Following the design of VTA, we distinguish *spec-*
 2739 *ified variables* from *inferred variables*. As described by Eisenberg et al. [2016, Section 3.1],
 2740 only specified variables can be instantiated via VKA. Instantiation of variables is inferred
 2741 when no explicit kind application is given. To illustrate, consider

```

2742   data T :: ∀a b. a b → ★

```

2743 Here, *a* and *b* are specified variables. Because their order is given, explicit instantiation of
 2744 *a* must happen before *b*. For example, *T @Maybe* instantiates *a* to *Maybe*. On the other
 2745 hand, the kind of *a* and *b* can be generalized to $a :: k \rightarrow \star$ and $b :: k$. Elaborating the kind
 2746 of *T*, we write $T :: \forall\{k :: \star\} (a :: k \rightarrow \star) (b :: k). a b \rightarrow \star$. The variable *k* is *inferred* and is
 2747 not available for instantiation with VKA. This split between specified and inferred variables
 2748 supports predictable type inference: if the variables generated by the compiler (e.g., *k*) were
 2749 available for instantiation, then we have no way of knowing what order to instantiate them.

2750 OPEN KIND SIGNATURES AND GENERALIZATION ORDER Echoing the design of Haskell, Poly-
 2751 Kinds supports *open kind signatures*. We say a signature is *closed* if it contains no free vari-
 2752 ables, e.g.,

2753 $\text{data } T :: \forall a. a \rightarrow \star$

2754 Otherwise, it is *open*, e.g.,

2755 $\text{data } Q :: \forall (a :: (f\ b))\ (c :: k). f\ c \rightarrow \star$

2756 Free variables (in this case, f, b, k) will be generalized over. We have a decision to make: in
 2757 which order do we generalize the free variables? This question is non-trivial, as there can be
 2758 dependency between the variables. We infer $k :: \star, f :: k \rightarrow \star, b :: k$. Even though f and
 2759 b appear before k , their kinds end up depending on k and we must quantify k before f and
 2760 b . Inferring this order is a challenge: we cannot know the correct order before completing
 2761 inference. We thus introduce *local scopes*, which are sets of variables that may be reordered.
 2762 Since the ordering is not fixed by the programmer, these variables are considered *inferred*,
 2763 not *specified*, with respect to VKA.

2764 EXISTENTIAL QUANTIFICATION. PolyKinds supports existentially quantified variables on
 2765 datatype constructors. This is useful, for example, to model GADTs. Given

2766 $\text{data } T1 = \forall a. MkT1\ a$

2767 we get $MkT1 :: \forall (a :: \star). a \rightarrow T1$. The type of the data constructor declaration can also be
 2768 generalized. Given

2769 $\text{data } P1 :: \forall (a :: \star). \star$

2770 from $\text{data } T2 = MkT2\ P1$, we infer $MkT2 :: \forall \{a :: \star\}. P1\ @a \rightarrow T2$, where $P1$ is elaborated
 2771 to $P1\ @a$ with a generalized as an inferred variable.

2772 7.2.3 DESIRABLE PROPERTIES FOR KIND INFERENCE

2773 The goal of this work is to provide concrete, principled guidance to implementors of depen-
 2774 dently typed languages, such as GHC/Haskell. It is thus important to be able to describe our
 2775 inference algorithm as sound and complete against a *declarative specification*. This declar-
 2776 ative specification is what we might imagine a programmer to have in her head as she pro-
 2777 grams. This system should be designed with a minimum of low-level detail and a minimum
 2778 of surprises. It is then up to an algorithm to live up to the expectations set by the specification.

2779 The algorithm is sound when all programs it accepts are also accepted by the specification; it
 2780 is complete when all programs accepted by the specification are accepted by the algorithm.

2781 Why choose the particular set of features described here? Because they lead to interesting
 2782 kind inference challenges. We have found that the features above are sufficient in exploring
 2783 kind inference in modern Haskell. We consider unformalized extensions in Section 7.8.

2784 7.3 DATATYPES IN HASKELL98

2785 We begin our formal presentation with Haskell98. The fragment of the syntax of Haskell98
 2786 that concerns us appears at the top of Figure 7.1, including datatype declarations, types,
 2787 kinds, and contexts. The metavariable e refers to expressions, but we do not elaborate the
 2788 details of expressions' syntax or typing rules here. A program pgm is a sequence of groups
 2789 (defined below) of datatype declarations \mathcal{T} , followed by an expression e . We write $\tau_1 \rightarrow \tau_2$
 2790 as an abbreviation for $(\rightarrow)\tau_1 \tau_2$.

2791 7.3.1 GROUPS AND DEPENDENCY ANALYSIS

2792 Users are free to write declarations in any order: earlier declarations can depend on later
 2793 ones in the same compilation unit. However, any kind-checking algorithm must process
 2794 the declarations in dependency order. Complicating this is that type declarations may be
 2795 mutually recursive. A formal analysis of this dependency analysis is not enlightening, so
 2796 we consider it to be a preprocessing step that produces the grammar in Figure 7.1. This
 2797 dependency analysis breaks up the (unordered) raw input into mutually recursive groups
 2798 (potentially containing just one declaration), and puts these in dependency order. We use
 2799 the term *group* to describe a set of mutually recursive declarations.

2800 7.3.2 DECLARATIVE TYPING RULES

2801 The declarative typing rules are in Figure 7.1. There are no surprises here; we review these
 2802 rules briefly. The top judgment is $\Sigma; \Psi \vdash^{pgm} pgm : \sigma$. Its rule **PGM-DT** extends the input
 2803 type context Σ with kinds for the datatype declarations to form Σ' , which is used to check
 2804 both the datatype declarations and the rest of the program. In rule **PGM-DT**, we implicitly
 2805 extract the names \overline{T}^i from the declarations $\overline{\mathcal{T}}^i$ (and use this abuse of notation throughout
 2806 our work, relating T to \mathcal{T} and D to \mathcal{D}). The kinds are *guessed* for an entire group all at once:
 2807 they are added to the context *before* looking at the declarations. This is needed because the
 2808 declarations in the group refer to one another. Guessing the right answer is typical of declar-
 2809 ative type systems. The algorithmic system presented in Section 7.4 provides a mechanism

program	pgm	$::=$	$\mathbf{rec} \overline{\tau}_i^i ; pgm \mid e$
datatype decl.	\mathcal{T}	$::=$	$\mathbf{data} T \overline{a}_i^i = \overline{\mathcal{D}}_j^j$
data c'tor decl.	\mathcal{D}	$::=$	$D \overline{\tau}_i^i$
expression	e	$::=$	\dots
polytype	σ	$::=$	$\forall \overline{a}_i : \overline{\kappa}_i^i . \tau$
monotype	τ	$::=$	$\mathbf{Int} \mid a \mid T \mid \tau_1 \tau_2 \mid \rightarrow$
kind	κ	$::=$	$\star \mid \kappa_1 \rightarrow \kappa_2$
term context	Ψ	$::=$	$\bullet \mid \Psi, D : \sigma$
type context	Σ	$::=$	$\bullet \mid \Sigma, a : \kappa \mid \Sigma, T : \kappa$

$$\boxed{\Sigma; \Psi \vdash^{\text{pgm}} pgm : \sigma} \quad (\text{Typing Program})$$

$$\frac{\text{PGM-EXPR} \quad \Sigma; \Psi \vdash e : \sigma}{\Sigma; \Psi \vdash^{\text{pgm}} e : \sigma} \quad \frac{\text{PGM-DT} \quad \Sigma' = \Sigma, \overline{\tau}_i : \overline{\kappa}_i^i \quad \overline{\Sigma'} \vdash^{\text{dt}} \overline{\tau}_i \rightsquigarrow \overline{\Psi}_i^i \quad \Sigma'; \Psi, \overline{\Psi}_i^i \vdash^{\text{pgm}} pgm : \sigma}{\Sigma; \Psi \vdash^{\text{pgm}} \mathbf{rec} \overline{\tau}_i^i ; pgm : \sigma}$$

$$\boxed{\Sigma \vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Psi} \quad (\text{Typing Datatype Decl.})$$

$$\frac{\text{DT-DECL} \quad (T : \overline{\kappa}_i^i \rightarrow \star) \in \Sigma \quad \overline{\Sigma}, \overline{a}_i : \overline{\kappa}_i^i \vdash_{T \overline{a}_i^i}^{\text{dc}} \overline{\mathcal{D}}_j^j \rightsquigarrow \tau_j^j}{\Sigma \vdash^{\text{dt}} \mathbf{data} T \overline{a}_i^i = \overline{\mathcal{D}}_j^j \rightsquigarrow D_j : \overline{\forall \overline{a}_i : \overline{\kappa}_i^i . \tau_j^j}}$$

$$\boxed{\Sigma \vdash_{\tau}^{\text{dc}} \mathcal{D} \rightsquigarrow \tau'} \quad (\text{Typing Data Constructor Decl.})$$

$$\frac{\text{DC-DECL} \quad \Sigma \vdash^k \overline{\tau}_i^i \rightarrow \tau : \star}{\Sigma \vdash_{\tau}^{\text{dc}} D \overline{\tau}_i^i \rightsquigarrow \overline{\tau}_i^i \rightarrow \tau}$$

$$\boxed{\Sigma \vdash^k \tau : \kappa} \quad (\text{Kinding})$$

$$\begin{array}{llll} \text{K-VAR} & \text{K-TCON} & \text{K-NAT} & \text{K-ARROW} \\ \frac{(a : \kappa) \in \Sigma}{\Sigma \vdash^k a : \kappa} & \frac{(T : \kappa) \in \Sigma}{\Sigma \vdash^k T : \kappa} & \frac{}{\Sigma \vdash^k \mathbf{Int} : \star} & \frac{}{\Sigma \vdash \rightarrow : \star \rightarrow \star \rightarrow \star} \\ & \text{K-APP} & & \\ & \frac{\Sigma \vdash^k \tau_2 : \kappa_1 \quad \Sigma \vdash^k \tau_1 : \kappa_1 \rightarrow \kappa_2}{\Sigma \vdash^k \tau_1 \tau_2 : \kappa_2} & & \end{array}$$

Figure 7.1: Declarative specification of Haskell98 datatype declarations

for an implementation. Although there is no special judgment for typing a group of mutually recursive datatypes, we use $\Sigma \vdash^{\text{grp}} \text{rec } \overline{T}_i^i \rightsquigarrow \overline{\kappa}_i^i; \overline{\Psi}_i^i$ to denote that the kinding results of datatype declarations are $\overline{\kappa}_i^i$, and the output term contexts are $\overline{\Psi}_i^i$.

Declarations are checked with $\Sigma \vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Psi$. This uses the guessed kinds to process the data constructors of a declaration, producing a term context Ψ with the data constructors and their types. The rule **DT-DECL** ensures that the datatype has an appropriate kind in the context and then checks data constructors using the \vdash^{dc} judgment. These checks are done in a type context extended with bindings for the type variables \overline{a}_i^i , where each a_i has a kind extracted from the guessed kind of the datatype T . The subscript on the \vdash^{dc} judgment is the return type of the constructors, whose types are easily checked by rule **DC-DECL**. The kinding judgment $\Sigma \vdash^{\text{k}} \tau : \kappa$ is standard.

7.4 KIND INFERENCE FOR HASKELL98

We now present the algorithmic system for Haskell98. Of particular interest is the defaulting rule (Section 7.4.3), which means that these rules are not complete with respect to the declarative system.

7.4.1 SYNTAX

The top of Figure 7.2 describes the syntax of kinds and contexts in the algorithmic system for Haskell98. The differences from the declarative system are highlighted in gray. Following Dunfield and Krishnaswami [2013], kinds are extended with unification kind variables $\widehat{\alpha}$. Algorithmic contexts are also extended with unification kind variables, either unsolved ($\widehat{\alpha}$) or solved ($\widehat{\alpha} = \kappa$). Although the grammar for algorithmic term contexts Γ appears identical to that of declarative contexts, note that the grammar for κ has been extended; accordingly, algorithmic contexts Γ might include kinds with unification variables, while declarative contexts Ψ do not.

7.4.2 ALGORITHMIC TYPING RULES

Figure 7.2 presents the typing rules for programs, datatype declarations and data constructor declarations. As this work focuses on the problem of kind inference of datatypes, we reduce the expression typing to the declarative system (rule **A-PGM-EXPR**); note the contexts used there are declarative. For type-checking a group of mutually recursive datatypes (rule **A-PGM-DT**), we first assign each type constructor a unification variable $\widehat{\alpha}$, and then type-check (\vdash^{dt}) each datatype definition (Section 7.4.4), producing the context Θ_{n+1} . Then we default (Sec-

kind	κ	$::=$	$\star \mid \kappa_1 \rightarrow \kappa_2 \mid \widehat{\alpha}$
term context	Γ	$::=$	$\bullet \mid \Gamma, D : \sigma$
type context	Δ, Θ	$::=$	$\bullet \mid \Delta, a : \kappa \mid \Delta, T : \kappa \mid \Delta, \widehat{\alpha} \mid \Delta, \widehat{\alpha} = \kappa$
complete type context	Ω	$::=$	$\bullet \mid \Omega, a : \kappa \mid \Omega, T : \kappa \mid \Omega, \widehat{\alpha} = \kappa$

$$\boxed{\Omega; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \sigma}$$

(Typing Program)

$$\frac{\text{A-PGM-EXPR} \quad [\Omega]\Omega; [\Omega]\Gamma \vdash e : \sigma}{\Omega; \Gamma \Vdash^{\text{pgm}} e : \sigma}$$

A-PGM-DT

$$\frac{\Theta_1 = \Omega, \overline{\widehat{\alpha}_i}^i, \overline{T_i : \widehat{\alpha}_i}^i \quad \Theta_i \Vdash^{\text{dt}} \mathcal{T}_i \rightsquigarrow \Gamma_i \dashv \Theta_{i+1}^i \quad \Theta_{n+1} \longrightarrow \Omega' \quad \Omega'; \Gamma, \overline{\Gamma_i}^i \Vdash^{\text{pgm}} \text{pgm} : \sigma}{\Omega; \Gamma \Vdash^{\text{pgm}} \text{rec } \overline{\mathcal{T}_i}^{i \in 1..n}; \text{pgm} : \sigma}$$

$$\boxed{\Delta \Vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Gamma \dashv \Theta}$$

(Typing Datatype Decl.)

A-DT-DECL

$$\frac{(T : \kappa) \in \Delta \quad \Delta, \overline{\widehat{\alpha}_i}^i \Vdash^{\mu} [\Delta]\kappa \approx (\overline{\widehat{\alpha}_i}^i \rightarrow \star) \dashv \Theta_1, \overline{\widehat{\alpha}_i = \kappa_i}^i \quad \Theta_j, \overline{a_i : \kappa_i}^i \Vdash_{T \overline{a_i}^i}^{\text{dc}} \mathcal{D}_j \rightsquigarrow \tau_j \dashv \Theta_{j+1}, \overline{a_i : \kappa_i}^{i,j}}{\Delta \Vdash^{\text{dt}} \text{data } T \overline{a_i}^i = \overline{\mathcal{D}_j}^{j \in 1..n} \rightsquigarrow \overline{D_j : \forall \overline{a_i} : \kappa_i^i. \tau_j^j} \dashv \Theta_{n+1}}$$

$$\boxed{\Delta \Vdash_{\tau}^{\text{dc}} \mathcal{D} \rightsquigarrow \tau' \dashv \Theta}$$

(Typing Data Constructor Decl.)

A-DC-DECL

$$\frac{\Delta \Vdash^k \overline{\tau_i}^i \rightarrow \tau : \star \dashv \Theta}{\Delta \Vdash_{\tau}^{\text{dc}} D \overline{\tau_i}^i \rightsquigarrow \overline{\tau_i}^i \rightarrow \tau \dashv \Theta}$$

Figure 7.2: Algorithmic program typing in Haskell98

tion 7.4.3) all unsolved unification variables with \star using $\Theta_{n+1} \longrightarrow \Omega$, and continue with the rest of the program. Defaulting here means that the constraints of one group do not propagate to the rest of the program; accordingly, the input context of \Vdash^{pgm} is always a complete context. Echoing the notation for the declarative system, we write $\Omega \Vdash^{\text{grp}} \text{rec } \overline{\mathcal{T}}_i^i \rightsquigarrow \overline{\kappa}_i^i; \overline{\Gamma}_i^i \dashv \Theta$ to denote that the results of type-checking a group of datatype declarations are the kinds $\overline{\kappa}_i^i$, the output term contexts $\overline{\Gamma}_i^i$, and the final output type context Θ .

7.4.3 DEFAULTING

One of the key properties of datatypes in Haskell98 is the *defaulting* rule. In a datatype definition, if a type parameter is not fully determined by the definitions in its mutually recursive group, it is defaulted to have kind \star .

Definition 18 (Defaulting, \longrightarrow). An algorithmic context Δ is defaulted to a complete context Ω , written $\Delta \longrightarrow \Omega$ by replacing all unsolved unification variables $\hat{\alpha}$ in Δ with $\hat{\alpha} = \star$.

To understand how this rule affects code in practice, consider the following definitions:

```
data Q1 a = MkQ1 -- Q1 :: ( $\star \rightarrow \star$ )
data Q2 = MkQ2 (Q1 Maybe) -- rejected

data P1 a = MkP1 P2 -- P1 :: ( $\star \rightarrow \star$ )  $\rightarrow \star$ 
data P2 = MkP2 (P1 Maybe) -- accepted
```

One might think that the result of checking *Q1* and *Q2* would be the same as checking *P1* and *P2*. However, this is not true. *Q1* and *Q2* are not mutually recursive: they will not be in the same group and are checked separately. In contrast, *P1* and *P2* are mutually recursive and are checked together. This difference leads to the rejection of *Q2*: after kinding *Q1*, the parameter *a* is defaulted to \star , and then *Q1 Maybe* fails to kind check. Our algorithm is a faithful model of datatypes in Haskell98, and this rejection is exactly what the step $\Theta_{n+1} \longrightarrow \Omega$ (in rule A-PGM-DT) brings.

OTHER DESIGN ALTERNATIVES. One alternative design is to default in rule A-PGM-EXPR instead of rule A-PGM-DT, as shown in rule A-PGM-EXPR-ALT. This means constraints in one group propagate to other groups, but not to expressions. Then *Q2* above is accepted.

$$\frac{\text{A-PGM-EXPR-ALT} \quad \Delta \longrightarrow \Omega \quad [\Omega]\Omega; [\Omega]\Gamma \vdash e : \sigma}{\Delta; \Gamma \Vdash^{\text{pgm}} e : \sigma}$$

A second alternative is that defaulting happens at the very end of type-checking a compilation unit. In this scenario, we wait to commit to the kind of a datatype until checking expressions. Now we can accept the following program, which would otherwise be rejected. However, this strategy does not play along well with modular design, as it takes an extra action at a module boundary.

```
data Q1 a = MkQ1
mkQ1     = MkQ1 :: Q1 Maybe
```

In the rest of this section, we stay with the standard, doing defaulting as portrayed in Figure 7.2.

7.4.4 CHECKING DATATYPE DECLARATIONS

The judgment $\Delta \Vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Gamma \dashv \Theta$ checks the datatype declaration \mathcal{T} under the input context Δ , returning a term context Γ and an output context Θ . Its rule **A-DT-DECL** first gets the kind κ of the type constructor from the context. It then assigns a fresh unification variable $\widehat{\alpha}$ to each type parameter. The expected kind of the type constructor is $\overline{\widehat{\alpha}}^i \rightarrow \star$. The rule then unifies κ with $\overline{\widehat{\alpha}}^i \rightarrow \star$. Before unification, we apply the context to κ ; unification (Section 7.4.6) requires its inputs to be inert with respect to the context substitution. Our implementation of unification guarantees that all the $\widehat{\alpha}_i$ will be solved, as reflected in the rule **A-DT-DECL**. The type parameters are added to the context to type check each data constructor. Checking the data constructor \mathcal{D}_j returns its type τ_j and the context $\Theta_{j+1}, \overline{a_i : \widehat{\alpha}_i^i}$. Note that each output context must be of this form as no new entries are added to the end of the context during checking individual data constructors. We can then generalize the type τ_j over type parameters, returning Θ_{n+1} as the result context.

The data constructor declaration judgment $\Delta \Vdash^{\text{dc}} \mathcal{D} \rightsquigarrow \tau' \dashv \Theta$ type-checks a data constructor, by simply checking that the expected type $\overline{\tau}_i^i \rightarrow \tau$ is well-kinded.

7.4.5 KINDING

The algorithmic kinding $\Delta \Vdash^{\text{k}} \tau : \kappa \dashv \Theta$ is given in Figure 7.3. Most rules are self-explanatory. For applications (rule **A-K-APP**), we synthesize the type for an application $\tau_1 \tau_2$, where τ_1 and τ_2 have kinds κ_1 and κ_2 , respectively. The hard work is delegated to the *application kinding* judgment.

Application kinding $\Delta \Vdash^{\text{kapp}} \kappa_1 \bullet \kappa_2 : \kappa \dashv \Theta$ says that, under the context Δ , applying an expression of kind κ_1 to an argument of kind κ_2 returns the result kind κ and an output context Θ . We require the invariants that $[\Delta]\kappa_1 = \kappa_1$ and $[\Delta]\kappa_2 = \kappa_2$. Therefore, if the kind

$$\boxed{\Delta \Vdash^k \tau : \kappa \dashv \Theta} \quad (\text{Kinding})$$

$$\begin{array}{c}
 \text{A-K-ARROW} \\
 \hline
 \Delta \Vdash^k \rightarrow : \star \rightarrow \star \rightarrow \star \dashv \Delta
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-K-TCON} \\
 (T : \kappa) \in \Delta \\
 \hline
 \Delta \Vdash^k T : \kappa \dashv \Delta
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-K-NAT} \\
 \hline
 \Delta \Vdash^k \text{Int} : \star \dashv \Delta
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-K-VAR} \\
 (a : \kappa) \in \Delta \\
 \hline
 \Delta \Vdash^k a : \kappa \dashv \Delta
 \end{array}$$

$$\begin{array}{c}
 \text{A-K-APP} \\
 \Delta \Vdash^k \tau_1 : \kappa_1 \dashv \Theta_1 \quad \Theta_1 \Vdash^k \tau_2 : \kappa_2 \dashv \Theta_2 \quad \Theta_2 \Vdash^{\text{kapp}} [\Theta_2]\kappa_1 \bullet [\Theta_2]\kappa_2 : \kappa_3 \dashv \Theta \\
 \hline
 \Delta \Vdash^k \tau_1 \tau_2 : \kappa_3 \dashv \Theta
 \end{array}$$

$$\boxed{\Delta \Vdash^{\text{kapp}} \kappa_1 \bullet \kappa_2 : \kappa \dashv \Theta} \quad (\text{Application Kinding})$$

$$\begin{array}{c}
 \text{A-KAPP-KUVAR} \\
 \Delta[\hat{\alpha}_1, \hat{\alpha}_2, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \Vdash^{\mu} \hat{\alpha}_1 \approx \kappa \dashv \Theta \\
 \hline
 \Delta[\hat{\alpha}] \Vdash^{\text{kapp}} \hat{\alpha} \bullet \kappa : \hat{\alpha}_2 \dashv \Theta
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-KAPP-ARROW} \\
 \Delta \Vdash^{\mu} \kappa_1 \approx \kappa \dashv \Theta \\
 \hline
 \Delta \Vdash^{\text{kapp}} \kappa_1 \rightarrow \kappa_2 \bullet \kappa : \kappa_2 \dashv \Theta
 \end{array}$$

$$\boxed{\Delta \Vdash^{\mu} \kappa_1 \approx \kappa_2 \dashv \Theta} \quad (\text{Kind Unification})$$

$$\begin{array}{c}
 \text{A-U-REFL} \\
 \hline
 \Delta \Vdash^{\mu} \kappa \approx \kappa \dashv \Delta
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-U-ARROW} \\
 \Delta \Vdash^{\mu} \kappa_1 \approx \kappa_3 \dashv \Theta_1 \quad \Theta_1 \Vdash^{\mu} [\Theta_1]\kappa_2 \approx [\Theta_1]\kappa_4 \dashv \Theta \\
 \hline
 \Delta \Vdash^{\mu} \kappa_1 \rightarrow \kappa_2 \approx \kappa_3 \rightarrow \kappa_4 \dashv \Theta
 \end{array}$$

$$\begin{array}{c}
 \text{A-U-KVARL} \\
 \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \kappa \rightsquigarrow \kappa_2 \dashv \Theta[\hat{\alpha}] \\
 \hline
 \Delta[\hat{\alpha}] \Vdash^{\mu} \hat{\alpha} \approx \kappa \dashv \Theta[\hat{\alpha} = \kappa_2]
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-U-KVARR} \\
 \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \kappa \rightsquigarrow \kappa_2 \dashv \Theta[\hat{\alpha}] \\
 \hline
 \Delta[\hat{\alpha}] \Vdash^{\mu} \kappa \approx \hat{\alpha} \dashv \Theta[\hat{\alpha} = \kappa_2]
 \end{array}$$

$$\boxed{\Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \kappa_1 \rightsquigarrow \kappa_2 \dashv \Theta} \quad (\text{Promotion})$$

$$\begin{array}{c}
 \text{A-PR-STAR} \\
 \hline
 \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \star \rightsquigarrow \star \dashv \Delta
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-PR-ARROW} \\
 \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \kappa_1 \rightsquigarrow \kappa_3 \dashv \Delta_1 \quad \Delta_1 \Vdash_{\hat{\alpha}}^{\text{pr}} [\Delta_1]\kappa_2 \rightsquigarrow \kappa_4 \dashv \Theta \\
 \hline
 \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \kappa_1 \rightarrow \kappa_2 \rightsquigarrow \kappa_3 \rightarrow \kappa_4 \dashv \Theta
 \end{array}$$

$$\begin{array}{c}
 \text{A-PR-KUVARL} \\
 \Delta[\hat{\beta}][\hat{\alpha}] \Vdash_{\hat{\alpha}}^{\text{pr}} \hat{\beta} \rightsquigarrow \hat{\beta} \dashv \Delta[\hat{\beta}][\hat{\alpha}]
 \end{array}
 \quad
 \begin{array}{c}
 \text{A-PR-KUVARR} \\
 \Delta[\hat{\alpha}][\hat{\beta}] \Vdash_{\hat{\alpha}}^{\text{pr}} \hat{\beta} \rightsquigarrow \hat{\beta}_1 \dashv \Delta[\hat{\beta}_1, \hat{\alpha}][\hat{\beta} = \hat{\beta}_1]
 \end{array}$$

Figure 7.3: Algorithmic kinding, unification and promotion in Haskell98.

is a unification variable $\hat{\alpha}$ (rule [A-KAPP-KUVAR](#)), we know it must be an unsolved unification variable. Since we know κ_1 must be a function kind, we solve $\hat{\alpha}$ using $\hat{\alpha}_1 \rightarrow \hat{\alpha}_2$, unify $\hat{\alpha}_1$ with the argument kind κ , and return $\hat{\alpha}_2$. Note that the unification variables $\hat{\alpha}_1$ and $\hat{\alpha}_2$ are inserted in the *middle* of the context Δ ; this allows us to remove the type variables from the end of the context in rule [A-DT-DECL](#) and also plays a critical role in maintaining unification variable scoping in the more complicated system we analyze later. If the kind of the function is not a unification variable, it must surely be a function kind $\kappa_1 \rightarrow \kappa_2$ (rule [A-KAPP-ARROW](#)), so we unify κ_1 with the known argument kind κ , returning κ_2 .

7.4.6 UNIFICATION

The unification judgment $\Delta \Vdash \kappa_1 \approx \kappa_2 \dashv \Theta$ is given in Figure 7.3. The elaborate style of this judgment (with the promotion process \Vdash^{pr}) is overkill for Haskell98, but this design sets us up well to understand unification in the presence of our PolyKinds system, later. We require the preconditions that $[\Delta]\kappa_1 = \kappa_1$ and $[\Delta]\kappa_2 = \kappa_2$, so that every time we encounter a unification variable, we know it is unsolved. Rule [A-U-REFL](#) is our base case, and rule [A-U-ARROW](#) unifies the components of the arrow types. When unifying $\hat{\alpha} \approx \kappa$ (rule [A-U-KVARL](#)), we cannot simply set $\hat{\alpha}$ to κ , as κ might include variables bound to the *right* of $\hat{\alpha}$. Instead, we need to *promote* (\Vdash^{pr}) κ . Rule [A-U-KVARL](#) first promotes the kind κ , yielding κ_2 , so that κ_2 is well-formed in the prefix context of $\hat{\alpha}$. We can then set $\hat{\alpha} = \kappa_2$ in the concluding context. Rule [A-U-KVARR](#) is symmetric to rule [A-U-KVARL](#).

PROMOTION. As described in Chapter 6, the crucial observation of \Vdash^{pr} is that *the relative order between unification variables does not matter for solving a constraint*. The promotion judgment $\Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \kappa_1 \rightsquigarrow \kappa_2 \dashv \Theta$ captures this observation. The judgment says that, under the context Δ , we promote the kind κ_1 , yielding κ_2 , so that κ_2 is well-formed in the prefix context of $\hat{\alpha}$, while retaining $[\Theta]\kappa_1 = [\Theta]\kappa_2$. The promotion rules here are essentially the same as in Figure 6.1. Importantly, in rule [A-PR-KUVARR](#), a unification variable $\hat{\beta}$ bound to the right of $\hat{\alpha}$ in Δ is replaced by a fresh variable introduced to $\hat{\alpha}$'s left. It is this promotion algorithm that guarantees that all the $\hat{\alpha}_i$ will be solved in rule [A-DT-DECL](#): those variables will appear to the right of the unification variable invented in rule [A-PGM-DT](#) and will be promoted (and thus solved).

7.4.7 SOUNDNESS AND COMPLETENESS

The main theorem of soundness is for program typing:

2931 **Theorem 7.1** (Soundness of \Vdash^{pgm}). *If Ω ok, and $\Omega \Vdash^{\text{ectx}} \Gamma$, and $\Omega; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \sigma$, then*
 2932 *$[\Omega]\Omega; [\Omega]\Gamma \Vdash^{\text{pgm}} \text{pgm} : \sigma$.*

2933 This lemma statement refers to judgments Ω ok and $\Omega \Vdash^{\text{ectx}} \Gamma$; these basic well-formedness
 2934 checks are standard. Because the declarative judgment \Vdash^{pgm} requires declarative contexts,
 2935 we write $[\Omega]\Omega$ and $[\Omega]\Gamma$ in the conclusion, applying the complete algorithmic context Ω as a
 2936 substitution to form a declarative context, free of unification variables.

2937 The statement of completeness relies on the definition of *context extension* $\Delta \longrightarrow \Theta$ [Dun-
 2938 field and Krishnaswami 2013]. The judgment captures a process of *information increase*, and
 2939 its definition is similar as in previous chapters. In all the algorithmic judgments, the output
 2940 context is an extension of the input context.

2941 We prove that our system is complete only up to checking *a group of datatype declarations*.
 2942

2943 **Theorem 7.2** (Completeness of \Vdash^{grp}). *Given Ω ok, if $[\Omega]\Omega \Vdash^{\text{grp}} \mathbf{rec} \overline{\mathcal{T}}_i^i \rightsquigarrow \overline{\kappa}_i^i; \overline{\Psi}_i^i$, then*
 2944 *there exists $\overline{\kappa}'_i, \overline{\Gamma}_i^i, \Theta$, and Ω' , such that $\Omega \Vdash^{\text{grp}} \mathbf{rec} \overline{\mathcal{T}}_i^i \rightsquigarrow \overline{\kappa}'_i; \overline{\Gamma}_i^i \dashv \Theta$, where $\Theta \longrightarrow \Omega'$,*
 2945 *and $[\Omega']\overline{\kappa}'_i = \overline{\kappa}_i^i$, and $\overline{\Psi}_i^i = [\Omega']\overline{\Gamma}_i^i$.*

2946 The theorem statement uses the notational convenience for checking groups, defined in
 2947 Section 7.3.2 and Section 7.4.2. The theorem states that for every possible declarative typing
 2948 for a group, the algorithmic typing results can be extended to support the declarative typing.

2949 Unfortunately, the typing program judgment \Vdash^{pgm} is incomplete, as our algorithm mod-
 2950 els defaulting, while the declarative system does not. (For example, the *Q1/Q2* example of
 2951 Section 7.4.3 is accepted by the declarative system but rejected by both GHC and our algo-
 2952 rithmic system.) As straightforward as the defaulting rule may seem, it is surprisingly hard
 2953 to model in a declarative system. We remedy this in the next section.

2954 7.5 TYPE PARAMETERS, PRINCIPAL KINDS AND COMPLETENESS IN 2955 HASKELL98

2956 We have seen that our judgments for checking programs \Vdash^{pgm} and \Vdash^{pgm} do not support com-
 2957 pleteness, because the declarative system cannot easily model the defaulting rule given in
 2958 Section 7.4.3. In Chapter 5, we have seen that introducing type parameters [Garcia and Ci-
 2959 mini 2015] helps resolve the dynamic gradual guarantee. Inspired by that, in this section,
 2960 we introduce *kind parameters*, and relate the defaulting rule to principal kinds to recover
 2961 completeness.

2962 7.5.1 TYPE PARAMETERS

2963 Consider the datatype `data App f a = MkApp (f a)` again. The parameter `a` in this example
 2964 can be of any kind, including \star , $\star \rightarrow \star$, or others. To express this polymorphism without
 2965 introducing first-class polymorphism, we endow the declarative system with a set of *kind*
 2966 *parameters*. Importantly, kind parameters live only in our reasoning; users are not allowed
 2967 to write any kind parameters in the source. We amend the definition of kinds in Figure 7.1
 2968 as follows.

2969	kind parameter	P	\in	KPARAM
	kind	κ	$::=$	$\star \mid \kappa_1 \rightarrow \kappa_2 \mid P$

2970 Kind parameters are uninterpreted kinds: there is no special treatment of kind parameters
 2971 in the type system. Think of them as abstract, opaque kind constants. Kind parameters are
 2972 eliminated by substitutions S , which map kind parameters to kinds, and homomorphically
 2973 work on kinds themselves. For example, `App` can be assigned kind $(P \rightarrow \star) \rightarrow P \rightarrow \star$. By
 2974 substituting for P , we can get, for example, $(\star \rightarrow \star) \rightarrow \star \rightarrow \star$. Indeed, from $(P \rightarrow \star) \rightarrow$
 2975 $P \rightarrow \star$ we can get all other possible kinds of `App`. This leads to the definition of *principal*
 2976 *kinds* for a group; and to the property that for every well-formed group, there exists a list of
 2977 principal kinds.

2978 **Definition 19** (Principal Kind in Haskell98 with Kind Parameters). Given a context Σ , a
 2979 group $\text{rec } \overline{\mathcal{T}}_i^i$, and a list of kinds $\overline{\kappa}_i^i$, we say that the $\overline{\kappa}_i^i$ are *principal kinds* of Σ and $\text{rec } \overline{\mathcal{T}}_i^i$, de-
 2980 noted as $\Sigma \vdash \text{rec } \overline{\mathcal{T}}_i^i \leadsto^p \overline{\kappa}_i^i$, if $\Sigma \vdash^{\text{grp}} \text{rec } \overline{\mathcal{T}}_i^i \leadsto \overline{\kappa}_i^i; \overline{\Psi}_i^i$, and whenever $\Sigma \vdash^{\text{grp}} \text{rec } \overline{\mathcal{T}}_i^i \leadsto$
 2981 $\overline{\kappa}_i^i; \overline{\Psi}_i^i$ holds, there exists some substitution S , such that $S(\kappa_i) = \kappa_i^i$ and $S(\Psi_i) = \Psi_i^i$.

2982 **Theorem 7.3** (Principality of Haskell98 with Kind Parameters). If $\Sigma \vdash^{\text{grp}} \text{rec } \overline{\mathcal{T}}_i^i \leadsto \overline{\kappa}_i^i; \overline{\Psi}_i^i$,
 2983 then there exists some $\overline{\kappa}_i^i$ such that $\Sigma \vdash \text{rec } \overline{\mathcal{T}}_i^i \leadsto^p \overline{\kappa}_i^i$.

2984 7.5.2 PRINCIPAL KINDS AND DEFAULTING

2985 Using the notion of kind parameters, we can now incorporate defaulting into the declarative
 2986 specification of Haskell98. To this end, we define the defaulting kind parameter substitution
 2987 S^* :

2988 **Definition 20** (Defaulting Kind Parameter Substitution). Let $S^* \in \text{KPARAM} \rightarrow \kappa$ denote
 2989 the substitution that substitutes all kind parameters to \star .

Using S^* , we can rewrite rule **PGM-DT**. Noteworthy is the fact that kind parameters only live in the middle of the derivation (in the κ_i), but never appear in the results $S^*(\kappa_i)$.

$$\frac{\text{PGM-DTP} \quad \Sigma \vdash^{\text{grp}} \text{rec } \overline{T}_i^i \leadsto \overline{\kappa}_i^i; \overline{\Psi}_i^i \quad \Sigma \vdash \text{rec } \overline{T}_i^i \leadsto^{\text{p}} \overline{\kappa}_i^i \quad \Sigma, \overline{T}_i : S^*(\kappa_i)^i; \Psi, \overline{S^*(\Psi_i)}^i \vdash^{\text{pgm}} \text{pgm} : \sigma}{\Sigma; \Psi \vdash^{\text{pgm}} \text{rec } \overline{T}_i^i; \text{pgm} : \sigma}$$

7.5.3 COMPLETENESS

The two versions of defaulting (the one above and $\Delta \longrightarrow \Omega$ of Section 7.4.2) are equivalent. This fact is embodied in the following theorem, stating that the algorithmic system is complete with respect to the declarative system with kind parameters.

Theorem 7.4 (Completeness of \Vdash^{pgm} with Kind Parameters). *Given algorithmic contexts Ω , Γ , and a program pgm , if $[\Omega]\Omega; [\Omega]\Gamma \vdash^{\text{pgm}} \text{pgm} : \sigma$, then $\Omega; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \sigma$.*

7.6 DECLARATIVE SYNTAX AND SEMANTICS OF POLYKINDS

Having set the stage for kind inference for datatypes in Haskell98, we now present the declarative PolyKinds system. Our syntax is given in Figure 7.7. Compared to Haskell98, programs pgm now include datatype signatures \mathcal{S} . Data constructor declarations \mathcal{D} support existential quantification. Types and kinds are collapsed into one level; σ and K are now synonymous metavariables and allow prenex polymorphism, where variables in a kind binder ϕ can optionally have kind annotations. Monotypes τ and κ allow visible kind applications $\tau_1 @ \tau_2$. Elaborated types μ, η are the result of elaboration, which decorates source types to make them fully explicit. This is done so that checking equality of elaborated types is straightforward. The syntax for elaborated types contains inferred polymorphism $\forall \{\phi^c\}. \mu$, where complete free kind binders ϕ^c have all variables annotated. Elaborated monotypes ρ and ω share the same syntax as monotypes. We informally use only ρ or ω for elaborated monotypes.

7.6.1 GROUPS AND DEPENDENCY ANALYSIS

Decomposition of signatures and definitions allows a more fine-grained control of dependency analysis. If T has a signature, and S depends on T , then we can kind-check S without inspecting the definition of T , because we know the kind of T . In other words, S only depends on the *signature* of T , not the *definition* of T . The complete dependency analysis rule, inspired by Jones [1999, Section 11.6.3], is:

Definition 21 (Dependency Analysis in PolyKinds).

program	pgm	$::=$	$\mathbf{sig} \mathcal{S}; pgm \mid \mathbf{rec} \overline{\mathcal{T}}_i^i; pgm \mid e$
datatype signature	\mathcal{S}	$::=$	$\mathbf{data} T : \sigma$
datatype decl.	\mathcal{T}	$::=$	$\mathbf{data} T \overline{a}_i^i = \overline{\mathcal{D}}_j^j$
data constructor decl.	\mathcal{D}	$::=$	$\forall \phi. D \overline{\tau}_i^i$
type, kind	σ, K	$::=$	$\forall \phi. \sigma \mid \tau$
monotype, monokind	$\tau, \kappa, \rho, \omega$	$::=$	$\star \mid \mathbf{Int} \mid a \mid T \mid \tau_1 \tau_2 \mid \tau_1 @ \tau_2 \mid \rightarrow$
elaborated type, kind	μ, η	$::=$	$\forall \{\phi^c\}. \mu \mid \forall \phi^c. \mu \mid \rho$
term context	Ψ	$::=$	$\bullet \mid \Psi, D : \mu$
type context	Σ	$::=$	$\bullet \mid \Sigma, a : \rho \mid \Sigma, T : \eta$
kind binder list	ϕ	$::=$	$\bullet \mid \phi, a \mid \phi, a : \kappa$
complete kind binder list	ϕ^c	$::=$	$\bullet \mid \phi^c, a : \rho$

Figure 7.4: Syntax of PolyKinds

- 3017 (i) If the signature/definition of T_1 mentions T_2 , then:
- 3018 a) if T_2 has a signature, the signature/definition of T_1 depends on the signature of
- 3019 T_2 ;
- 3020 b) otherwise, the signature/definition of T_1 depends on the definition of T_2 .

- 3021 (ii) A definition depends on its signature.

3022 To avoid a type that mentions itself in its own kind, we disallow self-dependency or mutual

3023 dependency involving signatures. For example, a group

3024 $\mathbf{data} \textcolor{violet}{T1} :: \textcolor{teal}{T2} \textcolor{violet}{a} \rightarrow \star$

3025 $\mathbf{data} \textcolor{teal}{T2} :: \textcolor{violet}{T1} \rightarrow \star$

3026 is rejected, lest $\textcolor{violet}{T1}$ be assigned type $\forall(a :: \textcolor{teal}{T1}). \textcolor{teal}{T2} \textcolor{violet}{a} \rightarrow \star$. In other words, signatures do not

3027 form groups: they are always processed individually. Moreover, the definition of a datatype

3028 which has a signature does not join others in a group, as according to Definition 21, there

3029 will be no dependency from datatypes on it. This simplifies the kinding procedure, as we will

3030 see in the coming section.

3031 The declarative typing rules appear in Figure 7.5. The judgment $\Sigma; \Psi \vdash^{pgm} pgm : \sigma$

3032 checks the program. From now on we omit the typing rule for expressions in programs,

3033 which is essentially the same as in Haskell98. Rule **PGM-SIG** processes kind signatures by

3034 elaborating and generalizing the kind, then adding it to the context Σ . The helper judgment

3035 $\Sigma \vdash^{sig} \mathcal{S} \rightsquigarrow T : \eta$ checks a kind signature $\mathbf{data} T : \sigma$. First, it uses $\lceil \sigma \rceil$ to ensure σ returns

$$\boxed{\Sigma; \Psi \vdash^{\text{pgm}} \text{pgm} : \sigma} \quad (\text{Typing Program})$$

$$\frac{\text{PGM-SIG} \quad \Sigma \vdash^{\text{sig}} \mathcal{S} \rightsquigarrow T : \eta \quad \Sigma, T : \eta; \Psi \vdash^{\text{pgm}} \text{pgm} : \mu}{\Sigma; \Psi \vdash^{\text{pgm}} \text{sig } \mathcal{S}; \text{pgm} : \mu}$$

$$\frac{\text{PGM-DT-TTS} \quad (T : \eta) \in \Sigma \quad \Sigma \vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Psi_1 \quad \Sigma; \Psi, \Psi_1 \vdash^{\text{pgm}} \text{pgm} : \mu}{\Sigma; \Psi \vdash^{\text{pgm}} \text{rec } \mathcal{T}; \text{pgm} : \mu}$$

$$\frac{\text{PGM-DT-TT} \quad \overline{\phi_i^c \in \mathcal{Q}(\omega_i)}^i \quad \overline{\Sigma, \phi_i^c \vdash^{\text{ela}} \omega_i : \star}^i \quad \overline{\Sigma, \cup \overline{\phi_i^c}^i, \overline{T_i : \omega_i}^i \vdash^{\text{dt}} \mathcal{T}_i \rightsquigarrow \Psi_i}^i \quad \overline{\Sigma, \cup \overline{\phi_i^c}^i, \overline{T_i : \omega_i}^i \vdash_{\phi_i^c}^{\text{gen}} \Psi_i \rightsquigarrow \Psi'_i}^i}{\Sigma, \overline{T_i : \forall \{\phi_i^c\}. \omega_i}^i; \Psi, \Psi'_i[\overline{T_i \mapsto T_i @ \phi_i^c}^i] \vdash^{\text{pgm}} \text{pgm} : \sigma} \quad \Sigma; \Psi \vdash^{\text{pgm}} \text{rec } \overline{\mathcal{T}_i}^i; \text{pgm} : \sigma$$

$$\boxed{\Sigma \vdash^{\text{sig}} \mathcal{S} \rightsquigarrow T : \eta} \quad (\text{Typing Signature})$$

$$\frac{\text{SIG-TT} \quad \lceil \sigma \rceil \quad \phi \in \mathcal{Q}(\sigma) \quad \phi_1^c \in \mathcal{Q}(\forall \phi^c. \eta) \quad \Sigma, \phi_1^c \vdash^k \forall \phi. \sigma : \star \rightsquigarrow \forall \phi^c. \eta \quad |\phi| = |\phi^c|}{\Sigma \vdash^{\text{sig}} \text{data } T : \sigma \rightsquigarrow T : \forall \{\phi_1^c\}. \forall \{\phi^c\}. \eta}$$

$$\boxed{\Sigma \vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Psi} \quad (\text{Typing Datatype Decl.})$$

$$\frac{\text{DT-TT} \quad (T : \forall \{\phi_1^c\}. \forall \phi_2^c. \overline{\omega_i}^i \rightarrow \star) \in \Sigma \quad \overline{\Sigma, \phi_1^c, \phi_2^c, \overline{a_i : \omega_i}^i \vdash_{(T @ \phi_1^c @ \phi_2^c \overline{a_i}^i)}^{\text{dc}} \mathcal{D}_j \rightsquigarrow \mu_j}^j}{\Sigma \vdash^{\text{dt}} \text{data } T \overline{a_i}^i = \overline{\mathcal{D}_j}^j \rightsquigarrow \overline{D_j : \forall \{\phi_1^c\}. \forall \phi_2^c. \forall \overline{a_i : \omega_i}^i. \mu_j}^j}$$

$$\boxed{\Sigma \vdash_{\rho}^{\text{dc}} \mathcal{D} \rightsquigarrow \mu} \quad (\text{Typing Data Constructor Decl.}) \quad \boxed{\Sigma \vdash_{\phi^c}^{\text{gen}} \Psi_1 \rightsquigarrow \Psi_2} \quad (\text{Generalization})$$

$$\frac{\text{DC-TT} \quad \phi^c \in \mathcal{Q}(\mu \setminus_{\Sigma, \overline{\tau_i}^i}) \quad \Sigma, \phi^c \vdash^k \forall \phi. \overline{\tau_i}^i \rightarrow \rho : \star \rightsquigarrow \mu}{\Sigma \vdash_{\rho}^{\text{dc}} \forall \phi. D \overline{\tau_i}^i \rightsquigarrow \forall \{\phi^c\}. \mu}$$

$$\frac{\text{GEN} \quad \overline{\phi^c, \phi_i^c \in \mathcal{Q}(\mu_i)}^i}{\Sigma \vdash_{\phi^c}^{\text{gen}} \overline{D_i : \mu_i}^i \rightsquigarrow \overline{D_i : \forall \{\phi^c, \phi_i^c\}. \mu_i}^i}$$

Figure 7.5: Declarative specification of PolyKinds

$$\boxed{\Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2} \quad (\text{Instantiation})$$

$$\begin{array}{c} \text{INST-REFL} \\ \hline \Sigma \vdash^{\text{inst}} \mu : \omega <: \omega \rightsquigarrow \mu \end{array} \quad \begin{array}{c} \text{INST-FORALL} \\ \hline \Sigma \vdash^{\text{ela}} \rho : \omega_1 \quad \Sigma \vdash^{\text{inst}} \mu_1 @ \rho : \eta[a \mapsto \rho] <: \omega_2 \rightsquigarrow \mu_2 \\ \hline \Sigma \vdash^{\text{inst}} \mu_1 : \forall a : \omega_1. \eta <: \omega_2 \rightsquigarrow \mu_2 \end{array}$$

$$\boxed{\Sigma \vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu} \quad (\text{Kind Checking})$$

$$\begin{array}{c} \text{KC-SUB} \\ \hline \Sigma \vdash^{\text{k}} \sigma : \eta \rightsquigarrow \mu_1 \quad \Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2 \\ \hline \Sigma \vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu_2 \end{array}$$

$$\boxed{\Sigma \vdash^{\text{k}} \sigma : \eta \rightsquigarrow \mu} \quad (\text{Kinding})$$

$$\begin{array}{c} \text{KTT-STAR} \\ \hline \Sigma \vdash^{\text{k}} \star : \star \rightsquigarrow \star \end{array}$$

$$\begin{array}{c} \text{KTT-APP} \\ \hline \Sigma \vdash^{\text{k}} \tau_1 : \eta_1 \rightsquigarrow \rho_1 \quad \Sigma \vdash^{\text{inst}} \rho_1 : \eta_1 <: (\omega_1 \rightarrow \omega_2) \rightsquigarrow \rho_2 \quad \Sigma \vdash^{\text{kc}} \tau_2 \Leftarrow \omega_1 \rightsquigarrow \rho_3 \\ \hline \Sigma \vdash^{\text{k}} \tau_1 \tau_2 : \omega_2 \rightsquigarrow \rho_2 \rho_3 \end{array}$$

$$\begin{array}{c} \text{KTT-KAPP} \\ \hline \Sigma \vdash^{\text{k}} \kappa_1 : \forall a : \omega. \eta \rightsquigarrow \rho_1 \quad \Sigma \vdash^{\text{kc}} \kappa_2 \Leftarrow \omega \rightsquigarrow \rho_2 \\ \hline \Sigma \vdash^{\text{k}} \kappa_1 @ \kappa_2 : \eta[a \mapsto \rho_2] \rightsquigarrow \rho_1 @ \rho_2 \end{array}$$

$$\begin{array}{c} \text{KTT-FORALLI} \\ \hline \Sigma \vdash^{\text{ela}} \omega : \star \quad \Sigma, a : \omega \vdash^{\text{kc}} \sigma \Leftarrow \star \rightsquigarrow \mu \\ \hline \Sigma \vdash^{\text{k}} \forall a. \sigma : \star \rightsquigarrow \forall a : \omega. \mu \end{array}$$

$$\boxed{\Sigma \vdash^{\text{ela}} \mu : \eta} \quad (\text{Elaborated Kinding})$$

$$\begin{array}{c} \text{ELA-APP} \\ \hline \Sigma \vdash^{\text{ela}} \rho_1 : \omega_1 \rightarrow \omega_2 \quad \Sigma \vdash^{\text{ela}} \rho_2 : \omega_1 \\ \hline \Sigma \vdash^{\text{ela}} \rho_1 \rho_2 : \omega_2 \end{array} \quad \begin{array}{c} \text{ELA-KAPP} \\ \hline \Sigma \vdash^{\text{ela}} \rho_1 : \forall a : \omega. \eta \quad \Sigma \vdash^{\text{ela}} \rho_2 : \omega \\ \hline \Sigma \vdash^{\text{ela}} \rho_1 @ \rho_2 : \eta[a \mapsto \rho_2] \end{array}$$

Figure 7.6: Selected rules for declarative kind-checking in PolyKinds

\star : $\lceil \sigma \rceil$ simply traverses over arrows and forall's, checking that the final kind of σ is \star . Then, as σ may be an open kind signature, it extracts the free kind variables $\phi \in \mathcal{Q}(\sigma)$, where $\mathcal{Q}(\sigma)$ is the set of all well-formed orderings of the free variables (transitively looking into variables' kinds) of σ ; thus, ϕ is one such ordering. As discussed in Section 7.2.2, variables in ϕ are *inferred* so we accept any relative order, as long as it features the necessary dependency between the variables. Then the rule tries to elaborate (\vdash^k) the kind $\forall \phi. \sigma$, where ϕ and ϕ^c have the same length ($|\phi| = |\phi^c|$). As the elaborated result $\forall \phi^c. \eta$ can be further generalized, we bring the free variables $\phi_1^c \in \mathcal{Q}(\forall \phi^c. \eta)$ into scope when elaborating. The concluding output is $T : \forall \{\phi_1^c\}. \forall \{\phi^c\}. \eta$. As an example, consider a kind signature $\forall a. b \rightarrow \star$. We have $\phi = b$, $\phi^c = b : \star$, and $\phi_1^c = c : \star$, and the final kind is $\forall \{c : \star\}. \forall \{b : \star\}. \forall (a : c). b \rightarrow \star$. We see in this one example the three sources of quantified variables, always in this order: variables arising from generalization (c), from implicit quantification (b), and from explicit quantification (a).

Returning to the \vdash^{pgm} judgment, rule **PGM-DT-TTS** checks a datatype definition that has a kind signature. It ensures that the signature has already been checked, by fetching the kind information in the context using $(T : \eta) \in \Sigma$. Then it checks the datatype declaration, and gathers the output term context to check the rest of the program. Rule **PGM-DT-TT**, as in Haskell98, guesses kinds ω_i for each datatype T_i and puts $T_i : \omega_i$ in the context *before* looking at the declarations. The major difference from Haskell98 is that kinds can be generalized *after* the group is checked. We use ϕ_i^c to denote the free variables in each kind ω_i . After the recursive group is typed, we generalize the kind of each type constructor as well as the type of its data constructors. To generalize the type of data constructors, we use the \vdash^{gen} judgment. Rule **GEN** generalizes every data constructor in the context, where ϕ^c are free type variables of its corresponding type constructor, and ϕ_i^c are free type variables specific to the data constructor. Returning to rule **PGM-DT-TT**, note that since the kinds of type constructors are generalized, the occurrences of the type constructors now require more type arguments. Therefore in Ψ'_i , we substitute T_i with $T_i @ \phi_i^c$, where T_i is applied to all the variables bound in ϕ_i^c .

The judgment of checking datatype declarations $\Sigma \vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Psi$ has only rule **DT-TT**, which expands on the rule in Haskell98, to support top-level polymorphism for the kind of T .

Rule **DC-TT** supports existential variables ϕ . Moreover, the elaborated type μ of $\forall \phi. \bar{\tau}_i^i \rightarrow \rho$ can be further generalized over ϕ^c . Note that ϕ^c (via a small abuse of notation in the rule) excludes free variables in τ_i and Σ .

elaborated monotype	ρ, ω	$::=$	$\star \mid \text{Int} \mid a \mid T \mid \rho_1 \rho_2 \mid \rho_1 @ \rho_2 \mid \rightarrow \mid \hat{\alpha}$
term context	Γ	$::=$	$\bullet \mid \Gamma, D : \mu$
type context	Δ, Θ	$::=$	$\bullet \mid \Delta, a : \omega \mid \Delta, T : \eta$
			$\mid \Delta, \hat{\alpha} : \omega \mid \Delta, \hat{\alpha} : \omega = \rho \mid \Delta, \{\Delta'\} \mid \Delta, \blacktriangleright_D$
complete type context	Ω	$::=$	$\bullet \mid \Omega, a : \omega \mid \Omega, T : \eta \mid \Omega, \hat{\alpha} : \omega = \rho \mid \Omega, \{\Omega'\} \mid \Omega, \blacktriangleright_D$
kind binder list	$\hat{\phi}^c$	$::=$	$\bullet \mid \hat{\phi}^c, \hat{\alpha} : \kappa$

Figure 7.7: Algorithmic syntax in PolyKinds

3069 7.6.2 CHECKING KINDS

3070 The kinding judgment \vdash^k appears in Figure 7.6. We only highlight selected rules. Kinding
3071 $\Sigma \vdash^k \sigma : \eta \rightsquigarrow \mu$ infers the type σ to have kind η , and it elaborates σ to μ . The kinding rules
3072 are built upon the axiom $\Sigma \vdash^k \star : \star \rightsquigarrow \star$ (rule **KTT-STAR**). While this axiom is known to
3073 violate logical consistency, as Haskell is already logically inconsistent because of its general
3074 recursion, we do not consider it as an issue here. Rule **KTT-APP** concerns applications $\tau_1 \tau_2$.
3075 It first infers the kind of τ_1 to be η_1 . The kind η_1 can be a polymorphic kind headed by a
3076 \forall , though it is expected to be a function kind. Thus the rule uses \vdash^{inst} to instantiate η_1 to
3077 $\omega_1 \rightarrow \omega_2$. The instantiation judgment $\Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2$ instantiates a kind η to
3078 a monokind ω , where if μ_1 has kind η then μ_2 has kind ω . After instantiation, rule **KTT-**
3079 **APP** checks (\vdash^{kc}) the argument τ_2 against the expected argument kind ω_1 . The kind checking
3080 judgment \vdash^{kc} simply delegates the work to kinding and instantiation. Rule **KTT-KAPP** checks
3081 visible kind applications. Note in the return kind η , the variable a is substituted by the elab-
3082 orated argument ρ_2 . Rule **KTT-FORALLI** elaborates an unannotated type $\forall a. \sigma$ to $\forall a : \omega. \mu$,
3083 where ω is an *elaborated* kind (\vdash^{ela}) guessed for a .

3084 The stand-alone elaborated kinding judgment \vdash^{ela} type-checks elaborated types. As all
3085 necessary instantiation has been done, type-checking for elaborated types is easy. For ex-
3086 ample, rule **ELA-APP** concerns applications $\rho_1 \rho_2$. Compared to rule **KTT-APP**, here ρ_1 has an
3087 arrow kind, and takes exactly the kind of ρ_2 . All judgments output well-formed elaborated
3088 types, as the following lemma states:

3089 **Lemma 7.5** (Type Elaboration). *We have: 1. if $\Sigma \vdash^k \sigma : \eta \rightsquigarrow \mu$, then $\Sigma \vdash^{\text{ela}} \mu : \eta$; 2. if*
3090 *$\Sigma \vdash^{\text{kc}} \sigma \Leftarrow \eta \rightsquigarrow \mu$, then $\Sigma \vdash^{\text{ela}} \mu : \eta$; 3. if $\Sigma \vdash^{\text{ela}} \mu_1 : \eta$, and $\Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2$, then*
3091 *$\Sigma \vdash^{\text{ela}} \mu_2 : \omega$.*

3092 7.7 KIND INFERENCE FOR POLYKINDS

3093 We now describe the *algorithmic* counterpart of the PolyKinds system. Figure 7.7 presents the
 3094 syntax of kinds and contexts in the algorithmic system for PolyKinds. Elaborated monotypes
 3095 are extended with unification variables $\hat{\alpha}$. Echoing the algorithm for Haskell98, type contexts
 3096 are extended with unification variables, which now have kinds ($\hat{\alpha} : \omega$ and $\hat{\alpha} : \omega = \rho$). Also
 3097 added to contexts are local scopes $\{\Delta\}$. These are special type contexts, where *variables can*
 3098 *be reordered*. Recall the kind $\forall (a :: (f\ b))\ (c :: k). f\ c \rightarrow \star$ in Section 7.2.2, where f
 3099 and b appear before k , but end up depending on k . In which order should we put f , b and
 3100 k in the algorithmic context to kind-check the signature? We cannot have a correct order
 3101 before completing inference. Therefore, we put them into a local scope, knowing we can
 3102 reorder the variables during kind-checking according to the dependency information. The
 3103 well-formedness judgment for local scopes requires them to be well-scoped, leading to the
 3104 fact that $\Delta, \{\Delta'\}$ is well-formed iff Δ, Δ' is. The marker \blacktriangleright_D , subscripted by the name of a
 3105 data constructor, is used only in and explained with rule A-DC-TT.

3106 7.7.1 ALGORITHMIC PROGRAM TYPING

3107 The algorithmic typing rules appear in Figure 7.8. The judgment $\Omega; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \mu$ checks
 3108 the program. The rule A-PGM-SIG and rule A-PGM-DT-TTS correspond directly to the declar-
 3109 ative rules. Note that as the datatype declaration in rule A-PGM-DT-TTS already has a sig-
 3110 nature, the output type context remains unchanged. Rule A-PGM-DT-TT concerns a group
 3111 (without kind signatures). Like in Haskell98, it first assigns a fresh unification variable $\hat{\alpha}_i : \star$
 3112 as the kind of each type constructor, and then type-checks each datatype declaration, yield-
 3113 ing the output context Θ_{n+1} . Unlike Haskell98 which then uses defaulting, here from each
 3114 $\hat{\alpha}_i$ we get their unsolved unification variables $\hat{\phi}_i^c$ and generalize the kind of each type con-
 3115 structor as well as the type of each data constructor. The **unsolved** (Δ) metafunction simply
 3116 extracts a set of free unification variables in Δ , with their kinds substituted by Δ . Before
 3117 generalization, we apply Θ_{n+1} to the results so all solved unification variables get substituted
 3118 away. We use the notation $\hat{\phi}_i^c \mapsto \phi_i^c$ to mean that all unification variables in $\hat{\phi}_i^c$ are replaced
 3119 by fresh type variables in ϕ_i^c . The algorithmic generalization judgment \Vdash^{gen} corresponds
 3120 straightforwardly to the declarative rule, and thus is omitted. Though they appear daunting,
 3121 the extended contexts used in the last premise to this rule are unsurprising: they just apply
 3122 the relevant substitutions (the solved unification variables in Θ_{n+1} , the replacement of uni-
 3123 fication variables with fresh proper type variables $\hat{\phi}_i^c \mapsto \phi_i^c$, and the generalization of the
 3124 kinds of the group of datatypes $T_i \mapsto T_i @ \phi_i^c$).

$$\boxed{\Omega; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \mu}$$

(Typing Program)

A-PGM-SIG

$$\frac{\Omega \Vdash^{\text{sig}} \mathcal{S} \rightsquigarrow T : \eta \quad \Omega, T : \eta; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \mu}{\Omega; \Gamma \Vdash^{\text{pgm}} \text{sig } \mathcal{S}; \text{pgm} : \mu}$$

A-PGM-DT-TTS

$$\frac{(T : \eta) \in \Omega \quad \Omega \Vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Gamma_1 \dashv \Omega \quad \Omega; \Gamma, \Gamma_1 \Vdash^{\text{pgm}} \text{pgm} : \mu}{\Omega; \Gamma \Vdash^{\text{pgm}} \text{rec } \mathcal{T}; \text{pgm} : \mu}$$

A-PGM-DT-TT

$$\frac{\begin{array}{c} \Theta_1 = \Omega, \overline{\widehat{\alpha}_i : \star}^i, \overline{T_i : \widehat{\alpha}_i}^i \quad \overline{\Theta_i \Vdash^{\text{dt}} \mathcal{T}_i \rightsquigarrow \Gamma_i \dashv \Theta_{i+1}}^i \\ \overline{\widehat{\phi}_i^c = \text{unsolved}([\Theta_{n+1}]\widehat{\alpha}_i)}^i \quad \overline{\Theta_{n+1} \Vdash_{\widehat{\phi}_i^c}^{\text{gen}} ([\Theta_{n+1}](\Gamma_i[\widehat{\phi}_i^c \mapsto \phi_i^c]) \rightsquigarrow \Gamma'_i)}^i \\ \Omega, T_i : \forall\{\phi_i^c\}.(([\Theta_{n+1}]\widehat{\alpha}_i)[\widehat{\phi}_i^c \mapsto \phi_i^c]) ; \Gamma, \Gamma'_i[T_i \mapsto T_i @ \phi_i^c] \Vdash^{\text{pgm}} \text{pgm} : \mu \end{array}}{\Omega; \Gamma \Vdash^{\text{pgm}} \text{rec } \overline{\mathcal{T}_i}^{i \in 1..n}; \text{pgm} : \mu}$$

$$\boxed{\Omega \Vdash^{\text{sig}} \mathcal{S} \rightsquigarrow T : \eta}$$

(Typing Signature)

A-SIG-TT

$$\frac{\begin{array}{c} \lfloor \sigma \rfloor \quad \overline{a_i}^i = \text{fkv}(\sigma) \quad \Omega, \{\overline{\widehat{\alpha}_i : \star}, a_i : \widehat{\alpha}_i\} \Vdash^k \sigma : \star \rightsquigarrow \eta \dashv \Delta \\ \widehat{\phi}_1^c = \text{scoped_sort}(\overline{a_i : [\Delta]\widehat{\alpha}_i}^i) \quad \widehat{\phi}_2^c = \text{unsolved}(\Delta) \quad \Delta \hookrightarrow \overline{a_i}^i \end{array}}{\Omega \Vdash^{\text{sig}} \text{data } T : \sigma \rightsquigarrow T : \forall\{\phi_2^c\}.((\forall\{\phi_1^c\}.[\Delta]\eta)[\widehat{\phi}_2^c \mapsto \phi_2^c])}$$

$$\boxed{\Delta \Vdash^{\text{dt}} \mathcal{T} \rightsquigarrow \Gamma \dashv \Theta}$$

(Typing Datatype Decl.)

A-DT-TT

$$\frac{\begin{array}{c} (T : \forall\{\phi_1^c\}. \forall\phi_2^c. \omega) \in \Delta \\ \Delta, \phi_1^c, \phi_2^c, \overline{\widehat{\alpha}_i : \star}^i \Vdash^\mu [\Delta]\omega \approx (\overline{\widehat{\alpha}_i}^i \rightarrow \star) \dashv \Theta_1, \phi_1^c, \phi_2^c, \overline{\widehat{\alpha}_i : \star = \omega_i}^i \\ \Theta_j, \phi_1^c, \phi_2^c, \overline{a_i : \omega_i}^i \Vdash_{(T @ \phi_1^c @ \phi_2^c \overline{a_i}^i)}^{\text{dc}} \mathcal{D}_j \rightsquigarrow \mu_j \dashv \Theta_{j+1}, \phi_1^c, \phi_2^c, \overline{a_i : \omega_i}^i \end{array}}{\Delta \Vdash^{\text{dt}} \text{data } T \overline{a_i}^i = \overline{\mathcal{D}_j}^{j \in 1..n} \rightsquigarrow D_j : \forall\{\phi_1^c\}. \forall\phi_2^c. \forall \overline{a_i : \omega_i}^i. \mu_j^j \dashv \Theta_{n+1}}$$

$$\boxed{\Delta \Vdash_\rho^{\text{dc}} \mathcal{D} \rightsquigarrow \mu \dashv \Theta}$$

(Typing Data Constructor Decl.)

A-DC-TT

$$\frac{\Delta, \blacktriangleright_D \Vdash^k \forall \phi. (\overline{\tau_i}^i \rightarrow \rho) : \star \rightsquigarrow \mu \dashv \Theta_1, \blacktriangleright_D, \Theta_2 \quad \widehat{\phi}^c = \text{unsolved}(\Theta_2)}{\Delta \Vdash_\rho^{\text{dc}} \forall \phi. D \overline{\tau_i}^i \rightsquigarrow \forall\{\phi^c\}.(([\Theta_2]\mu)[\widehat{\phi}^c \mapsto \phi^c]) \dashv \Theta_1}$$

Figure 7.8: Algorithmic program typing in PolyKinds

3125 The judgment $\Omega \Vdash^{\text{sig}} \mathcal{S} \rightsquigarrow T : \eta$ type-checks a signature definition. We get all free
 3126 variables in σ using $\text{fkv}(\sigma)$ and assign each variable a_i a kind $\widehat{\alpha}_i : \star$. Those variables are put
 3127 into a local scope to kind-check σ . Then, we use `scoped_sort`—a standard topological sort—
 3128 to return an ordering of the variables that respects dependencies. Finally, we substitute away
 3129 solved unification variables in the result kind μ and generalize over the unsolved variables $\widehat{\phi}_2^c$
 3130 in Δ . As $\widehat{\phi}_2^c$ is generalized outside ϕ_1^c , we use the *quantification check* $\Delta \hookrightarrow \overline{a}_i^i$ (Section 7.7.2)
 3131 to ensure the result kind is well-ordered.

3132 Rule **A-DT-TT** is a straightforward generalization of rule **A-DT-DECL** to polymorphic kinds.
 3133 Here T can have a polymorphic kind from kind signatures.

3134 Rule **A-DC-TT** checks a data constructor declaration. It first puts a marker into the context
 3135 before kinding. After kinding, it substitutes away all the solved unification variables to the
 3136 right of the marker, and generalizes over all unsolved unification variables to the right of the
 3137 marker. The fact that the context is ordered gives us precise control over variables that need
 3138 generalization.

3139 7.7.2 THE QUANTIFICATION CHECK

3140 Ill-ordered kinds are rejected. Consider the following example:

```
3141 data Proxy :: ∀k. k → ★
3142 data Relate :: ∀a (b :: a). a → Proxy b → ★
3143 data T :: ∀(a :: ★) (b :: a) (c :: a) d. Relate b d → ★
```

3144 *Proxy* just gives us a way to write a type whose kind is not \star . The *Relate* $\tau_1 \tau_2$ type forces the
 3145 kind of τ_2 to depend on that of τ_1 , giving rise to the unusual dependency in *T*. The definition
 3146 of *T* then introduces *a*, *b*, *c* and *d*. The kinds of *a*, *b* and *c* are known, but the kind of *d* must
 3147 be inferred; call it $\widehat{\alpha}$. We discover that $\widehat{\alpha} = \text{Proxy } \widehat{\beta}$, where $\widehat{\beta} :: a$. There are no further
 3148 constraints on $\widehat{\beta}$. Naïvely, we would generalize over $\widehat{\beta}$, but that would be disastrous, as *a* is
 3149 locally bound. Instead, we must reject this definition, as our declarative specification always
 3150 puts inferred variables (such as the type variable $\widehat{\beta}$ would become if generalized) before other
 3151 ones.

3152 The quantification-checking metafunction $\Delta \hookrightarrow \phi$, defined as $\text{fkv}(\text{unsolved}(\Delta)) \# \phi$,
 3153 ensures that free variables in $\text{unsolved}(\Delta)$ are disjoint ($\#$) with ϕ , so that we can safely gen-
 3154 eralize $\text{unsolved}(\Delta)$ outside ϕ .³

$$\boxed{\Delta \Vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2 \dashv \Theta} \quad (\text{Instantiation})$$

$$\begin{array}{c} \text{A-INST-REFL} \\ \Delta \Vdash^{\text{u}} \omega_1 \approx \omega_2 \dashv \Theta \\ \hline \Delta \Vdash^{\text{inst}} \mu : \omega_1 <: \omega_2 \rightsquigarrow \mu \dashv \Theta \end{array} \quad \begin{array}{c} \text{A-INST-FORALL} \\ \Delta, \hat{\alpha} : \omega_1 \Vdash^{\text{inst}} \mu_1 @ \hat{\alpha} : \eta[a \mapsto \hat{\alpha}] <: \omega_2 \rightsquigarrow \mu_2 \dashv \Theta \\ \hline \Delta \Vdash^{\text{inst}} \mu_1 : \forall a : \omega_1. \eta <: \omega_2 \rightsquigarrow \mu_2 \dashv \Theta \end{array}$$

$$\boxed{\Delta \Vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu \dashv \Theta} \quad (\text{Kind Checking})$$

$$\frac{\text{A-KC-SUB} \quad \Delta \Vdash^{\text{k}} \sigma : \eta \rightsquigarrow \mu_1 \dashv \Delta_1 \quad \Delta_1 \Vdash^{\text{inst}} \mu_1 : [\Delta_1]\eta <: [\Delta_1]\omega \rightsquigarrow \mu_2 \dashv \Delta_2}{\Delta \Vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu_2 \dashv \Delta_2}$$

$$\boxed{\Delta \Vdash^{\text{k}} \sigma : \eta \rightsquigarrow \mu \dashv \Theta} \quad (\text{Kinding})$$

$$\frac{\text{A-KTT-STAR}}{\Delta \Vdash^{\text{k}} \star : \star \rightsquigarrow \star \dashv \Delta}$$

$$\frac{\text{A-KTT-APP} \quad \Delta \Vdash^{\text{k}} \tau_1 : \eta_1 \rightsquigarrow \rho_1 \dashv \Delta_1 \quad \Delta_1 \Vdash^{\text{kapp}} (\rho_1 : [\Delta_1]\eta_1) \bullet \tau_2 : \omega \rightsquigarrow \rho \dashv \Theta}{\Delta \Vdash^{\text{k}} \tau_1 \tau_2 : \omega \rightsquigarrow \rho \dashv \Theta}$$

$$\frac{\text{A-KTT-FORALLI} \quad \Delta, \hat{\alpha} : \star, a : \hat{\alpha} \Vdash^{\text{kc}} \sigma \Leftarrow \star \rightsquigarrow \mu \dashv \Delta_2, a : \hat{\alpha}, \Delta_3 \quad \Delta_3 \hookrightarrow a}{\Delta \Vdash^{\text{k}} \forall a. \sigma : \star \rightsquigarrow \forall a : \hat{\alpha}. [\Delta_3]\mu \dashv \Delta_2, \text{unsolved}(\Delta_3)}$$

$$\boxed{\Delta \Vdash^{\text{kapp}} (\rho_1 : \eta) \bullet \tau : \omega \rightsquigarrow \rho_2 \dashv \Theta} \quad (\text{Application Kinding})$$

$$\frac{\text{A-KAPP-TT-ARROW} \quad \Delta \Vdash^{\text{kc}} \tau \Leftarrow \omega_1 \rightsquigarrow \rho_2 \dashv \Theta}{\Delta \Vdash^{\text{kapp}} (\rho_1 : \omega_1 \rightarrow \omega_2) \bullet \tau : \omega_2 \rightsquigarrow \rho_1 \rho_2 \dashv \Theta}$$

$$\frac{\text{A-KAPP-TT-FORALL} \quad \Delta, \hat{\alpha} : \omega_1 \Vdash^{\text{kapp}} (\rho_1 @ \hat{\alpha} : \eta[a \mapsto \hat{\alpha}]) \bullet \tau : \omega \rightsquigarrow \rho \dashv \Theta}{\Delta \Vdash^{\text{kapp}} (\rho_1 : \forall a : \omega_1. \eta) \bullet \tau : \omega \rightsquigarrow \rho \dashv \Theta}$$

$$\frac{\text{A-KAPP-TT-KUVAR} \quad \Delta_1, \hat{\alpha}_1 : \star, \hat{\alpha}_2 : \star, \hat{\alpha} : \omega = (\hat{\alpha}_1 \rightarrow \hat{\alpha}_2), \Delta_2 \Vdash^{\text{kc}} \tau \Leftarrow \hat{\alpha}_1 \rightsquigarrow \rho_2 \dashv \Theta}{\Delta_1, \hat{\alpha} : \omega, \Delta_2 \Vdash^{\text{kapp}} (\rho_1 : \hat{\alpha}) \bullet \tau : \hat{\alpha}_2 \rightsquigarrow \rho_1 \rho_2 \dashv \Theta}$$

$$\boxed{\Delta \Vdash^{\text{ela}} \mu : \eta} \quad (\text{Elaborated Kinding})$$

$$\begin{array}{c} \text{A-ELA-APP} \\ \Delta \Vdash^{\text{ela}} \rho_1 : \omega_1 \rightarrow \omega_2 \quad \Delta \Vdash^{\text{ela}} \rho_2 : \omega_1 \\ \hline \Delta \Vdash^{\text{ela}} \rho_1 \rho_2 : \omega_2 \end{array} \quad \begin{array}{c} \text{A-ELA-KAPP} \\ \Delta \Vdash^{\text{ela}} \rho_1 : \forall a : \omega. \eta \quad \Delta \Vdash^{\text{ela}} \rho_2 : \omega \\ \hline \Delta \Vdash^{\text{ela}} \rho_1 @ \rho_2 : \eta[a \mapsto [\Delta]\rho_2] \end{array}$$

Figure 7.9: Selected rules for algorithmic kinding in PolyKinds

3155 7.7.3 KINDING

3156 Figure 7.9 presents the selected rules for kinding judgment \Vdash^k , along with the auxiliary judg-
 3157 ments. Full rules can be found in Appendix C.3. Most rules correspond directly to their
 3158 declarative counterparts. For applications $\tau_1 \tau_2$, rule **A-KTT-APP** first synthesizes the kind of
 3159 τ_1 to be η_1 , then uses \Vdash^{kapp} to type-check τ_2 . The judgment $\Delta \Vdash^{kapp} (\rho_1 : \eta) \bullet \tau : \omega \rightsquigarrow \rho_2 \dashv \Theta$
 3160 is interpreted as, under context Δ , applying the type ρ_1 of kind η to the type τ returns kind
 3161 ω , the elaboration result ρ_2 , and an output context Θ . When η_1 is polymorphic (rule **A-KAPP-**
 3162 **TT-FORALL**), we instantiate it with a fresh unification variable. Rule **A-KTT-FORALLI** checks
 3163 a polymorphic type. We assign a unification variable as the kind of a , bring $\hat{\alpha} : \star, a : \hat{\alpha}$ into
 3164 scope to check the body against \star , yielding the output context $\Delta_2, a : \hat{\alpha}, \Delta_3$. As a goes out
 3165 of the scope in the conclusion, we need to drop a in the concluding context. To make sure
 3166 that dropping a outputs a well-formed context, we substitute away all solved unification vari-
 3167 ables in Δ_3 for the return kind, and keep only **unsolved** (Δ_3), which are ensured ($\Delta_3 \hookrightarrow a$)
 3168 to have no dependency on a .

3169 In the algorithmic elaborated kinding judgment $\Delta \Vdash^{ela} \mu : \eta$, we keep the invariant:
 3170 $[\Delta]\eta = \eta$. That is why in rule **A-ELA-APP** we substitute a with $[\Delta]\rho_2$.

3171 Instantiation (\Vdash^{inst}) contains the only entry to unification (rule **A-INST-REFL**).

3172 7.7.4 UNIFICATION

3173 The judgments of unification and promotion are excerpted in Figure 7.10. Most rules are
 3174 natural extensions of those in Haskell98.

3175 **PROMOTION** The promotion judgment $\Delta \vdash_{\hat{\alpha}}^{pr} \omega_1 \rightsquigarrow \omega_2 \dashv \Theta$ is extended with kind an-
 3176 notations for unification variables. As our unification variables have kinds now, rule **A-PR-**
 3177 **KUVARR-TT** must also promote the kind of $\hat{\beta}$, so that $\hat{\beta}_1 : \rho_1$ in the context is well-formed.
 3178 Promotion now has a new failure mode: it cannot move proper quantified type variables. In
 3179 rule **A-PR-TVAR**, the variable a must be to the left of $\hat{\alpha}$.

3180 Unfortunately, now we cannot easily tell whether promoting is terminating. In particular,
 3181 the convergence of promotion in Haskell98 is built upon the obvious fact that the size of the
 3182 kind being promoted always gets smaller from the conclusion to the hypothesis. However,
 3183 rule **A-PR-KUVARR-TT** breaks this invariant, as the judgment recurs into the kinds of unifi-
 3184 cation variables, and the size of the kinds may be larger than the unification variables. As
 3185 shown in Section 7.7.5, we prove that promotion is terminating.

³See also the alternative design in Appendix C.2.9.

$\Delta \Vdash \omega_1 \approx \omega_2 \dashv \Theta$

(Unification)

$\frac{\text{A-U-REFL-TT}}{\Delta \Vdash \omega \approx \omega \dashv \Delta}$	$\frac{\text{A-U-APP} \quad \Delta \Vdash \rho_1 \approx \rho_3 \dashv \Delta_1 \quad \Delta_1 \Vdash [\Delta_1]\rho_2 \approx [\Delta_1]\rho_4 \dashv \Theta}{\Delta \Vdash \rho_1 \rho_2 \approx \rho_3 \rho_4 \dashv \Theta}$
$\frac{\text{A-U-KVARL-TT} \quad \Delta \vdash_{\hat{\alpha}}^{\text{pr}} \rho_1 \rightsquigarrow \rho_2 \dashv \Theta_1, \hat{\alpha} : \omega_1, \Theta_2 \quad \Theta_1 \Vdash^{\text{ela}} \rho_2 : \omega_2 \quad \Theta_1 \Vdash [\Theta_1]\omega_1 \approx \omega_2 \dashv \Theta_3}{\Delta \Vdash \hat{\alpha} \approx \rho_1 \dashv \Theta_3, \hat{\alpha} : \omega_1 = \rho_2, \Theta_2}$	
$\frac{\text{A-U-KVARL-LO-TT} \quad \Delta_1, \Delta_2 \Vdash^{\text{mv}} \hat{\alpha} : \omega_1 \rightsquigarrow \Theta \quad \Delta[\{\Theta\}] \vdash_{\hat{\alpha}}^{\text{pr}} \rho_1 \rightsquigarrow \rho_2 \dashv \Theta_1, \{\Theta_2, \hat{\alpha} : \omega_1, \Theta_3\}, \Theta_4 \quad \Theta_1, \{\Theta_2\} \Vdash^{\text{ela}} \rho_2 : \omega_2 \quad \Theta_1, \{\Theta_2\} \Vdash [\Theta_1, \Theta_2]\omega_1 \approx \omega_2 \dashv \Theta_5, \{\Theta_6\}}{\Delta[\{\Delta_1, \hat{\alpha} : \omega_1, \Delta_2\}] \Vdash \hat{\alpha} \approx \rho_1 \dashv \Theta_5, \{\Theta_6, \hat{\alpha} : \omega_1 = \rho_2, \Theta_3\}, \Theta_4}$	

$\Delta \vdash_{\hat{\alpha}}^{\text{pr}} \omega_1 \rightsquigarrow \omega_2 \dashv \Theta$

(Promotion)

$\frac{\text{A-PR-TVAR}}{\Delta[a][\hat{\alpha}] \vdash_{\hat{\alpha}}^{\text{pr}} a \rightsquigarrow a \dashv \Delta[a][\hat{\alpha}]}$	$\frac{\text{A-PR-KUVARR-TT} \quad \Delta \vdash_{\hat{\alpha}}^{\text{pr}} [\Delta]\rho \rightsquigarrow \rho_1 \dashv \Theta[\hat{\alpha}][\hat{\beta} : \rho]}{\Delta[\hat{\alpha}][\hat{\beta} : \rho] \vdash_{\hat{\alpha}}^{\text{pr}} \hat{\beta} \rightsquigarrow \hat{\beta}_1 \dashv \Theta[\hat{\beta}_1 : \rho_1, \hat{\alpha}][\hat{\beta} : \rho = \hat{\beta}_1]}$
--	---

$\Delta_1 \Vdash^{\text{mv}} \Delta_2 \rightsquigarrow \Theta$

(Moving)

$\frac{\text{A-MV-EMPTY}}{\bullet \Vdash^{\text{mv}} \Delta \rightsquigarrow \Delta}$	$\frac{\text{A-MV-KUVAR} \quad \text{var}(\omega) \nmid \text{dom}(\Delta_2) \quad \Delta_1 \Vdash^{\text{mv}} \Delta_2 \rightsquigarrow \Theta}{\hat{\alpha} : \omega, \Delta_1 \Vdash^{\text{mv}} \Delta_2 \rightsquigarrow \hat{\alpha} : \omega, \Theta}$
$\frac{\text{A-MV-KUVARM} \quad \neg(\text{var}(\omega) \nmid \text{dom}(\Delta_2)) \quad \Delta_1 \Vdash^{\text{mv}} \Delta_2, \hat{\alpha} : \omega \rightsquigarrow \Theta}{\hat{\alpha} : \omega, \Delta_1 \Vdash^{\text{mv}} \Delta \rightsquigarrow \Theta}$	

Figure 7.10: Selected rules for unification, promotion, and moving in PolyKinds

UNIFICATION The unification judgment $\Delta \Vdash \omega_1 \approx \omega_2 \dashv \Theta$ for PolyKinds features *heterogeneous constraints*. Recall the definition of X and Y discussed in Section 7.2.2. When unifying $\hat{\alpha} \hat{\beta}$ with *Maybe Bool*, setting $\hat{\alpha} = \text{Maybe}$ and $\hat{\beta} = \text{Bool}$ results in ill-kinded results. This suggests that when solving a unification variable, we need to first unify the kinds of both sides, as shown in rule **A-U-KVARL-TT**. When unifying $\hat{\alpha}$ with ρ_1 , we first promote ρ_1 , yielding ρ_2 . Now ρ_2 must be well-formed under Θ_1 , so we can get its kind ω_1 . We then unify the kinds of both sides. If everything succeeds, we set $\hat{\alpha} : \omega_1 = \rho_2$. Under this rule, the unification $\hat{\alpha} \hat{\beta} \approx \text{Maybe Bool}$ would be rejected correctly.

Rule **A-U-KVARL-LO-TT** is essentially the same as rule **A-U-KVARL-TT**, but deals with unification variables in a local scope. We thus need an extra step to *move* $\hat{\alpha}$ towards the end of the local scope.

LOCAL SCOPES AND MOVING As we have mentioned, a local scope can be reordered as long as the context is well-formed. Consider unifying $\{\hat{\alpha} : \star, a : \star, b : \hat{\alpha}, c : \star\} \vdash \hat{\alpha} \approx a$. We see that a is not well-formed under the context before $\hat{\alpha}$, and thus we cannot rewrite $\hat{\alpha} : \star$ with $\hat{\alpha} = a : \star$. However, we *can* reorder the context to put $\hat{\alpha}$ to the right of a . In fact, to maximize the prefix context of $\hat{\alpha}$, we can move $\hat{\alpha}$ to the end of the context, yielding $\{a : \star, c : \star, \hat{\alpha} : \star, b : \hat{\alpha}\}$. As b depends on $\hat{\alpha}$, b is also moved to the end of the context. The final context is now $\{a : \star, c : \star, \hat{\alpha} : \star = a, b : \hat{\alpha}\}$.

The *moving* judgment $\Delta_1 \dashv\vdash^{\text{mv}} \Delta_2 \rightsquigarrow \Theta$ reorders the context, by appending Δ_2 to the end of Δ_1 , yielding Θ . As we have emphasized, reordering must preserve a well-formed context. Therefore, every term that depends on Δ_2 (rule **A-MV-KUVARM**) needs to be placed at the end, along with Δ_2 .

In rule **A-U-KVARL-LO-TT**, we begin by reordering the local scope to put $\hat{\alpha}$ as far to the right as possible. The rest of the rule is essentially the same as rule **A-U-KVARL-TT**: the added complication stems from the need to keep track of what bindings in the context are a part of the current local scope.

7.7.5 TERMINATION

Now the challenge is to prove that our unification algorithm terminates, which relies on the convergence of the promotion algorithm. Next, we first discuss the termination of unification, and then move to the more complicated proof for promotion. Let $\langle \Delta \rangle$ denote the number of unsolved unification variables in Δ .

Lemma 7.6 (Promotion Preserves $\langle \Delta \rangle$). *If $\Delta \vdash_{\hat{\alpha}}^{\text{pr}} \omega_1 \rightsquigarrow \omega_2 \dashv \Theta$, then $\langle \Delta \rangle = \langle \Theta \rangle$.*

Lemma 7.7 (Unification Makes Progress). *If $\Delta \Vdash \omega_1 \approx \omega_2 \dashv \Theta$, then either $\Theta = \Delta$, or $\langle \Theta \rangle < \langle \Delta \rangle$.*

Now we measure unification $\Delta \Vdash \omega_1 \approx \omega_2 \dashv \Theta$ using the lexicographic order of the pair $(\langle \Delta \rangle, |\omega_1|)$, where $|\omega_1|$ computes the standard size of ω_1 . We prove the pair always gets smaller from the conclusion to the hypothesis. Formally, assuming promotion terminates, we have

Theorem 7.8 (Unification Terminates). *Given a context Δ ok, and kinds ρ_1 and ρ_2 , where $[\Delta]\rho_1 = \rho_1$, and $[\Delta]\rho_2 = \rho_2$, it is decidable whether there exists Θ such that $\Delta \Vdash \rho_1 \approx \rho_2 \dashv \Theta$.*

We are not yet done, since Theorem 7.8 depends on the convergence of promotion. As observed in rule [A-PR-KUVAR](#), the size of the type being promoted increases from the conclusion to the hypothesis. Worse, the context never decreases. How do we prove promotion terminates? The crucial observation for rule [A-PR-KUVAR](#) is that, when we move from the conclusion to the hypothesis, we also move from a unification variable to its kind. Since the kind is well-formed under the prefix context of the variable, we are somehow moving leftward in the context.

To formalize the observation, we define the *dependency graph* of a context.

Definition 22 (Dependency Graph). The dependency graph of a context Δ is a *directed* graph where:

1. Nodes are all type variables and unsolved unification variables of Δ , and the terminal symbols \star , \rightarrow and Int .
2. Edges indicate the dependency from a type to its substituted kind. For example, if $\hat{\alpha} : \omega$, then there is a directed edge from $\hat{\alpha}$ to all the nodes appearing in $[\Delta]\omega$.

As an illustration, consider the context $\Delta = \hat{\alpha} : \star, \hat{\alpha}_1 : \star, \hat{\alpha}_2 : \star = \hat{\alpha}_1, \hat{\alpha}_3 : \star \rightarrow \hat{\alpha}_2$, whose dependency graph is given in Figure 7.11a (the reader is advised to ignore the color for now). There are several notable properties. First, as long as the context is well-formed, the graph is *acyclic* except for the self-loop of \star and \rightarrow . Second, solved unification variables never appear in the graph. The kind of $\hat{\alpha}_3$ depends on $\hat{\alpha}_2$, which is already solved by $\hat{\alpha}_1$, so the dependency goes from $\hat{\alpha}_3$ to $\hat{\alpha}_1$.

Now let us consider how promotion works in terms of the dependency graph, by trying to unify $\Delta \vdash \hat{\alpha} \approx \hat{\alpha}_3 \text{Int}$. We start by promoting $\hat{\alpha}_3 \text{Int}$. The derivation of the promotion is given at the bottom of Figure 7.11. We omit some details via (\dots) as promoting constants $(\star, \rightarrow$ and $\text{Int})$ is trivial. At the top of Figure 7.11 we give the dependency graph at certain

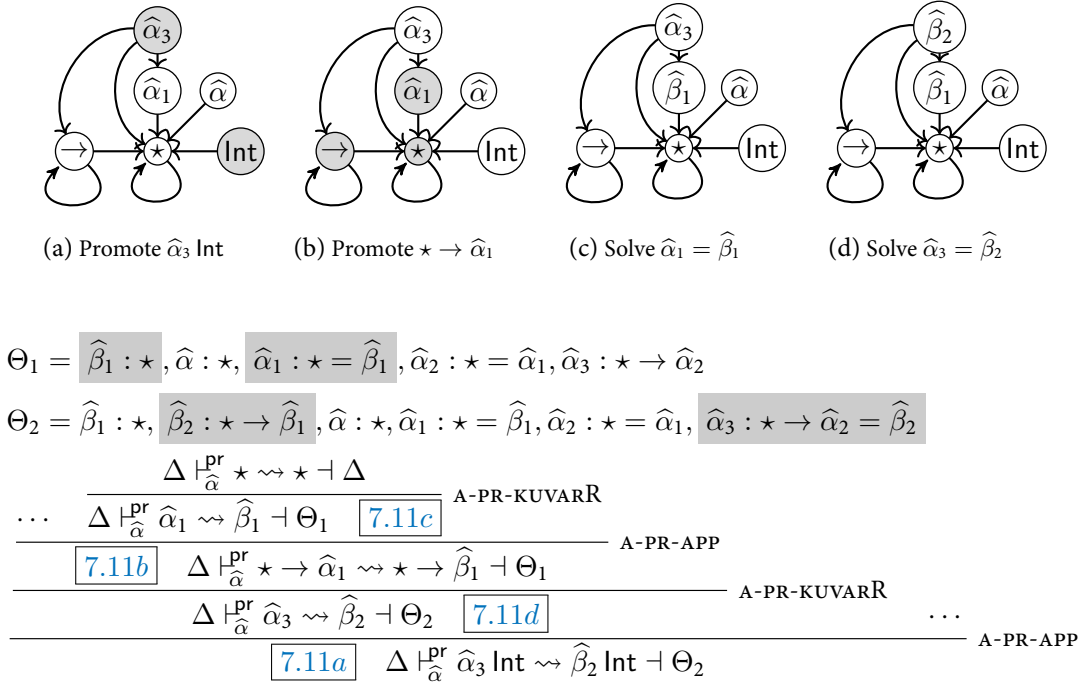


Figure 7.11: Example of dependency graph

points in the derivation, where the part being promoted is highlighted in gray. At the beginning we are at Figure 7.11a. For $\hat{\alpha}_3$, by rule **A-PR-KUVARR**, we first promote the kind of $\hat{\alpha}_3$, which is (after context application) $\star \rightarrow \hat{\alpha}_1$ (Figure 7.11b). As \star and \rightarrow are always well-formed, we then promote $\hat{\alpha}_1$ whose kind is the well-formed \star . Now we create a fresh variable $\hat{\beta}_1 : \star$, and solve $\hat{\alpha}_1$ with $\hat{\beta}_1$ (Figure 7.11c). Note since $\hat{\alpha}_1$ is solved, the dependency from $\hat{\alpha}_3$ goes to $\hat{\beta}_1$. Finally, we create a fresh variable $\hat{\beta}_2$ with kind $\star \rightarrow \hat{\beta}_1$, and solve $\hat{\alpha}_3$ with $\hat{\beta}_2$ (Figure 7.11d). Going back to unification, we solve $\hat{\alpha} = \hat{\beta}_2 \text{ Int}$.

We have several key observations. First, when we move from Figure 7.11a to Figure 7.11b via rule **A-PR-KUVARR**, we are actually moving from the current node ($\hat{\alpha}_3$) to its adjacent nodes (\star , \rightarrow , and $\hat{\alpha}_1$). In other words, we are going down in this graph. Moreover, promotion terminates immediately at type constants, so we never fall into the trap of loop. Further, when we solve variables with fresh ones (Figure 7.11c and Figure 7.11d), the shape of the graph never changes.

With all those in mind, we conclude that *the promotion process goes top-down via rule A-PR-KUVARR in the dependency graph until it terminates at types that are already well-formed.* Based on this conclusion, we can formally prove that promotion terminates.

Theorem 7.9 (Promotion Terminates). *Given a context $\Delta[\hat{\alpha}] \text{ ok}$, and a kind ω_1 with $[\Delta]\omega_1 = \omega_1$, it is decidable whether there exists Θ such that $\Delta \vdash_{\hat{\alpha}}^{\text{pr}} \omega_1 \rightsquigarrow \omega_2 \dashv \Theta$.*

7.7.6 SOUNDNESS, COMPLETENESS AND PRINCIPALITY

We prove our algorithm is sound:

Theorem 7.10 (Soundness of \vdash^{pgm}). *If $\Omega; \Gamma \Vdash^{\text{pgm}} \text{pgm} : \mu$, then $[\Omega]\Omega; [\Omega]\Gamma \vdash^{\text{pgm}} \text{pgm} : [\Omega]\mu$.*

Unfortunately, we lose completeness. Recall the example in Section 7.7.2. This definition of T is rejected by the algorithmic quantification check as the kind of d cannot be determined. However, the declarative system can guess correctly, e.g., *Proxy b* or *Proxy c*. Unfortunately, different choices lead to incomparable kinds for T . Thus we argue such programs must be rejected.

Nevertheless, if the user explicitly writes down $d :: \text{Proxy } b$ or $d :: \text{Proxy } c$, then the program will be accepted by the algorithm. Thus, we conjecture that if all local dependencies are annotated by the user, we can regain completeness. This, however, is a bit annoying to users, because it means that we cannot accept definitions like the one below, even though the dependency is clear.

```

3282   data Eq :: ∀k. k → k → ★
3283   data P  :: ∀k (a :: k) b. Eq a b → ★

```

We do not consider the incompleteness as a problematic issue in practice, as this scenario is quite contrived and (we expect) will rarely occur “in the wild”. See more discussion of this point in Section 8.7.

Although the algorithm is incomplete, we offer the following guarantee: *if the algorithm accepts a definition, then that definition has a principal kind, and the algorithm infers the principal kind.*

Definition 23 (Kind Instantiation). Under context Σ , a kind $\eta = \forall\{\phi_1\}.\forall\phi_2.\omega_1$, where ϕ ’s can be empty, instantiates to ω , denoted as $\Sigma \vdash \eta <: \omega$, if $\omega_1[\phi_1 \mapsto \bar{\rho}_1][\phi_2 \mapsto \bar{\rho}_2] = \omega$ for some $\bar{\rho}_1$ and $\bar{\rho}_2$.

The relation is embedded in $\Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2$ (Figure 7.6), where we ignore μ_1 and μ_2 .

Definition 24 (Partial Order of Kinds in PolyKinds). Under context Σ , a kind η_1 is *more general than* η_2 , denoted as $\Sigma \vdash \eta_1 \preceq \eta_2$, if for all ω such that $\Sigma \vdash \eta_2 <: \omega$, we have $\Sigma \vdash \eta_1 <: \omega$.

3298 To understand the definition, consider that if the program type-checks under $T : \eta_2$, then
 3299 it must type-check under $T : \eta_1$, as $T : \eta_1$ can be instantiated to all monokinds that $T : \eta_2$
 3300 is used at.

3301 Now we lift the definition of \Vdash^{grp} to be the generalized result of kinds and contexts.

3302 **Theorem 7.11** (Principality of \Vdash^{grp}). *If $\Omega \Vdash^{\text{grp}} \text{rec } \overline{\tau}_i^i \rightsquigarrow \overline{\eta}_i^i; \overline{\Gamma}_i^i$, then whenever $[\Omega]\Omega \vdash^{\text{grp}}$
 3303 $\text{rec } \overline{\tau}_i^i \rightsquigarrow \overline{\eta}'_i^i; \overline{\Psi}_i^i$ holds, we have $[\Omega]\Omega \vdash [\Omega]\eta_i \preceq \eta'_i$.*

3304 This result echoes the result in the term-level type inference algorithm for Haskell ([Vy-
 3305 tiniotis et al. 2011, Section 6.5]): our algorithm does not infer every kind acceptable by the
 3306 declarative system, but the kinds it does infer are always the best (principal) ones.

3307 7.8 LANGUAGE EXTENSIONS

3308 We have seen that the PolyKinds system incorporates many features and enjoys desirable
 3309 properties. In this section, we discuss how the PolyKinds system can be extended with more
 3310 related language features. Appendix C.1 contains a few more, less impactful extensions.

3311 7.8.1 HIGHER-RANK POLYMORPHISM

3312 The system can be extended naturally to support higher-rank polymorphism [Dunfield and
 3313 Krishnaswami 2013; Peyton Jones et al. 2007]. With higher-rank polymorphism, every type
 3314 can have a polymorphic kind. For example, data constructor declarations become $\forall\phi. D \overline{\sigma}_i^i$
 3315 instead of $\forall\phi. D \overline{\tau}_i^i$.

3316 Unfortunately, higher-rank polymorphism breaks principality. Consider:

3317 **data** $Q1 :: \forall k_1 k_2. k_1 \rightarrow \star$
 3318 **data** $Q2 :: (\forall (k_1 : \star) (k_2 : k_1). k_1 \rightarrow \star) \rightarrow \star$

3319 First, we modify the definition of partial order of kinds (Definition 24) to state that one
 3320 kind is more general than another if it can be instantiated to all *polykinds* that the other
 3321 kind can be instantiated to. Now consider the kind of $Q1$, which under the algorithm is
 3322 generalized to $\forall\{k3 : \star\} (k_1 : \star) (k_2 : k3). k_1 \rightarrow \star$. In Theorem 7.11, we guarantee that
 3323 this kind is a principal kind as it can be instantiated to all monokinds that other possible
 3324 kinds for $Q1$, e.g., $\forall (k_1 :: \star) (k_2 :: k_1). k_1 \rightarrow \star$, can be instantiated to. However, under
 3325 the new definition, $\forall\{k3 :: \star\} (k_1 :: \star) (k_2 :: k3). k_1 \rightarrow \star$ is no longer more general than
 3326 $\forall (k_1 :: \star) (k_2 :: k_1). k_1 \rightarrow \star$, as there is no way to instantiate the former to the latter. To see
 3327 why we need to modify the definition at all, consider the rank-2 kind of $Q2$, which expects
 3328 exactly an argument of kind $\forall (k_1 :: \star) (k_2 :: k_1). k_1 \rightarrow \star$.

We do not consider the absence of principality in the setting of higher-rank polymorphism to be a severe issue in practice, for two reasons: to our knowledge, higher-rank polymorphism for datatypes is not heavily used; and it may be possible to recover principality through the use of a more generous type-subsumption relation. Currently, GHC (and our model of it) does not support first-class type-level abstraction (i.e., Λ in types) [Jones 1995]. This means that we cannot introduce new variables (also called *skolemization* [Peyton Jones et al. 2007, Section 4.6.2]) in an attempt to equate one type with another. Returning to the example above, we *could* massage $\forall\{k3::\star\} (k1::\star) (k2::k3). k1 \rightarrow \star$ to $\forall(k1::\star) (k2::k1). k1 \rightarrow \star$ if we could abstract over the $k1$ in the target type. Recent advances in type-level programming in Haskell [Kiss et al. 2019] suggest we may be able to add first-class abstraction, meaning that type-subsumption can use both instantiation *and* skolemization. We conjecture that this development would recover principal types.

7.8.2 GENERALIZED ALGEBRAIC DATATYPES (GADTs)

The focus of this work has been on uniform datatypes, where every constructor’s type matches exactly the datatype head: this fact allows us to easily choose the subscript to the \vdash^{dc} judgment in, e.g., rule **DT-TT**. Programmers in modern Haskell, however, often use *generalized* algebraic datatypes [Peyton Jones et al. 2006; Xi et al. 2003]. There are two impacts of adding these, both of which we found surprising.

EQUALITY CONSTRAINTS The power of GADTs arises from how they encode local equality constraints. Any GADT can be rewritten to a uniform datatype with equality constraints [Vytiniotis et al. 2011, Section 4.1]. For example, we can rewrite

```
data G a where
  MkG :: G Bool
```

to be

```
data G a = (a ~ Bool) => MkG
```

where \sim describes an equality constraint. For our purposes of doing kind inference, these equality constraints are uninteresting: the \sim operator simply relates two types of the same kind and can be processed as any polykinded type constructor would be. Modeling constraints to the left of a \Rightarrow similarly would add a little clutter to our rules, but would offer no real challenges.

The unexpected simplicity of adding GADTs to our system arises from a key fact: we do not ever allow *pattern-matching*. A GADT pattern-match brings a local equality assumption

3361 into scope, which would influence the unification algorithm. However, as pattern matching
 3362 does not happen in the context of datatype declarations, we avoid this wrinkle here.

3363 SYNTAX The implementation of GADTs in GHC has an unusual syntax:

```
3364     data G a where
3365         MkG :: a → G Int
```

3366 The surprising aspect of this syntax is that the two *as* above are *different*: the *a* in the header
 3367 is unrelated to the *a* in the data constructor. This seemingly inconsequential design choice
 3368 makes kind inference for GADTs very challenging, as constructors have no way to refer back
 3369 to the datatype parameters. Given that this aspect of GADTs is a quirk of GHC’s design—and
 3370 is not repeated in other languages that support GADTs—we remark here that it is odd and
 3371 perhaps should be remedied. We will return back to this discussion in Section 9.4.

3372 7.8.3 TYPE FAMILIES

3373 Type families [Chakravarty et al. 2005] are, effectively, type-level functions. Kind inference
 3374 of type families thus can be designed much like type inference for ordinary functions. How-
 3375 ever, as they can have dependency, the complications we describe in this paper would arise
 3376 here, too. In particular, unification would have to be kind-directed, as we have described.
 3377 The current syntax for closed type families [Eisenberg et al. 2014] shares the same scoping
 3378 problem as the syntax for GADTs, so our arguments above apply to closed type families
 3379 equally.

3380 The challenge with type families is that they indeed do pattern-matching, and thus (in
 3381 concert with GADTs) can bring local equalities into scope. A full analysis of the ramifications
 3382 here is beyond the scope of this paper, but we believe the literature on type inference in the
 3383 presence of local equalities would be helpful. Principal among these is the work of Vytiniotis
 3384 et al. [2011], but Gundry [2013] and Eisenberg [2016] also approach this problem in the
 3385 context of dependent types.

PART V

EPILOGUE

8

RELATED WORK

3386

3387 There is a great deal of work related to this thesis. Along the way we have discussed some of
3388 the most relevant work. In this chapter, we briefly review more related work.

3389 8.1 TYPE INFERENCE FOR HIGHER-RANK TYPES

3390 PREDICATIVE HIGHER-RANK TYPE INFERENCE. Odersky and Läufer [1996] introduced a
3391 type system for higher-rank implicit polymorphic types. Based on that, Peyton Jones et al.
3392 [2007] developed an approach for type inference for higher-rank types using traditional bidi-
3393 rectional type checking. They use a more general subtyping relation, inspired by the type
3394 containment relation by Mitchell [1988], which supports *deep skolemisation*. With deep
3395 skolemization, examples like $\forall a. \text{Int} \rightarrow \text{Int} <: \text{Int} \rightarrow \forall a. a$ are allowed. We believe deep
3396 skolemization is compatible with our subtyping definition.

3397 Dunfield and Krishnaswami [2013] build a simple and concise algorithm for higher-rank
3398 polymorphism based on traditional bidirectional type checking. They deal with the same
3399 language of Peyton Jones et al. [2007], except they do not have **let** expressions nor general-
3400 ization (though it is discussed in design variations). Built upon some of these techniques,
3401 Dunfield and Krishnaswami [2019] extend the system to a much richer type language that
3402 includes existentials, indexed types, and equations over type variables.

3403 IMPREDICATIVE HIGHER-RANK TYPE INFERENCE. While our work focuses on predicative
3404 higher-rank types, there are also a lot of work on type inference for *impredicative* higher-
3405 rank types. Many of these work relies on new forms of types. ML^F [Le Botlan and Rémy
3406 2003, 2009; Rémy and Yakobowski 2008] generalizes ML with first-class polymorphism. ML^F
3407 introduces a new type of bounded quantification (either rigid or flexible) for polymorphic
3408 types so that instantiation of polymorphic bindings is delayed until a principal type is found.
3409 higher-rank types. The HML system [Leijen 2009] is proposed as a simplification and restric-
3410 tion of ML^F . HML only uses flexible types, which simplifies the type inference algorithm,
3411 but retains many interesting properties and features.

3412 The FPH system [Vytiniotis et al. 2008] introduces boxy monotypes into System F types.
 3413 One critique of boxy type inference is that the impredicativity is deeply hidden in the algo-
 3414 rithmic type inference rules, which makes it hard to understand the interaction between its
 3415 predicative constraints and impredicative instantiations [Rémy 2005].

3416 Recently, Serrano et al. [2020, 2018] exploit impredicative instantiations of type variables
 3417 that appears under a type constructor (i.e., type variables are *guarded*). Serrano et al. [2018]
 3418 distinguish variables using three *sorts*, so that certain sorts of variables can be instantiated
 3419 with higher-rank polymorphic types. Serrano et al. [2020] inspect the function arguments
 3420 and assign impredicative instantiations before monomorphic ones.

3421 8.2 BIDIRECTIONAL TYPE CHECKING

3422 Bidirectional type checking was popularized by the work of Pierce and Turner [2000]. It has
 3423 since been applied to many type systems with advanced features. The alternative application
 3424 mode introduced in Chapter 3 enables a variant of bidirectional type checking. There are
 3425 many other efforts to refine bidirectional type checking.

3426 Colored local type inference [Odersky et al. 2001] allows partial type information to be
 3427 propagated, by distinguishing inherited types (known from the context) and synthesized
 3428 types (inferred from terms). A similar distinction is achieved in Dunfield and Krishnaswami
 3429 [2013] by manipulating type variables.

3430 *Tridirectional* type checking [Dunfield and Pfenning 2004] is based on bidirectional type
 3431 checking and has a rich set of property types including intersections, unions and quantified
 3432 dependent types, but without parametric polymorphism. Tridirectional type checking has a
 3433 new direction for supporting type checking unions and existential quantification.

3434 Greedy bidirectional polymorphism [Dunfield 2009] adopts a greedy idea from Cardelli
 3435 [1993] on bidirectional type checking with higher-rank types, where type variables in in-
 3436 stantiations are determined by their first constraint. In this way, they support some uses of
 3437 impredicative polymorphism. However, the greediness also makes many obvious programs
 3438 rejected.

3439 A detailed survey of the development of bidirectional type checking is given by Dunfield
 3440 and Krishnaswami [2020], which collect and explain the design principles of bidirectional
 3441 type checking, and summarize past research related to bidirectional type checking.

8.3 GRADUAL TYPING

The seminal paper by Siek and Taha [2006] is the first to propose gradual typing, which enables programmers to mix static and dynamic typing in a program by providing a mechanism to control which parts of a program are statically checked. The original proposal extends the simply typed lambda calculus by introducing the unknown type $?$ and replacing type equality with type consistency. Casts are introduced to mediate between statically and dynamically typed code. Later Siek and Taha [2007] incorporated gradual typing into a simple object oriented language, and showed that subtyping and consistency are orthogonal – an insight that partly inspired our work on GPC. We show that subtyping and consistency are orthogonal in a much richer type system with higher-rank polymorphism. Siek et al. [2009] explores the design space of different dynamic semantics for simply typed lambda calculus with casts and unknown types. In the light of the ever-growing popularity of gradual typing, and its somewhat murky theoretical foundations, Siek et al. [2015] felt the urge to have a complete formal characterization of what it means to be gradually typed. They proposed a set of criteria that provides important guidelines for designers of gradually typed languages. Cimini and Siek [2016] introduced the *Gradualizer*, a general methodology for generating gradual type systems from static type systems. Later they also develop an algorithm to generate dynamic semantics [Cimini and Siek 2017]. Garcia et al. [2016] introduced the AGT approach based on abstract interpretation. As we discussed, none of these approaches instructed us how to define consistent subtyping for polymorphic types.

There is some work on integrating gradual typing with rich type disciplines. Bañados Schwerter et al. [2014] establish a framework to combine gradual typing and effects, with which a static effect system can be transformed to a dynamic effect system or any intermediate blend. Jafery and Dunfield [2017] present a type system with *gradual sums*, which combines refinement and imprecision. We have discussed the interesting definition of *directed consistency* in Section 4.2. Castagna and Lanvin [2017] develop a gradual type system with intersection and union types, with consistent subtyping defined by following the idea of Garcia et al. [2016]. Eremondi et al. [2019] develop a gradual dependently-typed language, where compile-time normalization and run-time execution are distinguished to account for nontermination and failure. TypeScript [Bierman et al. 2014] has a distinguished dynamic type, written `any`, whose fundamental feature is that any type can be implicitly converted to and from `any`. Our treatment of the unknown type in Figure 4.6 is similar to their treatment of `any`. However, their type system does not have polymorphic types. Also, unlike our consistent subtyping which inserts runtime casts, in TypeScript, type information is erased after compilation so there are no runtime casts, which makes runtime type errors possible.

3477 8.4 GRADUAL TYPE SYSTEMS WITH EXPLICIT POLYMORPHISM

3478 Morris [1973] dynamically enforces parametric polymorphism and uses *sealing* functions as
 3479 the dynamic type mechanism. More recent works on integrating gradual typing with para-
 3480 metric polymorphism include the dynamic type of Abadi et al. [1995] and the *Sage* language
 3481 of Gronski et al. [2006]. None of these has carefully studied the interaction between statically
 3482 and dynamically typed code.

3483 Ahmed et al. [2009] proposed λB that extends the blame calculus [Wadler and Findler
 3484 2009] to incorporate polymorphism. The key novelty of their work is to use dynamic seal-
 3485 ing to enforce parametricity. As such, they end up with a sophisticated dynamic seman-
 3486 tics. Later, Ahmed et al. [2017] prove that with more restrictions, λB satisfies parametricity.
 3487 Compared to their work, our GPC type system can catch more errors earlier since, as we
 3488 argued, their notion of *compatibility* is too permissive. For example, the following is rejected
 3489 (more precisely, the corresponding source program never gets elaborated) by our type sys-
 3490 tem:

$$(\lambda x : ?. x + 1) : \forall a. a \rightarrow a \rightsquigarrow \langle ? \rightarrow \text{Int} \hookrightarrow \forall a. a \rightarrow a \rangle (\lambda x : ?. x + 1)$$

3491 while the type system of λB would accept the translation, though at runtime, the program
 3492 would result in a cast error as it violates parametricity. We emphasize that it is the combina-
 3493 tion of our powerful type system together with the powerful dynamic semantics of λB that
 3494 makes it possible to have implicit higher-rank polymorphism in a gradually typed setting.
 3495 Devriese et al. [2017] proved that embedding of System F terms into λB is not fully abstract.
 3496 Igarashi et al. [2017] also studied integrating gradual typing with parametric polymorphism.
 3497 They proposed System F_G , a gradually typed extension of System F, and System F_C , a new
 3498 polymorphic blame calculus. As has been discussed extensively, their definition of type con-
 3499 sistency does not apply to our setting (implicit polymorphism). All of these approaches mix
 3500 consistency with subtyping to some extent, which we argue should be orthogonal. On a side
 3501 note, it seems that our calculus can also be safely translated to System F_C . However we do
 3502 not understand all the tradeoffs involved in the choice between λB and System F_C as a target.

3503 Recently, Toro et al. [2019] applied AGT to designing a gradual language with explicit
 3504 parametric polymorphism, claiming that graduality and parametricity are inherently incom-
 3505 patible. However, later New et al. [2019] show that by modifying System F's syntax to make
 3506 the sealing visible, both graduality and parametricity can be achieved.

8.5 GRADUAL TYPE INFERENCE

Siek and Vachharajani [2008] studied unification-based type inference for gradual typing, where they show why three straightforward approaches fail to meet their design goals. One of their main observations is that simply ignoring dynamic types during unification does not work. Therefore, their type system assigns unknown types to type variables and infers gradual types, which results in a complicated type system and inference algorithm. In our algorithm presented in Chapter 5, comparisons between existential variables and unknown types are emphasized by the distinction between static existential variables and gradual existential variables. By syntactically refining unsolved gradual existential variables with unknown types, we gain a similar effect as assigning unknown types, while keeping the algorithm relatively simple. Garcia and Cimini [2015] presented a new approach where gradual type inference only produces static types, which is adopted in our type system. They also deal with let-polymorphism (rank 1 types). They proposed the distinction between static and gradual type parameters, which inspired our extension to restore the dynamic gradual guarantee. Although those existing works all involve gradual types and inference, none of these works deal with higher-rank implicit polymorphism.

8.6 HASKELL AND GHC

THE GLASGOW HASKELL COMPILER. The systems we present in Chapter 7 are inspired by the algorithms implemented in GHC. However, our goal in the design of these systems is to produce a sound and (nearly) complete pair of specification and implementation, not simply to faithfully record what is implemented. We have identified ways that the GHC implementation can improve in the future. For example, GHC quantifies over local scopes as *specified* where we believe they should be *inferred*; and the tight connection in our system between unification and promotion may improve upon GHC’s approach, which separates the two. The details of the relationship between our work and GHC (including a myriad of ways our design choices differ in small ways from GHC’s) appear in Appendix C.2.

TYPE INFERENCE IN HASKELL. Type inference in Haskell is inspired by Damas and Milner [1982] and Pottier and Rémy [2005], extended with various type features, including higher rank polymorphism [Peyton Jones et al. 2007] and local assumptions [Schrijvers et al. 2009; Simonet and Pottier 2007; Vytiniotis et al. 2011], among others. However, none of these works describe an inference algorithm for datatypes, nor do they formalize type variables of varying kinds or polymorphic recursion.

DEPENDENT HASKELL. Our PolyKinds system merges types and kinds, a key feature of *Dependent Haskell* (DH) [Eisenberg 2016; Gundry 2013; Weirich et al. 2013, 2017]. There is ongoing work dedicated to its implementation [Xie and Eisenberg 2018]. The most recent work by Weirich et al. [2019] integrates *roles* Breitner et al. [2016] with dependent types. Our work is the first presentation of unification for DH, and our system may be useful in designing DH’s term-level type inference.

POLYMORPHIC RECURSION. Mycroft [1984] presented a semi-algorithm for polymorphic recursion. Jim [1996] and Damiani [2003] studied typing rules for recursive definitions based on rank-2 intersection types. Comini et al. [2008] studied recursive definitions in a type system that corresponds to the abstract interpreter in Gori and Levi [2002, 2003]. Our system PolyKinds does not infer polymorphic recursion; instead, we exploit kind annotations to guide the acceptance of polymorphic recursion.

CONSTRAINT-SOLVING APPROACHES. Many systems (e.g. [Pottier and Rémy 2005]) adopt a modular presentation of type inference, which consists of a constraint generator and a constraint solver. For simplicity, we have presented an eager unification algorithm instead of using a separate constraint solver. However, we believe changing to a constraint-solving approach should not change any of our main results. Xie et al. [2019b] considers this point further.

8.7 UNIFICATION WITH DEPENDENT TYPES

While full higher-order unification is undecidable [Goldfarb 1981], the *pattern* fragment [Miller 1991] is a well-known decidable fragment. Much literature [Abel and Pientka 2011; Gundry and McBride 2013; Reed 2009] is built upon the pattern fragment.

Unification in a dependently typed language features *heterogeneous constraints*. To prove correctness, Reed [2009] used a weaker invariant on homogeneous equality, *typing modulo*, which states that two sides are well typed up to the equality of the constraint yet to be solved. Gundry and McBride [2013] observed the same problem, and use *twin variables* to explicitly represent the same variable at different types, where twin variables are eliminated once the heterogeneous constraint is solved. In both approaches the well-formedness of a constraint depends on other constraints. Cockx et al. [2016] proposed a proof-relevant unification that keeps track of the dependencies between equations. Different from their approaches, our algorithm unifies the kinds when solving unification variables. This guarantees that our unification always outputs well-formed solutions.

3571 Ziliani and Sozeau [2015] present the higher-order unification algorithm for CIC, the base
 3572 logic of Coq. They favor syntactic equality by trying first-order unification, as they argue
 3573 the first-order solution gives the most *natural* solution. However, they omit a correctness
 3574 proof for their algorithm. Coen [2004] also considers first-order unification, but only the
 3575 soundness lemma is proved. Different from their systems, our system is based on the novel
 3576 promotion judgment, and correctness including soundness and termination is proved.

3577 The technique of *suspended substitutions* [Eisenberg 2016; Gundry and McBride 2013]
 3578 is widely adopted in unification algorithms. Our system provides a design alternative, our
 3579 *quantification check*. Choosing between suspended substitutions and the quantification check
 3580 is a user-facing language design decision, as suspended substitutions can accept some more
 3581 programs. The quantification check means that the kind of a locally quantified variable a
 3582 must be fully determined in a 's scope; it may *not* be influenced by usage sites of the con-
 3583 struct that depends on a . Suspended substitutions relax this restriction. We conjecture that
 3584 suspended substitutions can yield a complete algorithm. However, that mechanism is com-
 3585 plex. Moreover, unification based on suspended substitutions is only decidable for the pat-
 3586 tern fragment. Our system, in contrast, avoids all the complication introduced by suspended
 3587 substitutions through its quantification check. Our unification terminates for all inputs, pre-
 3588 serving backward compatibility to Hindley-Milner-style inference. Although we reject the
 3589 definition of T (Section 7.7.2), we can solve more constraints outside the pattern fragment.
 3590 We conjecture that those constraints are much more common than definitions like T . Sus-
 3591 pended substitutions often come with a *pruning* process [Abel and Pientka 2011], which
 3592 produces a valid solution before solving a unification variable. Our promotion process has a
 3593 similar effect.

3594 HOMOGENEOUS KIND-PRESERVING UNIFICATION. Jones [1995] proposed a homogeneous
 3595 kind-preserving unification between two types. Kinds κ are defined only as \star or $\kappa_1 \rightarrow \kappa_2$.
 3596 As the kind system is much simpler, kind-preserving unification \sim_κ is simply subscripted
 3597 by the kind, and working out the kinds is straightforward. Our unification subsumes Jones's
 3598 algorithm.

3599 CONTEXT EXTENSION. Our approach of recording unification variables and their solutions
 3600 in the contexts is inspired by Gundry et al. [2010] and Dunfield and Krishnaswami [2013].
 3601 Gundry and McBride [2013] applied the approach to unification in dependent types, where
 3602 the context also records constraints; constraints also appear in context in Eisenberg [2016].
 3603 Further, in PolyKinds, we extend the context extension approach with local scopes, support-
 3604 ing groups of order-insensitive variables.

9

SUMMARY AND FUTURE DIRECTIONS

In summary, this dissertation has pushed the research on predicative implicit higher-rank polymorphism further, and we believe that contributions in this dissertation can be used to guide the continued evolution of (functional) programming language design and implementations. Specifically, with the new bidirectional type checking algorithm using the application mode, we were able to type-check programs that traditional type inference algorithms cannot, and thus provide new insights for inference algorithm design with bidirectional type checking. With the integration of higher-rank polymorphism and gradual typing, we provided a step forward in gradualizing modern functional programming languages like Haskell. Moreover, the work on *type promotion* simplified type inference algorithms with tricky dependency and scoping issues, and the kind inference for datatypes presented a first known, detailed account of datatypes, which can serve as a guide for future development of datatypes.

In this section we discuss some future directions we would like to pursue.

9.1 DEPENDENT TYPE SYSTEMS WITH APPLICATION MODE

The application mode is possibly applicable to systems with advanced features, where type inference is sophisticated or even undecidable. One promising application is, for instance, dependent type systems [Xi and Pfenning 1999]. Type systems with dependent types usually unify the syntax for terms and types, with a single lambda abstraction generalizing both type and lambda abstractions. Unfortunately, this means that the **let** desugar is not valid in those systems. As a concrete example, consider desugaring the expression **let** $a = \text{Int}$ **in** $\lambda x : a. x + 1$ into $(\lambda a. \lambda x : a. x + 1) \text{Int}$, which is ill-typed because the type of x in the abstraction body is a and not Int .

Because **let** cannot be encoded, declarations cannot be encoded either. Modeling declarations in dependently typed languages is a subtle matter, and normally requires some additional complexity [Severi and Poll 1994].

We believe that the same technique presented in Section 3.5.3 can be adapted into a dependently typed language to enable a **let** encoding. In a dependent type system with unified syntax for terms and types, we can combine the two forms in the typing context, i.e.,

$x : \sigma$ and $a = \sigma$, into a unified form $x = e : \sigma$. Then we can combine two application rules rule [AP-APP-APP](#) and rule [AP-APP-TAPP](#) into rule [AP-APP-DAPP](#), and also two abstraction rules rule [AP-APP-LAM](#) and rule [AP-APP-TLAM](#) into rule [AP-APP-DLAM](#).

$$\frac{\Psi \vdash^{AP} e_2 \Rightarrow \sigma_1 \quad \Psi; \Sigma, e_2 : \sigma_1 \vdash^{AP} e_1 \Rightarrow \sigma_2}{\Psi; \Sigma \vdash^{AP} e_1 e_2 \Rightarrow \sigma_2} \text{AP-APP-DAPP}$$

$$\frac{\Psi, x = e_1 : \sigma_1; \Sigma \vdash^{AP} e \Rightarrow \sigma_2}{\Psi; \Sigma, e_1 : \sigma_1 \vdash^{AP} \lambda x. e \Rightarrow \sigma_2} \text{AP-APP-DLAM}$$

3630 With such rules it would be possible to handle declarations easily in dependent type sys-
3631 tems.

3632 9.2 TYPE INFERENCE FOR INTERSECTION TYPE SYSTEMS

3633 Another type system that could possibly benefit from the application mode is intersection
3634 type systems [Coppo et al. 1979; Pottinger 1980; Salle 1978]. In particular, we consider in-
3635 tersection type systems with an explicit *merge operator* [Dunfield 2014]. In such a system,
3636 we can construct terms of an intersection type, like $1, , \text{true}$ of type $\text{Int} \& \text{Bool}$. Thanks to
3637 *subtyping*, a term of type $\text{Int} \& \text{Bool}$ can also be used as if it had type Int , or as if it had type
3638 Bool . Calculi with *disjoint intersection types* [Alpuim et al. 2017; Bi et al. 2019; Oliveira et al.
3639 2016] incorporate a *coherent* merge operator. In such calculi the merge operator can merge
3640 two terms with *arbitrary* types as long as their types are disjoint; disjointness conflicts are
3641 reported as type-errors. As illustrated by Xie et al. [2020], the expressive power of disjoint
3642 intersection types can encode diverse programming language features, promising an econ-
3643 omy of theory and implementation.

3644 Disjoint intersection types also pose challenges to type inference. Supposing that we have
3645 $\text{succ} : \text{Int} \rightarrow \text{Int}$ and $\text{not} : \text{Bool} \rightarrow \text{Bool}$, consider the following term:

3646 $(\text{succ} , , \text{not}) 3$

3647 We expect the expression to type-check, as according to subtyping, the term $(\text{succ} , , \text{not})$
3648 of type $(\text{Int} \rightarrow \text{Int} \& \text{Bool} \rightarrow \text{Bool})$ can also be used as type $\text{Int} \rightarrow \text{Int}$. Thus we expect
3649 typing to automatically pick succ and apply it to 3. To this end, we need to push the type
3650 information of the argument (3) into the function $(\text{succ} , , \text{not})$.

3651 Future work is required to explore how well the application mode can be used for type
3652 inference in intersection type systems, and whether it can be integrated with the distributivity
3653 subtyping rules of intersection types [Bi et al. 2019].

3654 9.3 GRADUALIZING TYPE CLASSES

3655 In Section 4.1.2, we discussed about gradualizing modern functional programming languages
 3656 like Haskell. One of its core abstraction features in Haskell is *type classes*. Type classes
 3657 [Wadler and Blott 1989] were initially introduced in Haskell to make ad-hoc overloading less
 3658 ad-hoc, and since then have been adopted in many languages including Mercury [Henderson
 3659 et al. 1996], Coq [Sozeau and Oury 2008], PureScript [Freeman 2017], and Lean [de Moura
 3660 et al. 2015]. An interesting future direction then is to gradualizing type classes.

3661 Consider again the example used in Section 4.1.2:

```
3662 (\f. (f 1, f 'a')) (\x. x)
```

3663 While $f : \forall a. a \rightarrow a$ is of course a valid type annotation, it unfortunately rules out many
 3664 valid arguments that may have type class constraints in their types, e.g.,

```
3665 show      :: Show a => a -> String
3666
3667 (\f :: ∀a. a -> a. (f 1, f 'a')) show    -- rejected
```

3668 With gradual typing, if we annotation f with the the unknown type $?$, we expect that the
 3669 following expression can type-check.

```
3670 (\f :: ?. (f 1, f 'a')) show
```

3671 However, a nontrivial challenge in gradualizing type classes is that the dynamic seman-
 3672 tics of type classes is not expressed directly but rather by type-directed elaboration into a
 3673 simpler language without type classes. Thus the dynamic semantics of type classes is given
 3674 indirectly as the dynamic semantics of their elaborated forms. Consider `show` as an exam-
 3675 ple. The *dictionary-passing* elaboration of type-classes translates the type of `show` into the
 3676 following one, supposing `ShowD` is the dictionary type of the type class `show`.

```
3677 show :: ShowD a -> a -> String
```

3678 Now with the unknown type, we cannot predict how to elaborate the original expression.
 3679 In particular, if f is applied to `show`, it means that f needs to be elaborated into a function
 3680 that actually takes two arguments, first the dictionary and then the argument.

```
3681 (\f. (f showInt 1, f showChar 'a')) show
```

3682 This kind of uncertainty in elaboration brings extra complexity and may interact with
 3683 explicit casts in the target blame calculi.

3684 9.4 GENERALIZED ALGEBRAIC DATATYPES (GADTs)

3685 A natural extension of PolyKinds is to include GADTs. We have briefly discussed GADTs in
 3686 Section 7.8.2. In particular, we are interested in finding the right formalization of GADTs.

3687 Haskell’s *syntax* for GADT declarations is quite troublesome. Consider these examples:

```

3688     data R a where
3689         MkR :: b → R b
3690     data S a where
3691         MkS :: S b
3692     data T a where
3693         MkT :: ∀(k :: ★) (b :: k). T b

```

3694 In GHC’s implementation of GADTs, any variables declared in the header (between **data** and
 3695 **where**) *do not scope*. In all the examples above, the type variable *a* does not scope over the
 3696 constructor declarations. This is why we have written the variable *b* in those types, to make
 3697 it clear that *b* is distinct from *a*. We could have written *a*—it would still be a distinct *a* from
 3698 that in the header—but it would be more confusing.

3699 The question is: how do we determine the kind of the parameter to the datatype? One
 3700 possibility is to look only in the header. In all cases above, we would infer no constraints and
 3701 would give each type a kind of $\forall(k :: \star). k \rightarrow \star$. This is unfortunate, as it would make *R*
 3702 a kind-indexed GADT: the *MkR* constructor would carry a proof that the kind of its type
 3703 parameter is \star . This, in turn, wreaks havoc with type inference, as it is hard to infer the result
 3704 type of a pattern-match against a GADT Vytiniotis et al. [2011].

3705 Furthermore, this approach might accept *more* programs than the user wants. Consider
 3706 this definition:

```

3707     data P a where
3708         MkP1 :: b → P b
3709         MkP2 :: f a → P f

```

3710 Does the user want a kind-indexed GADT, noting that *b* and *f* have different kinds? Or
 3711 would the user want this rejected? If we make the fully general kind $\forall k. k \rightarrow \star$ for *P*, this
 3712 would be accepted, perhaps surprising users.

3713 It thus seems we wish to look at the data constructors when inferring the kind of the
 3714 datatype. The challenge in looking at data constructors is that their variables are *locally*
 3715 bound. In *MkR* and *MkS*, we implicitly quantify over *b*. In *MkR*, we discover that $b :: \star$, and
 3716 thus that *R* must have kind $\star \rightarrow \star$. In *MkS*, we find no constraints on *b*’s kind, and thus no

3717 constraints on S 's argument's kind, and so we can generalize to get $S :: \forall(k :: \star). k \rightarrow \star$. Let
 3718 us now examine MkT : it explicitly brings k and b into scope. Thus, the argument to T has
 3719 *local* kind k . It would be impossible to unify the kind of T 's argument—call it $\hat{\alpha}$ —with k ,
 3720 because k would be bound to the *right* of $\hat{\alpha}$ in an inference context. Thus it seems we would
 3721 reject T .

3722 Our conclusion here is that the design of GADTs in GHC/Haskell is flawed: the type vari-
 3723 ables mentioned in the header should indeed scope over the constructors. This would mean
 3724 we could reject T : if the user wanted to explicitly make T polymorphically kinded, they
 3725 could do so right in the header. So one possible application of our work is to apply our
 3726 insights in the scoping (order in the context) and unification into formalizing GADTs.

BIBLIOGRAPHY

[Citing pages are listed after each reference.]

Martin Abadi, Luca Cardelli, Benjamin Pierce, and Didier Rémy. 1995. Dynamic Typing in Polymorphic Languages. *Journal of Functional Programming* 5, 1 (1995), 111–130. [cited on page 172]

Andreas Abel and Brigitte Pientka. 2011. Higher-order dynamic pattern unification for dependent types and records. In *International Conference on Typed Lambda Calculi and Applications*. Springer, 10–26. [cited on pages 174 and 175]

Amal Ahmed, Robert Bruce Findler, Jacob Matthews, and Philip Wadler. 2009. Blame for All. In *Proceedings for the 1st Workshop on Script to Program Evolution (STOP '09)*. Association for Computing Machinery, New York, NY, USA, 1–13. <https://doi.org/10.1145/1570506.1570507> [cited on pages 11, 66, 68, 76, 78, 79, 81, 105, and 172]

Amal Ahmed, Dustin Jamner, Jeremy G. Siek, and Philip Wadler. 2017. Theorems for Free for Free: Parametricity, With and Without Types. In *Proceedings of the 22nd International Conference on Functional Programming*. [cited on page 172]

João Alpuim, Bruno C. d. S. Oliveira, and Zhiyuan Shi. 2017. Disjoint polymorphism. In *European Symposium on Programming (ESOP)*. [cited on page 178]

P. B. Andrews. 1971. Resolution in type Theory. *Journal of Symbolic Logic* 36 (1971), 414–432. [cited on page 135]

Andrea Asperti, Wilmer Ricciotti, Claudio Sacerdoti Coen, and Enrico Tassi. 2012. A Bi-Directional Refinement Algorithm for the Calculus of (Co) Inductive Constructions. *Logical Methods in Computer Science* 8 (2012), 1–49. [cited on page 23]

Felipe Bañados Schwerter, Ronald Garcia, and Éric Tanter. 2014. A Theory of Gradual Effect Systems. In *Proceedings of the 19th International Conference on Functional Programming*. [cited on pages 60 and 171]

- 3752 Xuan Bi, Ningning Xie, Bruno C. d. S. Oliveira, and Tom Schrijvers. 2019. Distributive dis-
3753 joint polymorphism for compositional programming. In *European Symposium on Pro-*
3754 *gramming (ESOP)*. [cited on page 178]
- 3755 Gavin Bierman, Martín Abadi, and Mads Torgersen. 2014. Understanding TypeScript. In
3756 *Proceedings of the 28th European Conference on Object-Oriented Programming*. [cited on
3757 pages 8, 59, and 171]
- 3758 Gavin Bierman, Erik Meijer, and Mads Torgersen. 2010. Adding Dynamic Types to C#.
3759 In *Proceedings of the European Conference on Object-Oriented Programming*. [cited on
3760 page 59]
- 3761 Richard S. Bird and Lambert Meertens. 1998. Nested datatypes. In *LNCS 1422: Pro-*
3762 *ceedings of Mathematics of Program Construction*, Johan Jeuring (Ed.). Springer-Verlag,
3763 Marstrand, Sweden, 52–67. [http://www.cs.ox.ac.uk/people/richard.bird/](http://www.cs.ox.ac.uk/people/richard.bird/online/BirdMeertens98Nested.pdf)
3764 [online/BirdMeertens98Nested.pdf](http://www.cs.ox.ac.uk/people/richard.bird/online/BirdMeertens98Nested.pdf) [cited on page 136]
- 3765 Ambrose Bonnaire-Sergeant, Rowan Davies, and Sam Tobin-Hochstadt. 2016. Practical Op-
3766 tional Types for Clojure. In *Programming Languages and Systems*. [cited on pages 8 and 59]
- 3767 Joachim Breitner, Richard A Eisenberg, Simon Peyton Jones, and Stephanie Weirich. 2016.
3768 Safe zero-cost coercions for Haskell. *Journal of Functional Programming* 26 (2016). [cited
3769 on page 174]
- 3770 L. Cardelli. 1986. *A polymorphic lambda-calculus with Type:Type*. Technical Report 10. SRC.
3771 [cited on page 134]
- 3772 Luca Cardelli. 1993. *An implementation of FSub*. Technical Report. Research Report 97,
3773 Digital Equipment Corporation Systems Research Center. [cited on pages 87 and 170]
- 3774 Giuseppe Castagna and Victor Lanvin. 2017. Gradual Typing with Union and Intersection
3775 Types. *Proc. ACM Program. Lang.* 1, ICFP, Article 41 (Aug. 2017), 28 pages. [cited on
3776 pages 60, 72, 97, and 171]
- 3777 Manuel M. T. Chakravarty, Gabriele Keller, and Simon Peyton Jones. 2005. Associated
3778 type synonyms. In *Proceedings of the Tenth ACM SIGPLAN International Conference on*
3779 *Functional Programming (ICFP '05)*. ACM, New York, NY, USA, 241–253. [https:](https://doi.org/10.1145/1086365.1086397)
3780 [//doi.org/10.1145/1086365.1086397](https://doi.org/10.1145/1086365.1086397) [cited on page 166]
- 3781 Gang Chen. 2003. Coercive Subtyping for the Calculus of Constructions (*POPL '03*). 10.
3782 [cited on page 50]

- Alonzo Church. 1941. *The calculi of lambda-conversion*. Number 6. Princeton University Press. [cited on page 63]
- Matteo Cimini and Jeremy G. Siek. 2016. The Gradualizer: A Methodology and Algorithm for Generating Gradual Type Systems. In *Proceedings of the 43rd Symposium on Principles of Programming Languages*. [cited on pages 59, 72, 80, and 171]
- Matteo Cimini and Jeremy G. Siek. 2017. Automatically Generating the Dynamic Semantics of Gradually Typed Languages. In *Proceedings of the 44th Symposium on Principles of Programming Languages*. [cited on pages 59 and 171]
- Jesper Cockx, Dominique Devriese, and Frank Piessens. 2016. Unifiers as equivalences: proof-relevant unification of dependently typed data. In *Proceedings of the 21st ACM SIGPLAN International Conference on Functional Programming (ICFP 2016)*. ACM, New York, NY, USA, 270–283. <https://doi.org/10.1145/2951913.2951917> [cited on page 174]
- Claudio Sacerdoti Coen. 2004. *Mathematical knowledge management and interactive theorem proving*. Ph.D. Dissertation. University of Bologna, 2004. Technical Report UBLCS 2004-5. [cited on page 175]
- Marco Comini, Ferruccio Damiani, and Samuel Vrech. 2008. On polymorphic recursion, type systems, and abstract interpretation. In *International Static Analysis Symposium*. Springer, 144–158. [cited on page 174]
- Mario Coppo, Mariangiola Dezani-Ciancaglini, and Patrick Sallé. 1979. Functional characterization of some semantic equalities inside λ -calculus. In *International Colloquium on Automata, Languages, and Programming*. Springer, 133–146. [cited on page 178]
- Thierry Coquand. 1996. An algorithm for type-checking dependent types. *Science of Computer Programming* 26, 1-3 (1996), 167–177. [cited on page 23]
- Haskell Brooks Curry, Robert Feys, William Craig, J Roger Hindley, and Jonathan P Seldin. 1958. *Combinatory logic*. Vol. 1. North-Holland Amsterdam. [cited on pages 62 and 63]
- Luis Damas and Robin Milner. 1982. Principal Type-Schemes for Functional Programs. In *Proceedings of the 9th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (POPL '82)*. Association for Computing Machinery, New York, NY, USA, 207–212. <https://doi.org/10.1145/582153.582176> [cited on pages 3, 4, 15, 18, 131, 134, and 173]

- 3814 Ferruccio Damiani. 2003. Rank 2 intersection types for local definitions and conditional
3815 expressions. *ACM Transactions on Programming Languages and Systems (TOPLAS)* 25, 4
3816 (2003), 401–451. [cited on page 174]
- 3817 Rowan Davies and Frank Pfenning. 2000. Intersection Types and Computational Effects. In
3818 *Proceedings of the Fifth ACM SIGPLAN International Conference on Functional Program-*
3819 *ming (ICFP '00)*. Association for Computing Machinery, New York, NY, USA, 198–208.
3820 <https://doi.org/10.1145/351240.351259> [cited on pages 23 and 97]
- 3821 Leonardo de Moura, Soonho Kong, Jeremy Avigad, Floris Van Doorn, and Jakob von
3822 Raumer. 2015. The Lean theorem prover. (2015). [cited on page 179]
- 3823 Dominique Devriese, Marco Patrignani, and Frank Piessens. 2017. Parametricity versus the
3824 universal type. *Proceedings of the ACM on Programming Languages* 2, POPL (2017), 38.
3825 [cited on page 172]
- 3826 Joshua Dunfield. 2009. Greedy Bidirectional Polymorphism. In *Workshop on ML*. [cited on
3827 page 170]
- 3828 Joshua Dunfield. 2014. Elaborating intersection and union types. *Journal of Functional Pro-*
3829 *gramming (JFP)* 24, 2-3 (2014), 133–165. [cited on page 178]
- 3830 Jana Dunfield and Neel Krishnaswami. 2020. Bidirectional Typing. *arXiv:cs.PL/1908.05839*
3831 [cited on page 170]
- 3832 Joshua Dunfield and Neelakantan R. Krishnaswami. 2013. Complete and Easy Bidirectional
3833 Typechecking for Higher-Rank Polymorphism. In *Proceedings of the 18th ACM SIGPLAN*
3834 *International Conference on Functional Programming (ICFP '13)*. Association for Comput-
3835 ing Machinery, New York, NY, USA, 429–442. [https://doi.org/10.1145/2500365.](https://doi.org/10.1145/2500365.2500582)
3836 2500582 [cited on pages 3, 6, 7, 12, 23, 24, 27, 59, 78, 83, 93, 107, 112, 117, 118, 122, 125,
3837 140, 146, 164, 169, 170, and 175]
- 3838 Joshua Dunfield and Neelakantan R. Krishnaswami. 2019. Sound and Complete Bidi-
3839 rectional Typechecking for Higher-Rank Polymorphism with Existentials and Indexed
3840 Types. *Proc. ACM Program. Lang.* 3, POPL, Article 9 (Jan. 2019), 28 pages. [https:](https://doi.org/10.1145/3290322)
3841 [//doi.org/10.1145/3290322](https://doi.org/10.1145/3290322) [cited on page 169]
- 3842 Joshua Dunfield and Frank Pfenning. 2004. Tridirectional Typechecking. *SIGPLAN Not.*
3843 39, 1 (Jan. 2004), 281–292. <https://doi.org/10.1145/982962.964025> [cited on
3844 pages 23, 32, 34, and 170]

- 3845 Richard A Eisenberg. 2016. *Dependent types in haskell: Theory and practice*. Ph.D. Disserta-
3846 tion. University of Pennsylvania. [cited on pages 166, 174, 175, and 209]
- 3847 Richard A. Eisenberg, Dimitrios Vytiniotis, Simon Peyton Jones, and Stephanie Weirich.
3848 2014. Closed type families with overlapping equations. In *Proceedings of the 41st ACM*
3849 *SIGPLAN-SIGACT Symposium on Principles of Programming Languages (POPL '14)*. ACM,
3850 New York, NY, USA, 671–683. <https://doi.org/10.1145/2535838.2535856> [cited
3851 on page 166]
- 3852 Richard A Eisenberg, Stephanie Weirich, and Hamidhasan G Ahmed. 2016. Visible type
3853 application. In *European Symposium on Programming*. Springer, 229–254. [cited on
3854 page 136]
- 3855 Joseph Eremondi, Éric Tanter, and Ronald Garcia. 2019. Approximate Normalization for
3856 Gradual Dependent Types. *Proc. ACM Program. Lang.* 3, ICFP, Article 88 (July 2019),
3857 30 pages. <https://doi.org/10.1145/3341692> [cited on page 171]
- 3858 Phil Freeman. 2017. *PureScript by Example*. Leanpub. [https://leanpub.com/](https://leanpub.com/purescript)
3859 [purescript](https://leanpub.com/purescript). [cited on page 179]
- 3860 Ronald Garcia and Matteo Cimini. 2015. Principal Type Schemes for Gradual Programs. In
3861 *Proceedings of the 42nd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Pro-*
3862 *gramming Languages (POPL '15)*. Association for Computing Machinery, New York, NY,
3863 USA, 303–315. <https://doi.org/10.1145/2676726.2676992> [cited on pages 11,
3864 12, 26, 83, 87, 101, 102, 107, 146, and 173]
- 3865 Ronald Garcia, Alison M Clark, and Éric Tanter. 2016. Abstracting Gradual Typing. In
3866 *Proceedings of the 43rd Symposium on Principles of Programming Languages*. [cited on
3867 pages 59, 61, 65, 66, 71, 72, 73, and 171]
- 3868 Andrew Gill, John Launchbury, and Simon L Peyton Jones. 1993. A short cut to deforesta-
3869 tion. In *Proceedings of the conference on Functional programming languages and computer*
3870 *architecture*. 223–232. [cited on page 5]
- 3871 Jean-Yves Girard. 1986. The System F of Variable Types, Fifteen Years Later. *Theoretical*
3872 *computer science* 45 (1986), 159–192. [cited on page 5]
- 3873 Warren D Goldfarb. 1981. The undecidability of the second-order unification problem. *The-*
3874 *oretical Computer Science* 13, 2 (1981), 225–230. [cited on pages 135 and 174]

- 3875 Roberta Gori and Giorgio Levi. 2002. An experiment in type inference and verification by
3876 abstract interpretation. In *International Workshop on Verification, Model Checking, and*
3877 *Abstract Interpretation*. Springer, 225–239. [cited on page 174]
- 3878 Roberta Gori and Giorgio Levi. 2003. Properties of a type abstract interpreter. In *Interna-*
3879 *tional Workshop on Verification, Model Checking, and Abstract Interpretation*. Springer,
3880 132–145. [cited on page 174]
- 3881 Jessica Gronski, Kenneth Knowles, Aaron Tomb, Stephen N Freund, and Cormac Flanagan.
3882 2006. Sage: Hybrid Checking for Flexible Specifications. In *Scheme and Functional Pro-*
3883 *gramming Workshop*. [cited on page 172]
- 3884 Adam Gundry and Conor McBride. 2013. A tutorial implementation of dynamic pattern
3885 unification. *Unpublished draft* (2013). [cited on pages 174 and 175]
- 3886 Adam Gundry, Conor McBride, and James McKinna. 2010. Type inference in context. In
3887 *Proceedings of the third ACM SIGPLAN workshop on Mathematically structured functional*
3888 *programming*. ACM, 43–54. [cited on pages 12, 117, 118, 119, 120, and 175]
- 3889 Adam Michael Gundry. 2013. *Type inference, Haskell and dependent types*. Ph.D. Disserta-
3890 tion. University of Strathclyde. [cited on pages 135, 166, and 174]
- 3891 Fergus Henderson, Thomas Conway, Zoltan Somogyi, David Jeffery, Peter Schachte, Simon
3892 Taylor, and Chris Speirs. 1996. *The Mercury Language Reference Manual*. Technical
3893 Report. [cited on page 179]
- 3894 Fritz Henglein. 1993. Type inference with polymorphic recursion. *ACM Trans. Program.*
3895 *Lang. Syst.* 15, 2 (April 1993), 253–289. <https://doi.org/10.1145/169701.169692>
3896 [cited on pages 136 and 214]
- 3897 J. Roger Hindley. 1969. The Principal Type-Scheme of an Object in Combinatory Logic.
3898 *Trans. Amer. Math. Soc.* 146 (1969), 29–60. [cited on pages 3, 4, 15, and 131]
- 3899 G. Huet. 1973. A unification algorithm for typed lambda calculus. *Theoretical Computer*
3900 *Science* 1, 1 (1973), 27–57. [cited on page 135]
- 3901 Yuu Igarashi, Taro Sekiyama, and Atsushi Igarashi. 2017. On Polymorphic Gradual Typing.
3902 In *Proceedings of the 22nd International Conference on Functional Programming*. [cited on
3903 pages 66, 68, 73, 101, 105, and 172]

- 3904 Khurram A. Jafery and Joshua Dunfield. 2017. Sums of Uncertainty: Refinements Go Grad-
 3905 ual. In *Proceedings of the 44th Symposium on Principles of Programming Languages*. 14.
 3906 [cited on pages 60, 72, and 171]
- 3907 Trevor Jim. 1996. What are principal typings and what are they good for?. In *Proceedings*
 3908 *of the 23rd ACM SIGPLAN-SIGACT symposium on Principles of programming languages*.
 3909 ACM, 42–53. [cited on page 174]
- 3910 Mark P Jones. 1995. A system of constructor classes: overloading and implicit higher-order
 3911 polymorphism. *Journal of functional programming* 5, 1 (1995), 1–35. [cited on pages 132,
 3912 135, 165, and 175]
- 3913 Mark P. Jones. 1996. Using Parameterized Signatures to Express Modular Structure. In *Pro-*
 3914 *ceedings of the 23rd ACM SIGPLAN-SIGACT Symposium on Principles of Programming*
 3915 *Languages (POPL '96)*. 68–78. <https://doi.org/10.1145/237721.237731> [cited
 3916 on page 5]
- 3917 Mark P. Jones. 1999. Typing Haskell in Haskell. In *Proceedings of the 1999 Haskell Workshop*
 3918 *(Haskell '99)*, Erik Meijer (Ed.). Paris, France, pp. 9–22. University of Utrecht Technical
 3919 Report UU-CS-1999-28. [cited on page 148]
- 3920 Mark P Jones. 2000. Type classes with functional dependencies. In *European Symposium on*
 3921 *Programming*. Springer, 230–244. [cited on page 65]
- 3922 Assaf J Kfoury and Jerzy Tiuryn. 1992. Type reconstruction in finite rank fragments of the
 3923 second-order λ -calculus. *Information and computation* 98, 2 (1992), 228–257. [cited on
 3924 page 19]
- 3925 Oleg Kiselyov, Ralf Lämmel, and Kean Schupke. 2004. Strongly typed heterogeneous col-
 3926 lections. In *Proceedings of the 2004 ACM SIGPLAN workshop on Haskell*. ACM, 96–107.
 3927 [cited on page 65]
- 3928 Csongor Kiss, Susan Eisenbach, Tony Field, and Simon Peyton Jones. 2019. Higher-order
 3929 type-level programming in Haskell. In *Proceedings of the 24th ACM SIGPLAN Interna-*
 3930 *tional Conference on Functional Programming (ICFP 2019)*. ACM. [cited on page 165]
- 3931 Didier Le Botlan and Didier Rémy. 2003. MLF: Raising ML to the Power of System F (*ICFP*
 3932 '03). 12. [cited on pages 6 and 169]
- 3933 Didier Le Botlan and Didier Rémy. 2009. Recasting MLF. *Information and Computation* 207,
 3934 6 (2009), 726–785. [cited on page 169]

- 3935 Jukka Lehtosalo et al. 2006. Mypy. <http://www.mypy-lang.org/> [cited on pages 8
3936 and 59]
- 3937 Daan Leijen. 2009. Flexible Types: Robust Type Inference for First-class Polymorphism
3938 (POPL '09). 12. [cited on pages 6 and 169]
- 3939 Andres Löb, Conor McBride, and Wouter Swierstra. 2010. A tutorial implementation of a
3940 dependently typed lambda calculus. *Fundamenta informaticae* 102, 2 (2010), 177–207.
3941 [cited on page 23]
- 3942 Jacob Matthews and Amal Ahmed. 2008. Parametric polymorphism through run-time seal-
3943 ing or, theorems for low, low prices!. In *European Symposium on Programming*. Springer,
3944 16–31. [cited on page 78]
- 3945 Conor McBride. 2002. Faking it Simulating dependent types in Haskell. *Journal of functional*
3946 *programming* 12, 4-5 (2002), 375–392. [cited on page 65]
- 3947 McCracken. 1984. The typechecking of programs with implicit type structure. In *Lecture*
3948 *Notes in Computer Science (Semantics of Data Types)*, Vol. 173. [cited on page 5]
- 3949 Dale Miller. 1991. Unification of simply typed lambda-terms as logic programming. (1991).
3950 [cited on page 174]
- 3951 Robin Milner. 1978. A theory of type polymorphism in programming. *Journal of computer*
3952 *and system sciences* 17, 3 (1978), 348–375. [cited on page 15]
- 3953 James H. Morris, Jr. 1973. Types Are Not Sets. In *Proceedings of the 1st Annual ACM SIGACT-*
3954 *SIGPLAN Symposium on Principles of Programming Languages (POPL '73)*. ACM, New
3955 York, NY, USA, 120–124. <https://doi.org/10.1145/512927.512938> [cited on
3956 page 172]
- 3957 James Hiram Morris Jr. 1969. *Lambda-calculus models of programming languages*. Ph.D.
3958 Dissertation. Massachusetts Institute of Technology. [cited on page 79]
- 3959 Alan Mycroft. 1984. Polymorphic type schemes and recursive definitions. In *International*
3960 *Symposium on Programming*. Springer, 217–228. [cited on page 174]
- 3961 Georg Neis, Derek Dreyer, and Andreas Rossberg. 2009. Non-parametric Parametricity. In
3962 *Proceedings of the 14th ACM SIGPLAN International Conference on Functional Program-*
3963 *ming (ICFP '09)*. ACM, New York, NY, USA, 135–148. [https://doi.org/10.1145/](https://doi.org/10.1145/1596550.1596572)
3964 [1596550.1596572](https://doi.org/10.1145/1596550.1596572) [cited on page 78]

- 3965 Max S. New, Dustin Jamner, and Amal Ahmed. 2019. Graduality and Parametricity: Together
 3966 Again for the First Time. *Proc. ACM Program. Lang.* 4, POPL, Article 46 (Dec. 2019),
 3967 32 pages. <https://doi.org/10.1145/3371114> [cited on page 172]
- 3968 Martin Odersky and Konstantin Läufer. 1996. Putting Type Annotations to Work. In *Pro-*
 3969 *ceedings of the 23rd ACM SIGPLAN-SIGACT Symposium on Principles of Programming*
 3970 *Languages (POPL '96)*. Association for Computing Machinery, New York, NY, USA, 54–
 3971 67. <https://doi.org/10.1145/237721.237729> [cited on pages 3, 6, 7, 15, 18, 20,
 3972 66, 131, and 169]
- 3973 Martin Odersky, Christoph Zenger, and Matthias Zenger. 2001. Colored Local Type Infer-
 3974 ence (*POPL '01*). 13. [cited on page 170]
- 3975 Bruno C. d. S. Oliveira, Zhiyuan Shi, and João Alpuim. 2016. Disjoint intersection types. In
 3976 *International Conference on Functional Programming (ICFP)*. [cited on page 178]
- 3977 Michel Parigot. 1992. Recursive programming with proofs. *Theoretical Computer Science* 94,
 3978 2 (1992), 335–356. [cited on pages 62 and 63]
- 3979 Simon Peyton Jones. 2003. *Haskell 98 language and libraries: the revised report*. Cambridge
 3980 University Press. [cited on page 133]
- 3981 Simon Peyton Jones, Mark Jones, and Erik Meijer. 1997. Type classes: exploring the design
 3982 space. In *Haskell workshop*, Vol. 1997. [cited on page 65]
- 3983 Simon Peyton Jones, Dimitrios Vytiniotis, Stephanie Weirich, and Mark Shields. 2007. Prac-
 3984 tical type inference for arbitrary-rank types. *Journal of functional programming* 17, 1
 3985 (2007), 1–82. [cited on pages 3, 6, 7, 18, 23, 35, 37, 43, 44, 45, 51, 78, 131, 135, 164,
 3986 165, 169, and 173]
- 3987 Simon Peyton Jones, Dimitrios Vytiniotis, Stephanie Weirich, and Geoffrey Washburn. 2006.
 3988 Simple unification-based type inference for GADTs. In *Proceedings of the Eleventh ACM*
 3989 *SIGPLAN International Conference on Functional Programming (ICFP '06)*. ACM, New
 3990 York, NY, USA, 50–61. <https://doi.org/10.1145/1159803.1159811> [cited on
 3991 pages 131 and 165]
- 3992 Benjamin C Pierce. 2002. *Types and programming languages*. [cited on page 78]
- 3993 Benjamin C. Pierce and David N. Turner. 2000. Local Type Inference. *ACM Trans. Pro-*
 3994 *gram. Lang. Syst.* 22, 1 (Jan. 2000), 1–44. <https://doi.org/10.1145/345099.345100>
 3995 [cited on pages 7, 11, 23, 54, and 170]

- 3996 François Pottier and Didier Rémy. 2005. The essence of ML type inference. *Advanced Topics*
3997 *in Types and Programming Languages* (2005). [cited on pages 173, 174, and 209]
- 3998 Garrel Pottinger. 1980. A type assignment for the strongly normalizable λ -terms. *To HB*
3999 *Curry: essays on combinatory logic, lambda calculus and formalism* (1980), 561–577. [cited
4000 on page 178]
- 4001 Jason Reed. 2009. Higher-order constraint simplification in dependent type theory. In *Pro-*
4002 *ceedings of the Fourth International Workshop on Logical Frameworks and Meta-Languages:*
4003 *Theory and Practice*. ACM, 49–56. [cited on page 174]
- 4004 Didier Rémy. 2005. Simple, Partial Type-inference for System F Based on Type-containment
4005 (*ICFP '05*). 14. [cited on page 170]
- 4006 Didier Rémy and Boris Yakobowski. 2008. From ML to MLF: Graphic Type Constraints with
4007 Efficient Type Inference (*ICFP '08*). 12. [cited on page 169]
- 4008 John C Reynolds. 1974. Towards a theory of type structure. In *Programming Symposium*.
4009 Springer, 408–425. [cited on page 5]
- 4010 John C. Reynolds. 1983. Types, Abstraction and Parametric Polymorphism. In *Proceedings*
4011 *of the IFIP 9th World Computer Congress*. [cited on page 78]
- 4012 John C. Reynolds. 1991. The Coherence of Languages with Intersection Types. In *Proceedings*
4013 *of the International Conference on Theoretical Aspects of Computer Software*. [cited on
4014 page 79]
- 4015 Patrick Salle. 1978. Une Extension De La Theorie Des Types En lambda-Calcul. In *Proceed-*
4016 *ings of the Fifth Colloquium on Automata, Languages and Programming*. Springer-Verlag,
4017 London, UK, UK, 398–410. [cited on page 178]
- 4018 Tom Schrijvers, Simon Peyton Jones, Martin Sulzmann, and Dimitrios Vytiniotis. 2009.
4019 Complete and decidable type inference for GADTs. In *Proceedings of the 14th ACM*
4020 *SIGPLAN International Conference on Functional Programming (ICFP '09)*. ACM, New
4021 York, NY, USA, 341–352. <https://doi.org/10.1145/1596550.1596599> [cited on
4022 page 173]
- 4023 Alejandro Serrano, Jurriaan Hage, Simon Peyton Jones, and Dimitrios Vytiniotis. 2020. A
4024 Quick Look at Impredicativity. *Proc. ACM Program. Lang.* 4, ICFP, Article 89 (Aug. 2020),
4025 29 pages. <https://doi.org/10.1145/3408971> [cited on pages 6 and 170]

- Alejandro Serrano, Jurriaan Hage, Dimitrios Vytiniotis, and Simon Peyton Jones. 2018. Guarded impredicative polymorphism. In *Proceedings of the 39th ACM SIGPLAN Conference on Programming Language Design and Implementation (PLDI 2018)*. ACM, New York, NY, USA, 783–796. <https://doi.org/10.1145/3192366.3192389> [cited on pages 6 and 170]
- Paula Severi and Erik Poll. 1994. Pure Type Systems with Definitions. *Logical Foundations of Computer Science* (1994), 316–328. [cited on page 177]
- Jeremy Siek, Ronald Garcia, and Walid Taha. 2009. Exploring the design space of higher-order casts. In *European Symposium on Programming*. 17–31. [cited on page 171]
- Jeremy G. Siek and Walid Taha. 2006. Gradual Typing for Functional Languages. In *Proceedings of the 2006 Scheme and Functional Programming Workshop*. [cited on pages 8, 11, 59, 99, and 171]
- Jeremy G. Siek and Walid Taha. 2007. Gradual Typing for Objects. In *European Conference on Object-Oriented Programming*. [cited on pages 6, 9, 11, 59, 60, 61, 65, 68, 71, 96, 97, 99, and 171]
- Jeremy G. Siek and Manish Vachharajani. 2008. Gradual Typing with Unification-based Inference. In *Proceedings of the 2008 Symposium on Dynamic Languages*. [cited on page 173]
- Jeremy G Siek, Michael M Vitousek, Matteo Cimini, and John Tang Boyland. 2015. Refined criteria for gradual typing. In *1st Summit on Advances in Programming Languages (SNAPL 2015)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik. [cited on pages 9, 11, 12, 73, 76, 80, 81, and 171]
- Vincent Simonet and François Pottier. 2007. A constraint-based approach to guarded algebraic data types. *ACM Transactions on Programming Languages and Systems (TOPLAS)* 29, 1 (2007), 1. [cited on page 173]
- Matthieu Sozeau and Nicolas Oury. 2008. First-Class Type Classes. In *TPHOLs '08*. Springer-Verlag, 278–293. [cited on page 179]
- Matías Toro, Elizabeth Labrada, and Éric Tanter. 2019. Gradual Parametricity, Revisited. *Proc. ACM Program. Lang.* 3, POPL, Article 17 (Jan. 2019), 30 pages. <https://doi.org/10.1145/3290330> [cited on page 172]
- Julien Verlaquet. 2013. Facebook: Analyzing PHP statically. In *Proceedings of Commercial Users of Functional Programming*. [cited on page 59]

- 4057 Michael M. Vitousek, Andrew M. Kent, Jeremy G. Siek, and Jim Baker. 2014. Design and
4058 Evaluation of Gradual Typing for Python. In *Proceedings of the 10th Symposium on Dy-*
4059 *namic languages*. [cited on pages 8 and 59]
- 4060 Dimitrios Vytiniotis, Simon Peyton Jones, Tom Schrijvers, and Martin Sulzmann. 2011. Out-
4061 sideIn (X) Modular type inference with local assumptions. *Journal of functional program-*
4062 *ming* 21, 4-5 (2011), 333–412. [cited on pages 135, 164, 165, 166, 173, 180, 209, and 210]
- 4063 Dimitrios Vytiniotis, Stephanie Weirich, and Simon Peyton Jones. 2008. FPH: First-class
4064 Polymorphism for Haskell (*ICFP '08*). 12. [cited on page 170]
- 4065 P. Wadler and S. Blott. 1989. How to Make Ad-hoc Polymorphism Less Ad Hoc. In *POPL*
4066 '89. ACM. [cited on page 179]
- 4067 Philip Wadler and Robert Bruce Findler. 2009. Well-Typed Programs Can't Be Blamed.
4068 In *Proceedings of the 18th European Symposium on Programming Languages and Systems*.
4069 [cited on page 172]
- 4070 Stephanie Weirich, Pritam Choudhury, Antoine Voizard, and Richard A. Eisenberg. 2019. A
4071 Role for dependent types in Haskell. *Proc. ACM Program. Lang.* 3, ICFP, Article 101 (July
4072 2019), 29 pages. <https://doi.org/10.1145/3341705> [cited on page 174]
- 4073 Stephanie Weirich, Justin Hsu, and Richard A. Eisenberg. 2013. System FC with Explicit Kind
4074 Equality. In *Proceedings of the 18th ACM SIGPLAN International Conference on Functional*
4075 *Programming (ICFP '13)*. ACM, New York, NY, USA, 275–286. [https://doi.org/10.](https://doi.org/10.1145/2500365.2500599)
4076 [1145/2500365.2500599](https://doi.org/10.1145/2500365.2500599) [cited on pages 132, 134, and 174]
- 4077 Stephanie Weirich, Antoine Voizard, Pedro Henrique Azevedo de Amorim, and Richard A
4078 Eisenberg. 2017. A specification for dependent types in Haskell. In *Proceedings of the 22th*
4079 *ACM SIGPLAN International Conference on Functional Programming (ICFP '17)*. ACM.
4080 [cited on page 174]
- 4081 Joe B Wells. 1999. Typability and Type Checking in System F are Equivalent and Undecidable.
4082 *Annals of Pure and Applied Logic* 98, 1-3 (1999), 111–156. [cited on pages 6, 7, 18, and 89]
- 4083 Thomas Winant, Dominique Devriese, Frank Piessens, and Tom Schrijvers. 2014. Partial
4084 type signatures for haskell. In *International Symposium on Practical Aspects of Declarative*
4085 *Languages*. Springer, 17–32. [cited on page 208]
- 4086 Hongwei Xi, Chiyan Chen, and Gang Chen. 2003. Guarded recursive datatype constructors.
4087 In *Proceedings of the 30th ACM SIGPLAN-SIGACT Symposium on Principles of Program-*

- 4088 *ming Languages (POPL '03)*. ACM, New York, NY, USA, 224–235. <https://doi.org/10.1145/604131.604150> [cited on page 165]
- 4089
- 4090 Hongwei Xi and Frank Pfenning. 1999. Dependent Types in Practical Programming. In
- 4091 *Proceedings of the 26th ACM SIGPLAN-SIGACT Symposium on Principles of Programming*
- 4092 *Languages (POPL '99)*. Association for Computing Machinery, New York, NY, USA, 214–
- 4093 227. <https://doi.org/10.1145/292540.292560> [cited on pages 23 and 177]
- 4094 Ningning Xie, Xuan Bi, and Bruno C d S Oliveira. 2018. Consistent Subtyping for All. In
- 4095 *European Symposium on Programming*. Springer, 3–30. [cited on pages 13 and 26]
- 4096 Ningning Xie, Xuan Bi, Bruno C. D. S. Oliveira, and Tom Schrijvers. 2019a. Consistent
- 4097 Subtyping for All. *ACM Transactions on Programming Languages and Systems* 42, 1, Article
- 4098 2 (Nov. 2019), 79 pages. <https://doi.org/10.1145/3310339> [cited on pages 13
- 4099 and 26]
- 4100 Ningning Xie, Bruno C. d. S. Oliveira, Xuan Bi, and Tom Schrijvers. 2020. Row and
- 4101 Bounded Polymorphism via Disjoint Polymorphism. In *34th European Conference on*
- 4102 *Object-Oriented Programming (ECOOP 2020) (Leibniz International Proceedings in Infor-*
- 4103 *matics (LIPIcs))*, Robert Hirschfeld and Tobias Pape (Eds.), Vol. 166. Schloss Dagstuhl–
- 4104 Leibniz-Zentrum für Informatik, Dagstuhl, Germany, 27:1–27:30. <https://doi.org/10.4230/LIPIcs.ECOOP.2020.27> [cited on page 178]
- 4105
- 4106 Ningnign Xie and Richard A Eisenberg. 2018. Coercion Quantification. In *Haskell Imple-*
- 4107 *mentors' Workshop*. [cited on page 174]
- 4108 Ningning Xie, Richard A Eisenberg, and Bruno CDS Oliveira. 2019b. Kind Inference for
- 4109 Datatypes: Technical Supplement. *arXiv preprint arXiv:1911.06153* (2019). [https://](https://arxiv.org/abs/1911.06153)
- 4110 arxiv.org/abs/1911.06153 [cited on pages 134 and 174]
- 4111 Ningning Xie, Richard A. Eisenberg, and Bruno C. d. S. Oliveira. 2019c. Kind Inference for
- 4112 Datatypes. *Proc. ACM Program. Lang.* 4, POPL, Article 53 (Dec. 2019), 28 pages. [https://](https://doi.org/10.1145/3371121)
- 4113 doi.org/10.1145/3371121 [cited on page 13]
- 4114 Ningning Xie and Bruno C d S Oliveira. 2017. Towards Unification for Dependent Types. In
- 4115 *Draft Proceedings of the 18th Symposium on Trends in Functional Programming (TFP '18)*.
- 4116 Extended abstract. [cited on pages 13 and 130]
- 4117 Ningning Xie and Bruno C d S Oliveira. 2018. Let Arguments Go First. In *European Sympo-*
- 4118 *sium on Programming*. Springer, 272–299. [cited on pages 13, 36, and 55]

Bibliography

- 4119 Brent A. Yorgey, Stephanie Weirich, Julien Cretin, Simon Peyton Jones, Dimitrios Vytiniotis,
4120 and José Pedro Magalhães. 2012. Giving Haskell a Promotion. In *Proceedings of the 8th*
4121 *ACM SIGPLAN Workshop on Types in Language Design and Implementation (TLDI '12)*.
4122 ACM, New York, NY, USA, 53–66. <https://doi.org/10.1145/2103786.2103795>
4123 [cited on pages 132, 134, and 208]
- 4124 Beta Ziliani and Matthieu Sozeau. 2015. A Unification Algorithm for Coq Featuring Universe
4125 Polymorphism and Overloading. In *Proceedings of the 20th ACM SIGPLAN International*
4126 *Conference on Functional Programming (ICFP 2015)*. ACM, New York, NY, USA, 179–191.
4127 <https://doi.org/10.1145/2784731.2784751> [cited on page 174]

PART VI

TECHNICAL APPENDIX

4128

A

FULL RULES FOR ALGORITHMIC AP

4129

$$\boxed{(S_1, N_1) \vdash^{AP} \sigma <: \sigma_2 \hookrightarrow (S_2, N_2)}$$

(Algorithmic Subtyping)

4130

$$\frac{\text{AP-A-S-MONO} \quad S_0 \vdash^{AP} \tau_1 \approx \tau_2 \hookrightarrow S_1}{(S_0, N_0) \vdash^{AP} \tau_1 <: \tau_2 \hookrightarrow (S_1, N_0)}$$

4131

$$\frac{\text{AP-A-S-ARROWL} \quad \begin{array}{l} (S_0, N_0) \vdash^{AP} \sigma \triangleright \sigma_3 \rightarrow \sigma_4 \hookrightarrow (S_1, N_1) \\ (S_1, N_1) \vdash^{AP} \sigma_3 <: \sigma_1 \hookrightarrow (S_2, N_2) \quad (S_2, N_2) \vdash^{AP} \sigma_2 <: \sigma_4 \hookrightarrow (S_3, N_3) \end{array}}{(S_0, N_0) \vdash^{AP} \sigma_1 \rightarrow \sigma_2 <: \sigma \hookrightarrow (S_3, N_3)}$$

4132

$$\frac{\text{AP-A-S-ARROWR} \quad \begin{array}{l} (S_0, N_0) \vdash^{AP} \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \hookrightarrow (S_1, N_1) \\ (S_1, N_1) \vdash^{AP} \sigma_3 <: \sigma_1 \hookrightarrow (S_2, N_2) \quad (S_2, N_2) \vdash^{AP} \sigma_2 <: \sigma_4 \hookrightarrow (S_3, N_3) \end{array}}{(S_0, N_0) \vdash^{AP} \sigma <: \sigma_3 \rightarrow \sigma_4 \hookrightarrow (S_3, N_3)}$$

4133

$$\frac{\text{AP-A-S-FORALLL} \quad (S_0, N_0) \vdash^{AP} \sigma_1[a \mapsto \widehat{\beta}] <: \sigma_2 \hookrightarrow (S_1, N_1)}{(S_0, N_0 \widehat{\beta}) \vdash^{AP} \forall a. \sigma_1 <: \sigma_2 \hookrightarrow (S_1, N_1)}$$

4134

$$\frac{\text{AP-A-S-FORALLR} \quad (S_0, N_0) \vdash^{AP} \sigma_1 <: \sigma_2[a \mapsto b] \hookrightarrow (S_1, N_1) \quad b \notin \text{FV}(S(\sigma_1)) \quad b \notin \text{FV}(S(\forall a. \sigma_2))}{(S_0, N_0 b) \vdash^{AP} \sigma_1 <: \forall a. \sigma_2 \hookrightarrow (S_1, N_1)}$$

4135

$$\boxed{(S_1, N_1); \Sigma \vdash^{AP} \sigma <: \sigma_2 \hookrightarrow (S_2, N_2)}$$

(Algorithmic Application Subtyping)

4136

$$\frac{\text{AP-A-AS-EMPTY}}{(S_0, N_0); \bullet \vdash^{AP} \sigma <: \sigma \hookrightarrow (S_0, N_0)}$$

4137

$$\frac{\text{AP-A-AS-FORALL} \quad (S_0, N_0); \Sigma, \sigma_3 \vdash^{AP} \sigma_1[a \mapsto \widehat{\beta}] <: \sigma_2 \hookrightarrow (S_1, N_1)}{(S_0, N_0 \widehat{\beta}); \Sigma, \sigma_3 \vdash^{AP} \forall a. \sigma_1 <: \sigma_2 \hookrightarrow (S_1, N_1)}$$

A Full Rules for Algorithmic AP

4138	$\frac{\text{AP-A-AS-ARROW} \quad (S_0, N_0) \vdash^{AP} \sigma_3 <: \sigma_1 \hookrightarrow (S_1, N_1) \quad (S_1, N_1); \Sigma \vdash^{AP} \sigma_2 <: \sigma_4 \hookrightarrow (S_2, N_2)}{(S_0, N_0); \Sigma, \sigma_3 \vdash^{AP} \sigma_1 \rightarrow \sigma_2 <: \sigma_3 \rightarrow \sigma_4 \hookrightarrow (S_2, N_2)}$	
4139	$\frac{\text{AP-A-AS-MONO} \quad (S_0, N_0) \vdash^{AP} \tau \triangleright \tau_1 \rightarrow \tau_2 \hookrightarrow (S_1, N_1) \quad (S_1, N_1); \Sigma, \sigma_3 \vdash^{AP} \tau_1 \rightarrow \tau_2 <: \sigma \hookrightarrow (S_2, N_2)}{(S_0, N_0 \hat{\beta}); \Sigma, \sigma_3 \vdash^{AP} \tau <: \sigma \hookrightarrow (S_2, N_2)}$	
4140	$\boxed{(S_1, N_1) \vdash^{AP} \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \hookrightarrow (S_2, N_2)}$	(Matching)
4141	$\frac{\text{AP-A-M-TVAR} \quad S_0 \vdash^{AP} \hat{\alpha} \approx \hat{\alpha}_1 \rightarrow \hat{\alpha}_2 \hookrightarrow S_1}{(S_0, N_0 \hat{\alpha}_1 \hat{\alpha}_2) \vdash^{AP} \hat{\alpha} \triangleright \hat{\alpha}_1 \rightarrow \hat{\alpha}_2 \hookrightarrow (S_1, N_0)}$	
4142	$\frac{\text{AP-A-M-ARROW}}{(S_0, N_0) \vdash^{AP} \sigma_1 \rightarrow \sigma_2 \triangleright \sigma_1 \rightarrow \sigma_2 \hookrightarrow (S_0, N_0)}$	
4143	$\boxed{S_1 \vdash^{AP} \tau_1 \approx \tau_2 \hookrightarrow S_2}$	(Unification)
4144	$\frac{\text{AP-A-U-REFL}}{S_0 \vdash^{AP} \tau \approx \tau \hookrightarrow S_0} \quad \frac{\text{AP-A-U-SOLVED\texttt{EVARL}} \quad \hat{\alpha} \in S_0 \quad S_0 \vdash^{AP} S_0(\hat{\alpha}) \approx \tau \hookrightarrow S_1}{S_0 \vdash^{AP} \hat{\alpha} \approx \tau \hookrightarrow S_1}$	
4145	$\frac{\text{AP-A-U-EVARL} \quad \hat{\alpha} \notin S_0 \quad \hat{\alpha} \notin \text{FV}(S_0(\tau))}{S_0 \vdash^{AP} \hat{\alpha} \approx \tau \hookrightarrow [\hat{\alpha} \mapsto S_0(\tau)] \cdot S_1} \quad \frac{\text{AP-A-U-SOLVED\texttt{EVARR}} \quad \hat{\alpha} \in S_0 \quad S_0 \vdash^{AP} \tau \approx S_0(\hat{\alpha}) \hookrightarrow S_1}{S_0 \vdash^{AP} \tau \approx \hat{\alpha} \hookrightarrow S_1}$	
4146	$\frac{\text{AP-A-U-EVARR} \quad \hat{\alpha} \notin S_0 \quad \hat{\alpha} \notin \text{FV}(S_0(\tau))}{S_0 \vdash^{AP} \tau \approx \hat{\alpha} \hookrightarrow [\hat{\alpha} \mapsto S_0(\tau)] \cdot S_1} \quad \frac{\text{AP-A-U-ARROW} \quad S_0 \vdash^{AP} \tau_1 \approx \tau_3 \hookrightarrow S_1 \quad S_1 \vdash^{AP} \tau_2 \approx \tau_4 \hookrightarrow S_2}{S_0 \vdash^{AP} \tau_1 \rightarrow \tau_2 \approx \tau_3 \rightarrow \tau_4 \hookrightarrow S_2}$	
4147	$\boxed{(S_1, N_1); \Psi \vdash^{AP} e \Rightarrow \sigma \hookrightarrow (S_2, N_2)}$	(Algorithmic Typing Inference)

AP-A-INF-INT

$$\frac{}{(S_0, N_0); \Psi \vdash^{AP} n \Rightarrow \text{Int} \hookrightarrow (S_0, N_0)}$$

$$\frac{\text{AP-A-INF-LAM} \quad (S_0, N_0); \Psi, x : \widehat{\beta} \vdash^{AP} e \Rightarrow \sigma \hookrightarrow (S_1, N_1)}{(S_0, N_0 \widehat{\beta}); \Psi \vdash^{AP} \lambda x. e \Rightarrow \widehat{\beta} \rightarrow \sigma \hookrightarrow (S_1, N_1)}$$

$$\frac{\text{AP-A-INF-LAMANN} \quad (S_0, N_0); \Psi, x : \sigma_1 \vdash^{AP} e \Rightarrow \sigma_2 \hookrightarrow (S_1, N_1)}{(S_0, N_0); \Psi \vdash^{AP} \lambda x : \sigma_1. e \Rightarrow \sigma_1 \rightarrow \sigma_2 \hookrightarrow (S_1, N_1)}$$

$$\boxed{(S_1, N_1); \Psi; \Sigma \vdash^{AP} e \Rightarrow \sigma \hookrightarrow (S_2, N_2)} \quad (\text{Algorithmic Typing Application Mode})$$

$$\frac{\text{AP-A-APP-VAR} \quad (x : \sigma_1) \in \Psi \quad (S_0, N_0); \Sigma \vdash^{AP} \sigma_1 <: \sigma_2 \hookrightarrow (S_1, N_1)}{(S_0, N_0); \Psi; \Sigma \vdash^{AP} x \Rightarrow \sigma_2 \hookrightarrow (S_1, N_1)}$$

$$\frac{\text{AP-A-APP-LAM} \quad (S_0, N_0); \Psi, x : \sigma_1 \vdash^{AP} e \Rightarrow \sigma_2 \hookrightarrow (S_1, N_1)}{(S_0, N_0); \Psi; \Sigma, \sigma_1 \vdash^{AP} \lambda x. e \Rightarrow \sigma_1 \rightarrow \sigma_2 \hookrightarrow (S_1, N_1)}$$

$$\frac{\text{AP-A-APP-LAMANN} \quad (S_0, N_0) \vdash^{AP} \sigma_2 <: \sigma_1 \hookrightarrow (S_1, N_1) \quad (S_1, N_1); \Psi, x : \sigma_1 \vdash^{AP} e \Rightarrow \sigma_3 \hookrightarrow (S_2, N_2)}{(S_0, N_0); \Psi; \Sigma, \sigma_2 \vdash^{AP} \lambda x : \sigma_1. e \Rightarrow \sigma_2 \rightarrow \sigma_3 \hookrightarrow (S_2, N_2)}$$

$$\frac{\text{AP-A-APP-APP} \quad (S_0, N_0); \Psi \vdash^{AP} e_2 \Rightarrow \sigma_1 \hookrightarrow (S_1, N_1 \overline{a_i^i}) \quad \overline{\alpha_i^i} = \text{FV}(S_1(\sigma_1)) - \text{FV}(S_1(\Psi)) \quad \sigma_2 = \forall \overline{a_i^i}. \sigma_1[\overline{\alpha_i^i} \mapsto \overline{a_i^i}] \quad (S_1, N_1); \Psi; \Sigma, \sigma_2 \vdash^{AP} e_1 \Rightarrow \sigma_2 \rightarrow \sigma_3 \hookrightarrow (S_2, N_2)}{(S_0, N_0); \Psi; \Sigma \vdash^{AP} e_1 e_2 \Rightarrow \sigma_3 \hookrightarrow (S_2, N_2)}$$

4156

B THE EXTENDED ALGORITHMIC GPC

4157

B.1 SYNTAX

4158

4159

Expressions	$e ::= x \mid n \mid \lambda x : \sigma. e \mid \lambda x. e \mid e_1 e_2 \mid e : \sigma \mid \mathbf{let} x = e_1 \mathbf{in} e_2$
Types	$\sigma ::= \mathbf{Int} \mid a \mid \hat{\alpha} \mid \sigma_1 \rightarrow \sigma_2 \mid \forall a. \sigma \mid ? \mid \mathcal{S} \mid \mathcal{G}$
Monotypes	$\tau ::= \mathbf{Int} \mid a \mid \hat{\alpha} \mid \tau_1 \rightarrow \tau_2 \mid \mathcal{S} \mid \mathcal{G}$
Existential variables	$\hat{\alpha} ::= \hat{\alpha}_S \mid \hat{\alpha}_G$
Castable Types	$\mathbb{C} ::= \mathbf{Int} \mid a \mid \hat{\alpha} \mid \mathbb{C}_1 \rightarrow \mathbb{C}_2 \mid \forall a. \mathbb{C} \mid ? \mid \mathcal{G}$
Castable Monotypes	$t ::= \mathbf{Int} \mid a \mid \hat{\alpha} \mid t_1 \rightarrow t_2 \mid \mathcal{G}$
Algorithmic Contexts	$\Gamma, \Delta, \Theta ::= \bullet \mid \Gamma, x : \sigma \mid \Gamma, a \mid \Gamma, \hat{\alpha} \mid \Gamma, \hat{\alpha}_S = \tau \mid \Gamma, \hat{\alpha}_G = t \mid \Gamma, \blacktriangleright_{\hat{\alpha}}$
Complete Contexts	$\Omega ::= \bullet \mid \Omega, x : \sigma \mid \Omega, a \mid \Omega, \hat{\alpha}_S = \tau \mid \Omega, \hat{\alpha}_G = t \mid \Omega, \blacktriangleright_{\hat{\alpha}}$

4160

B.2 TYPE SYSTEM

4161

$$\boxed{\Gamma \vdash^G \sigma \lesssim aB \dashv \Delta}$$

(Algorithmic Consistent Subtyping)

4162

GPC-AS-TVAR

$$\frac{}{\Gamma[a] \vdash^G a \lesssim a \dashv \Gamma[a]}$$

GPC-AS-EVAR

$$\frac{}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \hat{\alpha} \dashv \Gamma[\hat{\alpha}]}$$

GPC-AS-INT

$$\frac{}{\Gamma \vdash^G \mathbf{Int} \lesssim \mathbf{Int} \dashv \Gamma}$$

4163

GPC-AS-ARROW

$$\frac{\Gamma \vdash^G \sigma_3 \lesssim \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta] \sigma_2 \lesssim [\Theta] \sigma_4 \dashv \Delta}{\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \sigma_3 \rightarrow \sigma_4 \dashv \Delta}$$

GPC-AS-FORALLR

$$\frac{\Gamma, a \vdash^G \sigma_1 \lesssim \sigma_2 \dashv \Delta, a, \Theta}{\Gamma \vdash^G \sigma_1 \lesssim \forall a. \sigma_2 \dashv \Delta}$$

4164

GPC-AS-FORALLLL

$$\frac{\Gamma, \blacktriangleright_{\hat{\alpha}_S}, \hat{\alpha}_S \vdash^G \sigma_1[a \mapsto \hat{\alpha}_S] \lesssim \sigma_2 \dashv \Delta, \blacktriangleright_{\hat{\alpha}_S}, \Theta}{\Gamma \vdash^G \forall a. \sigma_1 \lesssim \sigma_2 \dashv \Delta}$$

GPC-AS-SPAR

$$\frac{}{\Gamma \vdash^G \mathcal{S} \lesssim \mathcal{S} \dashv \Gamma}$$

4165

GPC-AS-GPAR

$$\frac{}{\Gamma \vdash^G \mathcal{G} \lesssim \mathcal{G} \dashv \Gamma}$$

GPC-AS-UNKNOWNLL

$$\frac{}{\Gamma \vdash^G ? \lesssim \mathbb{C} \dashv \mathbf{contaminate}(\Gamma, \mathbb{C})}$$

4166	$\frac{\text{GPC-AS-UNKNOWNRR}}{\Gamma \vdash^G \mathbb{C} \lesssim ? \dashv \text{contaminate}(\Gamma, \mathbb{C})}$	$\frac{\text{GPC-AS-INSTL} \quad \hat{\alpha} \notin \text{FV}(\sigma) \quad \Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}$
4167	$\frac{\text{GPC-AS-INSTR} \quad \hat{\alpha} \notin \text{FV}(\sigma) \quad \Gamma[\hat{\alpha}] \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}$	
4168	$\boxed{\Gamma \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta}$	(Instantiation I)
4169	$\frac{\text{GPC-INSTL-SOLVE S} \quad \Gamma \vdash^G \tau}{\Gamma, \hat{\alpha}_S, \Gamma' \vdash^G \hat{\alpha}_S \lesssim \tau \dashv \Gamma, \hat{\alpha}_S = \tau, \Gamma'}$	$\frac{\text{GPC-INSTL-SOLVE G} \quad \Gamma \vdash^G t}{\Gamma, \hat{\alpha}_G, \Gamma' \vdash^G \hat{\alpha}_G \lesssim t \dashv \Gamma, \hat{\alpha}_G = t, \Gamma'}$
4170	$\frac{\text{GPC-INSTL-SOLVE US}}{\Gamma[\hat{\alpha}_S] \vdash^G \hat{\alpha}_S \lesssim ? \dashv \Gamma[\hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G]}$	$\frac{\text{GPC-INSTL-SOLVE UG}}{\Gamma[\hat{\alpha}_G] \vdash^G \hat{\alpha}_G \lesssim ? \dashv \Gamma[\hat{\alpha}_G]}$
4171	$\frac{\text{GPC-INSTL-REACH SG1}}{\Gamma[\hat{\alpha}_S][\hat{\beta}_G] \vdash^G \hat{\alpha}_S \lesssim \hat{\beta}_G \dashv \Gamma[\hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G][\hat{\beta}_G = \hat{\alpha}_G]}$	
4172	$\frac{\text{GPC-INSTL-REACH SG2}}{\Gamma[\hat{\beta}_S][\hat{\alpha}_G] \vdash^G \hat{\alpha}_G \lesssim \hat{\beta}_S \dashv \Gamma[\hat{\beta}_G, \hat{\beta}_S = \hat{\beta}_G][\hat{\alpha}_G = \hat{\beta}_G]}$	
4173	$\frac{\text{GPC-INSTL-REACH OTHER}}{\Gamma[\hat{\alpha}][\hat{\beta}] \vdash^G \hat{\alpha} \lesssim \hat{\beta} \dashv \Gamma[\hat{\alpha}][\hat{\beta} = \hat{\alpha}]}$	
4174	$\frac{\text{GPC-INSTL-ARR} \quad \Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \sigma_1 \lesssim \hat{\alpha}_1 \dashv \Theta \quad \Theta \vdash^G \hat{\alpha}_2 \lesssim [\Theta]\sigma_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \sigma_1 \rightarrow \sigma_2 \dashv \Delta}$	
4175	$\frac{\text{GPC-INSTL-FORALL R} \quad \Gamma[\hat{\alpha}], b \vdash^G \hat{\alpha} \lesssim \sigma \dashv \Delta, b, \Theta}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \lesssim \forall b. \sigma \dashv \Delta}$	
4176	$\boxed{\Gamma \vdash^G \sigma \lesssim \hat{\alpha} \dashv \Delta}$	(Instantiation II)

	GPC-INSTR-SOLVES		GPC-INSTR-SOLVEG	
	$\Gamma \vdash^G \tau$		$\Gamma \vdash^G t$	
4177	$\frac{}{\Gamma, \hat{\alpha}_S, \Gamma' \vdash^G \tau \lesssim \hat{\alpha}_S \dashv \Gamma, \hat{\alpha}_S = \tau, \Gamma'}$		$\frac{}{\Gamma, \hat{\alpha}_G, \Gamma' \vdash^G t \lesssim \hat{\alpha}_G \dashv \Gamma, \hat{\alpha}_G = t, \Gamma'}$	
	GPC-INSTR-SOLVEUS		GPC-INSTR-SOLVEUG	
4178	$\frac{}{\Gamma[\hat{\alpha}_S] \vdash^G ? \lesssim \hat{\alpha}_S \dashv \Gamma[\hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G]}$		$\frac{}{\Gamma[\hat{\alpha}_G] \vdash^G ? \lesssim \hat{\alpha}_G \dashv \Gamma[\hat{\alpha}_G]}$	
	GPC-INSTR-REACHSG1			
4179	$\frac{}{\Gamma[\hat{\alpha}_S][\hat{\beta}_G] \vdash^G \hat{\beta}_G \lesssim \hat{\alpha}_S \dashv \Gamma[\hat{\alpha}_G, \hat{\alpha}_S = \hat{\alpha}_G][\hat{\beta}_G = \hat{\alpha}_G]}$			
	GPC-INSTR-REACHSG2			
4180	$\frac{}{\Gamma[\hat{\beta}_S][\hat{\alpha}_G] \vdash^G \hat{\beta}_S \lesssim \hat{\alpha}_G \dashv \Gamma[\hat{\beta}_G, \hat{\beta}_S = \hat{\beta}_G][\hat{\alpha}_G = \hat{\beta}_G]}$			
	GPC-INSTR-REACHOTHER			
4181	$\frac{}{\Gamma[\hat{\alpha}][\hat{\beta}] \vdash^G \hat{\beta} \lesssim \hat{\alpha} \dashv \Gamma[\hat{\alpha}][\hat{\beta} = \hat{\alpha}]}$			
	GPC-INSTR-ARR			
4182	$\frac{\Gamma[\hat{\alpha}_2, \hat{\alpha}_1, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2] \vdash^G \hat{\alpha}_1 \lesssim \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta]\sigma_2 \lesssim \hat{\alpha}_2 \dashv \Delta}{\Gamma[\hat{\alpha}] \vdash^G \sigma_1 \rightarrow \sigma_2 \lesssim \hat{\alpha} \dashv \Delta}$			
	GPC-INSTR-FORALLLL			
4183	$\frac{\Gamma[\hat{\alpha}], \blacktriangleright_{\hat{b}_S}, \hat{\beta}_S \vdash^G \sigma[b \mapsto \hat{\beta}_S] \lesssim \hat{\alpha} \dashv \Delta, \blacktriangleright_{\hat{b}_S}, \Theta}{\Gamma[\hat{\alpha}] \vdash^G \forall b. \sigma \lesssim \hat{\alpha} \dashv \Delta}$			
4184	$\boxed{\Gamma \vdash^G e \Rightarrow \sigma \dashv \Delta}$			(Inference)
	GPC-INF-VAR		GPC-INF-INT	
4185	$\frac{(x : \sigma) \in \Gamma}{\Gamma \vdash^G x \Rightarrow \sigma \dashv \Gamma}$		$\frac{}{\Gamma \vdash^G n \Rightarrow \text{Int} \dashv \Gamma}$	
	GPC-INF-LAMANN2			
4186	$\frac{\Gamma \vdash^G \sigma \quad \Gamma, \hat{\beta}_S, x : \sigma \vdash^G e \Leftarrow \hat{\beta}_S \dashv \Delta, x : \sigma, \Theta}{\Gamma \vdash^G \lambda x : \sigma. e \Rightarrow \sigma \rightarrow \hat{\beta}_S \dashv \Delta}$			
	GPC-INF-LAM2		GPC-INF-ANNO	
4187	$\frac{\Gamma, \hat{\alpha}_S, \hat{\beta}_S, x : \hat{\alpha}_S \vdash^G e \Leftarrow \hat{\beta}_S \dashv \Delta, x : \hat{\alpha}_S, \Theta}{\Gamma \vdash^G \lambda x. e \Rightarrow \hat{\alpha}_S \rightarrow \hat{\beta}_S \dashv \Delta}$		$\frac{\Gamma \vdash^G \sigma \quad \Gamma \vdash^G e \Leftarrow \sigma \dashv \Delta}{\Gamma \vdash^G e : \sigma \Rightarrow \sigma \dashv \Delta}$	

B The Extended Algorithmic GPC

4188	$\frac{\text{GPC-INF-APP} \quad \Gamma \vdash^G e_1 \Rightarrow \sigma \dashv \Theta_1 \quad \Theta_1 \vdash^G [\Theta_1] \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Theta_2 \quad \Theta_2 \vdash^G e_2 \Leftarrow [\Theta_2] \sigma_1 \dashv \Delta}{\Gamma \vdash^G e_1 e_2 \Rightarrow \sigma_2 \dashv \Delta}$	
4189	$\frac{\text{GPC-INF-LET2} \quad \Gamma \vdash^G e_1 \Rightarrow \sigma \dashv \Theta_1 \quad \Theta_1, \hat{\alpha}_S, x : \sigma \vdash^G e_2 \Leftarrow \hat{\alpha}_S \dashv \Delta, x : \sigma, \Theta_2}{\Gamma \vdash^G \text{let } x = e_1 \text{ in } e_2 \Rightarrow \hat{\alpha}_S \dashv \Delta}$	
4190	$\boxed{\Gamma \vdash^G e \Leftarrow \sigma \dashv \Delta}$	(Checking)
4191	$\frac{\text{GPC-CHK-LAM} \quad \Gamma, x : \sigma_1 \vdash^G e \Leftarrow \sigma_2 \dashv \Delta, x : \sigma_1, \Theta}{\Gamma \vdash^G \lambda x. e \Leftarrow \sigma_1 \rightarrow \sigma_2 \dashv \Delta} \quad \frac{\text{GPC-CHK-GEN} \quad \Gamma, a \vdash^G e \Leftarrow \sigma \dashv \Delta, a, \Theta}{\Gamma \vdash^G e \Leftarrow \forall a. \sigma \dashv \Delta}$	
4192	$\frac{\text{GPC-CHK-SUB} \quad \Gamma \vdash^G e \Rightarrow \sigma_1 \dashv \Theta \quad \Theta \vdash^G [\Theta] \sigma_1 \lesssim [\Theta] \sigma_2 \dashv \Delta}{\Gamma \vdash^G e \Leftarrow \sigma_2 \dashv \Delta}$	
4193	$\boxed{\Gamma \vdash^G \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta}$	(Algorithmic Matching)
4194	$\frac{\text{GPC-AM-FORALL} \quad \Gamma, \hat{\alpha}_S \vdash^G \sigma[a \mapsto \hat{\alpha}_S] \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta}{\Gamma \vdash^G \forall a. \sigma \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Delta} \quad \frac{\text{GPC-AM-ARR}}{\Gamma \vdash^G \sigma_1 \rightarrow \sigma_2 \triangleright \sigma_1 \rightarrow \sigma_2 \dashv \Gamma}$	
4195	$\frac{\text{GPC-AM-UNKNOWN}}{\Gamma \vdash^G ? \triangleright ? \rightarrow ? \dashv \Gamma} \quad \frac{\text{GPC-AM-VAR}}{\Gamma[\hat{\alpha}] \vdash^G \hat{\alpha} \triangleright \hat{\alpha}_1 \rightarrow \hat{\alpha}_2 \dashv \Gamma[\hat{\alpha}_1, \hat{\alpha}_2, \hat{\alpha} = \hat{\alpha}_1 \rightarrow \hat{\alpha}_2]}$	

C KIND INFERENCE FOR DATATYPES

C.1 OTHER LANGUAGE EXTENSIONS

This section accompanies Section 7.8 of the main paper, including discussion about more related language extensions. These extensions affect kind inference, but not in a fundamental way.

C.1.1 VISIBLE DEPENDENT QUANTIFICATION

Besides specified type variables for which users can optionally provide type arguments, Haskell also incorporates *visible dependent quantification* (VDQ)¹, e.g., `type T :: $\forall(k :: \star) \rightarrow k \rightarrow \star$` , with which users are forced to provide type arguments to `T`. That is, one would use `T` with, e.g., `T \star Int` and `T ($\star \rightarrow \star$) Maybe`, never just `T Int`. Visible dependent quantification is Haskell's equivalent to routine dependent quantification in dependently typed languages.

To support VDQ, rule `DT-TT` needs to be extended, as VDQ brings variables into scope for later reference. For example, given

```
data T ::  $\forall(k :: \star) \rightarrow k \rightarrow \star$ 
data T k a = MkT
```

We should get a context `k :: \star , a :: k` when checking `MkT`.

VDQ opens an interesting design choice: should unannotated type variables be able to introduce VDQ? For example, in the definition of `P` below, we use `f` and `a` as the arguments to `T`. To make it type-check, we need to infer `P :: $\forall(f :: \star) \rightarrow f \rightarrow \star$` .

```
data P f a = MkP (T f a)
```

However, the tricky part with inferring the kind of `P` is that we cannot have a fixed initial form of the kind of `P`, i.e., $\hat{\alpha} \rightarrow \hat{\beta} \rightarrow \star$ or $\forall(f : \hat{\alpha}) \rightarrow \hat{\beta} \rightarrow \star$, when type-checking the `rec` group of `P`, until we type-check `P`'s body. In order to avoid this challenge, we support GHC's current ruling on the matter: *dependent variables must be manifestly so*. That is, the

¹VDQ is implemented in GHC 8.10.

initial kind of a datatype includes VDQ only for those variables that appear, lexically, in the kind of a variable; other type parameters are reflected in a datatype's initial kind with a regular (non-dependent) arrow. This guideline rejects P as an example of non-manifest dependency.

C.1.2 DATATYPE PROMOTION

Haskellers can use datatypes as kinds and can write data constructors in types [Yorgey et al. 2012]. In the PolyKinds system, types and kinds are mixed (allowing datatypes to be used as kinds), but there is no facility to use a data constructor in a type.

To support such usage, the kinding judgment must now use the term context to fetch the type of data constructors. Moreover, dependency analysis needs to take dependencies on data constructors into account.

Definition 25 (Dependency Analysis with Type-Level Data). We extend Definition 21 with

- (iii) The definition of T_1 depends on the definition of T_2 if T_1 uses data constructors of T_2 .

While the appearance of data constructors in types enriches the type language considerably, they do not pose a particular challenge for inference; the rest of our presentation would remain unaffected.

C.1.3 PARTIAL TYPE SIGNATURES

For quite some time, GHC has supported kind signatures on a subset of a datatype's parameters, much like the partial type signatures described by Winant et al. [2014]. For example, App , below, does not have a signature but still has a kind annotation for f .

```
data  $App$  ( $f :: \star \rightarrow \star$ )  $a = A$  ( $f$   $a$ )
```

To deal with such a construct we first need to amend the syntax of a datatype declaration to support kind annotations for variables.

$$\text{datatype decl. } \mathcal{T} ::= \mathbf{data} \, T \, \phi = \overline{\mathcal{D}}_j^j$$

Kind annotations can also contain free variables, which need to be generalized in a similar way as signatures. For example, $T2$ has kind $\forall\{k :: \star\}. \forall(f :: k). \star$.

```
data  $T2$  ( $f :: k$ ) =  $MkT2$ 
```

Supporting these partial signatures adds complication to rule **PGM-DT-TT** (and its algorithmic counterpart) to bring the kind variables into scope. However, and critically, a partial

signature will still go via rule `PGM-DT-TT`, never rule `PGM-DT-TTS`, used for full signatures only. This means that a partial type signature does *not* unlock polymorphic recursion: the datatype will be considered monomorphic and ungeneralized within its own recursive group.

C.2 TODAY'S GHC

Our Chapter 7 describes, in depth, how kind inference can work for datatype declarations. Here, we review how our work relates to GHC. To make the claims concrete, this section contains references to specific stretches of code within GHC.

C.2.1 CONSTRAINT-BASED TYPE INFERENCE

Type inference in GHC is based on generating and solving constraints [Pottier and Rémy 2005; Vytiniotis et al. 2011], distinct from our approach here, where we unify on the fly. Despite this different architecture, our results carry over to the constraint-based style. Instead of using eager unification, we can imagine accumulating constraints in output contexts Θ , and then invoking a solver to extend the context with solutions. This approach is taken by Eisenberg [2016].

In thinking about the change from eager unification to delayed constraints, one might worry about information loss around any place where we apply a context as a substitution, as these substitutions would be empty in a constraint-solving approach without eager unification. At top-level (Figure 7.8), a constraint-solving approach would run the constraint solver, and the substitutions would contain the same mappings as our approach provides. Conversely, the relations in Figure 7.10 would become part of the constraint solver, so substituting here is safe, too. A potential problem arises in rule `A-KTT-APP` (Figure 7.9), where we substitute in the function's kind before running the kind-directed \Vdash^{kapp} judgment. However, our system is predicative: it never unifies a type variable with a polytype. Thus, the substitution in rule `A-KTT-APP` can never trigger a new usage of rule `A-KAPP-TT-FORALL`. It *can* distinguish between rule `A-KAPP-TT-ARROW` and rule `A-KAPP-TT-KUVAR`, but we conjecture that the choice between these rules is irrelevant: both will lead to equivalent substitutions in the end.

C.2.2 CONTEXTS

A typing context is *not* maintained in much of GHC's inference algorithm. Instead, a variable's kind is stored in the data structure representing the variable. This is very convenient, as it means that looking up a variable's type or kind is a pure, fast operation. One downside

4280 is that the compiler must maintain an extra invariant that all occurrences of a variable store
 4281 the same kind; this is straightforward to maintain in practice.

4282 Beyond just storing variables' kinds, the typing context in this work also critically stores
 4283 variables' ordering. Lacking contexts, GHC uses a different mechanism: *level numbers*, orig-
 4284 inally invented to implement untouchability [Vytiniotis et al. 2011, Section 5.1]. Every type
 4285 variable in GHC is assigned a level number during inference. Type variables contain a struc-
 4286 ture that includes level numbers. Roughly, the level number of a type variable *a* corresponds
 4287 to the number of type variables in scope before *a*. Accordingly, we can tell the relative order
 4288 (in a hypothetical context, according to the systems in this work) of two variables simply by
 4289 comparing their level numbers. One of GHC's invariants is that a unification variable at level
 4290 *n* is never unified with a type that mentions a variable with a level number *m* > *n*; this is
 4291 much like the extra checks in the unification judgments in our work.

4292 The *local scopes* of this work are also tracked by GHC. All the variables in the same local
 4293 scope are assigned the same level number, and they are flagged as reorderable. After inference
 4294 is complete, GHC does a topological sort to get the final order.

4295 A final role that contexts play in our formalism is that they store solutions for unification
 4296 variables; we apply contexts as a substitution. In GHC, unification variables store mutable
 4297 cells that get filled in. It has a process called *zonking*², which is exactly analogous to our
 4298 use of contexts as substitutions. Zonking a unification variable replaces the variable with its
 4299 solution, if any.

4300 C.2.3 UNIFICATION

4301 The solver in GHC still has to carry out unification, much along the lines of the unification
 4302 judgment we present here. This algorithm has to deal with the heterogeneous unification
 4303 problems we consider, as well. Indeed, GHC's unification algorithm recurs into the kinds of a
 4304 unification variable and the type it is unifying with, just as ours does. As implied by our focus
 4305 on decidability of unification, there have been a number of bugs in GHC's implementation
 4306 that led to loops in the type checker; the most recent is #16902.

4307 GHC actually uses several unification algorithms internally. It has an eager unifier, much
 4308 like the one we describe. When that unifier fails, it generates the constraint that is sent to the
 4309 solver. (The eager unifier is meant solely to be an optimization.) There is also a unifier meant
 4310 to work after type inference is complete; it checks for instance overlap, for example. All the
 4311 unifiers recur into kinds:

²There are actually two variants of zonking in GHC: we can zonk during type-checking or at the end. The difference between the variants is chiefly what to do for an unfilled unification variable. The former leaves them alone, while the latter has to default them somehow; details are beyond our scope here.

- 4312 • The eager unifier recurs into kinds.
- 4313 • The unifier in the solver recurs into kinds.
- 4314 • The pure unifier uses an invariant that the kinds are related before looking at the types.
- 4315 It must recur when decomposing applications.

4316 In addition, GHC also has an overlap problem within unification, as exhibited in our work
 4317 by the overlap between rules `A-U-KVARL` and `A-U-KVARR` in Figure 7.3. Both the eager unifier
 4318 and the constraint-solver unifier deal with this ambiguity by using heuristics to choose which
 4319 variable might be more suitable for unification. This particular issue—which variable to unify
 4320 when there is a choice—has been the subject of some amount of churn over the years.

4321 C.2.4 PROMOTION

4322 The promotion operation, too, is present in GHC, though its form is quite different than what
 4323 we have presented. Instead of promoting during unification, GHC simply refuses to solve
 4324 a unification variable if any of the free variables of its supposed solution lives to the right
 4325 of the variable in the context. Because GHC is working with constraints, it just leaves the
 4326 unification problem as an unsolved constraint. If there remain unsolved constraints, GHC
 4327 then promotes the variables it can: some cannot be promoted because they depend on locally
 4328 bound quantified (not unification) type variables.

4329 C.2.5 COMPLETE USER-SUPPLIED KINDS

4330 Along with stand-alone kind signatures, as described in this work, GHC supports *complete*
 4331 *user-supplied kinds*, or CUSKs. A datatype has a CUSK when certain syntactic conditions are
 4332 satisfied; GHC detects these conditions *before* doing any kind inference. These CUSKs are a
 4333 poor substitute for proper kind signatures, as the syntactic cues are fragile and unexpected:
 4334 users sometimes write a CUSK without meaning to, and also sometimes leave out a necessary
 4335 part of a CUSK when they intend to specify the kind. Stand-alone kind signatures are a new
 4336 feature; they begin with the keyword `type` instead of `data`, as we have used in our work.

4337 Interestingly, it would be wrong to support CUSKs in a system without polymorphic kinds.
 4338 Consider this example:

```
4339     data S1 a = MkT1 S2
4340     data S2 = MkS2 (S1 Maybe)
```

4341 The types `S1` and `S2` form a group. We put `S2` (which has a CUSK) into the context with
 4342 kind `*`. When we check `S1`, we find no constraints on `a` (in the constraint-generation pass;

4343 see the general approach below). The kind of *S1* is then defaulted to $\star \rightarrow \star$. Checking
 4344 *S2* fails. Instead, we wish to pretend that *S2* does not have a CUSK. This would mean that
 4345 constraint-generation happens for all the constructors in both *S1* and *S2*, and *S1* would get
 4346 its correct kind $(\star \rightarrow \star) \rightarrow \star$.

4347 With kind-polymorphism, we have no problem because the kind of *T1* will be generalized
 4348 to $\forall(k :: \star). k \rightarrow \star$.

4349 This was reported as bug #16609.

4350 C.2.6 DEPENDENCY ANALYSIS

4351 The algorithm implemented in GHC for processing datatype declarations starts with depen-
 4352 dency analysis, as ours does. The dependency analysis is less fine-grained than what we have
 4353 proposed in this work: signatures are ignored in the dependency analysis, and so datatypes
 4354 with signatures are processed alongside all the others. This means that the kinds in the ex-
 4355 ample below have more restrictive kinds in GHC than they do in our system:

```
4356 data S1 :: ∀k. k → ★
4357 data S1 a = MkS1 (S2 Int)
4358 data S2 a = MkS2 (S3 Int)
4359 data S3 a = MkS3 (S1 Int)
```

4360 A naïve dependency analysis would put all three definitions in the same group. The kind for
 4361 *S1* is given; it would indeed have that kind. The parameters of *S2* and *S3* would initially have
 4362 an unknown kind, but when occurrences of *S2* and *S3* are processed (in the definitions of
 4363 *S1* and *S2*, respectively), this unknown kind would become \star . Neither *S2* nor *S3* would be
 4364 generalized.

4365 There is a ticket to improve the dependency analysis: #9427.

4366 C.2.7 APPROACH TO KIND-CHECKING DATATYPES

4367 In GHC’s approach, after dependency analysis, so-called *initial kinds* are produced for all the
 4368 datatypes in the group. These either come from a datatype’s CUSK or from a simple analysis
 4369 of the header of the datatype (without looking at constructors). This step corresponds to our
 4370 algorithm’s placing a binding for the datatype in the context, either with the kind signature
 4371 or with a unification variable (rules [A-PGM-DT-TTS](#) and [A-PGM-DT-TT](#)).

4372 If there is no CUSK, GHC then passes over all the datatype’s constructors, collecting
 4373 constraints on unification variables. After solving these constraints, GHC generalizes the
 4374 datatype kind.

For all datatypes, now with generalized kinds, all data constructors are checked (again, for non-CUSK types). Because the kinds of the types are now generalized, a pass infers any invisible parameters to polykinded types. For non-CUSK types, this second pass using generalized kinds replaces the $T_i \mapsto T_i @ \phi_i^c$ substitution in the context in the last premise to rule [A-PGM-DT-TT](#). Performing a substitution—instead of re-generating and solving constraints—may be an opportunity for improvement in GHC.

C.2.8 POLYMORPHIC RECURSION

One challenge in kind inference is in the handling of polymorphic recursion. Although non-CUSK types are indeed monomorphic during the constraint-generation pass, some limited form of polymorphic recursion can get through. This is because all type variables are represented by a special form of unification variable called a TyVarTv. TyVarTvs can unify only with other type variables. This design is motivated by the following examples:

```
data T1 (a :: k) b = MkT1 (T2 a b)
data T2 (c :: j) d = MkT2 (T1 c d)
data T3 a where
  MkT3 ::  $\forall (k :: \star) (b :: k). T3 b$ 
```

We want to accept all of these definitions. The first two, *T1* and *T2*, form a mutually recursive group. Neither has a CUSK. However, the recursive occurrences are not polymorphically recursive: both recursive occurrences are at the *same* kind as the definition. Yet the first parameter to *T1* is declared to have kind *k* while the first parameter to *T2* is declared to have kind *j*. The solution: allow *k* to unify with *j* during the constraint-generation pass. We would *not* want to allow either *k* or *j* to unify with a non-variable, as that would seem to go against the user's wishes. But they must be allowed to unify with each other to accept this example.

With *T3* (identical to *T* from Section 9.4), we have a different motivation. During inference, we will guess the kind of *a*; call it $\hat{\alpha}$. When checking the *MkT3* constructor, we will need to unify $\hat{\alpha}$ with the locally bound *k*. We cannot set $\hat{\alpha} := k$, as that will fill $\hat{\alpha}$ with a *k*, bound to $\hat{\alpha}$'s *right* in the context. Instead, we must set $k := \hat{\alpha}$. This is possible only if *k* is represented by a unification variable.

There are two known problems with this approach:

1. It sometimes accepts polymorphic recursion, even without a CUSK. Here is an example:

```
data T4 a =  $\forall (k :: \star) (b :: k). MkT4 (T4 b)$ 
```

4408 The definition of $T4$ is polymorphically recursive: the occurrence $T4\ b$ is specialized
 4409 to a kind other than the kind of a . Yet this definition is accepted. The two kinds unify
 4410 (as k becomes a unification variable, set to the guessed kind of a) during the constraint-
 4411 generation pass. Then, $T4$ is generalized to get the kind $\forall k. k \rightarrow \star$, at which point the
 4412 last pass goes through without a hitch.

4413 The reason this acceptance is troublesome is not that $T4$ is somehow dangerous or
 4414 unsafe. It is that we know that polymorphic recursion cannot be inferred Henglein
 4415 [1993], and yet GHC does it. Invariably, this must mean that GHC’s algorithm will be
 4416 hard to specify beyond its implementation.

4417 2. In rare cases, the constraint-generation pass will succeed, while the final pass—meant
 4418 to be redundant—will fail. Here is an example:

```
4419     data SameKind :: k → k → Type
4420     data Bad a where
4421       MkBad :: ∀k1 k2 (a :: k1) (b :: k2). Bad (SameKind a b)
```

4422 During the constraint-generation pass, the kinds k_1 and k_2 are allowed to unify, ac-
 4423 cepting the definition of Bad . During the final pass, however, k_1 and k_2 are proper
 4424 quantified type variables, always distinct. Thus the $SameKind\ a\ b$ type is ill-kinded
 4425 and rejected.

4426 The fact that this final pass can fail means that we cannot implement it via a simple
 4427 substitution, as we do in rule [A-PGM-DT-TT](#). One possible solution is our suggestion
 4428 to change the scoping of type parameters to GADT-syntax datatype declarations. With
 4429 that change, our second motivation above for TyVarTvs would disappear. GHC could
 4430 then use TyVarTvs only for kind variables in the head of a datatype declaration, using
 4431 proper quantified type variables in constructors. Of course, this change would break
 4432 much code in the wild, and we do not truly expect it to ever be adopted.

4433 C.2.9 THE QUANTIFICATION CHECK

4434 Our quantification check (Section [7.7.2](#)) also has a parallel in GHC, but GHC’s solution to the
 4435 problem differed from ours. Instead of rejecting programs that fail the quantification check,
 4436 GHC accepted them, replacing the variables that would be (but cannot be) quantified with
 4437 its constant $Any :: \forall k. k$. The Any type is uninhabited, but exists at all kinds. As such, it is
 4438 an appropriate replacement for unquantifiable, unconstrained unification variables. Yet this
 4439 decision in GHC had unfortunate consequences: the Any type can appear in error messages,
 4440 and its introduction induces hard-to-understand type errors.

4441 We have later implemented our quantification check in GHC; see #16775.

4442 Another design alternative is to generalize the variable to the leftmost position where it is
4443 still well-formed. Recall the example in Section 7.7.2:

```
4444 data Proxy :: ∀k. k → ★
4445 data Relate :: ∀a (b :: a). a → Proxy b → ★
4446 data T :: ∀(a :: ★) (b :: a) (c :: a) d. Relate b d → ★
```

4447 We have $d :: \hat{\alpha}$, and $\hat{\alpha} = \text{Proxy } \hat{\beta}$, with $\hat{\beta} :: a$. As there are no further constraints on $\hat{\beta}$, the
4448 definition of T is rejected by the quantification check.

4449 Instead of rejecting the program, or solving $\hat{\beta}$ using *Any*, we can generalize over $\hat{\beta}$ as a
4450 fresh variable f , which is put after a to make it well-kinded. Namely, we get

```
4451 data T :: ∀(a :: ★) {f :: a} (b :: a) (c :: a) (d :: Proxy f). Relate @a @f b d → ★
```

4452 However, this ordering of the variables violates our declarative specification. Moreover,
4453 this type requires an inferred variable to be between specified variables. With higher-rank
4454 polymorphism, due to the fact that GHC does not support first-class type-level abstraction
4455 (i.e., Λ in types), this type cannot be instantiated to

```
4456 ∀(a :: ★) (b :: a) (c :: a) (d :: Proxy f). Relate @a @b b d → ★
```

4457 or

```
4458 ∀(a :: ★) (b :: a) (c :: a) (d :: Proxy f). Relate @a @c b d → ★
```

4459 which makes the generalization less useful.

4460 C.2.10 SCOPEDSORT

4461 When GHC deals with a local scope—a set of variables that may be reordered—it does a
4462 topological sort on the variables at the end. However, not any topological sort will do: it must
4463 use one that preserves the left-to-right ordering of the variables as much as possible. This is
4464 because GHC considers these implicitly bound variables to be *specified*: they are available
4465 for visible type application. For example, recall the example from Section 7.2.2, modified
4466 slightly:

```
4467 data Q (a :: (f b)) (c :: k) (x :: f c)
```

4468 Inference will tell us that k must come before f and b , but the order of f and b is immaterial.
4469 Our approach here is to make f , b , and k *inferred* variables: users of Q will not be able to

4470 instantiate these parameters with visible type application. However, GHC takes a different
 4471 view: because the user has written the names of f , b , and k , they will be *specified*. This choice
 4472 means that the precise sorting algorithm GHC uses to fix the order of local scopes becomes
 4473 part of the *specification* of the language. Indeed, GHC documents the precise algorithm in
 4474 its manual. If we followed suit, the algorithm would have to appear in our declarative speci-
 4475 fication, which goes against the philosophy of a declarative system.

4476 Some recent debate led to a conclusion (see #16726) that we would change the interpre-
 4477 tation of the Q example from the main work, meaning that its kind variables would indeed
 4478 become *inferred*. However, the problem with ScopedSort still exists in type signatures, where
 4479 type variables may be implicitly bound.

4480 C.2.1.1 THE “FORALL-OR-NOTHING” RULE

4481 GHC implements the so-called *forall-or-nothing* rule, which states that either *all* variables
 4482 are quantified by a user-written \forall or none are. These examples illustrate the effect:

4483 $ex1 :: a \rightarrow b \rightarrow a$
 4484 $ex2 :: \forall a\ b. a \rightarrow b \rightarrow a$
 4485 $ex3 :: \forall a. a \rightarrow b \rightarrow a$
 4486 $ex4 :: (\forall a. a \rightarrow b \rightarrow a)$

4487 The signatures for both $ex1$ and $ex2$ are accepted: $ex1$ quantifies none, while $ex2$ quantifies
 4488 all. The signature for $ex3$ is rejected, as GHC rejects a mixed economy. However, and perhaps
 4489 surprisingly, $ex4$ is accepted. The only difference between $ex3$ and $ex4$ is the seemingly-
 4490 redundant parentheses. However, because the forall-or-nothing rule applies only at the top
 4491 level of a signature, the rule is not in effect for the \forall in $ex4$.

4492 This rule interacts with the main work only in that our formalism (and some of our exam-
 4493 ples) does not respect it. This may be the cause of differing behavior between GHC and the
 4494 examples we present.

4495 C.3 COMPLETE SET OF RULES

4496 In this section we include the complete set of rules for Chapter 7. Some of the rules are
 4497 repeated from those in the chapter.

4498 C.3.1 DECLARATIVE HASKELL98

4499 $\Sigma \vdash^k \sigma : \kappa$ (Kinding for Polymorphic Types)

4500		$\frac{\text{K-FORALL} \quad \Sigma, a : \kappa \vdash^k \sigma : \star}{\Sigma \vdash^k \forall a : \kappa. \sigma : \star}$	
4501	$\boxed{\Sigma \vdash \Psi}$		(Well-formed Term Contexts)
4502		$\frac{\text{ECTX-EMPTY}}{\Sigma \vdash \bullet}$ $\frac{\text{ECTX-DCON} \quad \Sigma \vdash \Psi \quad \Sigma \vdash^k \sigma : \star}{\Sigma \vdash \Psi, D : \sigma}$	
4503	C.3.2 ALGORITHMIC HASKELL98		
4504	$\boxed{\Delta \Vdash^k \sigma : \kappa \dashv \Theta}$		(Kinding for Polymorphic Types)
4505		$\frac{\text{A-K-FORALL} \quad \Delta \Vdash^{kv} \kappa \quad \Delta, a : \kappa \Vdash^k \sigma : \kappa_2 \dashv \Theta, a : \kappa \quad [\Theta]\kappa_2 = \star}{\Delta \Vdash^k \forall a : \kappa. \sigma : \star \dashv \Theta}$	
4506	$\boxed{\Delta \Vdash^{kc} \sigma \Leftarrow \kappa}$		(Checking)
4507		$\frac{\text{A-KC-EQ} \quad \Delta \Vdash^k \sigma : \kappa_1 \dashv \Delta \quad [\Delta]\kappa_1 = [\Delta]\kappa_2}{\Delta \Vdash^{kc} \sigma \Leftarrow \kappa_2}$	
4508	$\boxed{\Delta \Vdash^{kv} \kappa}$		(Well-formed Kinds)
4509		$\frac{\text{A-KV-STAR}}{\Delta \Vdash^{kv} \star}$ $\frac{\text{A-KV-ARROW} \quad \Delta \Vdash^{kv} \kappa_1 \quad \Delta \Vdash^{kv} \kappa_2}{\Delta \Vdash^{kv} \kappa_1 \rightarrow \kappa_2}$ $\frac{\text{A-KV-KUVAR} \quad \hat{\alpha} \in \Delta}{\Delta \Vdash^{kv} \hat{\alpha}}$	
4510	$\boxed{\Delta \text{ ok}}$		(Well-formed Type Contexts)
4511		$\frac{\text{A-TCTX-EMPTY}}{\bullet \text{ ok}}$ $\frac{\text{A-TCTX-TVAR} \quad \Delta \text{ ok} \quad \Delta \Vdash^{kv} \kappa}{\Delta, a : \kappa \text{ ok}}$ $\frac{\text{A-TCTX-TCON} \quad \Delta \text{ ok} \quad \Delta \Vdash^{kv} \kappa}{\Delta, T : \kappa \text{ ok}}$ $\frac{\text{A-TCTX-KUVAR} \quad \Delta \text{ ok}}{\Delta, \hat{\alpha} \text{ ok}}$	
4512		$\frac{\text{A-TCTX-KUVAR SOLVED} \quad \Delta \text{ ok} \quad \Delta \Vdash^{kv} \kappa}{\Delta, \hat{\alpha} = \kappa \text{ ok}}$	

4513 $\boxed{\Delta \Vdash^{\text{ectx}} \Gamma}$ (Well-formed Term Contexts)

$$\begin{array}{c}
 \text{A-ECTX-EMPTY} \\
 \hline
 \Delta \Vdash^{\text{ectx}} \bullet
 \end{array}
 \qquad
 \begin{array}{c}
 \text{A-ECTX-DCON} \\
 \Delta \Vdash^{\text{ectx}} \Gamma \quad \Delta \Vdash^{\text{kc}} \sigma \Leftarrow \star \\
 \hline
 \Delta \Vdash^{\text{ectx}} \Gamma, D : \sigma
 \end{array}$$

4514

4515 $\boxed{\Delta \longrightarrow \Omega}$ (Defaulting)

$$\begin{array}{c}
 \text{A-CTXDE-EMPTY} \\
 \hline
 \bullet \longrightarrow \bullet
 \end{array}
 \qquad
 \begin{array}{c}
 \text{A-CTXDE-TVAR} \\
 \Delta \longrightarrow \Omega \\
 \hline
 \Delta, a : \kappa \longrightarrow \Omega, a : \kappa
 \end{array}
 \qquad
 \begin{array}{c}
 \text{A-CTXDE-TCON} \\
 \Delta \longrightarrow \Omega \\
 \hline
 \Delta, T : \kappa \longrightarrow \Omega, T : \kappa
 \end{array}$$

4516

$$\begin{array}{c}
 \text{A-CTXDE-KUVARsOLVED} \\
 \Delta \longrightarrow \Omega \\
 \hline
 \Delta, \hat{\alpha} = \kappa \longrightarrow \Omega, \hat{\alpha} = \kappa
 \end{array}
 \qquad
 \begin{array}{c}
 \text{A-CTXDE-SOLVE} \\
 \Delta \longrightarrow \Omega \\
 \hline
 \Delta, \hat{\alpha} \longrightarrow \Omega, \hat{\alpha} = \star
 \end{array}$$

4517

4518 C.3.3 CONTEXT APPLICATION IN HASKELL98

$$\begin{array}{l}
 \hline
 [\Delta]\kappa \text{ applies } \Delta \text{ as a substitution to } \kappa. \\
 [\Delta]\star = \star \\
 [\Delta]\kappa_1 \rightarrow \kappa_2 = [\Delta]\kappa_1 \rightarrow [\Delta]\kappa_2 \\
 [\Delta][\hat{\alpha}]\hat{\alpha} = \hat{\alpha} \\
 [\Delta][\hat{\alpha} = \kappa]\hat{\alpha} = [\Delta][\hat{\alpha} = \kappa]\kappa \\
 \hline
 \end{array}$$

4519

$$\begin{array}{l}
 \hline
 [\Delta]\Gamma \text{ applies } \Delta \text{ as a substitution to } \Gamma. \\
 [\Delta]\bullet = \bullet \\
 [\Delta](\Gamma, D : \sigma) = [\Delta]\Gamma, D : [\Delta]\sigma \\
 \hline
 \end{array}$$

4520

$$\begin{array}{l}
 \hline
 [\Omega]\Delta \text{ applies } \Omega \text{ as a substitution to } \Delta. \\
 [\bullet]\bullet = \bullet \\
 [\Omega, a : \kappa](\Delta, a : \kappa) = [\Omega]\Delta, a : [\Omega]\kappa \\
 [\Omega, T : \kappa](\Delta, T : \kappa) = [\Omega]\Delta, T : [\Omega]\kappa \\
 [\Omega, \hat{\alpha} = \kappa](\Delta, \hat{\alpha}) = [\Omega]\Delta \\
 [\Omega, \hat{\alpha} = \kappa](\Delta, \hat{\alpha} = \kappa') = [\Omega]\Delta \quad \text{if } [\Omega]\kappa = [\Omega]\kappa' \\
 [\Omega, \hat{\alpha} = \kappa]\Delta = [\Omega]\Delta \quad \text{if } \hat{\alpha} \notin \Delta \\
 \hline
 \end{array}$$

4521

4522 C.3.4 CONTEXT EXTENSION IN HASKELL98

4523 $\boxed{\Delta \longrightarrow \Theta}$ (Context Extension)

$$\begin{array}{c}
\text{A-CTXE-EMPTY} \quad \text{A-CTXE-TVAR} \quad \text{A-CTXE-TCON} \\
\frac{}{\bullet \longrightarrow \bullet} \quad \frac{\Delta \longrightarrow \Theta}{\Delta, a : \kappa \longrightarrow \Theta, a : \kappa} \quad \frac{\Delta \longrightarrow \Theta}{\Delta, T : \kappa \longrightarrow \Theta, T : \kappa} \\
4524 \\
\text{A-CTXE-KUVAR} \quad \text{A-CTXE-KUVAR SOLVED} \quad \text{A-CTXE-SOLVE} \\
\frac{\Delta \longrightarrow \Theta}{\Delta, \hat{\alpha} \longrightarrow \Theta, \hat{\alpha}} \quad \frac{\Delta \longrightarrow \Theta \quad [\Theta]\kappa_1 = [\Theta]\kappa_2}{\Delta, \hat{\alpha} = \kappa_1 \longrightarrow \Theta, \hat{\alpha} = \kappa_2} \quad \frac{\Delta \longrightarrow \Theta \quad \Theta \Vdash^{\text{kv}} \kappa}{\Delta, \hat{\alpha} \longrightarrow \Theta, \hat{\alpha} = \kappa} \\
4525 \\
\text{A-CTXE-ADD} \quad \text{A-CTXE-ADD SOLVED} \\
\frac{\Delta \longrightarrow \Theta}{\Delta \longrightarrow \Theta, \hat{\alpha}} \quad \frac{\Delta \longrightarrow \Theta \quad \Theta \Vdash^{\text{kv}} \kappa}{\Delta \longrightarrow \Theta, \hat{\alpha} = \kappa} \\
4526
\end{array}$$

4527 C.3.5 DECLARATIVE POLYKINDS

4528 $\boxed{\ulcorner \sigma \urcorner}$ (Kind results in \star)

$$\begin{array}{c}
\text{SR-STAR} \quad \text{SR-ARROW} \quad \text{SR-FORALL} \\
\frac{}{\ulcorner \star \urcorner} \quad \frac{\ulcorner \kappa_2 \urcorner}{\ulcorner \kappa_1 \rightarrow \kappa_2 \urcorner} \quad \frac{\ulcorner \sigma \urcorner}{\ulcorner \forall \phi. \sigma \urcorner} \\
4529
\end{array}$$

4530 $\boxed{\Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2}$ (Instantiation)

$$\begin{array}{c}
\text{INST-REFL} \quad \text{INST-FORALL} \\
\frac{}{\Sigma \vdash^{\text{inst}} \mu : \omega <: \omega \rightsquigarrow \mu} \quad \frac{\Sigma \vdash^{\text{ela}} \rho : \omega_1 \quad \Sigma \vdash^{\text{inst}} \mu_1 @ \rho : \eta[a \mapsto \rho] <: \omega_2 \rightsquigarrow \mu_2}{\Sigma \vdash^{\text{inst}} \mu_1 : \forall a : \omega_1. \eta <: \omega_2 \rightsquigarrow \mu_2} \\
4531 \\
\text{INST-FORALL-INFER} \\
\frac{\Sigma \vdash^{\text{ela}} \rho : \omega_1 \quad \Sigma \vdash^{\text{inst}} \mu_1 @ \rho : \eta[a \mapsto \rho] <: \omega_2 \rightsquigarrow \mu_2}{\Sigma \vdash^{\text{inst}} \mu_1 : \forall \{a : \omega_1\}. \eta <: \omega_2 \rightsquigarrow \mu_2} \\
4532
\end{array}$$

4533 $\boxed{\Sigma \vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu}$ (Kind Checking)

$$\begin{array}{c}
\text{KC-SUB} \\
\frac{\Sigma \vdash^{\text{k}} \sigma : \eta \rightsquigarrow \mu_1 \quad \Sigma \vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2}{\Sigma \vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu_2} \\
4534
\end{array}$$

4535 $\boxed{\Sigma \vdash^k \sigma : \eta \rightsquigarrow \mu}$ (Kinding)

$$\begin{array}{c}
 \text{KTT-STAR} \qquad \text{KTT-NAT} \qquad \text{KTT-VAR} \\
 \frac{}{\Sigma \vdash^k \star : \star \rightsquigarrow \star} \qquad \frac{}{\Sigma \vdash^k \text{Int} : \star \rightsquigarrow \text{Int}} \qquad \frac{(a : \omega) \in \Sigma}{\Sigma \vdash^k a : \omega \rightsquigarrow a} \\
 4536 \\
 \text{KTT-ARROW} \qquad \text{KTT-TCON} \\
 \frac{}{\Sigma \vdash^k \rightarrow : \star \rightarrow \star \rightsquigarrow \rightarrow} \qquad \frac{(T : \eta) \in \Sigma}{\Sigma \vdash^k T : \eta \rightsquigarrow T} \\
 4537 \\
 \text{KTT-APP} \\
 \frac{\Sigma \vdash^k \tau_1 : \eta_1 \rightsquigarrow \rho_1 \quad \Sigma \vdash^{\text{inst}} \rho_1 : \eta_1 <: (\omega_1 \rightarrow \omega_2) \rightsquigarrow \rho_2 \quad \Sigma \vdash^{\text{kc}} \tau_2 \Leftarrow \omega_1 \rightsquigarrow \rho_3}{\Sigma \vdash^k \tau_1 \tau_2 : \omega_2 \rightsquigarrow \rho_2 \rho_3} \\
 4538 \\
 \text{KTT-KAPP} \\
 \frac{\Sigma \vdash^k \kappa_1 : \forall a : \omega. \eta \rightsquigarrow \rho_1 \quad \Sigma \vdash^{\text{kc}} \kappa_2 \Leftarrow \omega \rightsquigarrow \rho_2}{\Sigma \vdash^k \kappa_1 @ \kappa_2 : \eta[a \mapsto \rho_2] \rightsquigarrow \rho_1 @ \rho_2} \\
 4539 \\
 \text{KTT-KAPP-INFER} \\
 \frac{\Sigma \vdash^k \kappa_1 : \forall \{\overline{a_i} : \overline{\omega_i^i}\}. \forall a : \omega. \eta \rightsquigarrow \rho'_1 \quad \Sigma \vdash^{\text{ela}} \rho_i : \omega_i[\overline{a_i} \mapsto \overline{\rho_i^i}]^i \quad \Sigma \vdash^{\text{kc}} \kappa_2 \Leftarrow \omega[\overline{a_i} \mapsto \overline{\rho_i^i}] \rightsquigarrow \rho'_2}{\Sigma \vdash^k \kappa_1 @ \kappa_2 : \eta[\overline{a_i} \mapsto \overline{\rho_i^i}][a \mapsto \rho_2] \rightsquigarrow \rho'_1 @ \overline{\rho_i^i} @ \rho'_2} \\
 4540 \\
 \text{KTT-FORALL} \\
 \frac{\Sigma \vdash^{\text{kc}} \kappa \Leftarrow \star \rightsquigarrow \omega \quad \Sigma, a : \omega \vdash^{\text{kc}} \sigma \Leftarrow \star \rightsquigarrow \mu}{\Sigma \vdash^k \forall a : \kappa. \sigma : \star \rightsquigarrow \forall a : \omega. \mu} \\
 4541 \\
 \text{KTT-FORALLI} \\
 \frac{\Sigma \vdash^{\text{ela}} \omega : \star \quad \Sigma, a : \omega \vdash^{\text{kc}} \sigma \Leftarrow \star \rightsquigarrow \mu}{\Sigma \vdash^k \forall a. \sigma : \star \rightsquigarrow \forall a : \omega. \mu} \\
 4542
 \end{array}$$

4543 $\boxed{\Sigma \vdash^{\text{ela}} \mu : \eta}$ (Elaborated Kinding)

$$\begin{array}{c}
 \text{ELA-STAR} \qquad \text{ELA-NAT} \qquad \text{ELA-VAR} \qquad \text{ELA-TCON} \\
 \frac{}{\Sigma \vdash^{\text{ela}} \star : \star} \qquad \frac{}{\Sigma \vdash^{\text{ela}} \text{Int} : \star} \qquad \frac{(a : \omega) \in \Sigma}{\Sigma \vdash^{\text{ela}} a : \omega} \qquad \frac{(T : \eta) \in \Sigma}{\Sigma \vdash^{\text{ela}} T : \eta} \\
 4544 \\
 \text{ELA-ARROW} \qquad \text{ELA-APP} \\
 \frac{}{\Sigma \vdash^{\text{ela}} \rightarrow : \star \rightarrow \star \rightsquigarrow \star} \qquad \frac{\Sigma \vdash^{\text{ela}} \rho_1 : \omega_1 \rightarrow \omega_2 \quad \Sigma \vdash^{\text{ela}} \rho_2 : \omega_1}{\Sigma \vdash^{\text{ela}} \rho_1 \rho_2 : \omega_2} \\
 4545
 \end{array}$$

4546	$\frac{\text{ELA-KAPP} \quad \Sigma \vdash^{\text{ela}} \rho_1 : \forall a : \omega. \eta \quad \Sigma \vdash^{\text{ela}} \rho_2 : \omega}{\Sigma \vdash^{\text{ela}} \rho_1 @ \rho_2 : \eta[a \mapsto \rho_2]}$	$\frac{\text{ELA-KAPP-INFER} \quad \Sigma \vdash^{\text{ela}} \rho_1 : \forall \{a : \omega\}. \eta \quad \Sigma \vdash^{\text{ela}} \rho_2 : \omega}{\Sigma \vdash^{\text{ela}} \rho_1 @ \rho_2 : \eta[a \mapsto \rho_2]}$
4547	$\frac{\text{ELA-FORALL} \quad \Sigma \vdash^{\text{ela}} \omega : \star \quad \Sigma, a : \omega \vdash^{\text{ela}} \mu : \star}{\Sigma \vdash^{\text{ela}} \forall a : \omega. \mu : \star}$	$\frac{\text{ELA-FORALL-INFER} \quad \Sigma \vdash^{\text{ela}} \omega : \star \quad \Sigma, a : \omega \vdash^{\text{ela}} \mu : \star}{\Sigma \vdash^{\text{ela}} \forall \{a : \omega\}. \mu : \star}$
4548	$\boxed{\Sigma \text{ ok}}$	(Well-formed Type Contexts)
4549	$\frac{\text{TCTX-EMPTY}}{\bullet \text{ ok}}$ $\frac{\text{TCTX-TVAR-TT} \quad \Sigma \text{ ok} \quad \Sigma \vdash^{\text{ela}} \rho : \star}{\Sigma, a : \rho \text{ ok}}$ $\frac{\text{TCTX-TCON-TT} \quad \Sigma \text{ ok} \quad \Sigma \vdash^{\text{ela}} \eta : \star}{\Sigma, T : \eta \text{ ok}}$	
4550	$\boxed{\Sigma \vdash \Psi}$	(Well-formed Term Contexts)
4551	$\frac{\text{ECTX-EMPTY}}{\Sigma \vdash \bullet}$ $\frac{\text{ECTX-DCON-TT} \quad \Sigma \vdash \Psi \quad \Sigma \vdash^{\text{ela}} \mu : \star}{\Sigma \vdash \Psi, D : \mu}$	

4552 C.3.6 ALGORITHMIC POLYKINDS

4553	$\boxed{\Delta \Vdash^{\text{inst}} \mu_1 : \eta <: \omega \rightsquigarrow \mu_2 \dashv \Theta}$	(Instantiation)
4554	$\frac{\text{A-INST-REFL} \quad \Delta \Vdash^{\text{u}} \omega_1 \approx \omega_2 \dashv \Theta}{\Delta \Vdash^{\text{inst}} \mu : \omega_1 <: \omega_2 \rightsquigarrow \mu \dashv \Theta}$ $\frac{\text{A-INST-FORALL} \quad \Delta, \hat{\alpha} : \omega_1 \Vdash^{\text{inst}} \mu_1 @ \hat{\alpha} : \eta[a \mapsto \hat{\alpha}] <: \omega_2 \rightsquigarrow \mu_2 \dashv \Theta}{\Delta \Vdash^{\text{inst}} \mu_1 : \forall a : \omega_1. \eta <: \omega_2 \rightsquigarrow \mu_2 \dashv \Theta}$	
4555	$\frac{\text{A-INST-FORALL-INFER} \quad \Delta, \hat{\alpha} : \omega_1 \Vdash^{\text{inst}} \mu_1 @ \hat{\alpha} : \eta[a \mapsto \hat{\alpha}] <: \omega_2 \rightsquigarrow \mu_2 \dashv \Theta}{\Delta \Vdash^{\text{inst}} \mu_1 : \forall \{a : \omega_1\}. \eta <: \omega_2 \rightsquigarrow \mu_2 \dashv \Theta}$	
4556	$\boxed{\Delta \Vdash^{\text{kc}} \sigma \Leftarrow \eta \rightsquigarrow \mu \dashv \Theta}$	(Kind Checking)
4557	$\frac{\text{A-KC-SUB} \quad \Delta \Vdash^{\text{k}} \sigma : \eta \rightsquigarrow \mu_1 \dashv \Delta_1 \quad \Delta_1 \Vdash^{\text{inst}} \mu_1 : [\Delta_1] \eta <: [\Delta_1] \omega \rightsquigarrow \mu_2 \dashv \Delta_2}{\Delta \Vdash^{\text{kc}} \sigma \Leftarrow \omega \rightsquigarrow \mu_2 \dashv \Delta_2}$	

$$4558 \quad \boxed{\Delta \Vdash^k \sigma : \eta \rightsquigarrow \mu \dashv \Theta} \quad (\text{Kinding})$$

$$4559 \quad \begin{array}{ccc} \text{A-KTT-STAR} & \text{A-KTT-NAT} & \text{A-KTT-VAR} \\ \hline \Delta \Vdash^k \star : \star \rightsquigarrow \star \dashv \Delta & \Delta \Vdash^k \text{Int} : \star \rightsquigarrow \text{Int} \dashv \Delta & \frac{(a : \omega) \in \Delta}{\Delta \Vdash^k a : \omega \rightsquigarrow a \dashv \Delta} \end{array}$$

$$4560 \quad \begin{array}{cc} \text{A-KTT-TCON} & \text{A-KTT-ARROW} \\ \hline \frac{(T : \eta) \in \Delta}{\Delta \Vdash^k T : \eta \rightsquigarrow T \dashv \Delta} & \frac{}{\Delta \Vdash^k \rightarrow : \star \rightarrow \star \rightarrow \star \rightsquigarrow \rightarrow \dashv \Delta} \end{array}$$

$$4561 \quad \frac{\text{A-KTT-FORALL} \quad \Delta \Vdash^{\text{kc}} \kappa \Leftarrow \star \rightsquigarrow \omega \dashv \Delta_1 \quad \Delta_1, a : \omega \Vdash^{\text{kc}} \sigma \Leftarrow \star \rightsquigarrow \mu \dashv \Delta_2, a : \omega, \Delta_3 \quad \Delta_3 \hookrightarrow a}{\Delta \Vdash^k \forall a : \kappa. \sigma : \star \rightsquigarrow \forall a : \omega. [\Delta_3]\mu \dashv \Delta_2, \text{unsolved}(\Delta_3)}$$

$$4562 \quad \frac{\text{A-KTT-APP} \quad \Delta \Vdash^k \tau_1 : \eta_1 \rightsquigarrow \rho_1 \dashv \Delta_1 \quad \Delta_1 \Vdash^{\text{kapp}} (\rho_1 : [\Delta_1]\eta_1) \bullet \tau_2 : \omega \rightsquigarrow \rho \dashv \Theta}{\Delta \Vdash^k \tau_1 \tau_2 : \omega \rightsquigarrow \rho \dashv \Theta}$$

$$4563 \quad \frac{\text{A-KTT-FORALLI} \quad \Delta, \hat{\alpha} : \star, a : \hat{\alpha} \Vdash^{\text{kc}} \sigma \Leftarrow \star \rightsquigarrow \mu \dashv \Delta_2, a : \hat{\alpha}, \Delta_3 \quad \Delta_3 \hookrightarrow a}{\Delta \Vdash^k \forall a. \sigma : \star \rightsquigarrow \forall a : \hat{\alpha}. [\Delta_3]\mu \dashv \Delta_2, \text{unsolved}(\Delta_3)}$$

$$4564 \quad \frac{\text{A-KTT-KAPP} \quad \Delta \Vdash^k \tau_1 : \eta \rightsquigarrow \rho_1 \dashv \Delta_1 \quad [\Delta_1]\eta = \forall a : \omega. \eta_2 \quad \Delta_1 \Vdash^{\text{kc}} \tau_2 \Leftarrow \omega \rightsquigarrow \rho_2 \dashv \Delta_2}{\Delta \Vdash^k \tau_1 @ \tau_2 : \eta_2[a \mapsto \rho_2] \rightsquigarrow \rho_1 @ \rho_2 \dashv \Delta_2}$$

$$4565 \quad \frac{\text{A-KTT-KAPP-INFER} \quad \Delta \Vdash^k \tau_1 : \eta \rightsquigarrow \rho_1 \dashv \Delta_1 \quad [\Delta_1]\eta = \forall \{\overline{a_i : \omega_i^i}\}. \forall a : \omega. \eta_2 \quad \frac{\Delta_1, \hat{\alpha}_i : \omega_i[\overline{a_i \mapsto \hat{\alpha}_i^i}] \Vdash^{\text{kc}} \tau_2 \Leftarrow \omega[\overline{a_i \mapsto \hat{\alpha}_i^i}] \rightsquigarrow \rho_2 \dashv \Delta_2}{\Delta \Vdash^k \tau_1 @ \tau_2 : \eta_2[\overline{a_i \mapsto \hat{\alpha}_i^i}][a \mapsto \rho_2] \rightsquigarrow \rho_1 @ \overline{\hat{\alpha}_i^i} @ \rho_2 \dashv \Delta_2}$$

$$4566 \quad \boxed{\Delta \Vdash^{\text{kapp}} (\rho_1 : \eta) \bullet \tau : \omega \rightsquigarrow \rho_2 \dashv \Theta} \quad (\text{Application Kinding})$$

$$4567 \quad \frac{\text{A-KAPP-TT-ARROW} \quad \Delta \Vdash^{\text{kc}} \tau \Leftarrow \omega_1 \rightsquigarrow \rho_2 \dashv \Theta}{\Delta \Vdash^{\text{kapp}} (\rho_1 : \omega_1 \rightarrow \omega_2) \bullet \tau : \omega_2 \rightsquigarrow \rho_1 \rho_2 \dashv \Theta}$$

$$4568 \quad \frac{\text{A-KAPP-TT-FORALL} \quad \Delta, \hat{\alpha} : \omega_1 \Vdash^{\text{kapp}} (\rho_1 @ \hat{\alpha} : \eta[a \mapsto \hat{\alpha}]) \bullet \tau : \omega \rightsquigarrow \rho \dashv \Theta}{\Delta \Vdash^{\text{kapp}} (\rho_1 : \forall a : \omega_1. \eta) \bullet \tau : \omega \rightsquigarrow \rho \dashv \Theta}$$

A-KAPP-TT-FORALL-INFER

$$\frac{\Delta, \hat{\alpha} : \omega_1 \Vdash^{\text{kapp}} (\rho_1 @ \hat{\alpha} : \eta[a \mapsto \hat{\alpha}]) \bullet \tau : \omega \rightsquigarrow \rho \dashv \Theta}{\Delta \Vdash^{\text{kapp}} (\rho_1 : \forall\{a : \omega_1\}.\eta) \bullet \tau : \omega \rightsquigarrow \rho \dashv \Theta}$$

4569

A-KAPP-TT-KUVAR

$$\frac{\Delta_1, \hat{\alpha}_1 : \star, \hat{\alpha}_2 : \star, \hat{\alpha} : \omega = (\hat{\alpha}_1 \rightarrow \hat{\alpha}_2), \Delta_2 \Vdash^{\text{kc}} \tau \Leftarrow \hat{\alpha}_1 \rightsquigarrow \rho_2 \dashv \Theta}{\Delta_1, \hat{\alpha} : \omega, \Delta_2 \Vdash^{\text{kapp}} (\rho_1 : \hat{\alpha}) \bullet \tau : \hat{\alpha}_2 \rightsquigarrow \rho_1 \rho_2 \dashv \Theta}$$

4570

4571

$$\boxed{\Delta \Vdash^{\text{ela}} \mu : \eta}$$

(Elaborated Kinding)

A-ELA-STAR

$$\frac{}{\Delta \Vdash^{\text{ela}} \star : \star}$$

4572

A-ELA-KUVAR

$$\frac{(\hat{\alpha} : \omega) \in \Delta}{\Delta \Vdash^{\text{ela}} \hat{\alpha} : [\Delta]\omega}$$

A-ELA-NAT

$$\frac{}{\Delta \Vdash^{\text{ela}} \text{Int} : \star}$$

A-ELA-VAR

$$\frac{(a : \omega) \in \Delta}{\Delta \Vdash^{\text{ela}} a : [\Delta]\omega}$$

A-ELA-TCON

$$\frac{(T : \eta) \in \Delta}{\Delta \Vdash^{\text{ela}} T : [\Delta]\eta}$$

4573

ELA-ARROW

$$\frac{}{\Delta \Vdash^{\text{ela}} \rightarrow : \star \rightarrow \star \rightarrow \star}$$

A-ELA-FORALL

$$\frac{\Delta \Vdash^{\text{ela}} \omega : \star \quad \Delta, a : \omega \Vdash^{\text{ela}} \mu : \star}{\Delta \Vdash^{\text{ela}} \forall a : \omega. \mu : \star}$$

A-ELA-FORALL-INFER

$$\frac{\Delta \Vdash^{\text{ela}} \omega : \star \quad \Delta, a : \omega \Vdash^{\text{ela}} \mu : \star}{\Delta \Vdash^{\text{ela}} \forall\{a : \omega\}.\mu : \star}$$

4574

A-ELA-APP

$$\frac{\Delta \Vdash^{\text{ela}} \rho_1 : \omega_1 \rightarrow \omega_2 \quad \Delta \Vdash^{\text{ela}} \rho_2 : \omega_1}{\Delta \Vdash^{\text{ela}} \rho_1 \rho_2 : \omega_2}$$

A-ELA-KAPP

$$\frac{\Delta \Vdash^{\text{ela}} \rho_1 : \forall a : \omega. \eta \quad \Delta \Vdash^{\text{ela}} \rho_2 : \omega}{\Delta \Vdash^{\text{ela}} \rho_1 @ \rho_2 : \eta[a \mapsto [\Delta]\rho_2]}$$

4575

A-ELA-KAPP-INFER

$$\frac{\Delta \Vdash^{\text{ela}} \rho_1 : \forall\{a : \omega\}.\eta \quad \Delta \Vdash^{\text{ela}} \rho_2 : \omega}{\Delta \Vdash^{\text{ela}} \rho_1 @ \rho_2 : \eta[a \mapsto [\Delta]\rho_2]}$$

4576

$$\boxed{\Delta \Vdash_{\phi^c}^{\text{gen}} \Gamma_1 \rightsquigarrow \Gamma_2}$$

(Generalization)

A-GEN

$$\frac{\overline{\widehat{\phi}_i^c = \text{unsolved}(\mu_i)}^i}{\Delta \Vdash_{\phi^c}^{\text{gen}} \overline{D_i : \mu_i}^i \rightsquigarrow \overline{D : \forall\{\phi^c\}.\forall\{\phi_i^c\}.\mu[\widehat{\phi}_i^c \mapsto \phi_i^c]}^i}$$

4577

4578

$$\boxed{\Delta \text{ ok}}$$

(Well-formed Type Contexts)

4579	$\frac{\text{A-TCTX-EMPTY}}{\bullet \text{ ok}}$	$\frac{\text{A-TCTX-TVAR-TT} \quad \Delta \text{ ok} \quad \Delta \Vdash^{\text{ela}} \omega : \star}{\Delta, a : \omega \text{ ok}}$	$\frac{\text{A-TCTX-TCON-TT} \quad \Delta \text{ ok} \quad \Delta \Vdash^{\text{ela}} \eta : \star}{\Delta, T : \eta \text{ ok}}$
4580	$\frac{\text{A-TCTX-KUVAR-TT} \quad \Delta \text{ ok} \quad \Delta \Vdash^{\text{ela}} \omega : \star}{\Delta, \hat{\alpha} : \omega \text{ ok}}$	$\frac{\text{A-TCTX-KUVAR} \text{SOLVED-TT} \quad \Delta \text{ ok} \quad \Delta \Vdash^{\text{ela}} \omega_2 : [\Delta] \omega_1}{\Delta, \hat{\alpha} : \omega_1 = \omega_2 \text{ ok}}$	$\frac{\text{A-TCTX-LO} \quad \Delta, \Delta^{\text{lo}} \text{ ok}}{\Delta, \{\Delta^{\text{lo}}\} \text{ ok}}$
4581	$\frac{\text{A-TCTX-MARKER} \quad \Delta \text{ ok}}{\Delta, \blacktriangleright_D \text{ ok}}$		
4582	$\boxed{\Delta \Vdash^{\text{ectx}} \Gamma}$	(Well-formed Term Contexts)	
4583	$\frac{\text{A-ECTX-EMPTY}}{\Delta \Vdash^{\text{ectx}} \bullet}$	$\frac{\text{A-ECTX-DCON-TT} \quad \Delta \Vdash^{\text{ectx}} \Gamma \quad \Delta \Vdash^{\text{ela}} \mu : \star}{\Delta \Vdash^{\text{ectx}} \Gamma, D : \mu}$	
4584	$\boxed{\Delta \Vdash^{\mu} \omega_1 \approx \omega_2 \dashv \Theta}$	(Unification)	
4585	$\frac{\text{A-U-REFL-TT}}{\Delta \Vdash^{\mu} \omega \approx \omega \dashv \Delta}$	$\frac{\text{A-U-APP} \quad \Delta \Vdash^{\mu} \rho_1 \approx \rho_3 \dashv \Delta_1 \quad \Delta_1 \Vdash^{\mu} [\Delta_1] \rho_2 \approx [\Delta_1] \rho_4 \dashv \Theta}{\Delta \Vdash^{\mu} \rho_1 \rho_2 \approx \rho_3 \rho_4 \dashv \Theta}$	
4586	$\frac{\text{A-U-KAPP} \quad \Delta \Vdash^{\mu} \rho_1 \approx \rho_3 \dashv \Delta_1 \quad \Delta_1 \Vdash^{\mu} [\Delta_1] \rho_2 \approx [\Delta_1] \rho_4 \dashv \Theta}{\Delta \Vdash^{\mu} \rho_1 @ \rho_2 \approx \rho_3 @ \rho_4 \dashv \Theta}$		
4587	$\frac{\text{A-U-KVARL-TT} \quad \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \rho_1 \rightsquigarrow \rho_2 \dashv \Theta_1, \hat{\alpha} : \omega_1, \Theta_2 \quad \Theta_1 \Vdash^{\text{ela}} \rho_2 : \omega_2 \quad \Theta_1 \Vdash^{\mu} [\Theta_1] \omega_1 \approx \omega_2 \dashv \Theta_3}{\Delta \Vdash^{\mu} \hat{\alpha} \approx \rho_1 \dashv \Theta_3, \hat{\alpha} : \omega_1 = \rho_2, \Theta_2}$		
4588	$\frac{\text{A-U-KVARR-TT} \quad \Delta \Vdash_{\hat{\alpha}}^{\text{pr}} \rho_1 \rightsquigarrow \rho_2 \dashv \Theta_1, \hat{\alpha} : \omega_1, \Theta_2 \quad \Theta_1 \Vdash^{\text{ela}} \rho_2 : \omega_2 \quad \Theta_1 \Vdash^{\mu} [\Theta_1] \omega_1 \approx \omega_2 \dashv \Theta_3}{\Delta \Vdash^{\mu} \rho_1 \approx \hat{\alpha} \dashv \Theta_3, \hat{\alpha} : \omega_1 = \rho_2, \Theta_2}$		

4589	$\frac{\text{A-U-KVARL-LO-TT} \quad \begin{array}{c} \Delta_1, \Delta_2 \vdash^{\text{mv}} \widehat{\alpha} : \omega_1 \rightsquigarrow \Theta \quad \Delta[\{\Theta\}] \vdash_{\widehat{\alpha}}^{\text{pr}} \rho_1 \rightsquigarrow \rho_2 \dashv \Theta_1, \{\Theta_2, \widehat{\alpha} : \omega_1, \Theta_3\}, \Theta_4 \\ \Theta_1, \{\Theta_2\} \Vdash^{\text{ela}} \rho_2 : \omega_2 \quad \Theta_1, \{\Theta_2\} \Vdash^{\text{u}} [\Theta_1, \Theta_2] \omega_1 \approx \omega_2 \dashv \Theta_5, \{\Theta_6\} \end{array}}{\Delta[\{\Delta_1, \widehat{\alpha} : \omega_1, \Delta_2\}] \Vdash^{\text{u}} \widehat{\alpha} \approx \rho_1 \dashv \Theta_5, \{\Theta_6, \widehat{\alpha} : \omega_1 = \rho_2, \Theta_3\}, \Theta_4}$	(Promotion)
4590	$\frac{\text{A-U-KVARR-LO-TT} \quad \begin{array}{c} \Delta_1, \Delta_2 \vdash^{\text{mv}} \widehat{\alpha} : \omega_1 \rightsquigarrow \Theta \quad \Delta[\{\Theta\}] \vdash_{\widehat{\alpha}}^{\text{pr}} \rho_1 \rightsquigarrow \rho_2 \dashv \Theta_1, \{\Theta_2, \widehat{\alpha} : \omega_1, \Theta_3\}, \Theta_4 \\ \Theta_1, \{\Theta_2\} \Vdash^{\text{ela}} \rho_2 : \omega_2 \quad \Theta_1, \{\Theta_2\} \Vdash^{\text{u}} [\Theta_1, \Theta_2] \omega_1 \approx \omega_2 \dashv \Theta_5, \{\Theta_6\} \end{array}}{\Delta[\{\Delta_1, \widehat{\alpha} : \omega_1, \Delta_2\}] \Vdash^{\text{u}} \rho_1 \approx \widehat{\alpha} \dashv \Theta_5, \{\Theta_6, \widehat{\alpha} : \omega_1 = \rho_2, \Theta_3\}, \Theta_4}$	
4591	$\Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \omega_1 \rightsquigarrow \omega_2 \dashv \Theta$	(Promotion)
4592	$\begin{array}{ccc} \text{A-PR-STAR} & \text{A-PR-ARROW} & \text{A-PR-TCON} \\ \hline \Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \star \rightsquigarrow \star \dashv \Delta & \Delta \Vdash_{\widehat{\alpha}}^{\text{pr}} \rightarrow \rightsquigarrow \rightarrow \dashv \Delta & \Delta[T][\widehat{\alpha}] \vdash_{\widehat{\alpha}}^{\text{pr}} T \rightsquigarrow T \dashv \Delta[T][\widehat{\alpha}] \end{array}$	
4593	$\begin{array}{ccc} \text{A-PR-NAT} & \text{A-PR-APP} & \\ \hline \Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \text{Int} \rightsquigarrow \text{Int} \dashv \Delta & \frac{\Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \omega_1 \rightsquigarrow \rho_1 \dashv \Delta_1 \quad \Delta_1 \vdash_{\widehat{\alpha}}^{\text{pr}} [\Delta_1] \omega_2 \rightsquigarrow \rho_2 \dashv \Theta}{\Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \omega_1 \omega_2 \rightsquigarrow \rho_1 \rho_2 \dashv \Theta} & \end{array}$	
4594	$\begin{array}{ccc} \text{A-PR-KAPP} & & \text{A-PR-TVAR} \\ \hline \Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \omega_1 \rightsquigarrow \rho_1 \dashv \Delta_1 \quad \Delta_1 \vdash_{\widehat{\alpha}}^{\text{pr}} [\Delta_1] \omega_2 \rightsquigarrow \rho_2 \dashv \Theta & & \Delta[a][\widehat{\alpha}] \vdash_{\widehat{\alpha}}^{\text{pr}} a \rightsquigarrow a \dashv \Delta[a][\widehat{\alpha}] \\ \hline \Delta \vdash_{\widehat{\alpha}}^{\text{pr}} \omega_1 @ \omega_2 \rightsquigarrow \rho_1 @ \rho_2 \dashv \Theta & & \end{array}$	
4595	$\begin{array}{ccc} \text{A-PR-KUVAL} & \text{A-PR-KUVALR-TT} & \\ \hline \Delta[\widehat{\beta}][\widehat{\alpha}] \vdash_{\widehat{\alpha}}^{\text{pr}} \widehat{\beta} \rightsquigarrow \widehat{\beta} \dashv \Delta[\widehat{\beta}][\widehat{\alpha}] & \frac{\Delta \vdash_{\widehat{\alpha}}^{\text{pr}} [\Delta] \rho \rightsquigarrow \rho_1 \dashv \Theta[\widehat{\alpha}][\widehat{\beta} : \rho]}{\Delta[\widehat{\alpha}][\widehat{\beta} : \rho] \vdash_{\widehat{\alpha}}^{\text{pr}} \widehat{\beta} \rightsquigarrow \widehat{\beta}_1 \dashv \Theta[\widehat{\beta}_1 : \rho_1, \widehat{\alpha}][\widehat{\beta} : \rho = \widehat{\beta}_1]} & \end{array}$	
4596	$\Delta_1 \vdash^{\text{mv}} \Delta_2 \rightsquigarrow \Theta$	(Moving)
4597	$\begin{array}{ccc} \text{A-MV-EMPTY} & \text{A-MV-KUVAL} & \\ \hline \bullet \vdash^{\text{mv}} \Delta \rightsquigarrow \Delta & \frac{\text{var}(\omega) \# \text{dom}(\Delta_2) \quad \Delta_1 \vdash^{\text{mv}} \Delta_2 \rightsquigarrow \Theta}{\widehat{\alpha} : \omega, \Delta_1 \vdash^{\text{mv}} \Delta_2 \rightsquigarrow \widehat{\alpha} : \omega, \Theta} & \end{array}$	
4598	$\frac{\text{A-MV-KUVALM} \quad \neg(\text{var}(\omega) \# \text{dom}(\Delta_2)) \quad \Delta_1 \vdash^{\text{mv}} \Delta_2, \widehat{\alpha} : \omega \rightsquigarrow \Theta}{\widehat{\alpha} : \omega, \Delta_1 \vdash^{\text{mv}} \Delta \rightsquigarrow \Theta}$	

$$\begin{array}{c}
 \text{A-MV-TVARM} \\
 \frac{\text{var}(\omega) \# \text{dom}(\Delta_2) \quad \Delta_1 ++^{\text{mv}} \Delta_2 \leadsto \Theta}{a : \omega, \Delta_1 ++^{\text{mv}} \Delta_2 \leadsto a : \omega, \Theta} \\
 4599 \\
 \\
 \text{A-MV-TVARM} \\
 \frac{\neg(\text{var}(\omega) \# \text{dom}(\Delta_2)) \quad \Delta_1 ++^{\text{mv}} \Delta_2, a : \omega \leadsto \Theta}{a : \omega, \Delta_1 ++^{\text{mv}} \Delta_2 \leadsto \Theta} \\
 4600
 \end{array}$$

4601 C.3.7 CONTEXT APPLICATION IN POLYKINDS

$$\begin{array}{c}
 \hline
 [\Delta]\eta \text{ applies } \Delta \text{ as a substitution to } \eta. \\
 \begin{array}{lcl}
 [\Delta]\star & = & \star \\
 [\Delta]\text{Int} & = & \text{Int} \\
 [\Delta]a & = & a \\
 [\Delta]T & = & T \\
 [\Delta] \rightarrow & = & \rightarrow \\
 [\Delta]\forall a : \omega. \eta & = & \forall a : [\Delta]\omega. [\Delta]\eta \\
 [\Delta]\forall \{a : \omega\}. \eta & = & \forall \{a : [\Delta]\omega\}. [\Delta]\eta \\
 [\Delta](\rho_1 \rho_2) & = & ([\Delta]\rho_1) ([\Delta]\rho_2) \\
 [\Delta](\rho_1 @ \rho_2) & = & ([\Delta]\rho_1) @ ([\Delta]\rho_2) \\
 [\Delta][\hat{\alpha}]\hat{\alpha} & = & \hat{\alpha} \\
 [\Delta][\hat{\alpha} : \omega = \rho]\hat{\alpha} & = & [\Delta][\hat{\alpha} : \omega = \rho]\rho
 \end{array} \\
 \hline
 \\
 [\Delta]\Gamma \text{ applies } \Delta \text{ as a substitution to } \Gamma. \\
 \begin{array}{lcl}
 [\Omega]\bullet & = & \bullet \\
 [\Omega](\Gamma, D : \mu) & = & [\Omega]\Gamma, D : [\Omega]\mu
 \end{array} \\
 \hline
 \\
 [\Omega]\Delta \text{ applies } \Omega \text{ as a substitution to } \Delta. \\
 \begin{array}{lcl}
 [\Omega]\bullet & = & \bullet \\
 [\Omega, a : \omega](\Delta, a : \omega) & = & [\Omega]\Delta, a : [\Omega]\omega \\
 [\Omega, T : \omega](\Delta, T : \omega) & = & [\Omega]\Delta, T : [\Omega]\omega \\
 [\Omega, \hat{\alpha} : \omega = \rho](\Delta, \hat{\alpha} : \omega) & = & [\Omega]\Delta \\
 [\Omega, \hat{\alpha} : \omega = \rho_1](\Delta, \hat{\alpha} : \omega = \rho_2) & = & [\Omega]\Delta \quad \text{if } [\Omega]\rho_1 = [\Omega]\rho_2 \\
 [\Omega, \hat{\alpha} : \omega = \rho]\Delta & = & [\Omega]\Delta \quad \text{if } \hat{\alpha} \notin \Delta \\
 [\Omega, \blacktriangleright_D](\Delta, \blacktriangleright_D) & = & [\Omega]\Delta \\
 [\Omega, \{\Omega_1\}](\Delta, \{\Delta_1\}) & = & [\Omega, \Omega_1](\Delta, \Delta') \\
 & & \text{where } \Delta' = \text{topo}(\Delta_1)
 \end{array} \\
 \hline
 \end{array}$$

4605 C.3.8 CONTEXT EXTENSION IN POLYKINDS

4606 $\boxed{\Delta \longrightarrow \Theta}$ (Context Extension)

$$\begin{array}{c}
\text{A-CTXE-EMPTY} \qquad \text{A-CTXE-TVAR-TT} \qquad \text{A-CTXE-TCON-TT} \\
\hline
\bullet \longrightarrow \bullet \qquad \Delta \longrightarrow \Theta \qquad \Delta \longrightarrow \Theta \\
\hline
\Delta, a : \omega \longrightarrow \Theta, a : \omega \qquad \Delta, T : \eta \longrightarrow \Theta, T : \eta
\end{array}$$

4607

$$\begin{array}{c}
\text{A-CTXE-KUVAR-TT} \qquad \text{A-CTXE-KUVARsOLVED-TT} \\
\hline
\Delta \longrightarrow \Theta \qquad \Delta \longrightarrow \Theta \quad [\Theta]\rho_1 = [\Theta]\rho_2 \\
\hline
\Delta, \hat{\alpha} : \omega \longrightarrow \Theta, \hat{\alpha} : \omega \qquad \Delta, \hat{\alpha} : \omega = \rho_1 \longrightarrow \Theta, \hat{\alpha} : \omega = \rho_2
\end{array}$$

4608

$$\begin{array}{c}
\text{A-CTXE-SOLVE-TT} \qquad \text{A-CTXE-ADD-TT} \\
\hline
\Delta \longrightarrow \Theta \quad \Theta \Vdash^{\text{ela}} \rho : [\Theta]\omega \qquad \Delta \longrightarrow \Theta \quad \Theta \Vdash^{\text{ela}} \omega : \star \\
\hline
\Delta, \hat{\alpha} : \omega \longrightarrow \Theta, \hat{\alpha} : \omega = \rho \qquad \Delta \longrightarrow \Theta, \hat{\alpha} : \omega
\end{array}$$

4609

$$\begin{array}{c}
\text{A-CTXE-ADDsOLVED-TT} \qquad \text{A-CTXE-MARKER} \\
\hline
\Delta \longrightarrow \Theta \quad \Theta \Vdash^{\text{ela}} \rho : [\Theta]\omega \qquad \Delta \longrightarrow \Theta \\
\hline
\Delta \longrightarrow \Theta, \hat{\alpha} : \omega = \rho \qquad \Delta, \blacktriangleright_D \longrightarrow \Theta, \blacktriangleright_D
\end{array}$$

4610

$$\begin{array}{c}
\text{A-CTXE-LO} \\
\hline
\Delta \longrightarrow \Theta \quad \Delta, \text{topo}(\Delta_1) \longrightarrow \Theta, \Theta_1 \\
\hline
\Delta, \{\Delta_1\} \longrightarrow \Theta, \{\Theta_1\}
\end{array}$$

4611