Residual super-resolution: shared features, two routes to 5× sampling

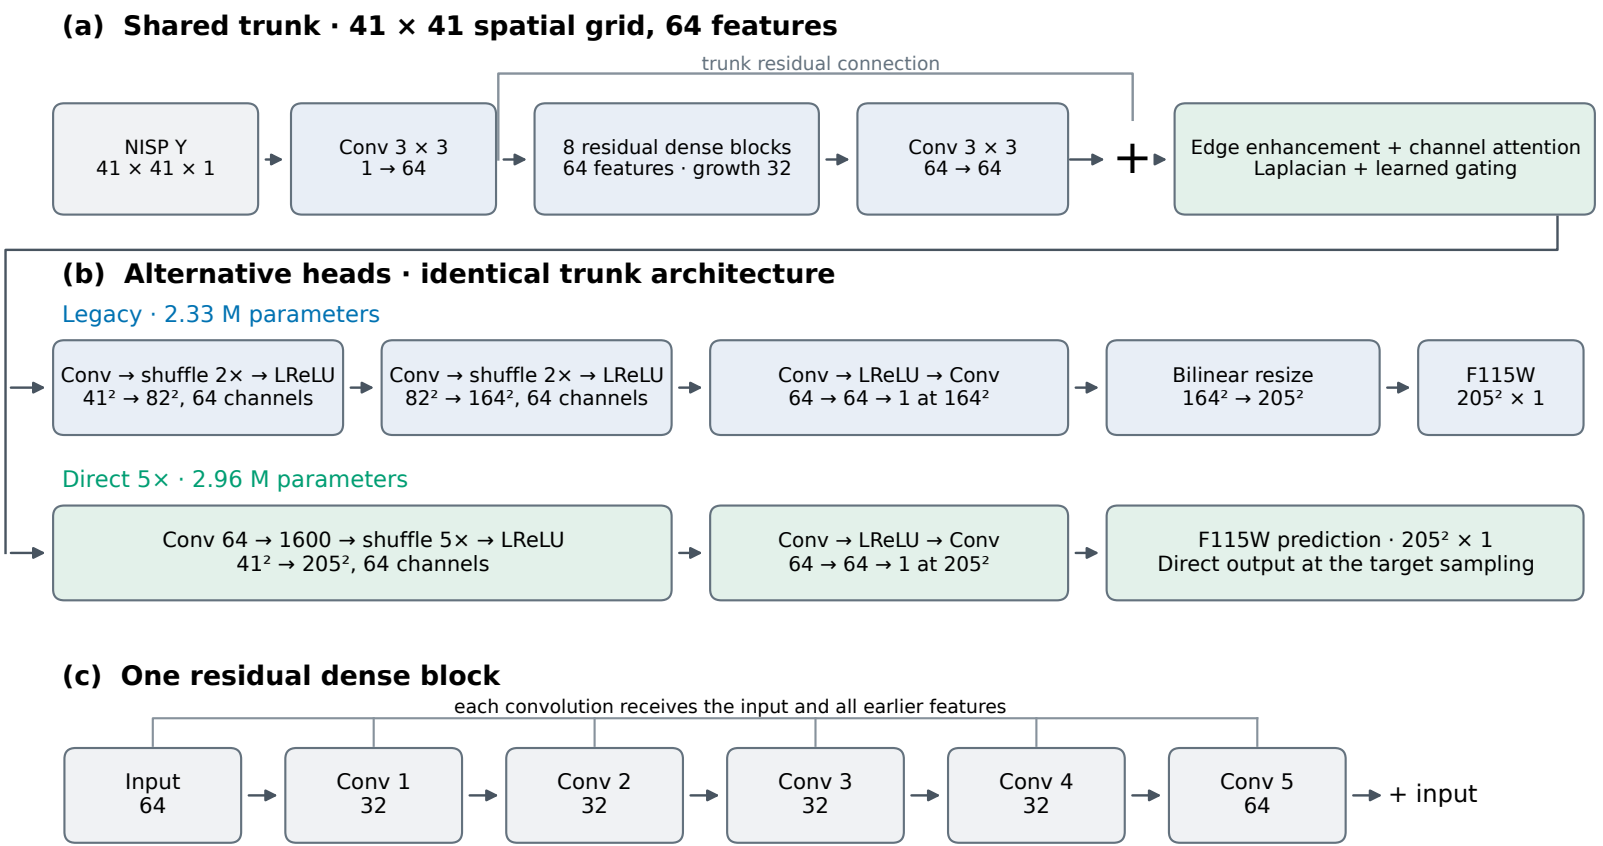

Dense-block kernels: 3 × 3. LeakyReLU after convolutions 1–4. Concatenate → final convolution → residual addition.

Shuffle = PixelShuffle. Both models: signed linear normalization; masked L1 loss; no output clipping.