

24. Sorting a List

Topics:

Selection Sort

Merge Sort

Our examples will
highlight the interplay between
functions and lists

Sorting a List of Numbers

Before:

x -->

50	40	10	80	20	60
----	----	----	----	----	----

After:

x -->

10	20	40	50	60	80
----	----	----	----	----	----

We Will First Implement the Method of Selection Sort

At the Start:

x -->

50	40	10	80	20	60
----	----	----	----	----	----

High-Level:

```
for k in range(len(x)-1)
    Swap x[k] with the smallest
    value in x[k:]
```

Selection Sort: How It Works

Before:

x -->

50	40	10	80	20	60
----	----	----	----	----	----

Swap `x[0]` with the smallest value in `x[0:]`

Selection Sort: How It Works

Before:

x -->

50	40	10	80	20	60
----	----	----	----	----	----

Swap `x[0]` with the smallest value in `x[0:]`

After:

x -->

10	40	50	80	20	60
----	----	----	----	----	----

Selection Sort: How It Works

Before:

x -->

10	40	50	80	20	60
----	----	----	----	----	----

Swap `x[1]` with the smallest value in `x[1:]`

Selection Sort: How It Works

Before:

x -->

10	40	50	80	20	60
----	----	----	----	----	----

Swap `x[1]` with the smallest value in `x[1:]`

After:

x -->

10	20	50	80	40	60
----	----	----	----	----	----

Selection Sort: How It Works

Before:

x -->

10	20	50	80	40	60
----	----	----	----	----	----

Swap `x[2]` with the smallest value in `x[2:]`

Selection Sort: How It Works

Before:

x -->

10	20	50	80	40	60
----	----	----	----	----	----

Swap `x[2]` with the smallest value in `x[2:]`

After:

x -->

10	20	40	80	50	60
----	----	----	----	----	----

Selection Sort: How It Works

Before:

x -->

10	20	40	80	50	60
----	----	----	----	----	----

Swap `x[3]` with the smallest value in `x[3:]`

Selection Sort: How It Works

Before:

x -->

10	20	40	80	50	60
----	----	----	----	----	----

Swap `x[3]` with the smallest value in `x[3:]`

After:

x -->

10	20	40	50	80	60
----	----	----	----	----	----

Selection Sort: How It Works

Before:

x -->

10	20	40	50	80	60
----	----	----	----	----	----

Swap `x[4]` with the smallest value in `x[4:]`

Selection Sort: How It Works

Before:

x -->

10	20	40	50	80	60
----	----	----	----	----	----

Swap `x[4]` with the smallest value in `x[4:]`

After:

x -->

10	20	40	50	60	80
----	----	----	----	----	----

Selection Sort: Recap

50	40	10	80	20	60
----	----	----	----	----	----

10	40	50	80	20	60
----	----	----	----	----	----

10	20	50	80	40	60
----	----	----	----	----	----

10	20	40	80	50	60
----	----	----	----	----	----

10	20	40	50	80	60
----	----	----	----	----	----

10	20	40	50	60	80
----	----	----	----	----	----

10	20	40	50	60	80
----	----	----	----	----	----

The Essential Helper Function: `Select(x,i)`

```
def Select(x,i):  
    """ Swaps the smallest value in  
    x[i:] with x[i]  
  
    PreC: x is a list of integers and  
    i is an in that satisfies  
    0<=i<len(x) """
```

Does not return anything and it has a list argument

How Does it Work?

The calling program has a list. E.g.,

```
graph LR; a --> node0; node0 --> node1; node1 --> node2; node2 --> node3; node3 --> node4; node4 --> node5; node5 --> end;
```

0	---->	50
1	---->	40
2	---->	10
3	---->	80
4	---->	20
5	---->	60


How Does it Work?

The calling program executes `Select(a, 0)`
and control passes to `Select`

a -->	0	---->	50
	1	---->	40
	2	---->	10
	3	---->	80
	4	---->	20
	5	---->	60

How Does Select Work?

- Nothing new about the assignment of 0 to i.
- But there is no assignment of the list a to x.
- Instead x now **refers** to the same list as a.

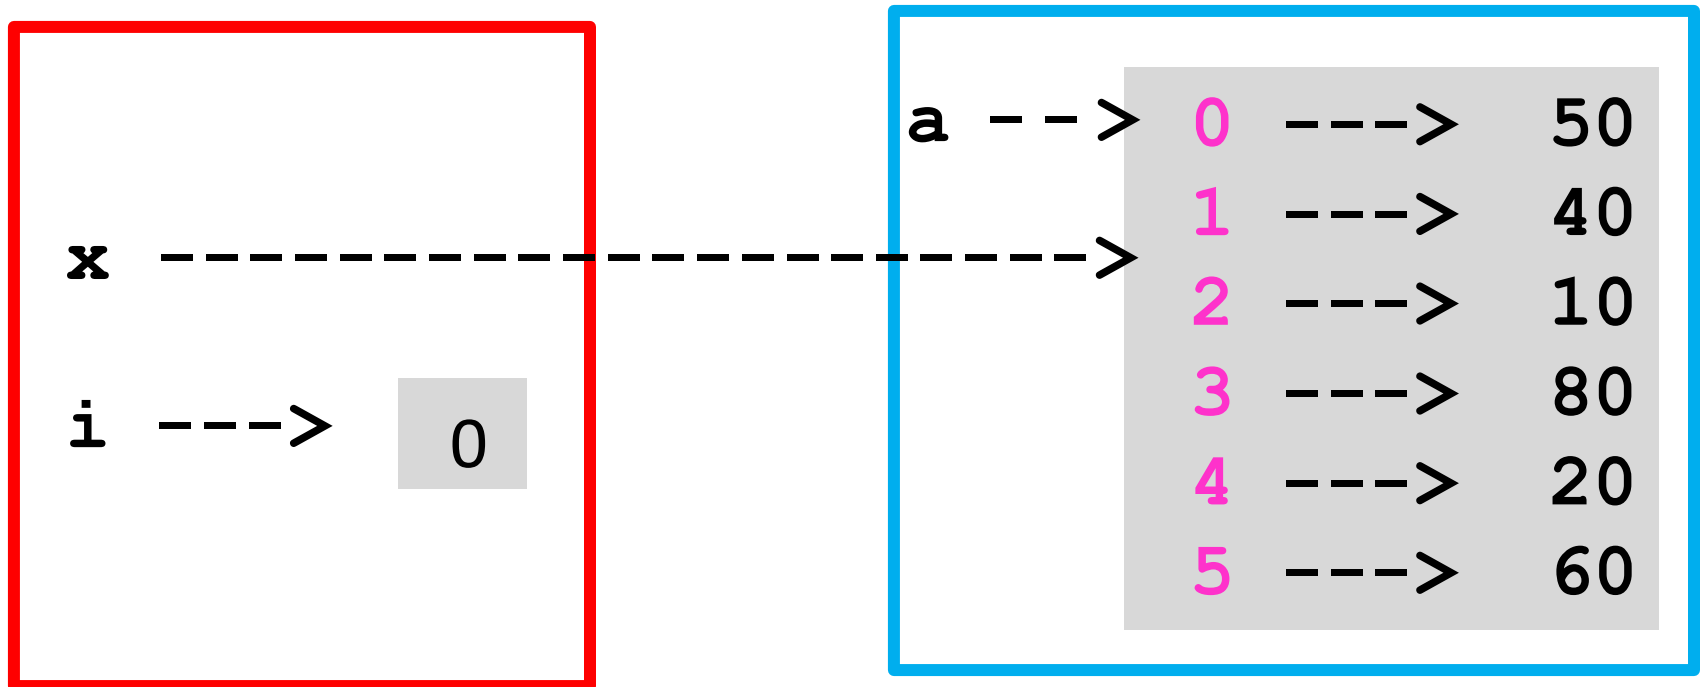


How Does Select Work?

If inside Select we have

$t = x[0]; x[0] = x[2]; x[2] = t$


it is as if we said

$t = a[0]; a[0] = a[2]; a[2] = t$

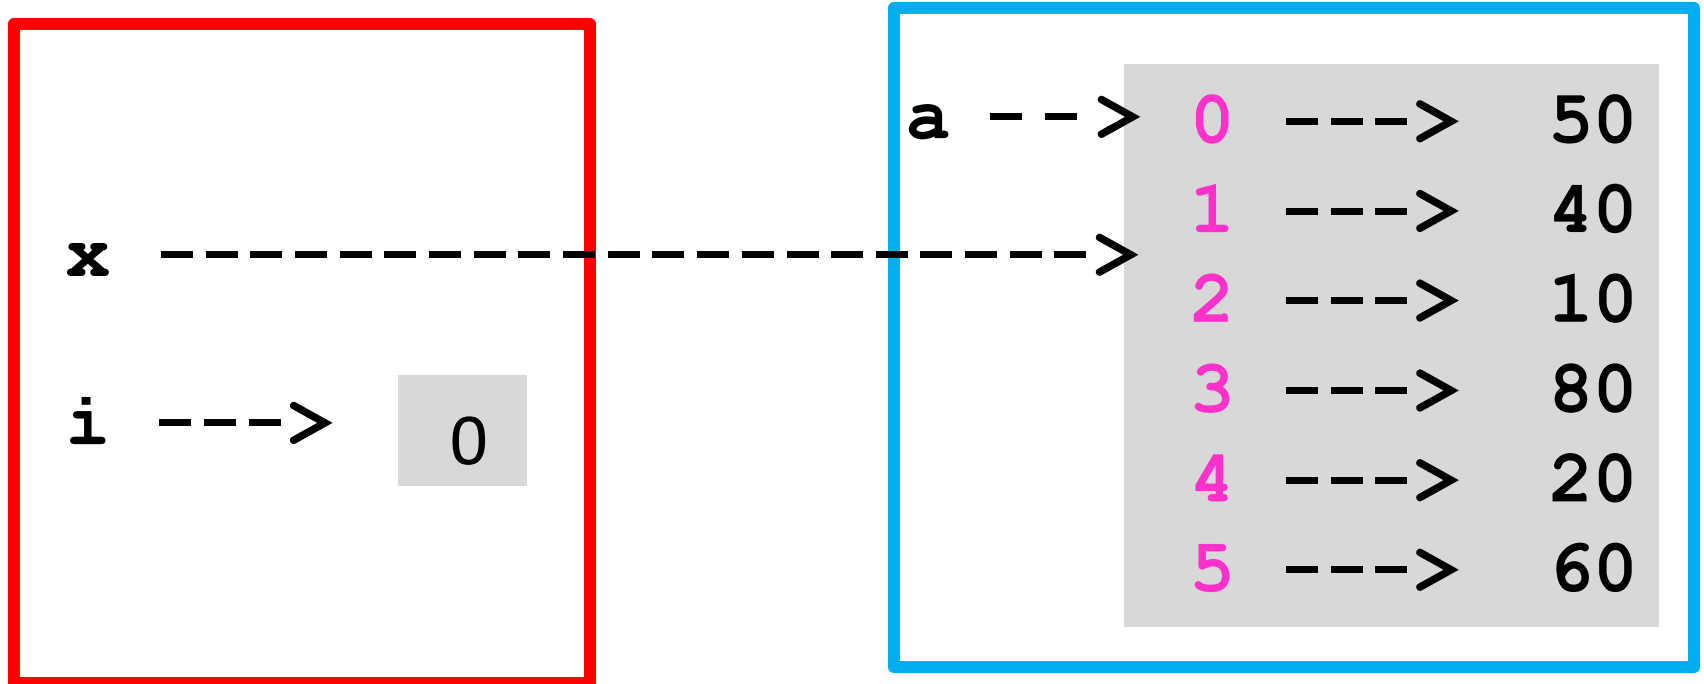

How Does Select Work?

It changes the list `a` in the calling program.
We say `x` and `a` are aliased. They refer to the same list

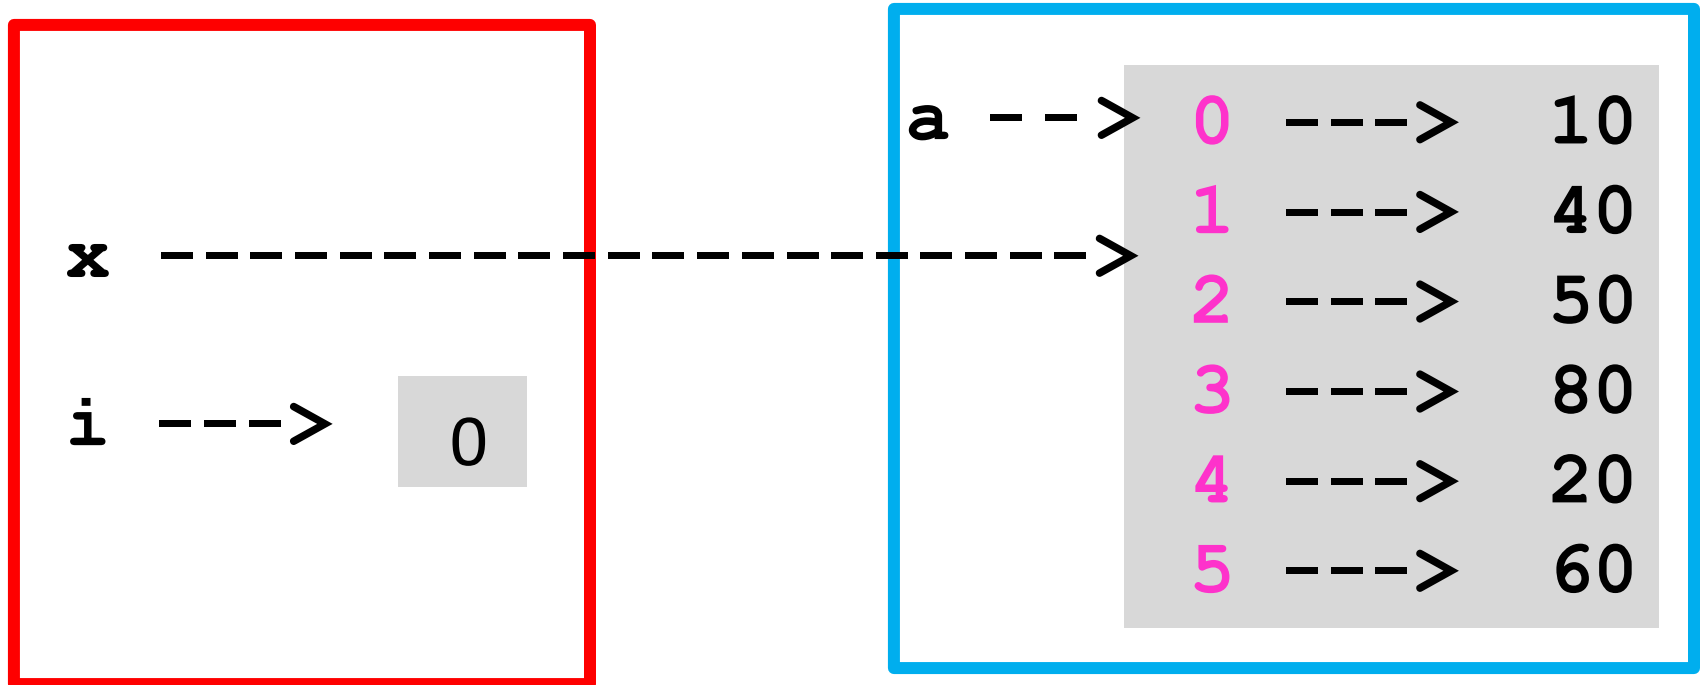

Let's Assume This Is Implemented

```
def Select(x,i):  
    """ Swaps the smallest value in  
    x[i:] with x[i]  
  
    PreC: x is a list of integers and  
    i is an in that satisfies  
    0<=i<len(x) """
```

After this:

The list a looks like this

Initialization

50	40	10	80	20	60
----	----	----	----	----	----

Select (a, 0)

10	40	50	80	20	60
----	----	----	----	----	----

Select (a, 1)

10	20	50	80	40	60
----	----	----	----	----	----

Select (a, 2)

10	20	40	80	50	60
----	----	----	----	----	----

Select (a, 3)

10	20	40	50	80	60
----	----	----	----	----	----

Select (a, 4)

10	20	40	50	60	80
----	----	----	----	----	----

Select (a, 5)

10	20	40	50	60	80
----	----	----	----	----	----

In General We Have This

```
def SelectionSort(a):  
    n = len(a)  
    for k in range(n):  
        Select(a,k)
```


Demonstration!

- Download and run the python script ShowSelect.py
- TODO:
 - Our implementation of selection sort sorts the numbers in ascending order. Think about, how would you modify the code to sort the numbers in descending order?

Next Problem

Merging Two Sorted Lists
into a
Single Sorted List

Example

x →

12	33	35	45
----	----	----	----

y →

15	42	55	65	75
----	----	----	----	----



x and y are input
They are sorted

z is the output

z →

12	15	33	35	42	45	55	65	75
----	----	----	----	----	----	----	----	----

Merging Two Sorted Lists

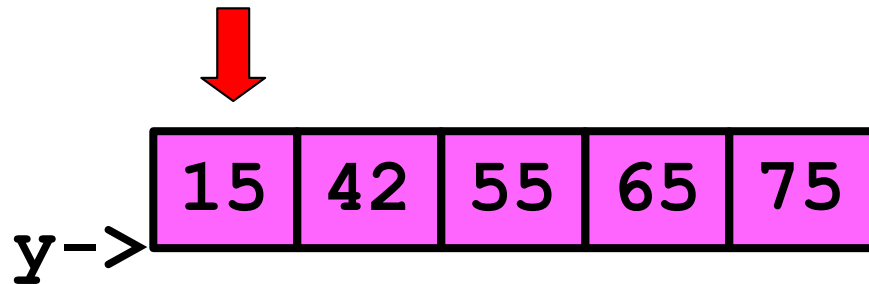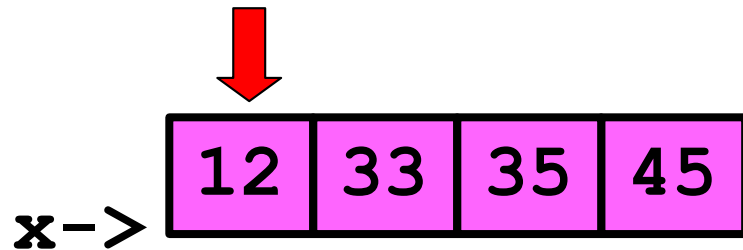


z-> []

ix and iy
keep track
of where
we are in x
and y


ix:

iy:

Merging Two Sorted Lists

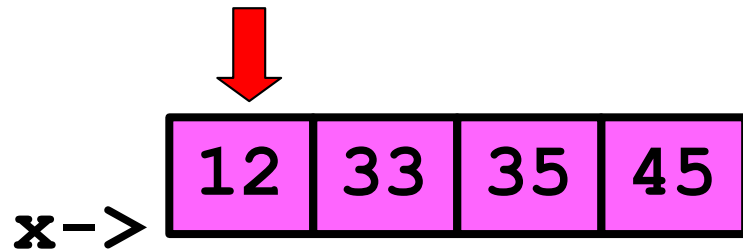

ix:

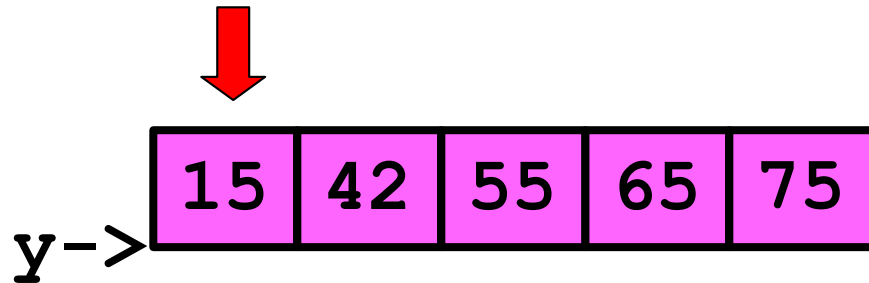

iy:


z->

Do we pick from x ?


x[ix] <= y[iy]

???


Merge

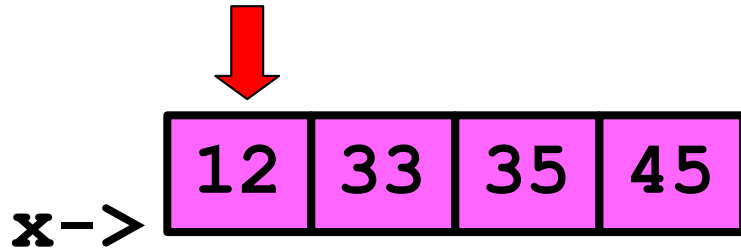

ix:

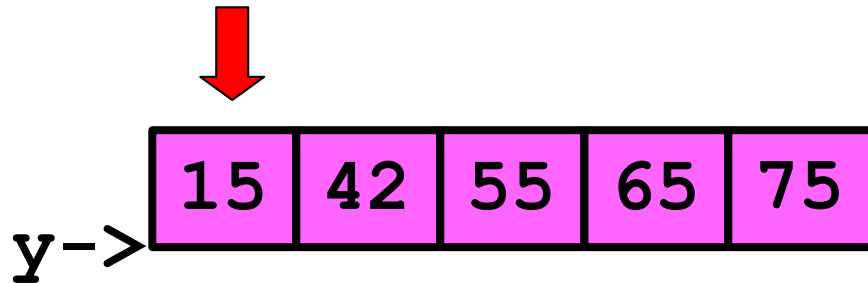


iy:




Yes. So update ix

Merge

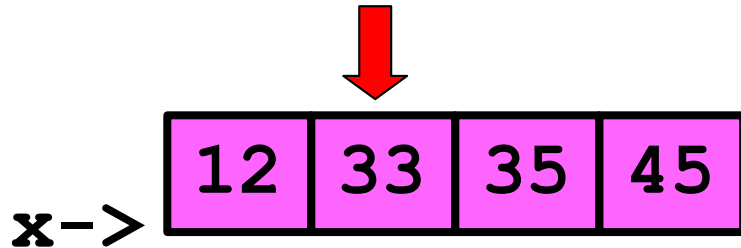


ix:

1

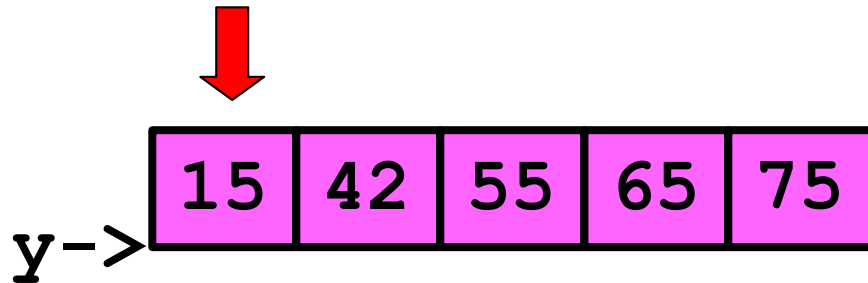

iy:

0




Do we pick from x ?

$x[ix] \leq y[iy]$


???

Merge

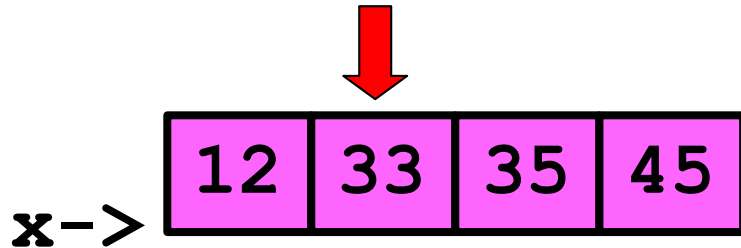


ix:

1

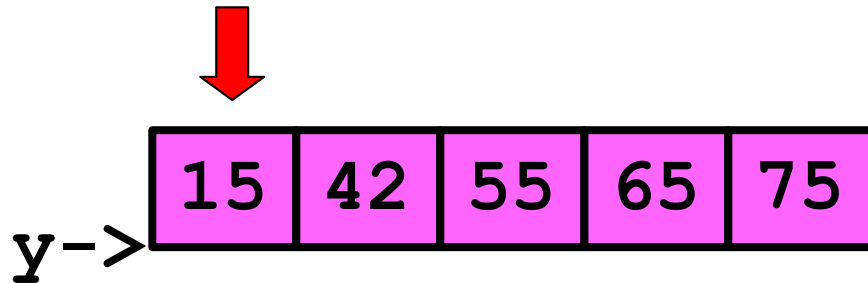

iy:


0



iz:


No. So update iy

Merge

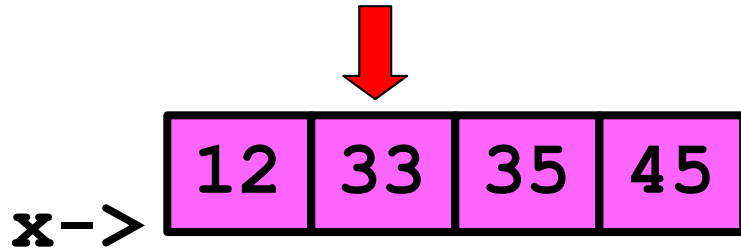


ix:

1

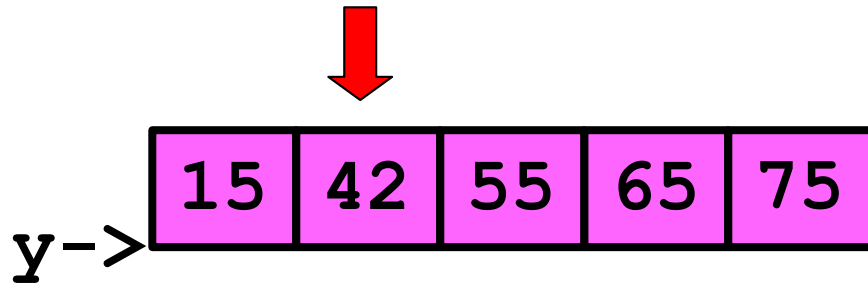

iy:

1




Do we pick from x ?

$x[ix] \leq y[iy]$


???

Merge

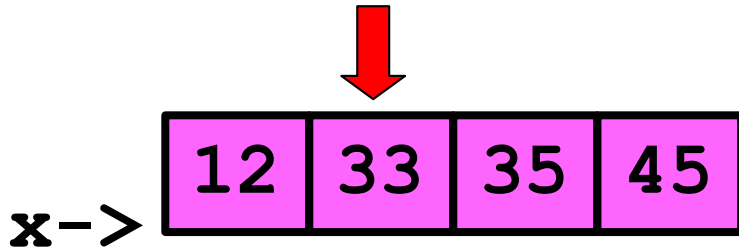


ix:

1

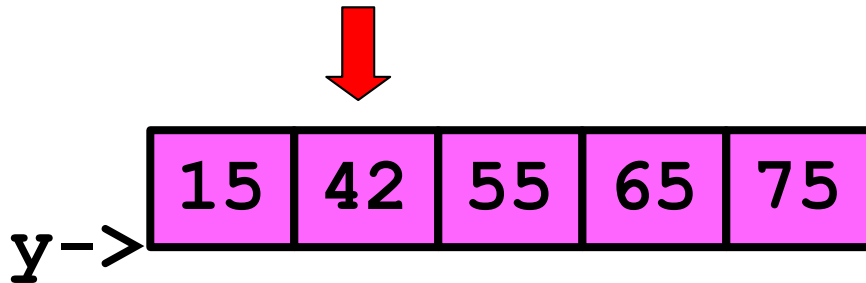


iy:

1




Yes. So update ix

Merge

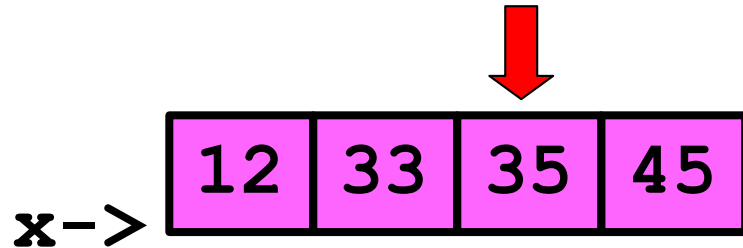


ix:

2

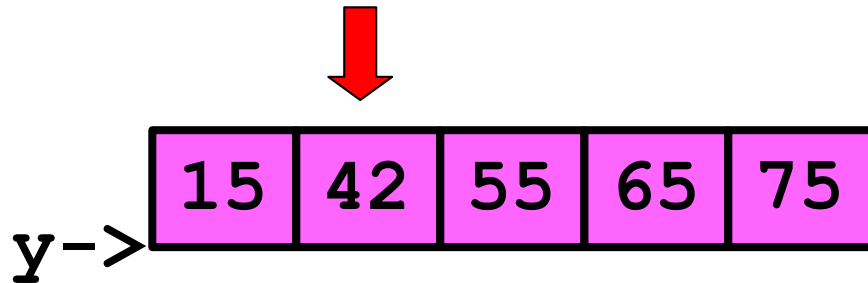

iy:

1




Do we pick from x ?

$x[ix] \leq y[iy]$


???

Merge




ix:

2

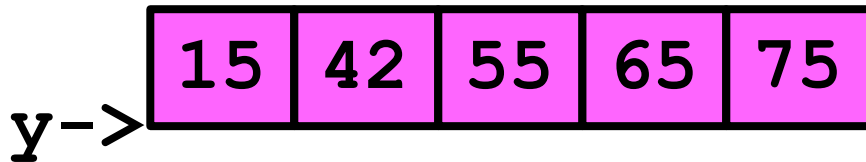


iy:

1




Yes. So update ix

Merge

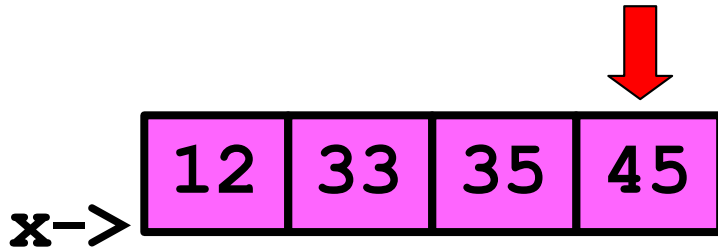


ix:

3

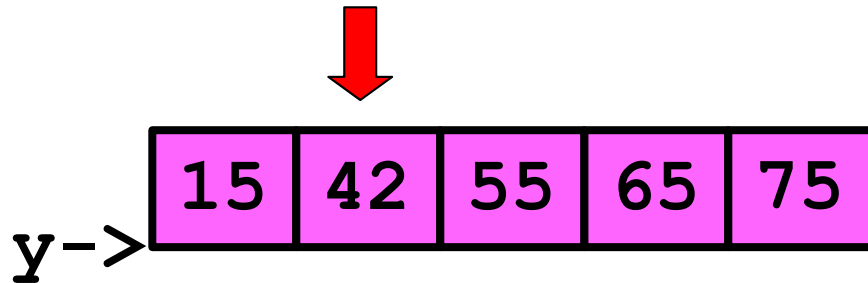

iy:

1




Do we pick from x ?

$x[ix] \leq y[iy]$


???

Merge

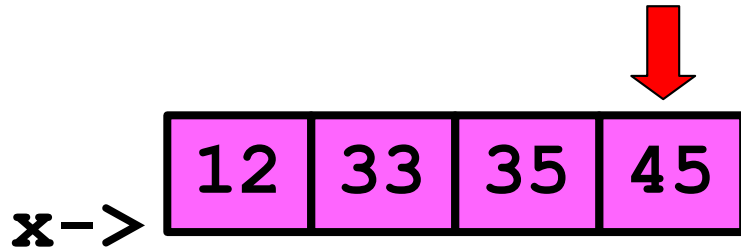


ix:

3

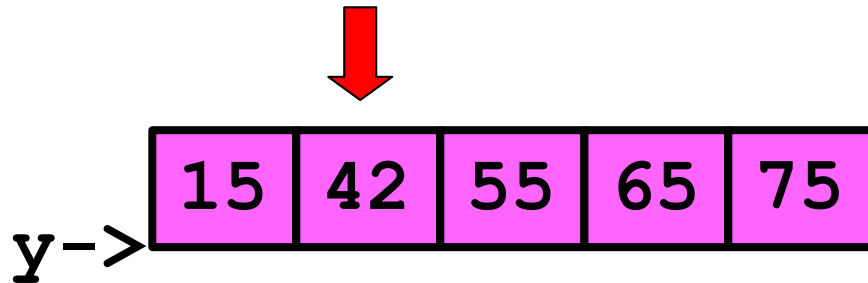


iy:

1




No. So update iy...

Merge

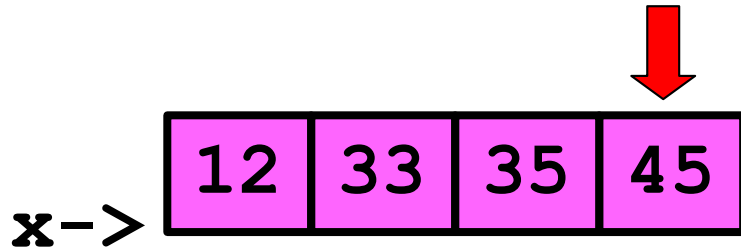


ix:

3

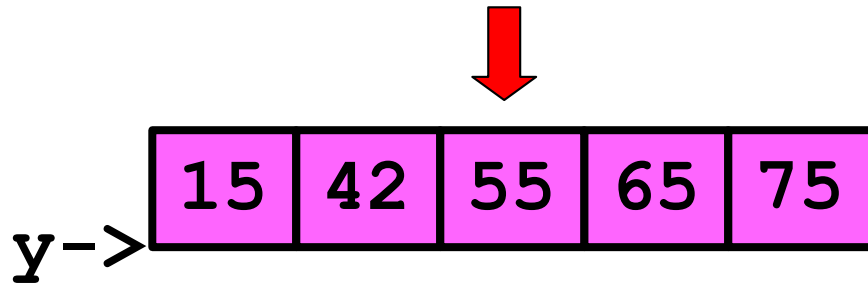

iy:

2




Do we pick from x ?

$x[ix] \leq y[iy]$


???

Merge

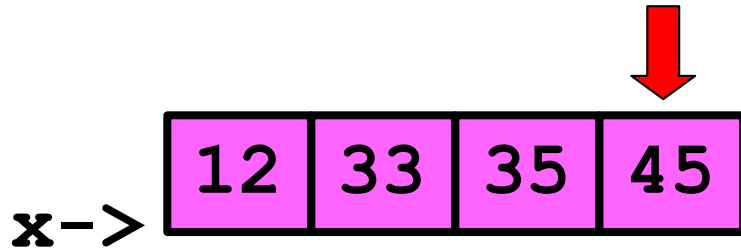


ix:

3

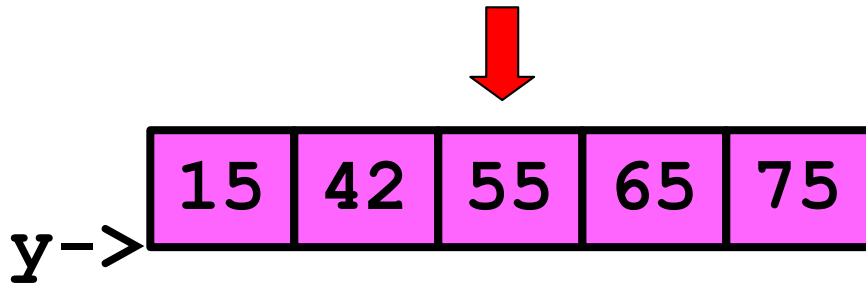


iy:

2




Yes. So update ix.

Merge



ix:

4

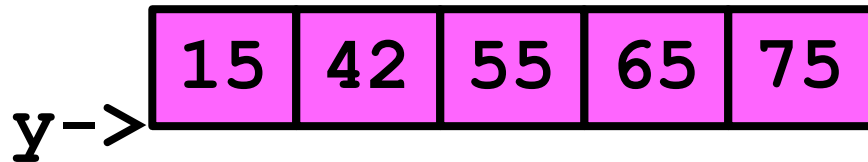


iy:

2




Done with x. Pick from y

Merge




ix:

4

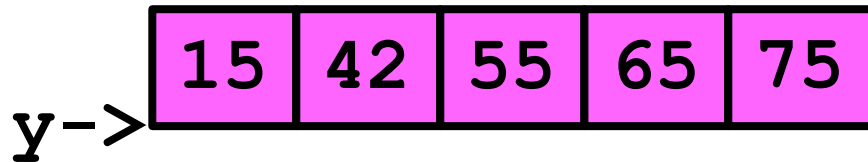


iy:

2

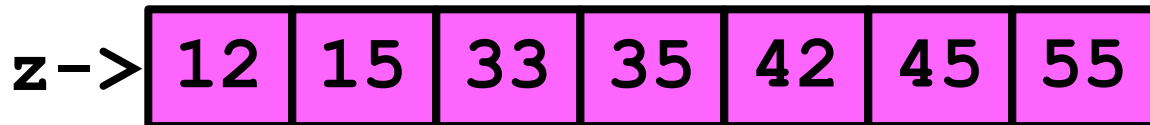


So update iy

Merge




ix:

4

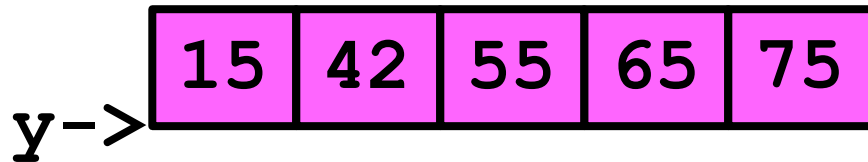


iy:

3

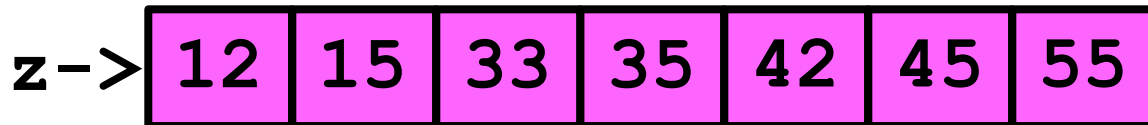


Done with x. Pick from y

Merge




ix:

4

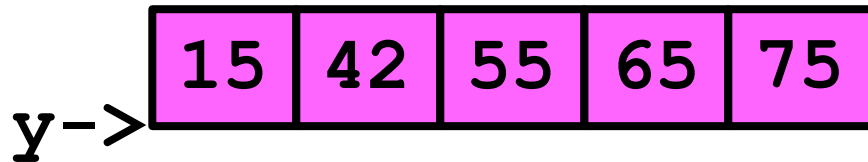


iy:

3

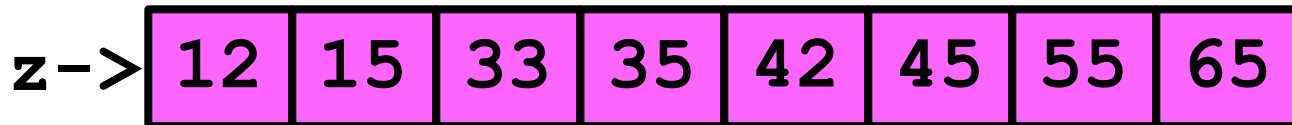


So update iy.

Merge




ix:

4

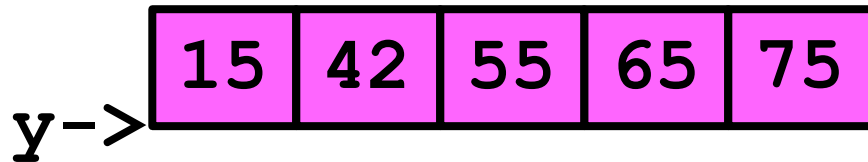


iy:

4

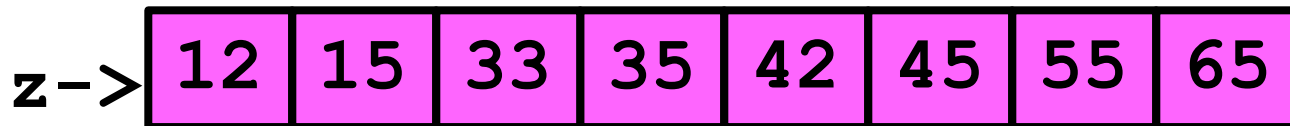


Done with x. Pick from y

Merge




ix:

4

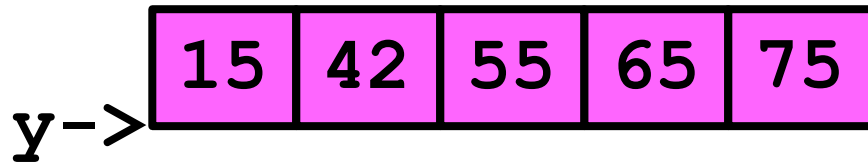


iy:

4

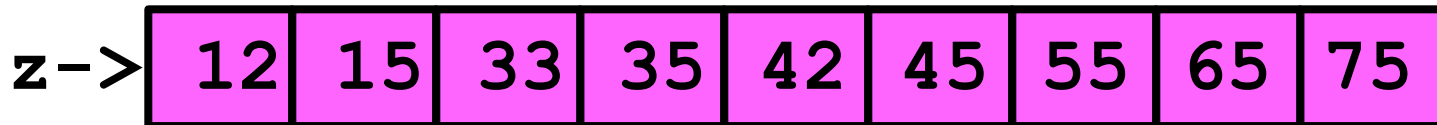


Update iy

Merge




ix:

4

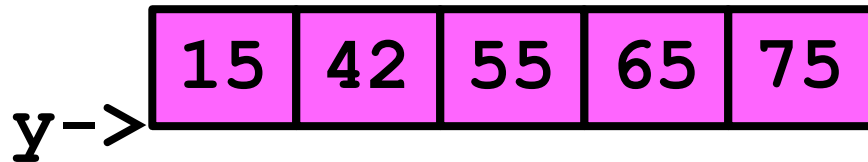

iy:

5

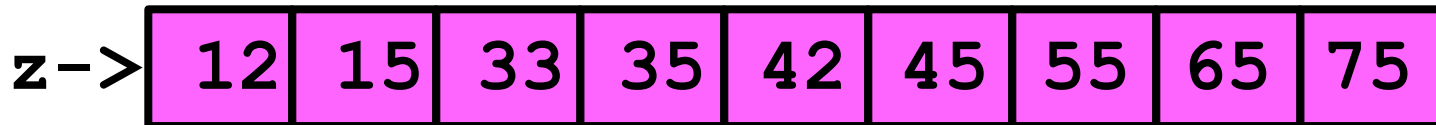

All Done

The Python Implementation...


```

def Merge(x,y):
    n = len(x); m = len(y);
    ix = 0; iy = 0; z = []
    for iz in range(n+m):
        if ix >= n:
            z.append(y[iy]); iy+=1
        elif iy >= m:
            z.append(x[ix]); ix+=1
        elif x[ix] <= y[iy]:
            z.append(x[ix]); ix+=1
        elif x[ix] > y[iy]:
            z.append(y[iy]); iy+=1
    return z

```

Build z up
via repeated
appending

x-list exhausted y-list exhausted x-value smaller y-value smaller

```

def Merge(x,y):
    n = len(x); m = len(y);
    ix = 0; iy = 0; z = []
    for iz in range(n+m):
        if ix >= n:
            z.append(y[iy]); iy+=1
        elif iy >= m:
            z.append(x[ix]); ix+=1
        elif x[ix] <= y[iy]:
            z.append(x[ix]); ix+=1
        elif x[ix] > y[iy]:
            z.append(y[iy]); iy+=1
    return z

```

len(x)+len(y)
is the total length
of the merged list

x-list exhausted y-list exhausted x-value smaller y-value smaller

Implementation Using Pop

```
def Merge (x, y) :  
    u = list(x)  
    v = list(y)  
    z = []  
    while len(u)>0 and len(v)>0 :  
        if u[0]<= v[0]:  
            g = u.pop(0)  
        else:  
            g = v.pop(0)  
        z.append(g)  
    z.extend(u)  
    z.extend(v)  
    return z
```

Make copies of the
Incoming lists

Implementation Using Pop

```
def Merge(x, y):  
    u = list(x)  
    v = list(y)  
    z = []  
    while len(u) > 0 and len(v) > 0 :  
        if u[0] <= v[0]:  
            g = u.pop(0)  
        else:  
            g = v.pop(0)  
        z.append(g)  
    z.extend(u)  
    z.extend(v)  
    return z
```

Build z up via
repeated appending

Implementation Using Pop

```
def Merge(x, y):  
    u = list(x)  
    v = list(y)  
    z = []  
    while len(u)>0 and len(v)>0 :  
        if u[0]<= v[0]:  
            g = u.pop(0)  
        else:  
            g = v.pop(0)  
        z.append(g)  
    z.extend(u)  
    z.extend(v)  
    return z
```

Every “pop” reduces the length by 1. The loop shuts down when one of u or v is exhausted

Implementation Using Pop

```
def Merge(x, y):  
    u = list(x)  
    v = list(y)  
    z = []  
    while len(u) > 0 and len(v) > 0 :  
        if u[0] <= v[0]:  
            g = u.pop(0)  
        else:  
            g = v.pop(0)  
        z.append(g)  
    z.extend(u)  
    z.extend(v)  
    return z
```

g gets the popped value
and it is appended to z

Implementation Using Pop

```
def Merge(x,y):  
    u = list(x)  
    v = list(y)  
    z = []  
    while len(u)>0 and len(v)>0 :  
        if u[0]<= v[0]:  
            g = u.pop(0)  
        else:  
            g = v.pop(0)  
        z.append(g)  
    z.extend(u)  
    z.extend(v)  
    return z
```

Add what is left in u.
OK if u is the empty list

Implementation Using Pop

```
def Merge(x,y):  
    u = list(x)  
    v = list(y)  
    z = []  
    while len(u)>0 and len(v)>0 :  
        if u[0]<= v[0]:  
            g = u.pop(0)  
        else:  
            g = v.pop(0)  
        z.append(g)  
    z.extend(u)  
    z.extend(v)  
    return z
```

Add what is left in v.
OK if v is the empty list

MergeSort

Binary Search is an example of a “divide and conquer” approach to problem solving.

A method for sorting a list that features this strategy is MergeSort

Motivation

You are asked to sort a list but you have two "helpers": H1 and H2.

Idea:

1. Split the list in half and have each helper sort one of the halves.
2. Then merge the two sorted lists into a single larger list.

This idea can be repeated if H1 has two helpers and H2 has two helpers.



Subdivide the Sorting Task

H	E	M	G	B	K	A	Q	F	L	P	D	R	C	J	N
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

H	E	M	G	B	K	A	Q
---	---	---	---	---	---	---	---

F	L	P	D	R	C	J	N
---	---	---	---	---	---	---	---

Subdivide Again



And Again

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

H	E	M	G
---	---	---	---

B	K	A	Q
---	---	---	---

F	L	P	D
---	---	---	---

R	C	J	N
---	---	---	---

H	E
---	---

M	G
---	---

B	K
---	---

A	Q
---	---

F	L
---	---

P	D
---	---

R	C
---	---

J	N
---	---

And One Last Time

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

H	E	M	G	B	K	A	Q	F	L	P	D	R	C	J	N
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Now Merge



E H

G M

B K

A Q

F L

D P

C R

J N

H E

M G

B K

A Q






F L

P D

R C

J N

And Merge Again



And Again

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

A	B	E	G	H	K	M	Q
---	---	---	---	---	---	---	---

C	D	F	J	L	N	P	R
---	---	---	---	---	---	---	---

E	G	H	M
---	---	---	---

A	B	K	Q
---	---	---	---

D	F	L	P
---	---	---	---

C	J	N	R
---	---	---	---

And One Last Time

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

A	B	E	G	H	K	M	Q
---	---	---	---	---	---	---	---

C	D	F	J	L	N	P	R
---	---	---	---	---	---	---	---

Done!

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---












Done!

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Let's write a function to do this making use of

```
def Merge(x,y):  
    """ Returns a float list that is the  
    merge of sorted lists x and y.  
  
    PreC: x and y are lists of floats  
    that are sorted from small to big.  
    """
```

8 Merges Producing length-2 lists



Handcoding the $n = 16$ case

A0 = Merge(a[0], a[1])

A1 = Merge(a[2], a[3])

A2 = Merge(a[4], a[5])

A3 = Merge(a[6], a[7])



A4 = Merge(a[8], a[9])

A5 = Merge(a[10], a[11])

A6 = Merge(a[12], a[13])

A7 = Merge(a[14], a[15])

4 Merges Producing Length-4 lists



Handcoding the $n = 16$ case




B0 = Merge (A0 , A1)

B1 = Merge (A2 , A3)

B2 = Merge (A4 , A5)

B3 = Merge (A6 , A7)

2 Merges Producing Length-8 Lists



Handcoding the $n = 16$ case

```
C0 = Merge (B0 , B1)
```

```
C1 = Merge (B2 , B3)
```

1 Merge Producing a Length-16 List

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

A	B	E	G	H	K	M	Q
---	---	---	---	---	---	---	---



C	D	F	J	L	N	P	R
---	---	---	---	---	---	---	---

All Done!

$$D0 = \text{Merge}(C0, C1)$$

For general n , it can be handled using recursion.

Recursive Merge Sort

```
def MergeSort(a):  
    n = length(a)  
    if n==1:  
        return a  
    else:  
        m = n/2  
        u0 = list(a[:m])  
        u1 = list(a[m:])  
        y0 = MergeSort(u0)  
        y1 = MergeSort(u1)  
        return Merge(y0,y1)
```

A function
can call
itself!



Back To Merge Sort


Recursive Merge Sort

```
def MergeSort(a):  
    n = length(a)  
    if n==1:  
        return a  
    else:  
        m = n/2  
        u0 = list(a[:m])  
        u1 = list(a[m:])  
        y0 = MergeSort(u0)  
        y1 = MergeSort(u1)  
        return Merge(y0,y1)
```

A function
can call
itself!




A Schematic

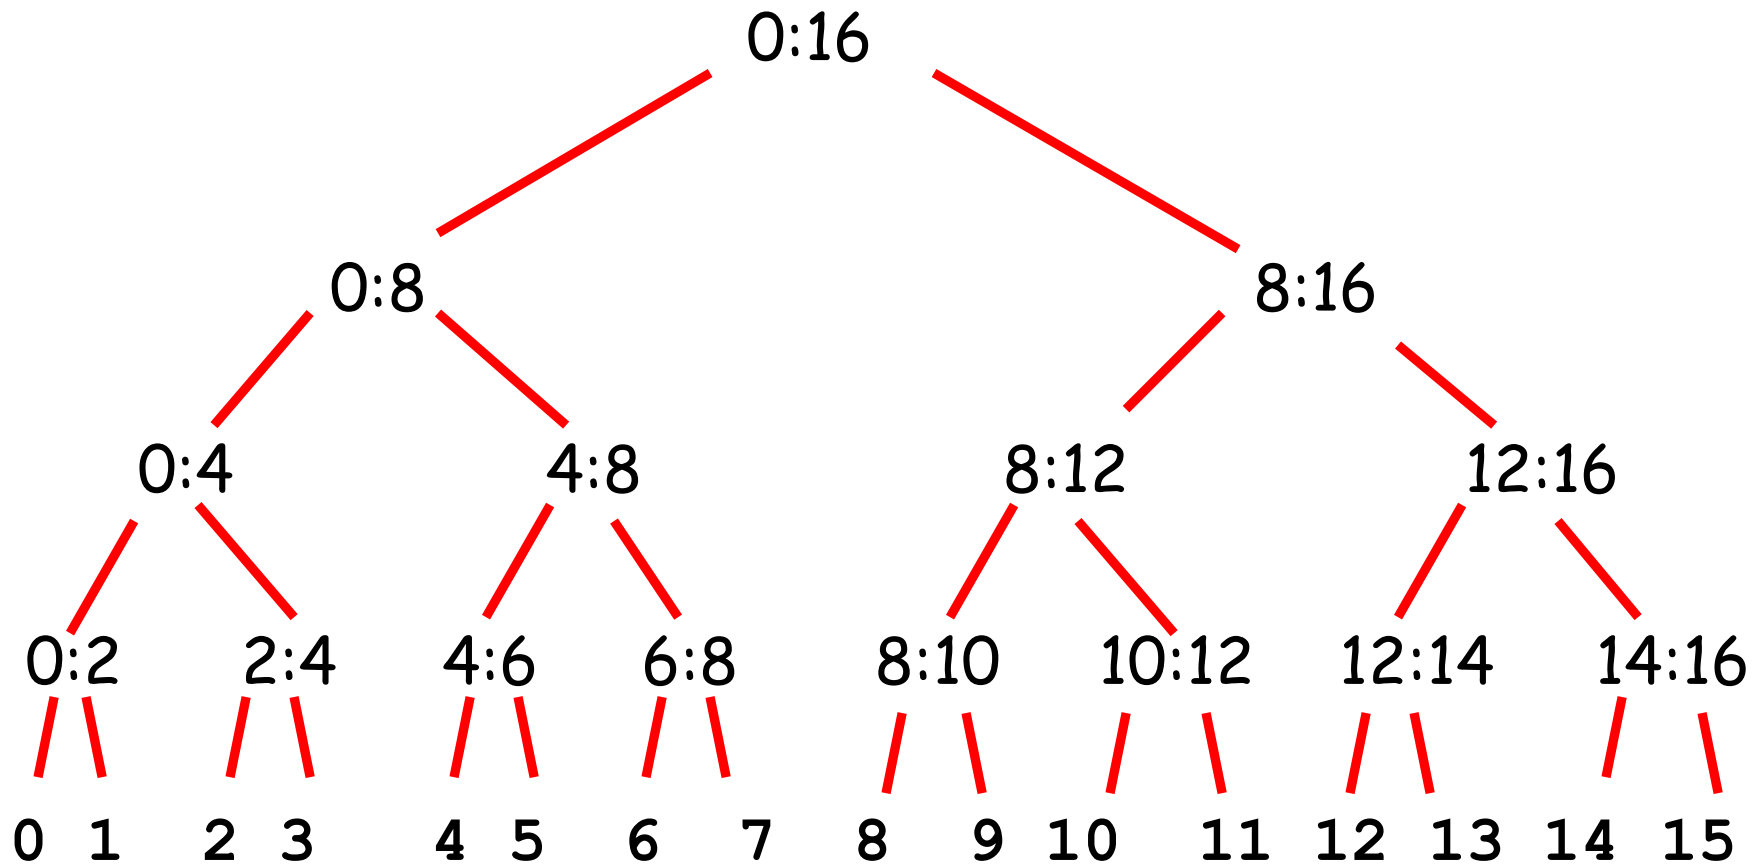


A Sorted List is produced at each ":" Let's look at the order in which Lists are sorted

A Schematic

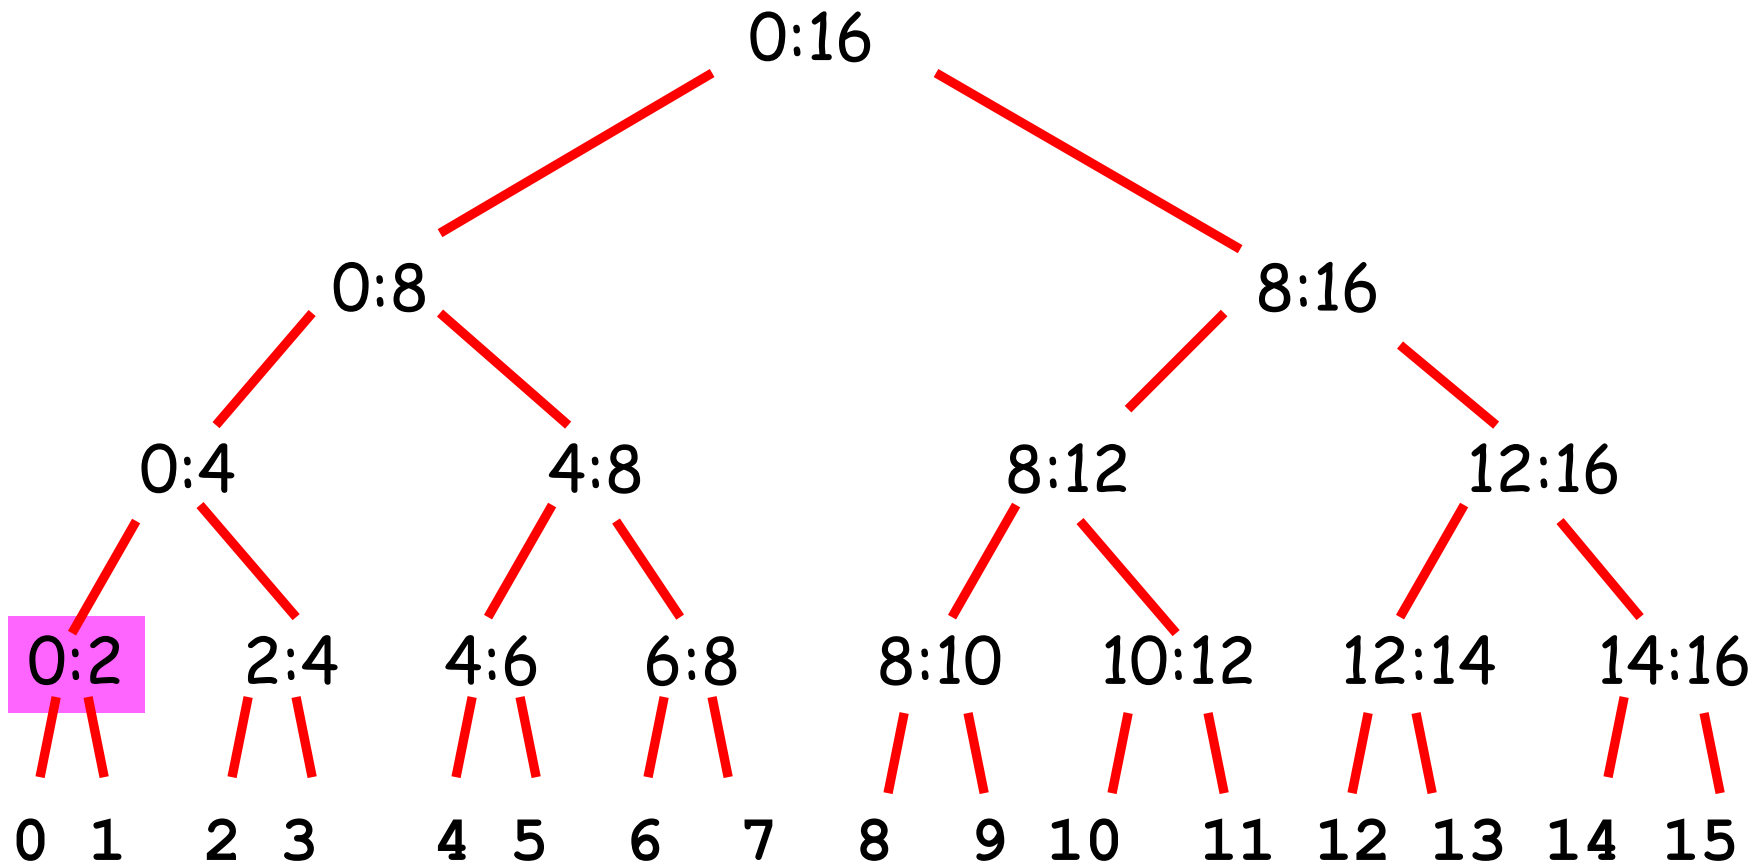


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

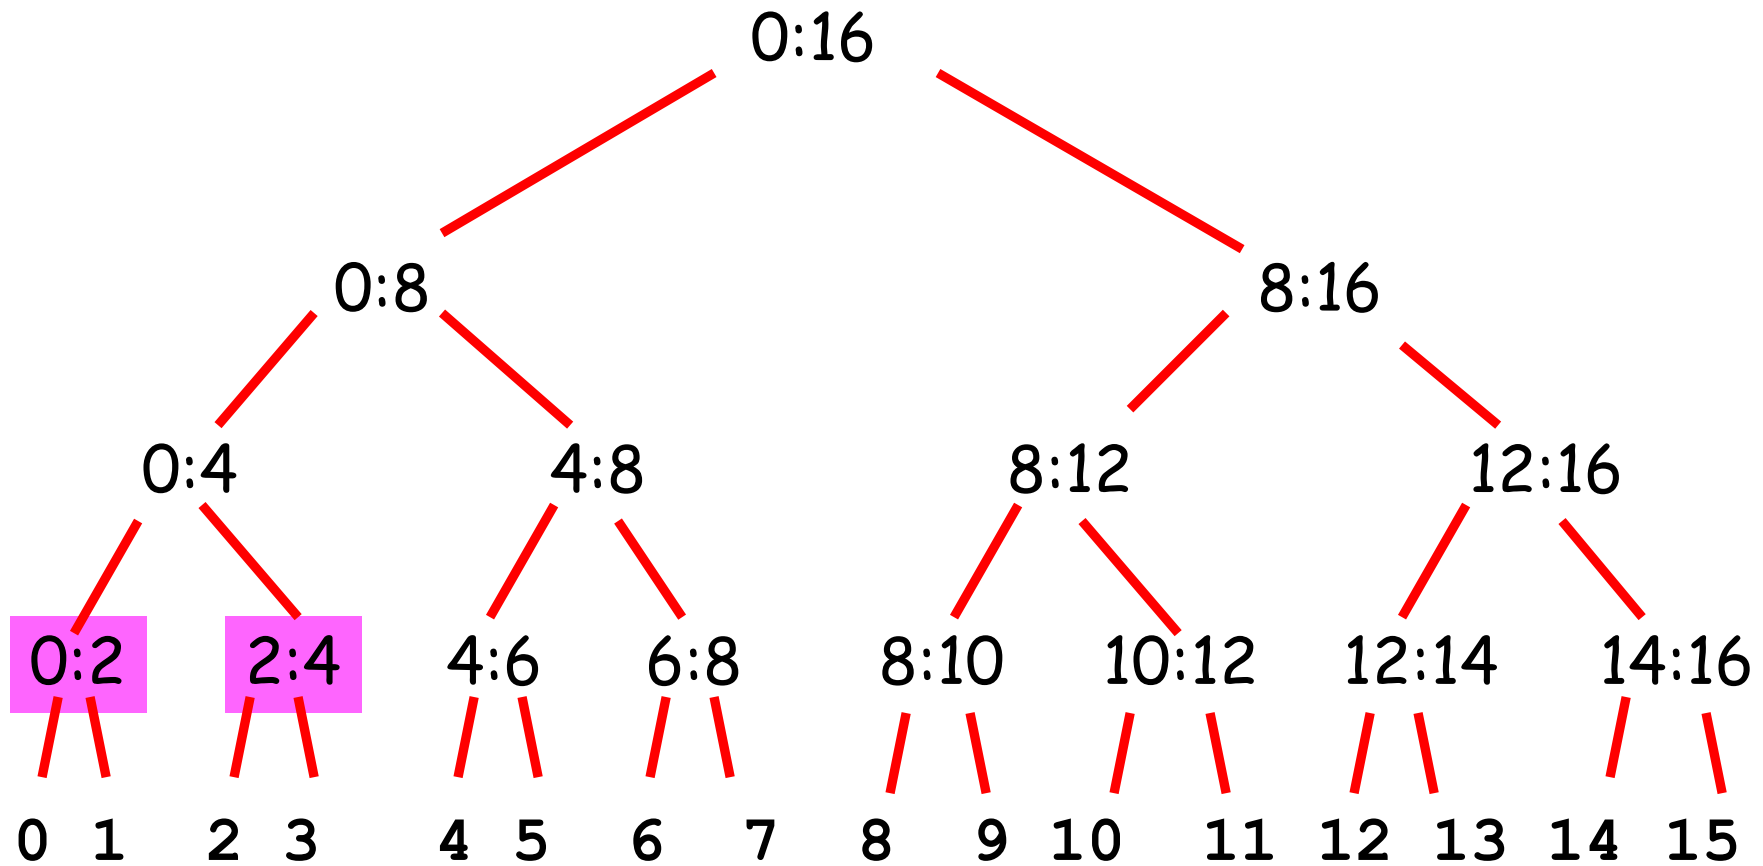


A Sorted List is produced at each ":" Let's look at the order in which

A Schematic

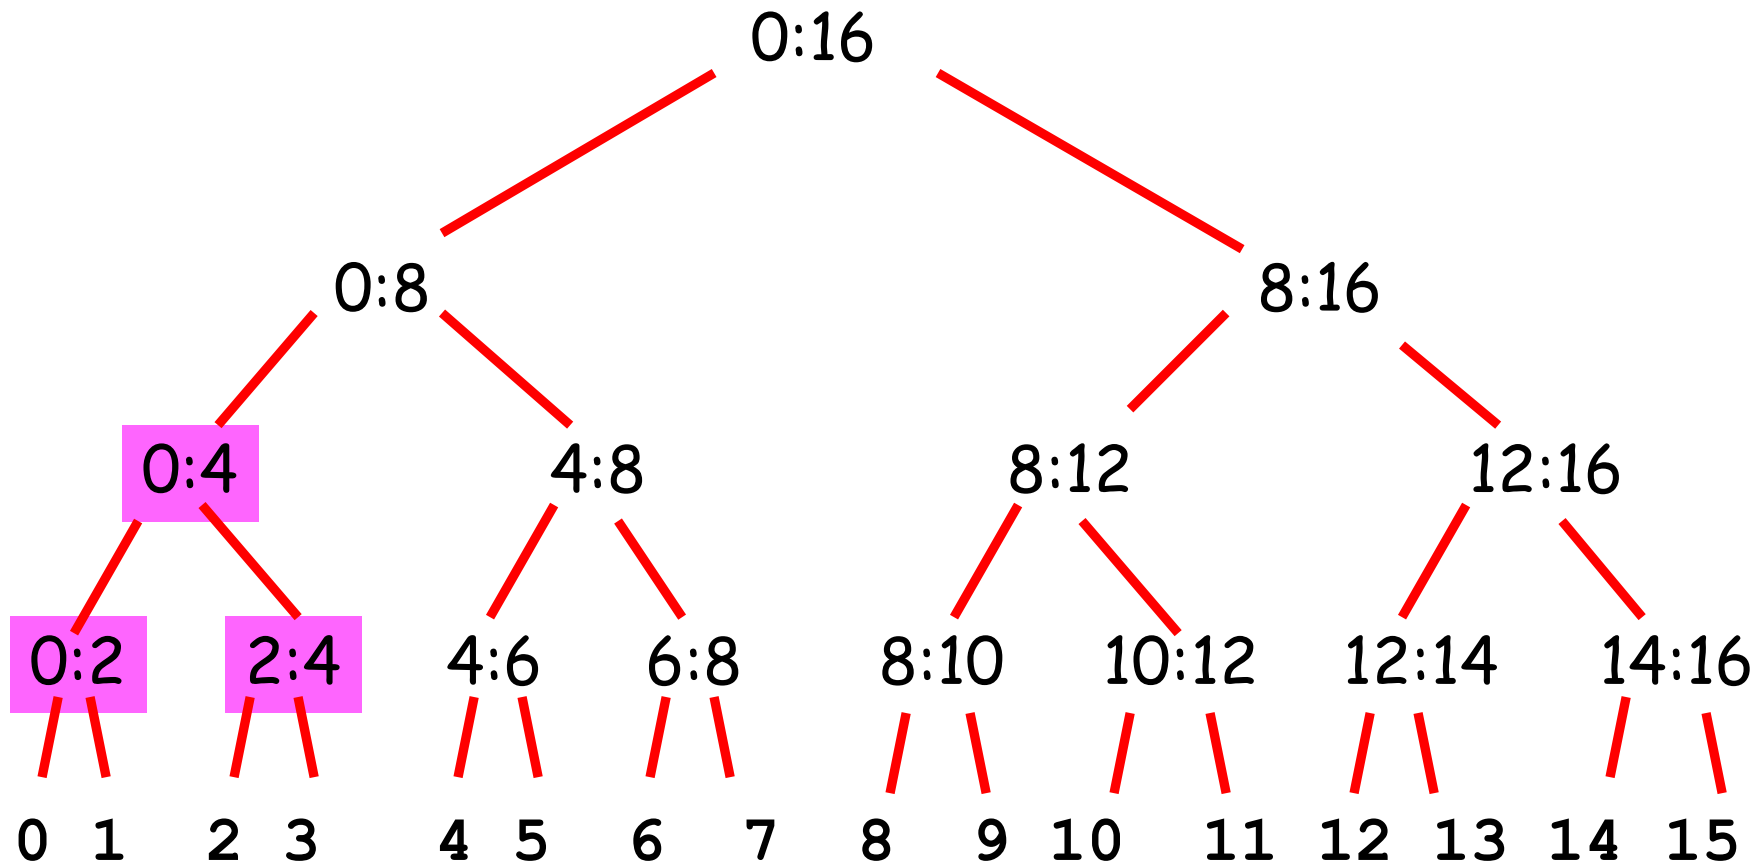


A Sorted List is produced at each ":" Let's look at the order in which

A Schematic

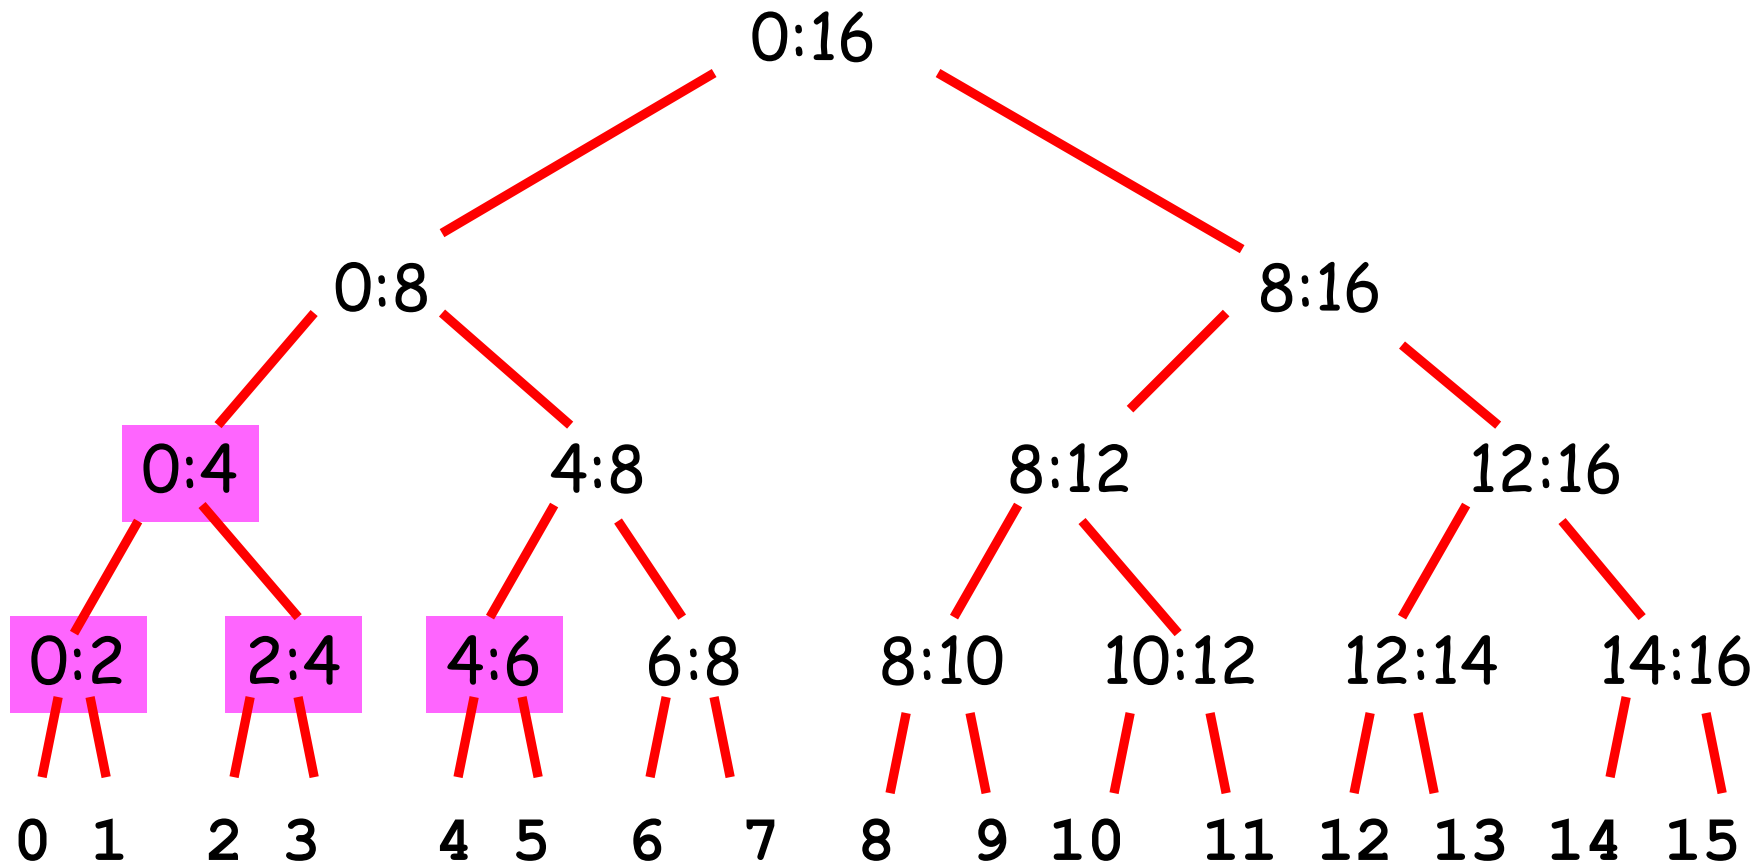


A Sorted List is produced at each ":" Let's look at the order in which

A Schematic

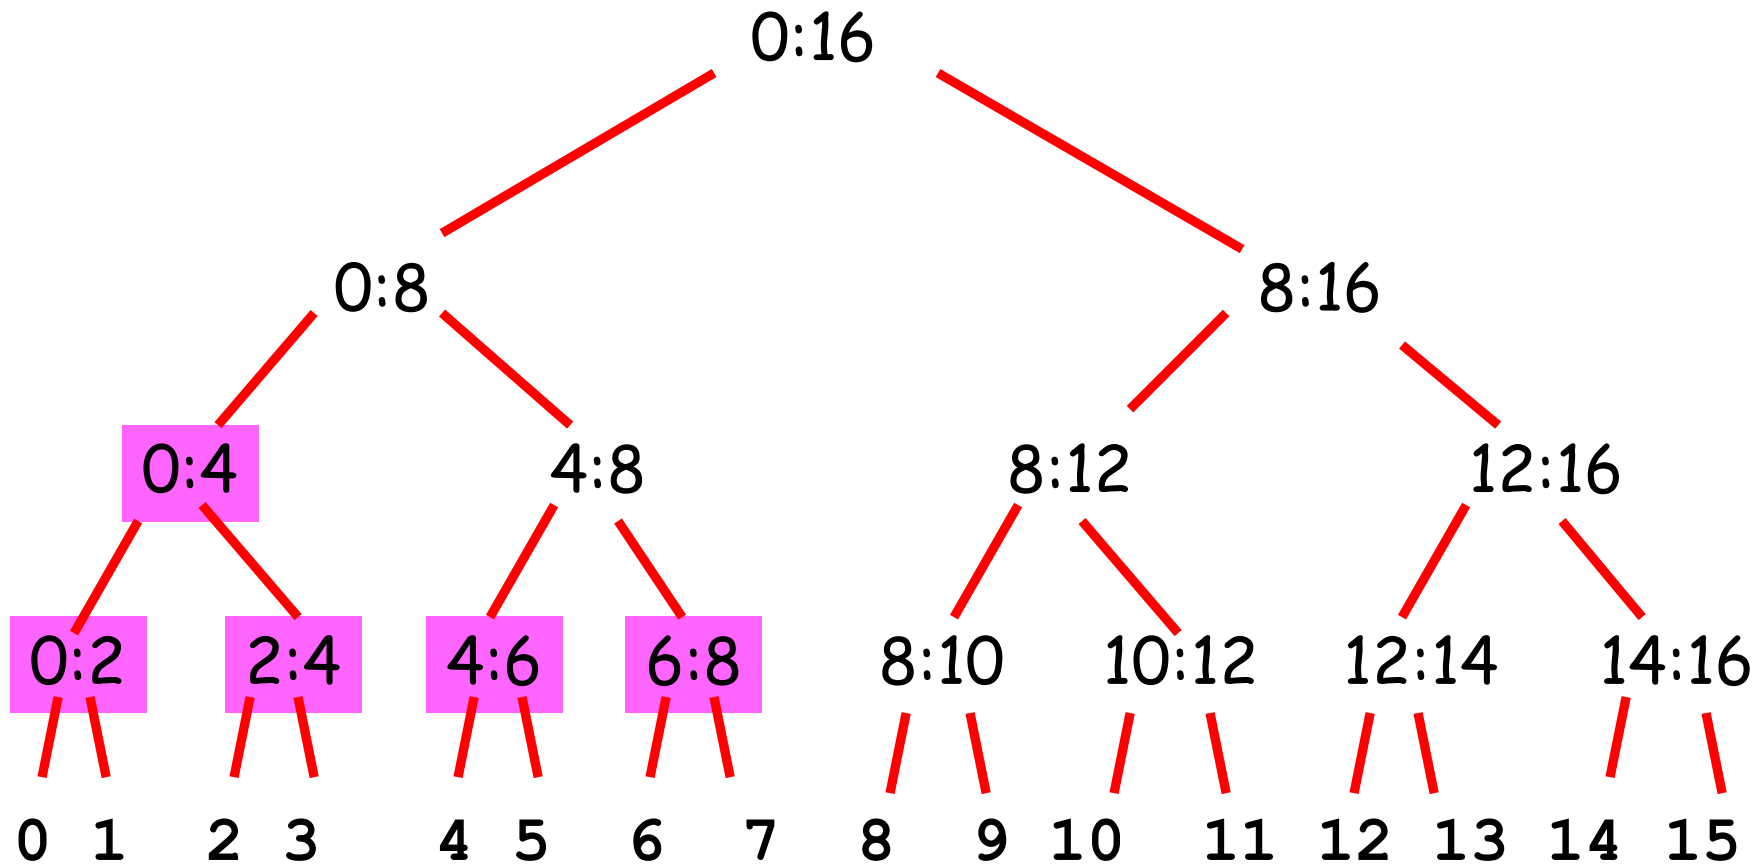


A Sorted List is produced at each ":" Let's look at the order in which

A Schematic

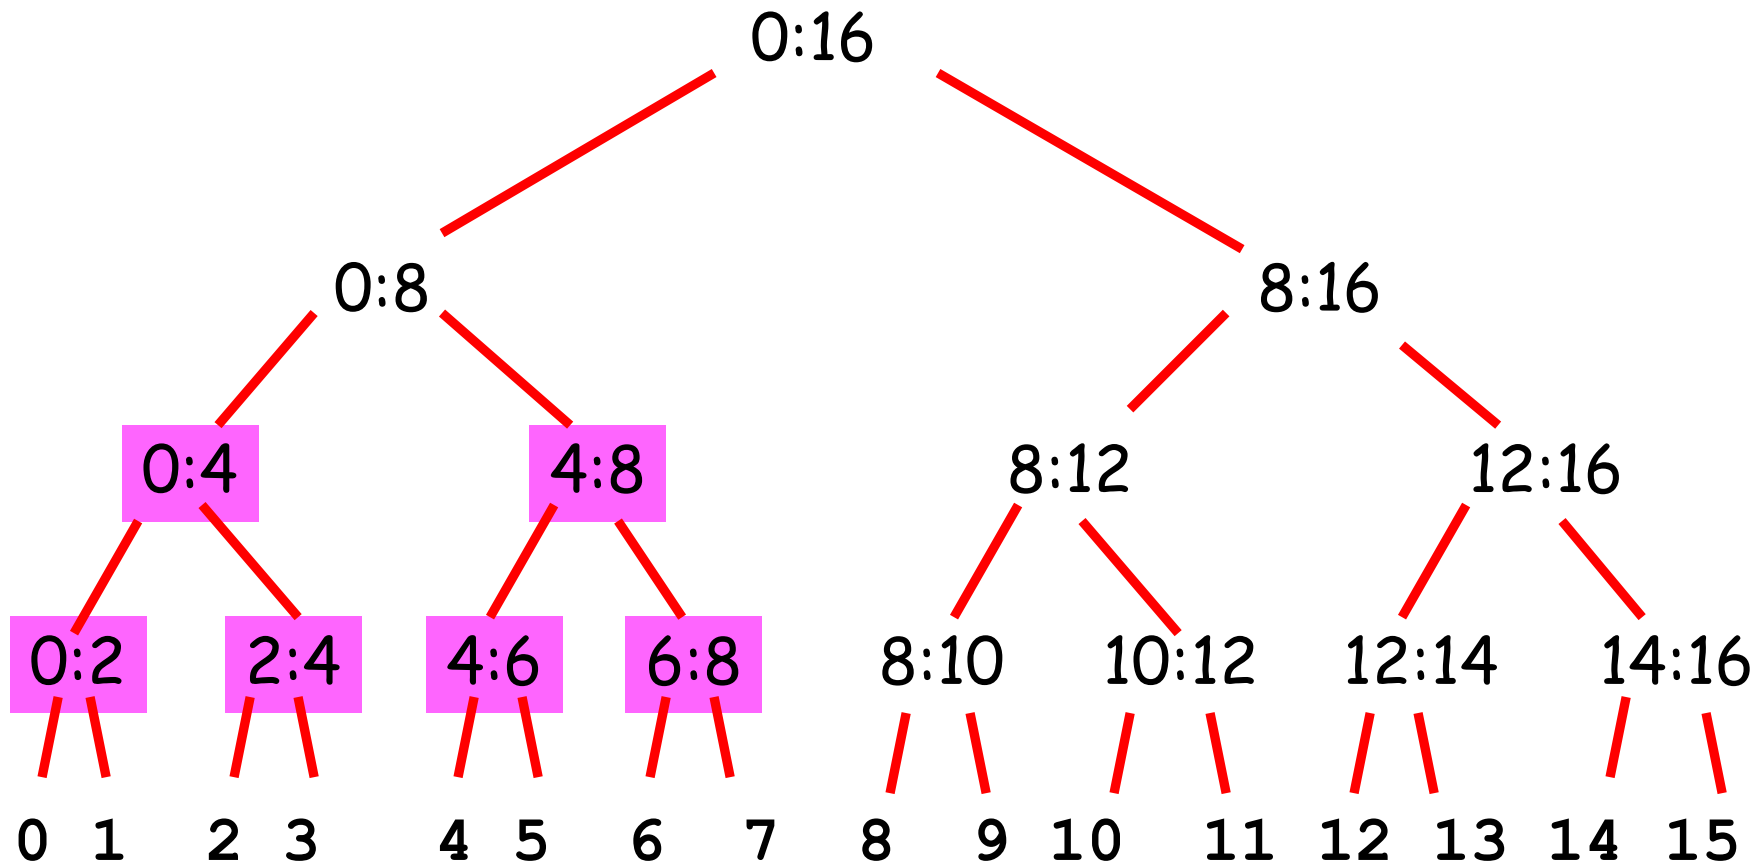


A Sorted List is produced at each ":" Let's look at the order in which

A Schematic

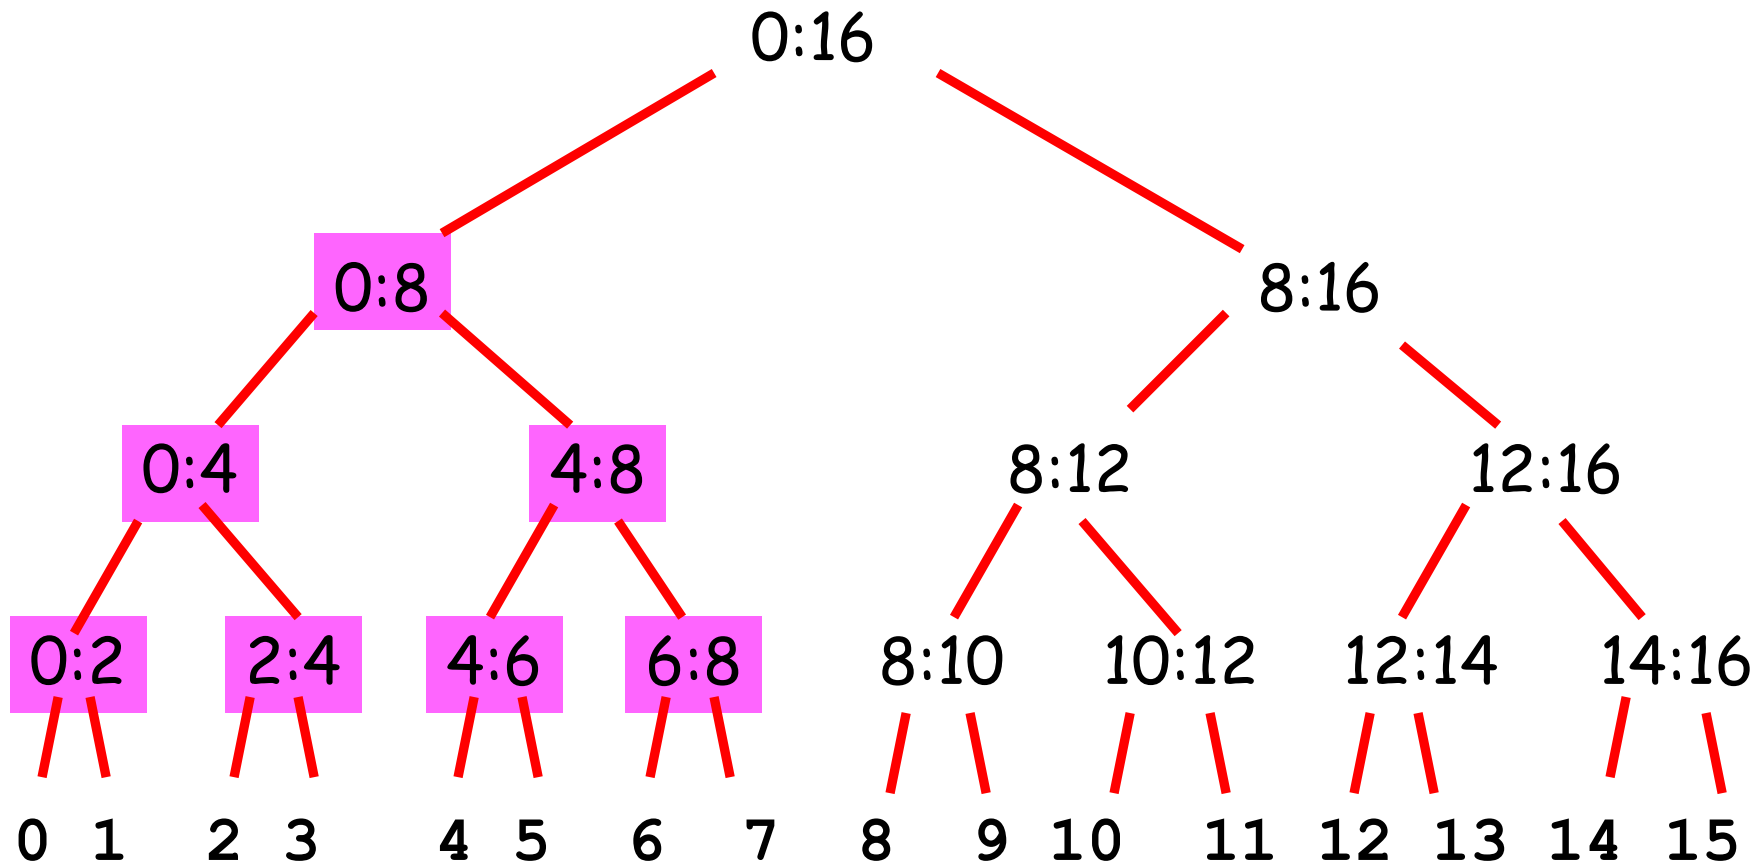


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

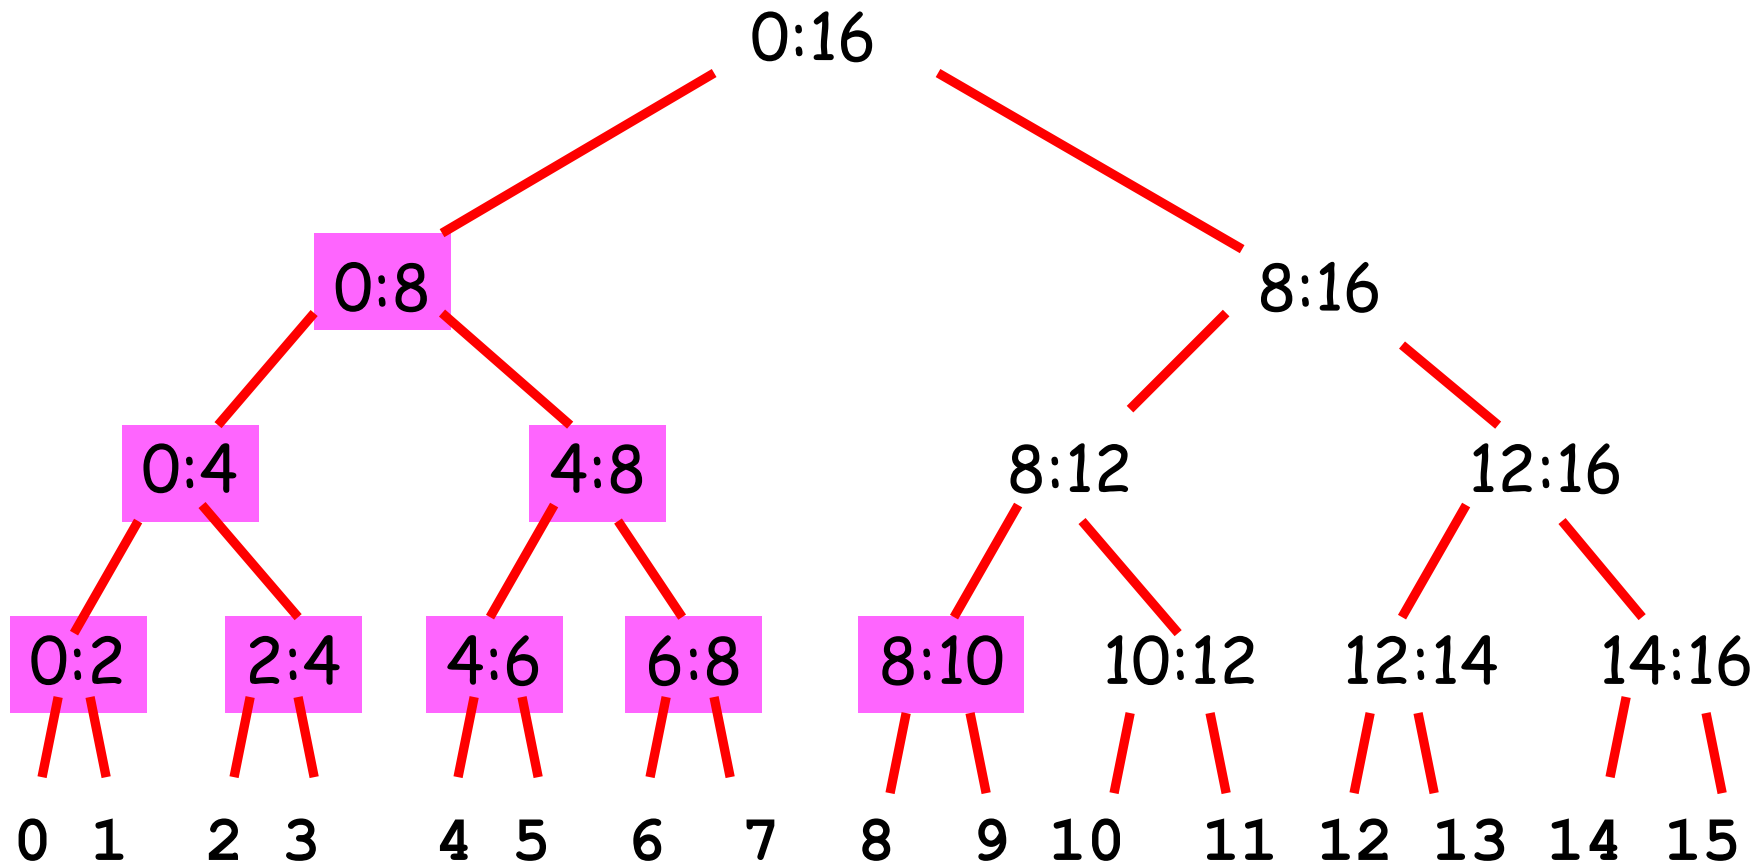


A Sorted List is produced at each ":" Let's look at the order in which

A Schematic

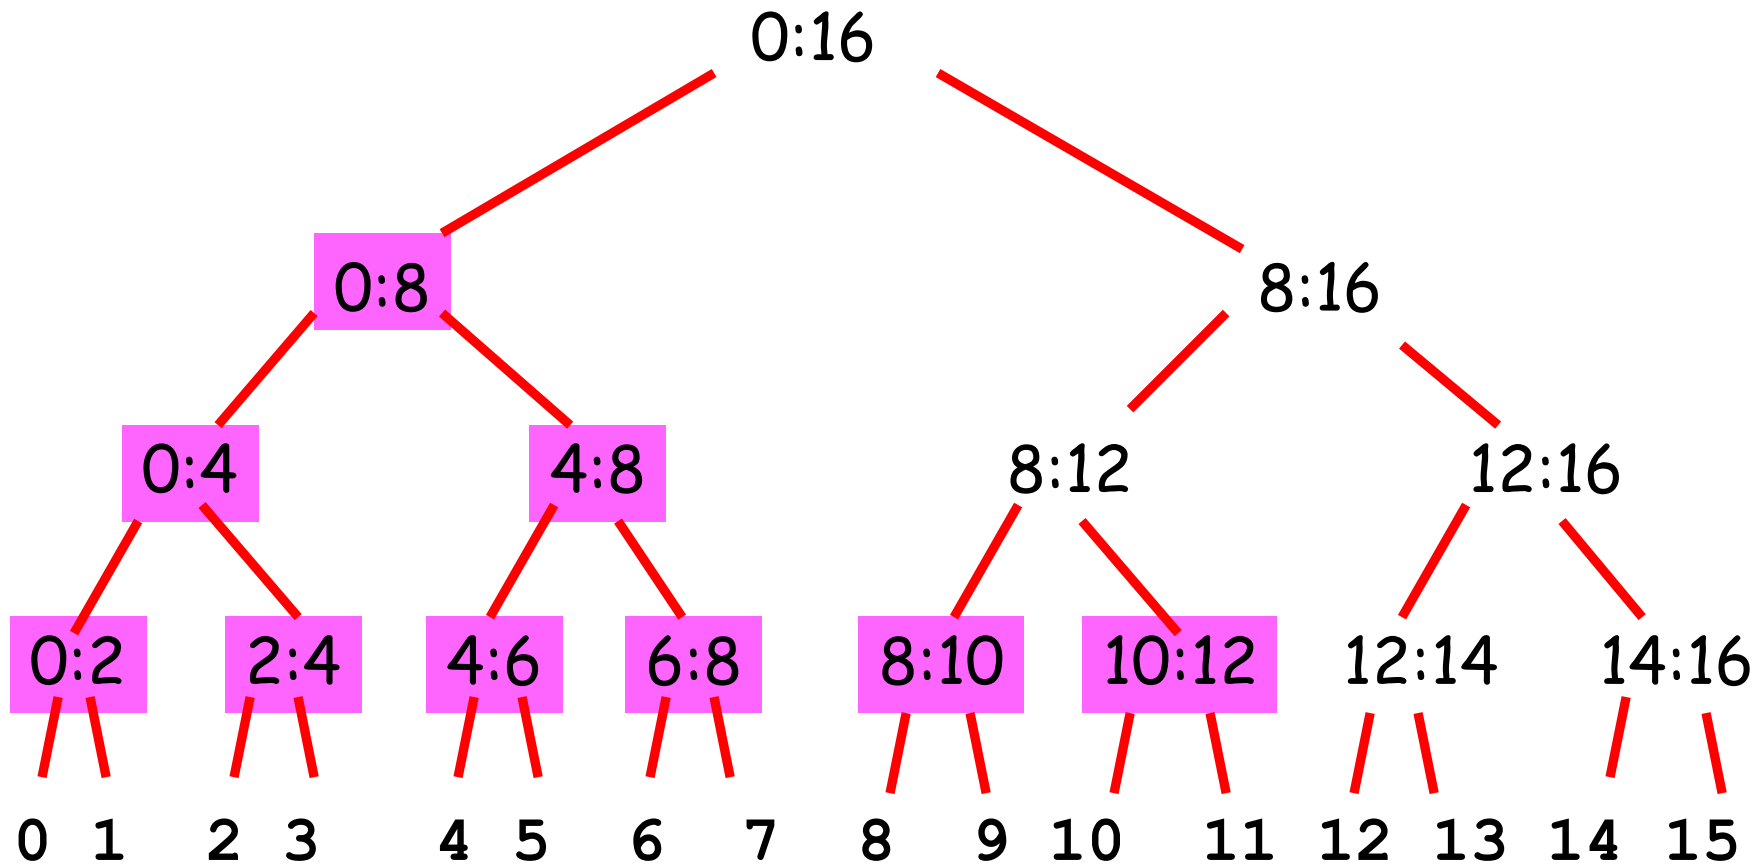


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

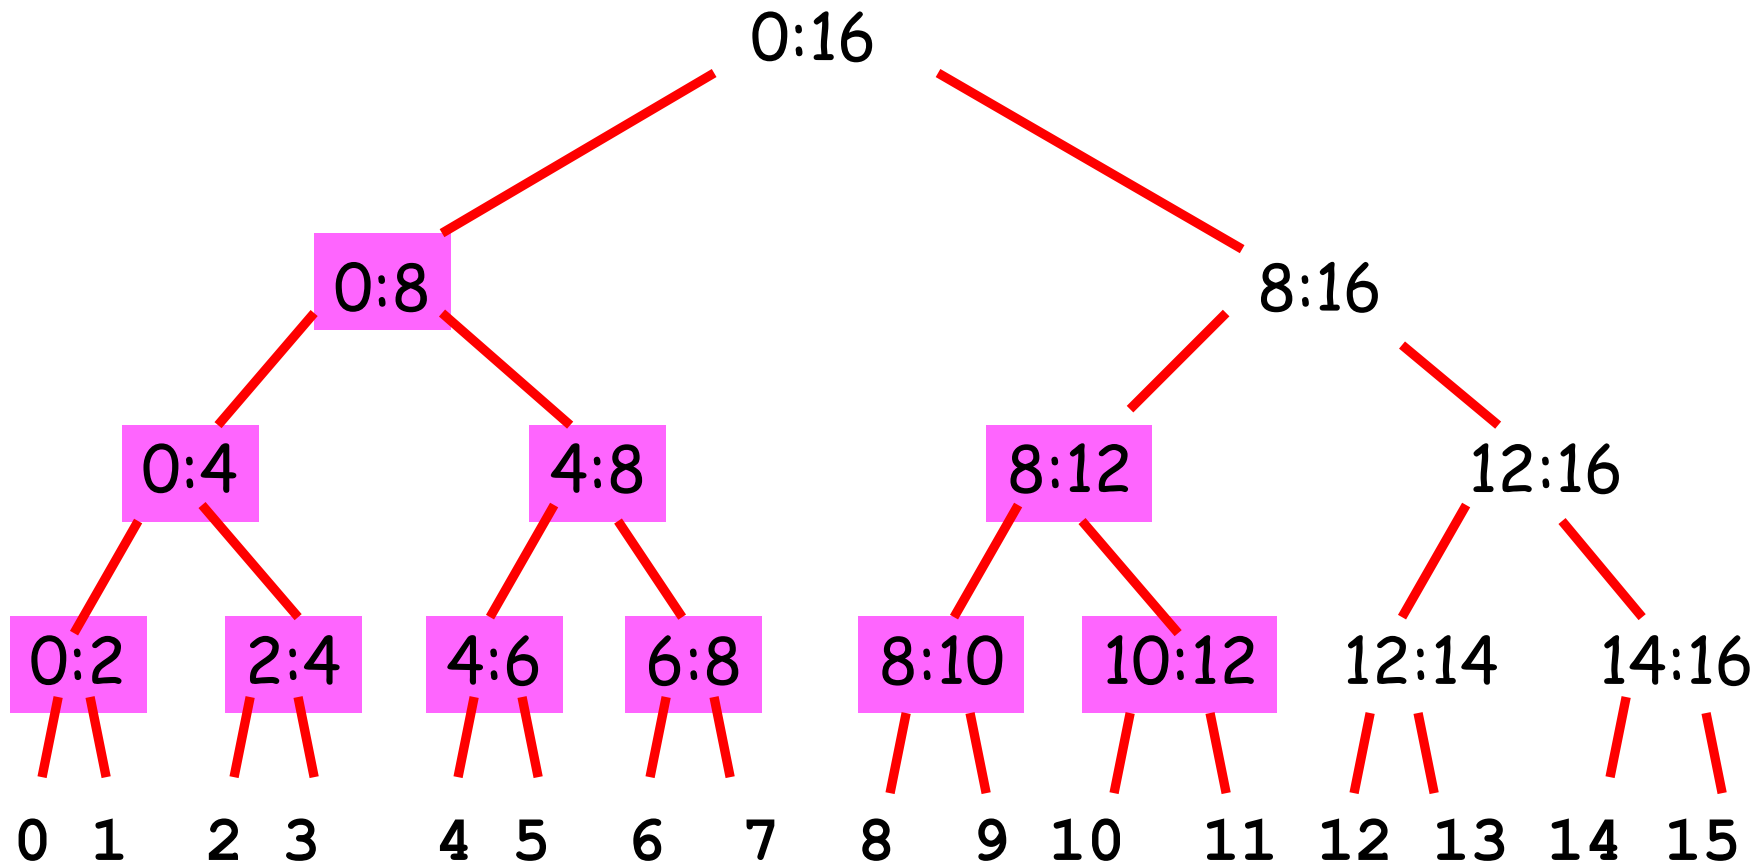


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

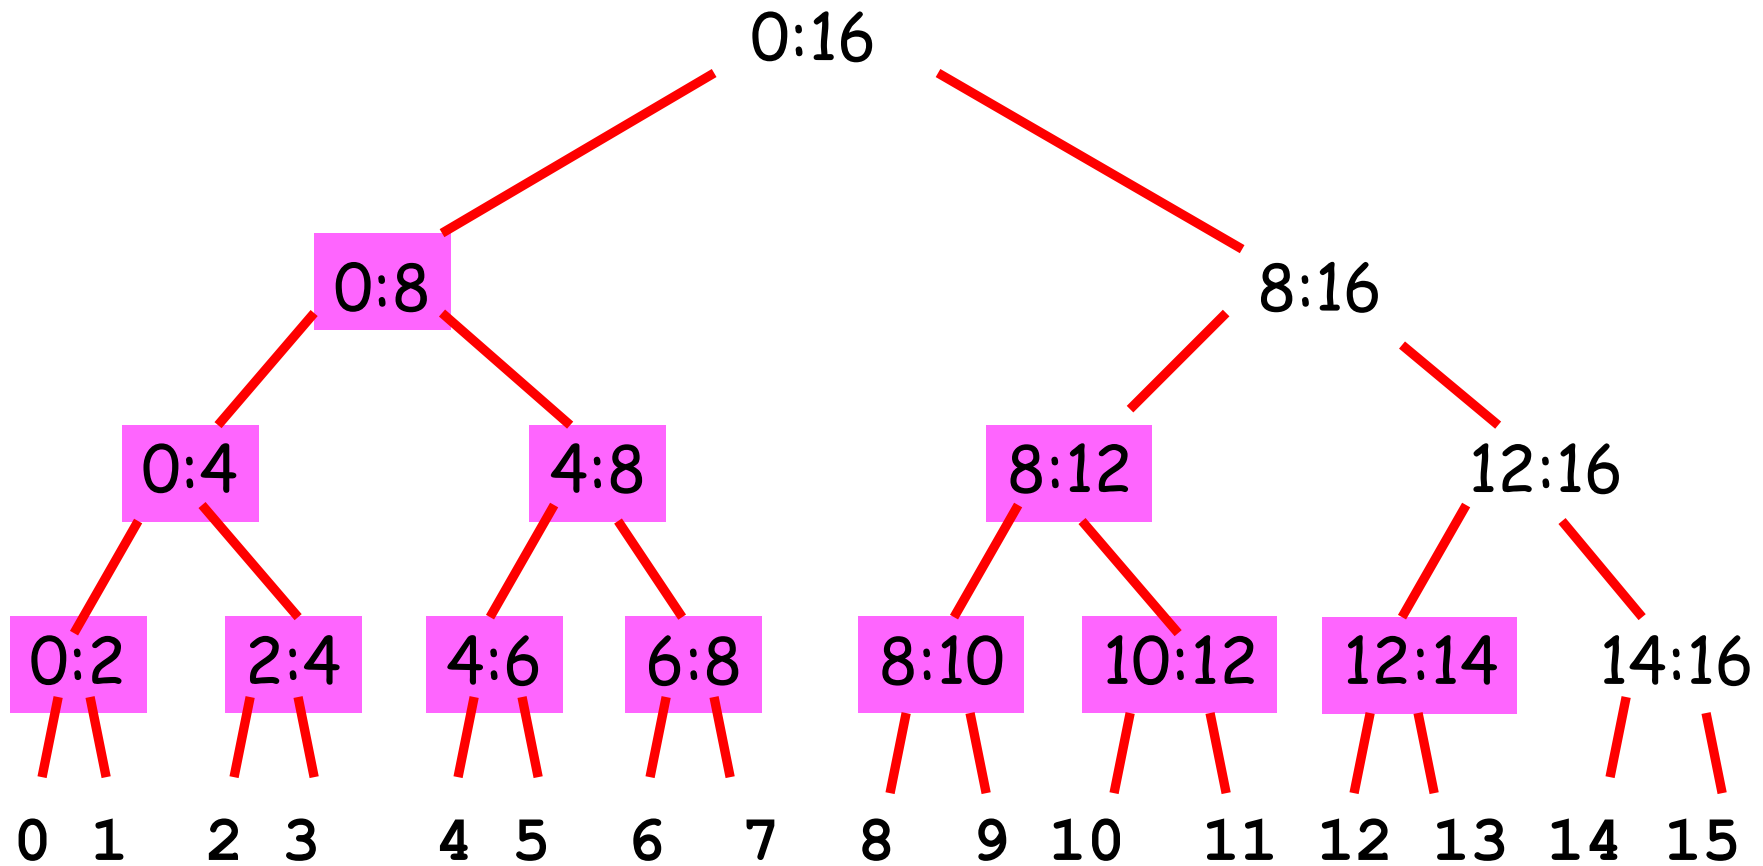


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

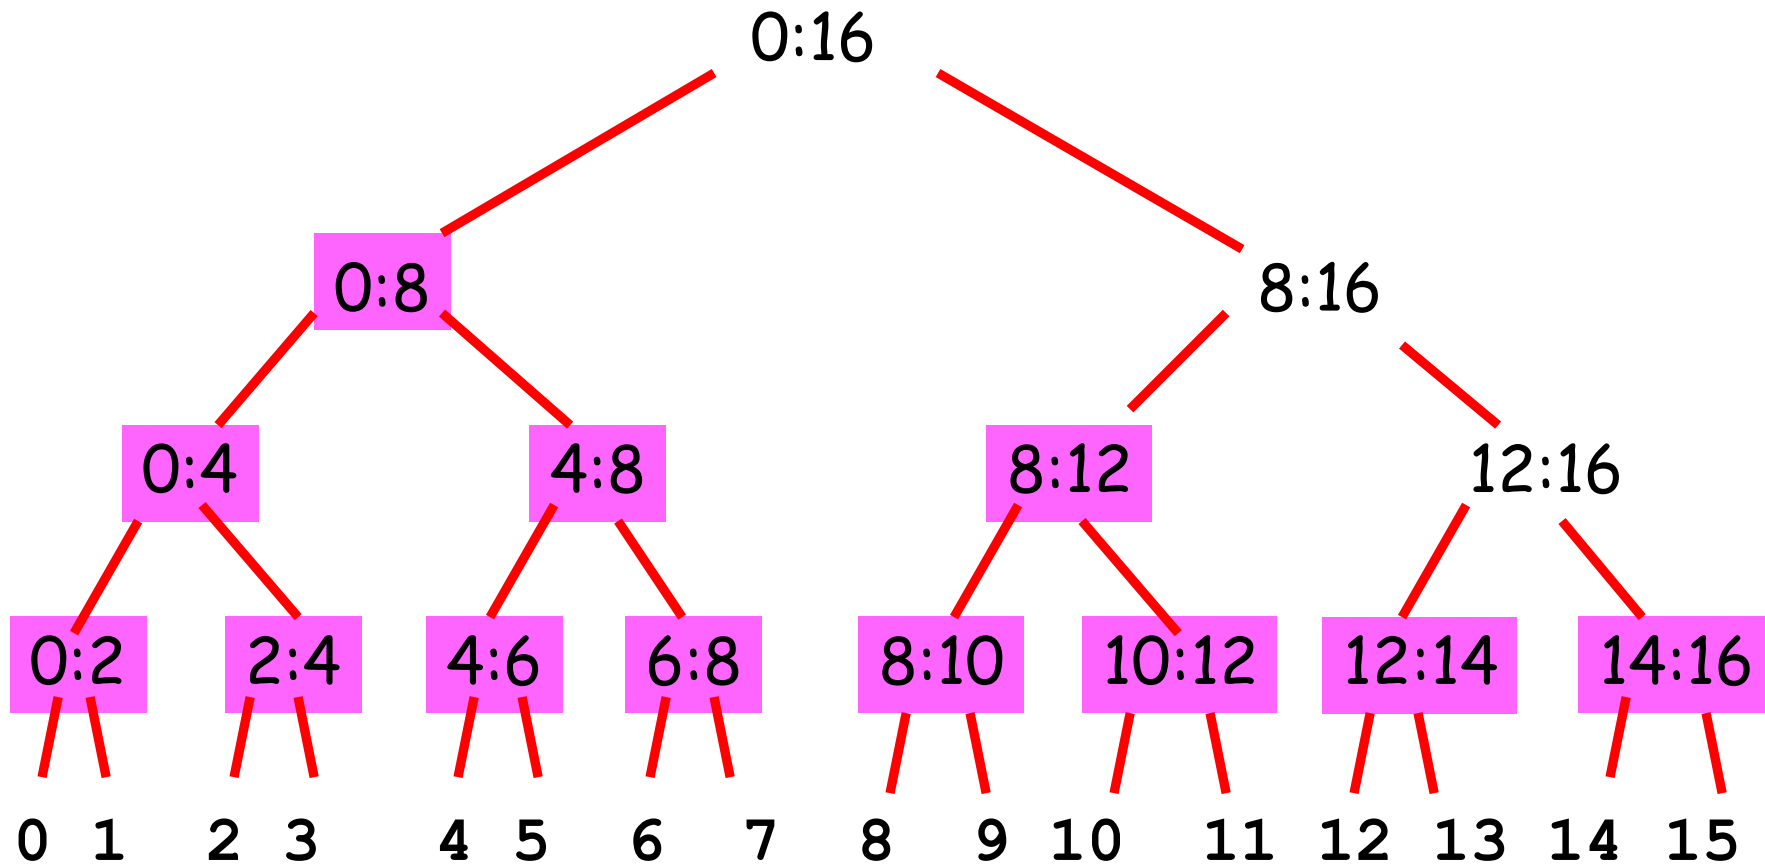


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

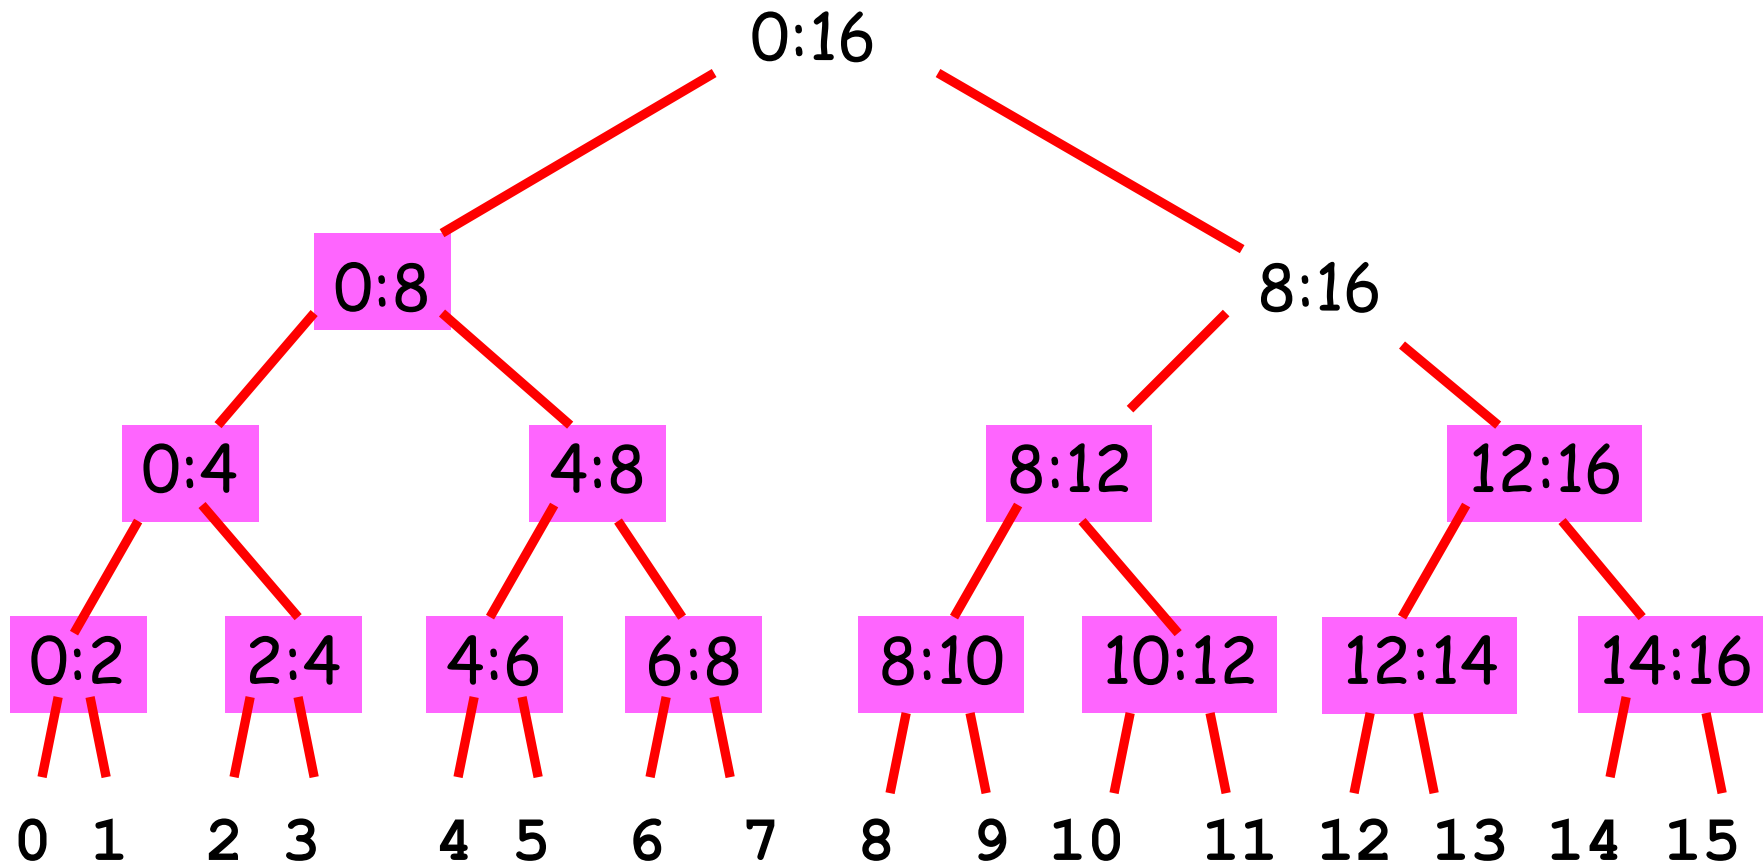


A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

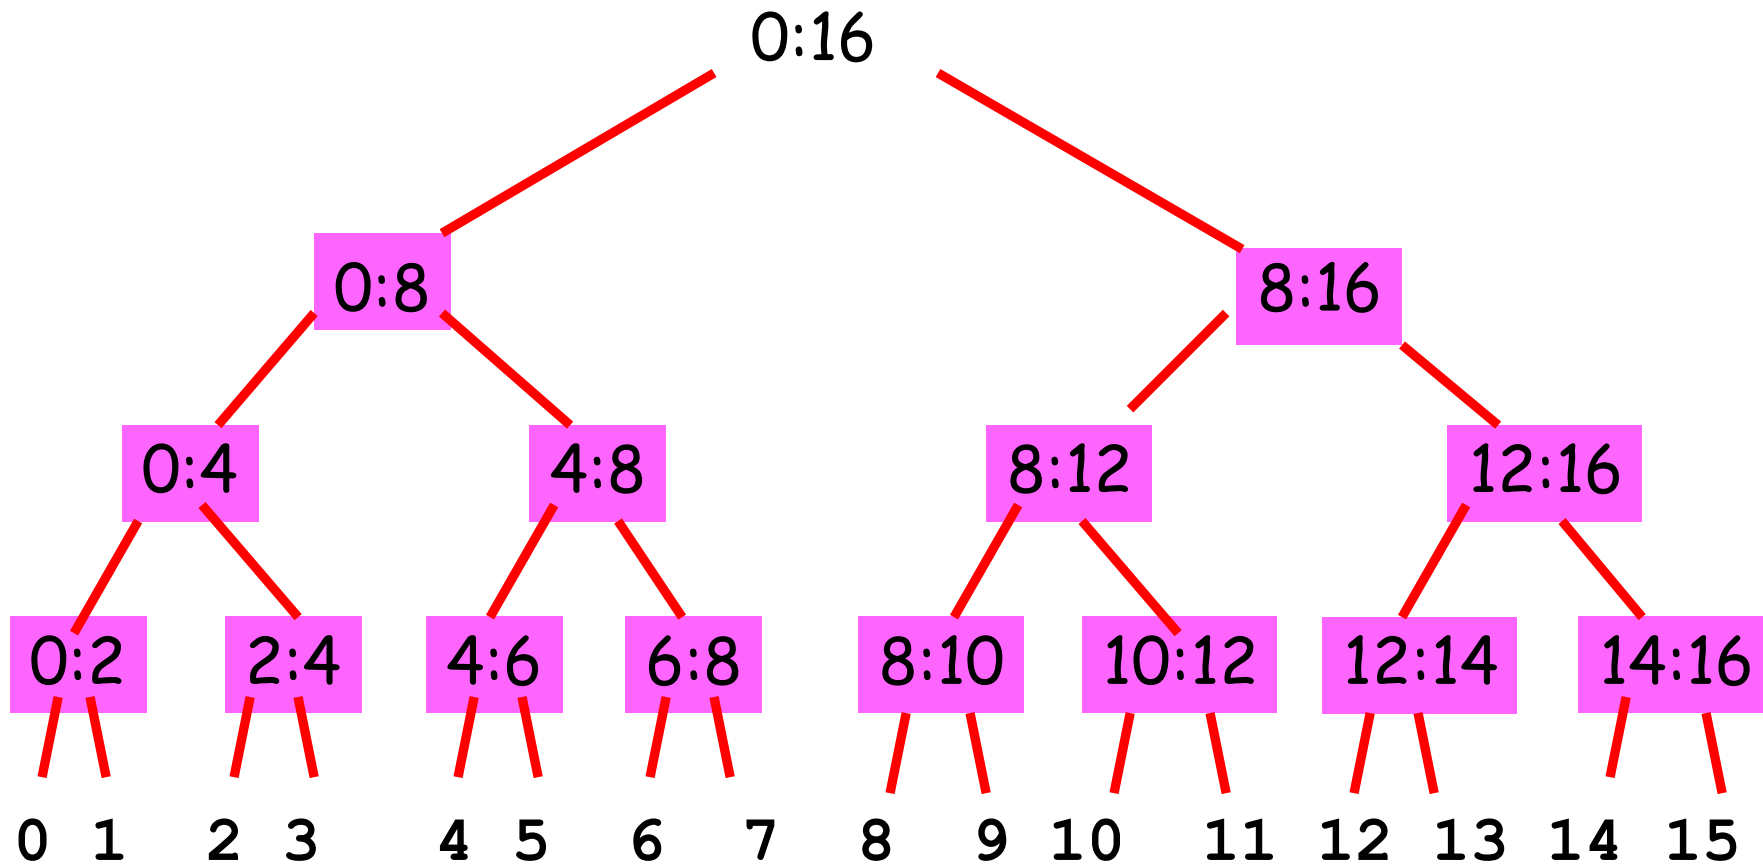

A Sorted List is produced at each ":" Let's look at the order in which lists are sorted.

A Schematic

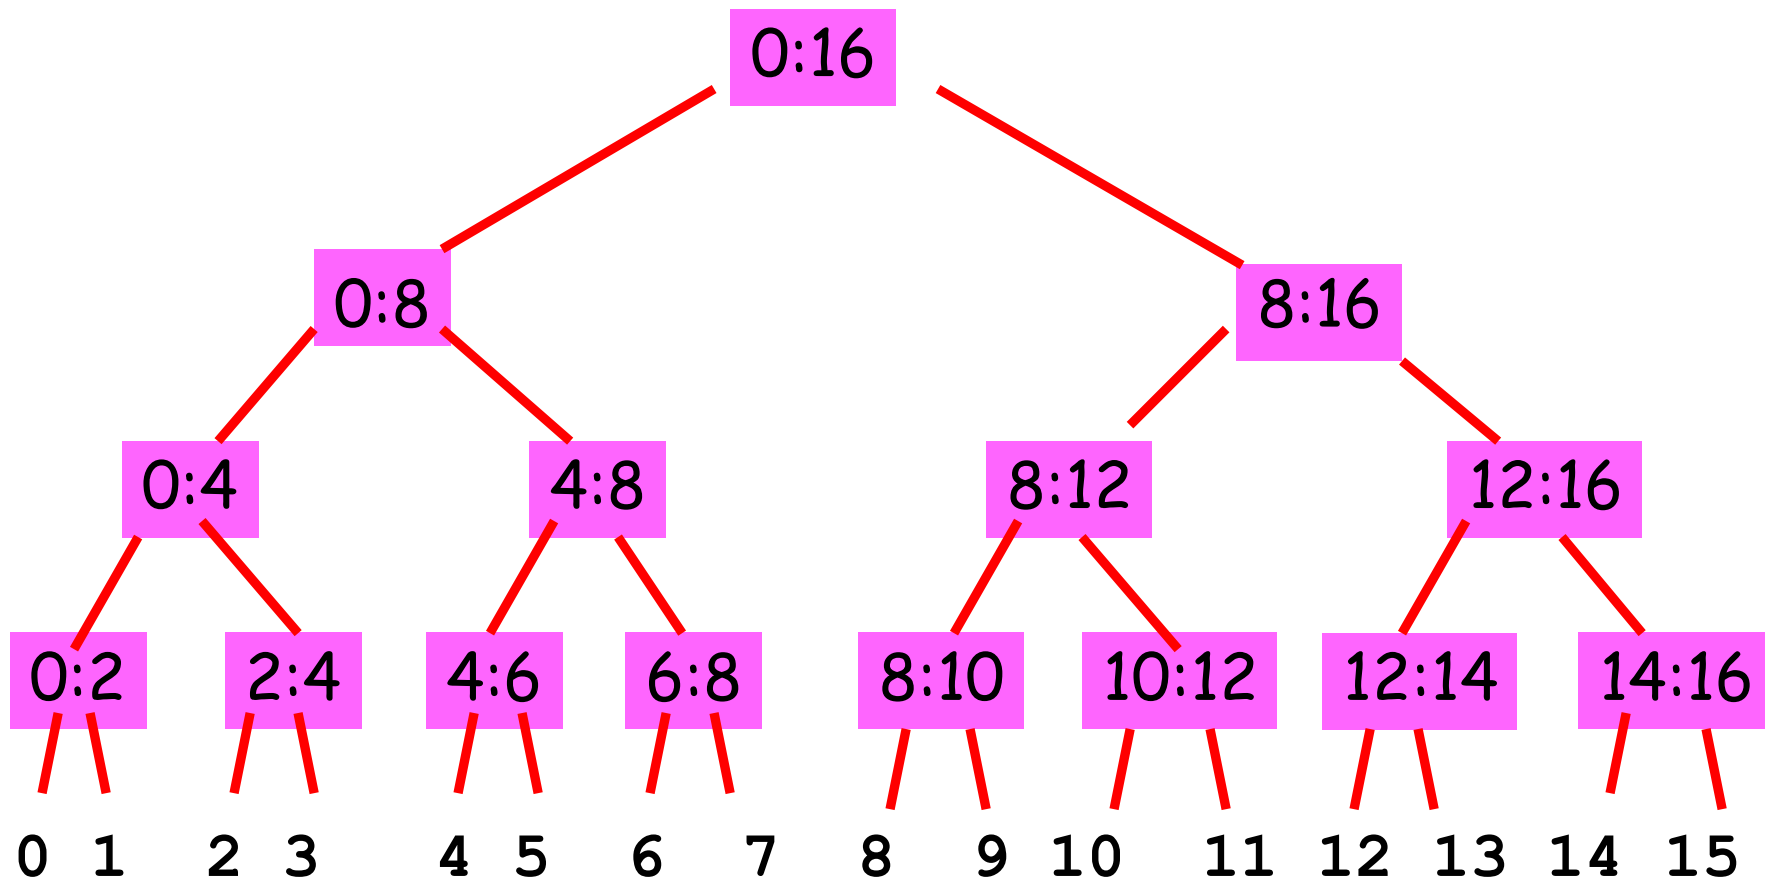

All Done!

Some Conclusions

Infinite recursion (like infinite loops) can happen so careful reasoning is required.

Will we reach the "base case"?

In **MergeSort**, a recursive call always involves a list that is shorter than the input list. So eventually we reach the $\text{len}(a) == 1$ base case.

Demonstration!

- Download and run the python script `ShowMergeSort.py`
- TODO:
 - Do you think the code in `ShowMergeSort.py` can also sort character strings?
 - Include the following list in the script and sort it using the MergeSort function
 - `words = ["orange", "apple", "Marcus", "Caiden", "Brandon", "Zachary", "Andrew", "Cameron", "Aileen", "Tiffany"]`
 - What output do you get? Do you get an error message?