

18. Introduction to Classes

Topics:

- Class Definitions

- Constructors

- Example: The class `Point`

- Functions that work with `Point` Objects

- Defining methods


What a Simple Class Definition Looks Like

```
class Point(object):  
    """  
    Attributes:  
        x: float, the x-coordinate of a point  
        y: float, the y-coordinate of a point  
    """  
    def __init__(self,x,y):  
        self.x = x  
        self.y = y
```

A class can be used to “package” related data.

One Reason for classes: They Elevate the Level Thinking


```
>>> P = Point(2,1)
>>> Q = Point(6,4)
>>> d = P.Dist(Q)
>>> print d
5
```

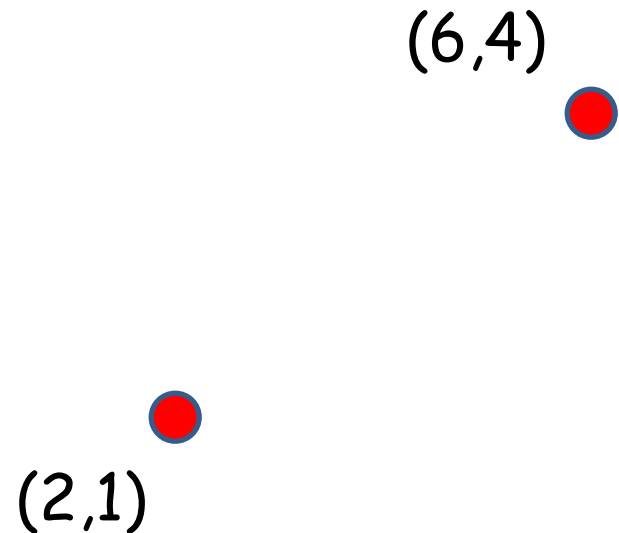

Here, `Dist` is a method and `P.Dist(Q)` says "compute and return the distance from point P to point Q."

One Reason for classes: They Elevate the Level Thinking

```
>>> P = Point(2,1)
>>> Q = Point(6,4)
>>> d = P.Dist(Q)
>>> print d
5
```

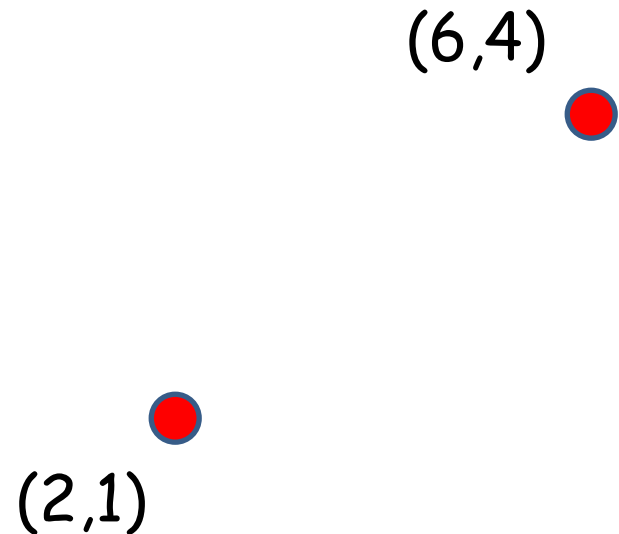

By having a `Point` class we can think at the "point level" instead of at the "xy level"

Classes and Types

Recall that a type is a set of values and operations that can be performed on those values.

The four basic “built-in” types:

`int, float, str, bool`

Classes are a way to define new types.

Examples

By suitably defining a rectangle class, we could say something like

```
if R1.intersect(R2):  
    print 'Rectangles R1 and R2 intersect'
```

Examples

By suitably defining a polynomial class, we could perform operations like

$$p = q + r$$

where q and r are polynomials that are added together to produce a polynomial p

How to Define a Class

A Point Class

```
class Point(object):  
    """  
    Attributes:  
        x: float, the x-coordinate of a point  
        y: float, the y-coordinate of a point  
    """  
    def __init__(self,x,y):  
        self.x = x  
        self.y = y
```

A class provides a "blue print" for packaging data.
The data is stored in the attributes.

A Point Class

```
class Point(object):  
    """  
    Attributes:  
        x: float, the x-coordinate of a point  
        y: float, the y-coordinate of a point  
    """  
    def __init__(self, x, y):  
        self.x = x  
        self.y = y
```

This special function, called a constructor,
does the packaging.

A Point Class

```
class Point(object):
```

```
    """
```

```
    Attributes:
```

```
        x: float, the x-coordinate of a point
```

```
        y: float, the y-coordinate of a point
```

```
    """
```

```
    def __init__(self, x, y):
```

```
        self.x = x
```

```
        self.y = y
```

The name of this class is "Point"


The " __init__ " Function

```
def __init__(self,x,y):  
    """ Creates a Point object  
  
    PreC: x and y are floats  
    """  
  
    self.x = x  
    self.y = y
```

That's a double underscore: `__init__`

The " __init__ " Function

```
def __init__(self,x,y):  
    """ Creates a Point object  
  
    PreC: x and y are floats  
    """  
  
    self.x = x  
    self.y = y
```



"self" is always the first argument for any method defined in a class.


The "__init__" Function

```
def __init__(self,x,y):  
    """ Creates a Point object  
  
    PreC: x and y are floats  
    """  
  
    self.x = x    ←  
    self.y = y    ←
```

The attributes are assigned values.

Calling the Constructor
Creates an Object


Calling the Constructor

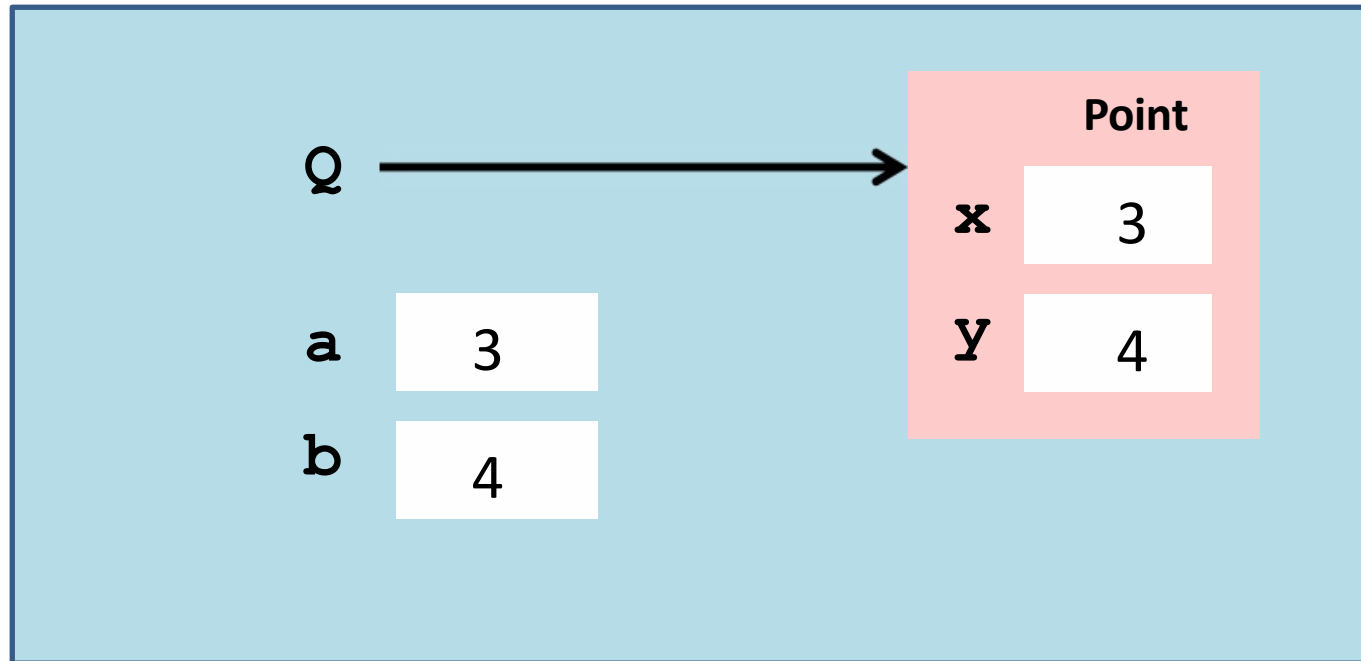

```
>>> a = 3
>>> b = 4
>>> Q = Point(a,b)
```

The constructor's
name is the name
of the class


Calling the Constructor

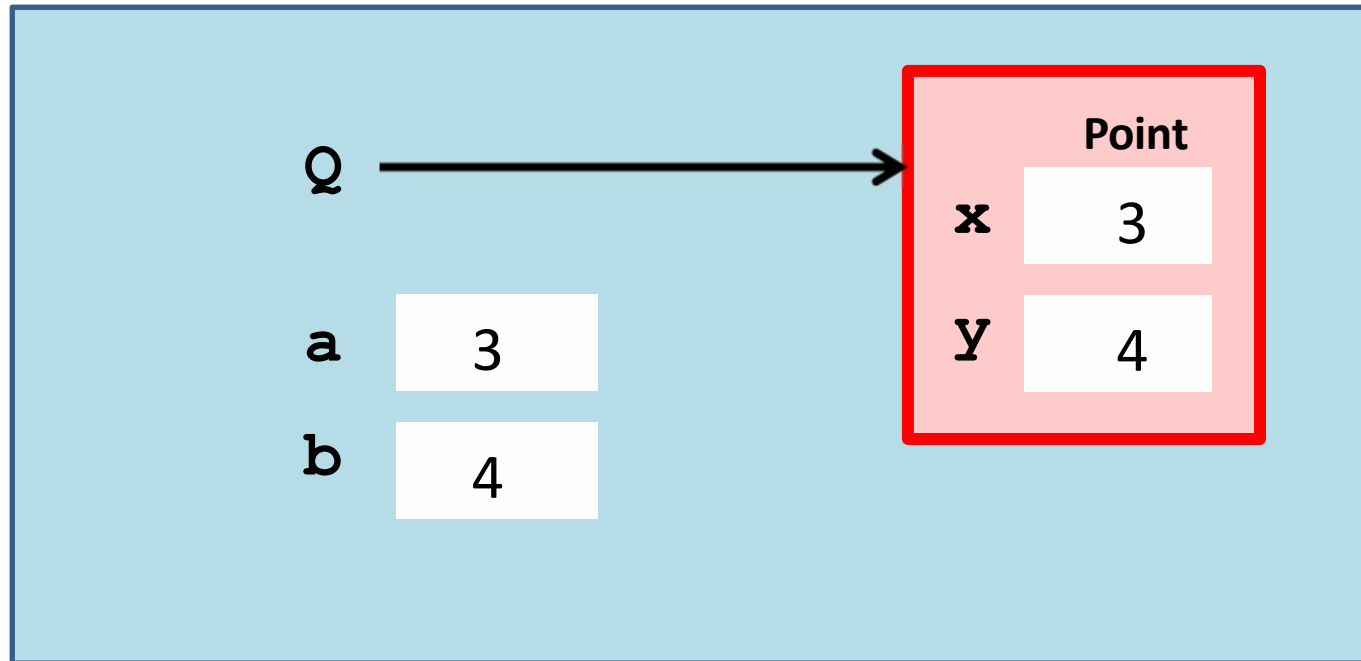

```
>>> a = 3
>>> b = 4
>>> Q = Point(a,b)
```

This creates
a **Point** object

Calling the Constructor

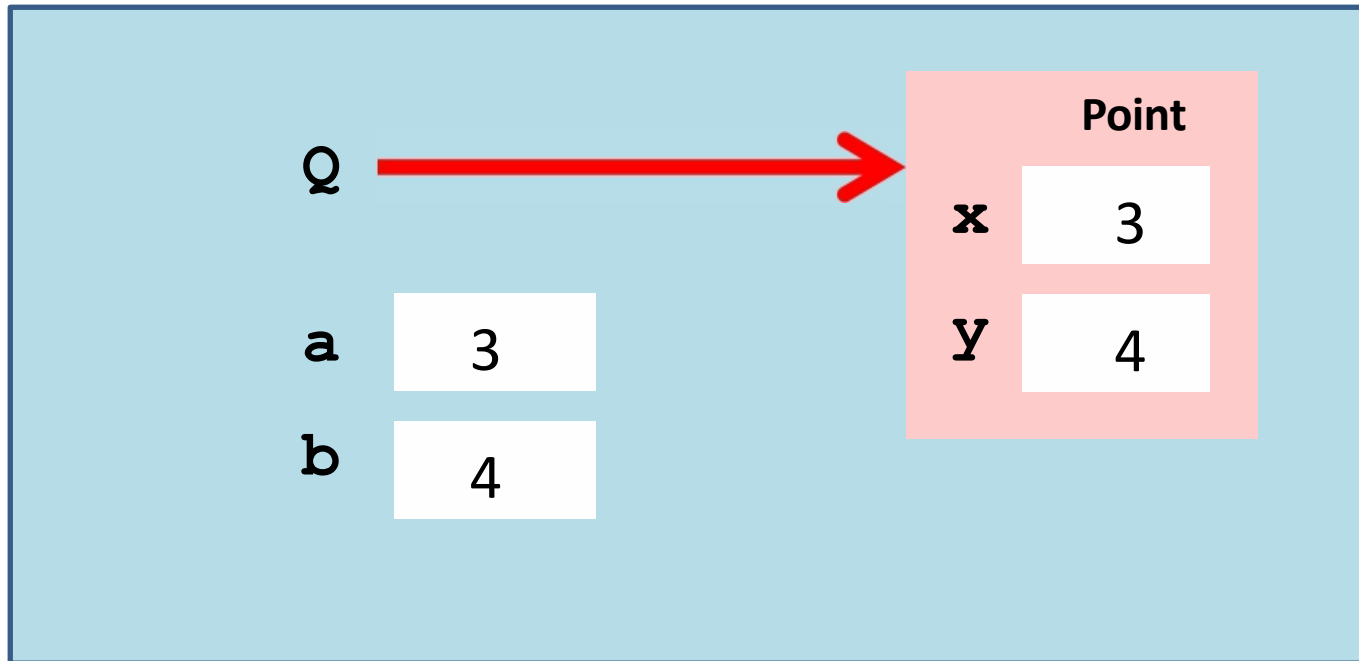

```
>>> a = 3
>>> b = 4
>>> Q = Point(a,b)
```

The constructor returns a reference, in effect, the red arrow.

Objects: The Folder Metaphor

In the office, manila folders organize data.

Objects organize data.

A point object houses float variables x and y , called the attributes, where (x,y) is the point.


Objects: The Folder Metaphor

In the office manila folders organize data.

Objects organize data.

A color object might house an rgb list like [1,0,1] and a string that names it, i.e., 'magenta'

Visualizing a Point Object

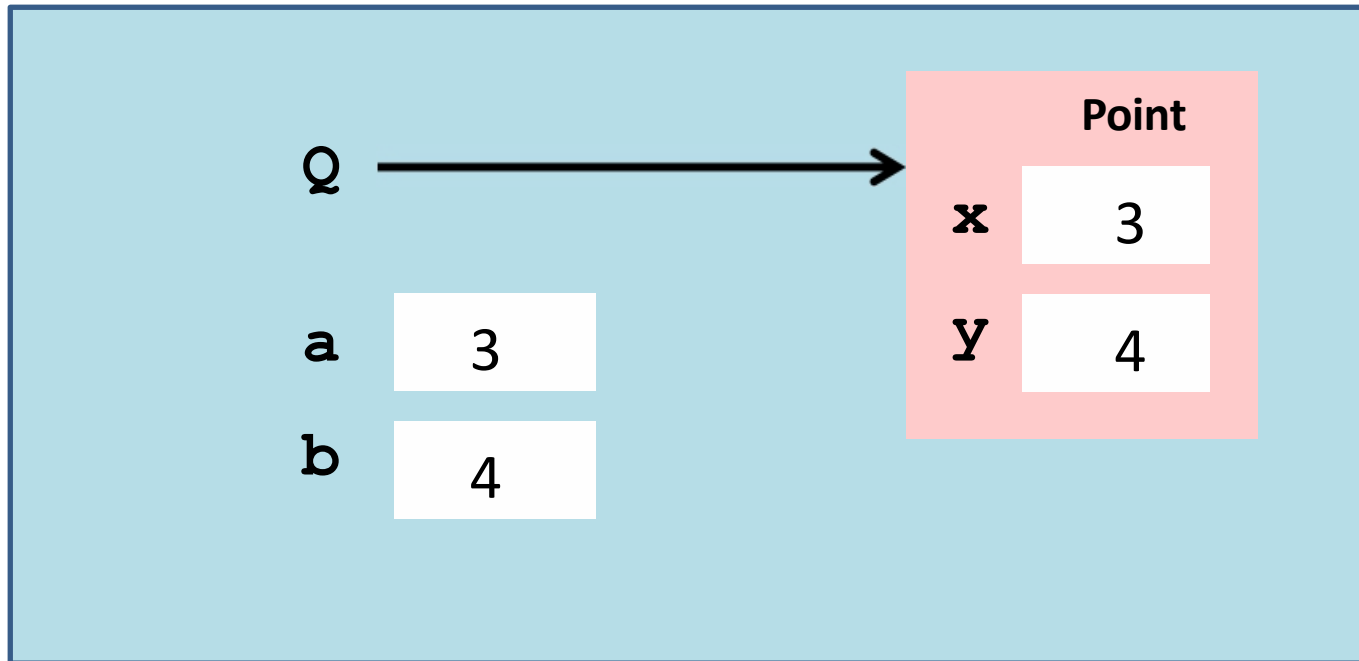

```
>>> a = 3
>>> b = 4
>>> Q = Point(a,b)
```

x and y are
attributes

Attributes are
variables that live
inside objects

Accessing an Attribute

The "Dot Notation" Again

Not a coincidence: modules are objects

Accessing Attributes

```
>>> Q = Point(3,4)
>>> print Q
( 3.000, 4.000)
>>> Q.x = Q.x + 5
>>> print Q
( 8.000, 4.000)
```

`Q.x` is a variable and can "show up" in all the usual places, i.e., in an assignment statement.

Accessing Attributes

```
>>> Q = Point(3,4)
```

```
>>> print Q
```

```
( 3.000, 4.000)
```

```
>>> Q.x = Q.x + 5
```

```
>>> print Q
```

```
( 8.000, 4.000)
```

Seems that we can print an object!

The " __str__ " function

```
def __str__(self):  
    return ' (%6.3f,%6.3f) ' % (self.x,self.y)
```

This "double underscore" function is part of the class definition.

Whenever a statement like

```
print(P)
```

is encountered, then P is "pretty printed" according to the format rules.

Two Examples

A function that returns a **Point** Object:

RandomPoint (Lx , Rx , Ly , Ry)

A function that has input parameters that are **Point** objects:

Midpoint (P , Q)

Computing a Random Point

```
def RandomPoint(Lx,Rx,Ly,Ry):  
    """ Returns a point that is randomly chosen  
    from the square  $Lx \leq x \leq Rx$ ,  $Ly \leq y \leq Ry$ .  
  
    PreC: Lx and Rx are floats with  $Lx < Rx$   
    Ly and Ry are floats with  $Ly < Ry$   
    """  
    x = randu(Lx,Rx)  
    y = randu(Ly,Ry)  
    P = Point(x,y)  
    return P
```



calling the
constructor


Computing a Midpoint

```
def Midpoint(P1,P2):  
    """ Returns a point that is the midpoint of  
    a line segment that connects P1 and P2.  
  
    PreC: P1 and P2 are point objects.  
    """  
    xm = (P1.x + P2.x)/2.0  
    ym = (P1.y + P2.y)/2.0  
    Q = Point(xm,ym)  
    return Q
```

Computing a Midpoint

```
def Midpoint(P1,P2):  
    """ Returns a point that is the midpoint of  
    the line segment that connects P1 and P2.  
  
    PreC: P1 and P2 are points.  
    """  
    xm = (P1.x + P2.x)/2.0  
    ym = (P1.y + P2.y)/2.0  
    Q = Point(xm,ym)  
    return Q
```

referencing
a point's
attributes



calling the
constructor



Methods

Methods are functions that are defined inside a class definition.

We have experience **using** them with strings

```
s.upper() , s.find(s1) , s.count(s2) ,  
s.append(s2) , s.split(c) , etc
```

and lists

```
L.append(x) , L.extend(x) , L.sort() , etc
```

Methods

Now we show how to implement them.

We will design a method for the `Point` class that can be used to compute the distance between two points.

It will be used like this:

```
delta = P.Dist(Q)
```

Note the dot notation syntax for method Calls.

A Point Class Method: Dist

```
class Point(object):  
    def __init__(self,x,y):  
        self.x = x  
        self.y = y  
  
    def Dist(self,other):  
        """ Returns distance from self to other.  
        PreC: other is a point  
        """  
        dx = self.x - other.x  
        dy = self.y - other.y  
        d = sqrt(dx**2+dy**2)  
        return d
```

Assume proper importing from math class

Using the Dist Method

Let's create two point objects and compute the distance between them. This can be done two ways...

```
>>> P = Point(3,4)
>>> Q = Point(6,8)
>>> deltaPQ = P.Dist(Q)
>>> deltaQP = Q.Dist(P)
>>> print deltaPQ,deltaQP
5.0 5.0
```

The usual
"dot" notation
for invoking
a method

Method Implementation: Syntax Concerns

```
class Point(object)
:
def Dist(self, other):
    """ Returns distance from self to other.
    PreC: P is a point
    """
    dx = self.x - other.x
    dy = self.y - other.y
    d = sqrt(dx**2+dy**2)
    return d
```

Note the use of "self".

It is always the first argument of a method.

How to Think "Method"

```
class Point(object):  
    :  
    def Dist(self, other):  
        """ Returns distance from self to other.  
        PreC: P is a point  
        """  
  
        dx = self.x - other.x  
        dy = self.y - other.y  
        d = sqrt(dx**2+dy**2)  
        return d
```

Think like this: "We are going to apply the method `dist` to a pair of `Point` objects, `self` and `other`."

Method Implementation: Syntax Concerns

```
class Point(object):  
    :  
    def Dist(self, other):  
        """ Returns distance from self to other  
        PreC: other is a point  
        """  
        dx = self.x - other.x  
        dy = self.y - other.y  
        d = sqrt(dx**2+dy**2)  
        return d
```

Two Facts:

Indentation is important.

A class method is part of the class definition.


Visualizing a Method Call Using State Diagrams

Let's see what happens when we execute the following:

```
P = Point(3,4)  
Q = Point(6,8)  
D = P.Dist(Q)
```


Visualizing a Method Call

- `P = Point(3, 4)`
`Q = Point(6, 8)`
`D = P.Dist(Q)`

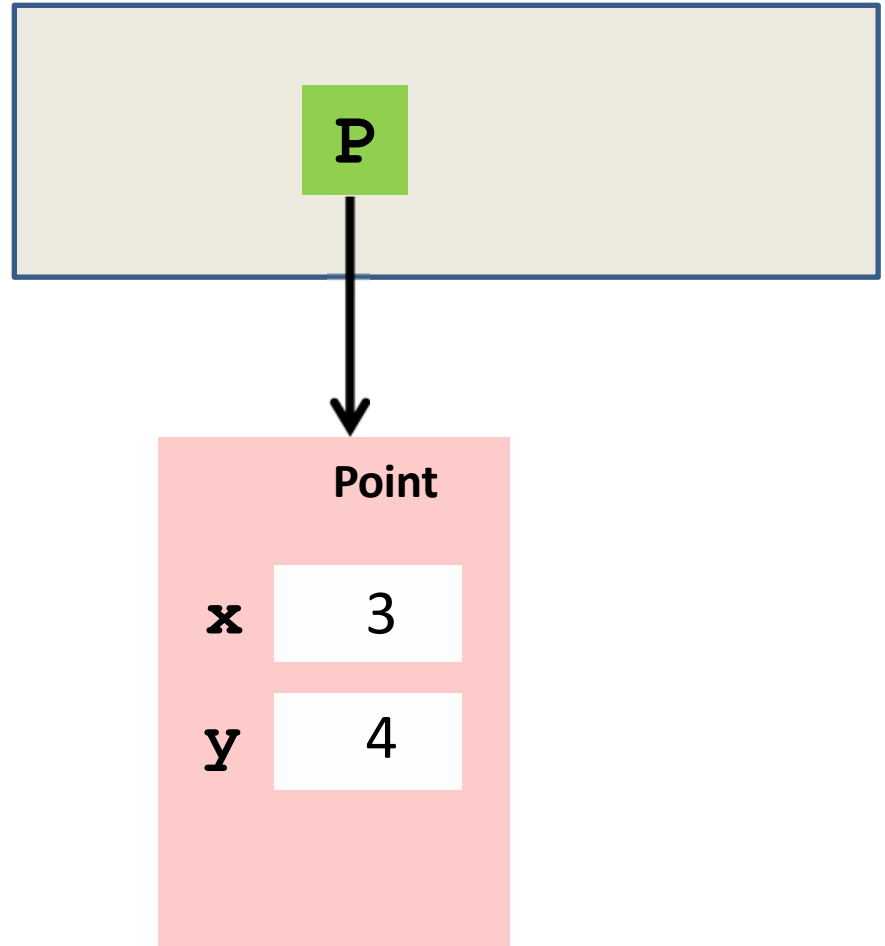

Visualizing a Method Call

```
P = Point(3,4)  
● Q = Point(6,8)  
D = P.Dist(Q)
```

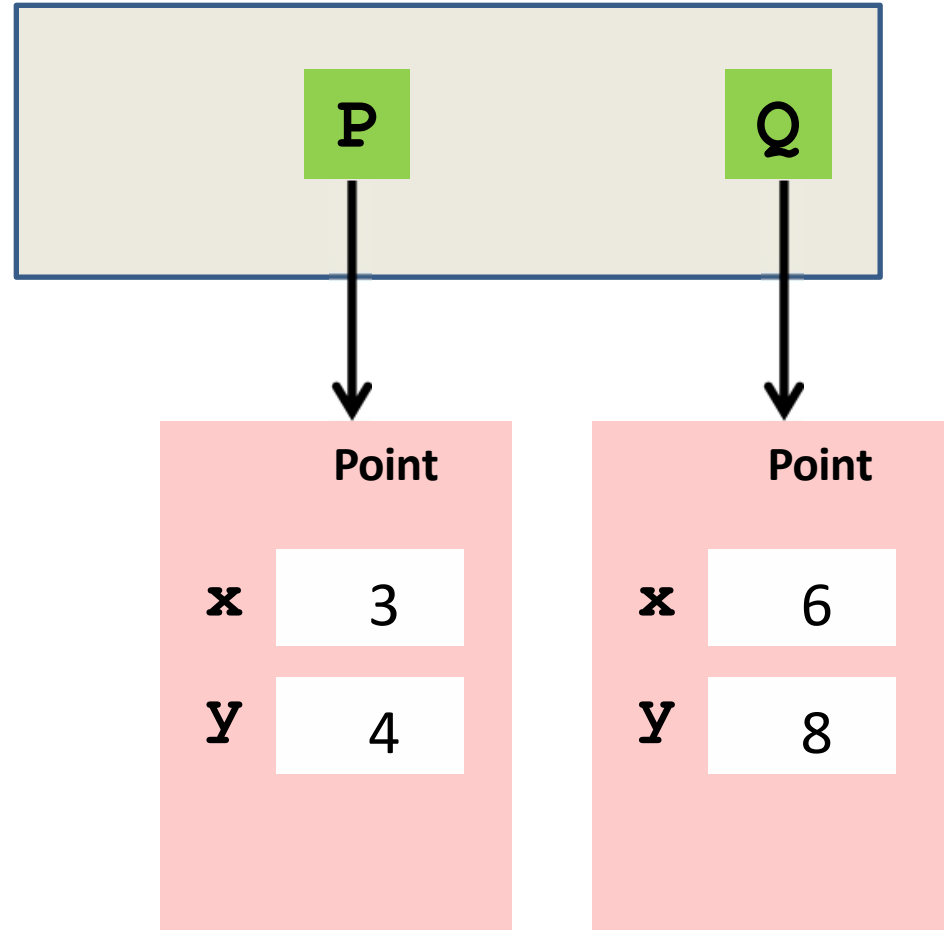


Visualizing a Method Call

```
P = Point(3,4)  
Q = Point(6,8)  
● D = P.Dist(Q)
```

Dist

```
dx = self.x - other.x  
dy = self.y - other.y  
d = sqrt(dx**2 + dy**2)  
return d
```

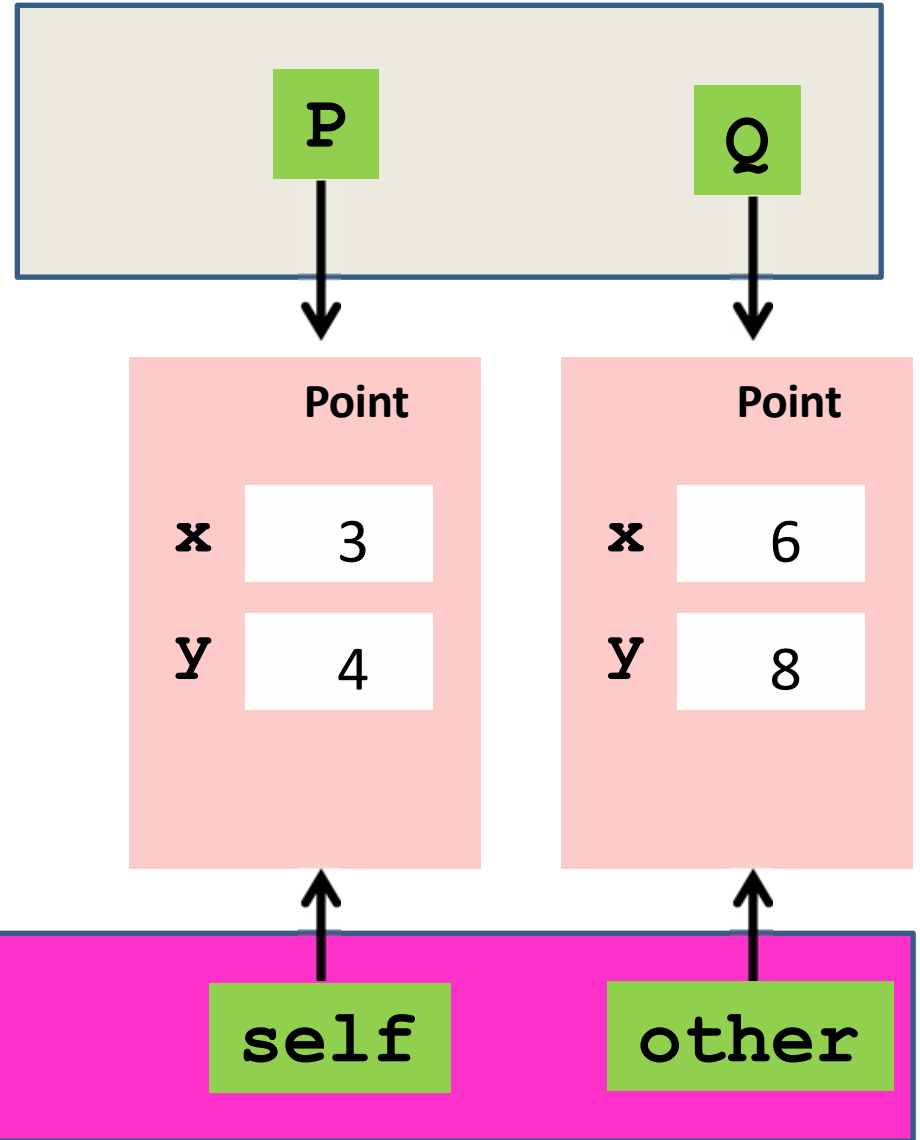

Method: Dist

```
class Point(object):  
    :  
    def Dist(self, other):  
        """ Returns distance from self to other.  
        PreC: other is a point  
        """  
  
        dx = self.x - other.x  
        dy = self.y - other.y  
        d = sqrt(dx**2+dy**2)  
        return d
```

Think of **self** and **other** as input parameters.


Visualizing a Method Call

```
P = Point(3,4)  
Q = Point(6,8)  
● D = P.Dist(Q)
```

Dist

```
● dx = self.x - other.x  
  dy = self.y - other.y  
  d = sqrt(dx**2 + dy**2)  
  return d
```

Control passes to
the method Dist

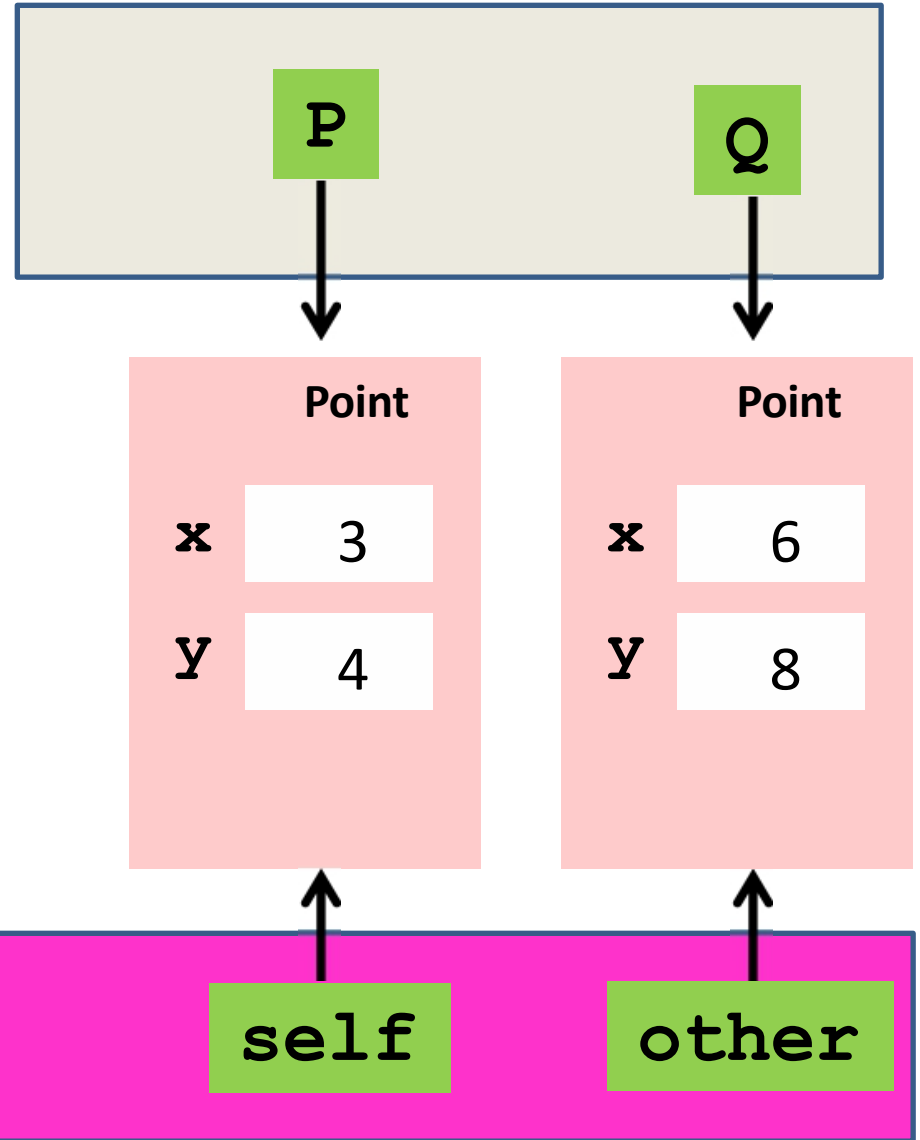


Visualizing a Method Call

```
P = Point(3,4)  
Q = Point(6,8)  
● D = P.Dist(Q)
```

Dist


```
dx = self.x - other.x  
● dy = self.y - other.y  
d = sqrt(dx**2 + dy**2)  
return d
```

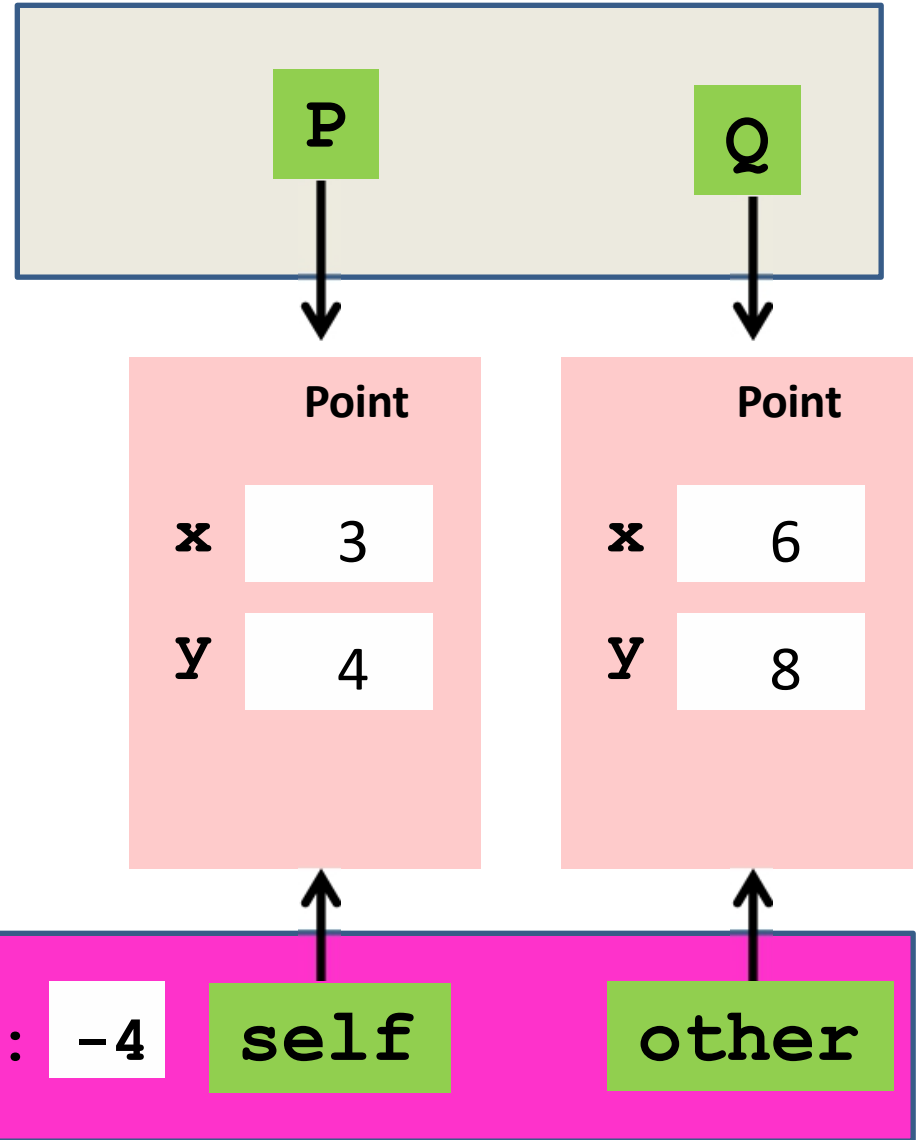

Visualizing a Method Call

```
P = Point(3,4)  
Q = Point(6,8)  
● D = P.Dist(Q)
```

```
dx = self.x-other.x  
dy = self.y-other.y  
● d = sqrt(dx**2+dy**2)  
return d
```



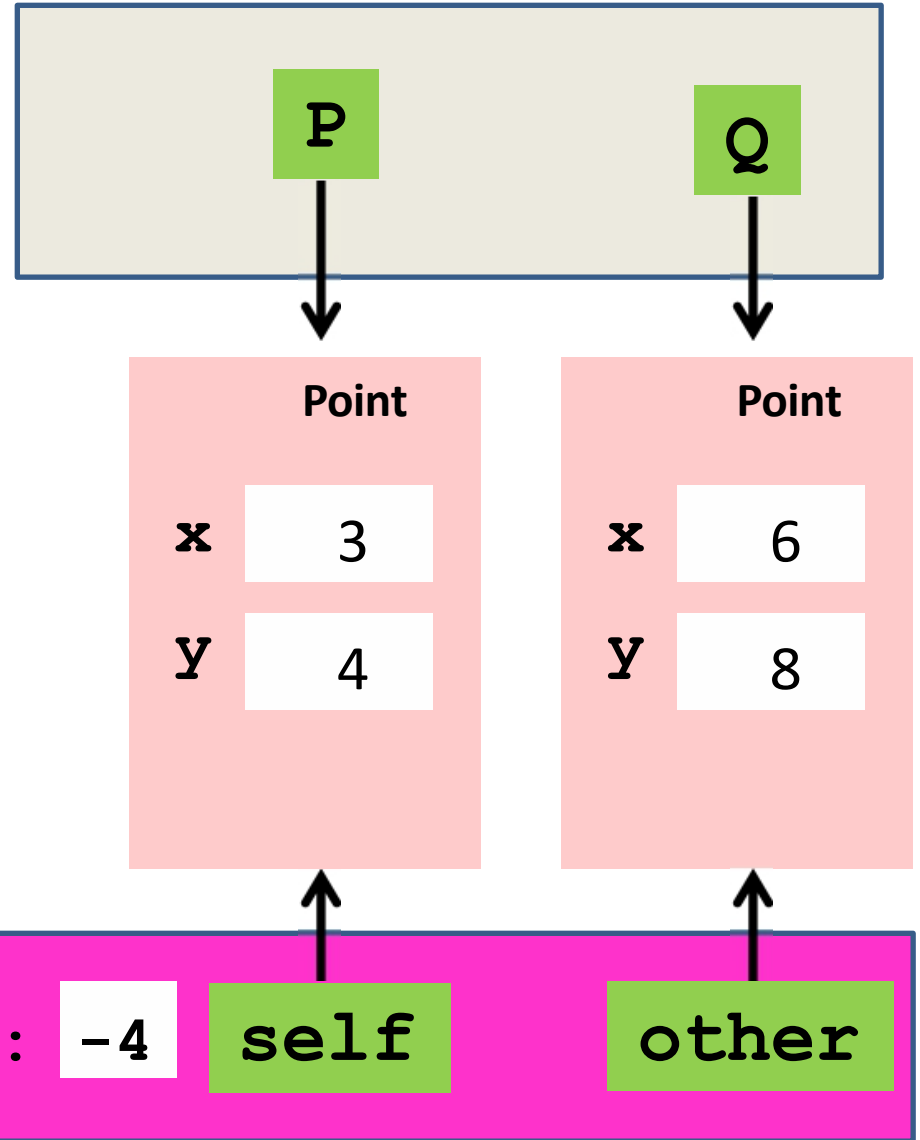


Visualizing a Method Call

```
P = Point(3,4)  
Q = Point(6,8)  
● D = P.Distance(Q)
```


Dist

```
dx = self.x - other.x  
dy = self.y - other.y  
d = sqrt(dx**2 + dy**2)  
● return d
```

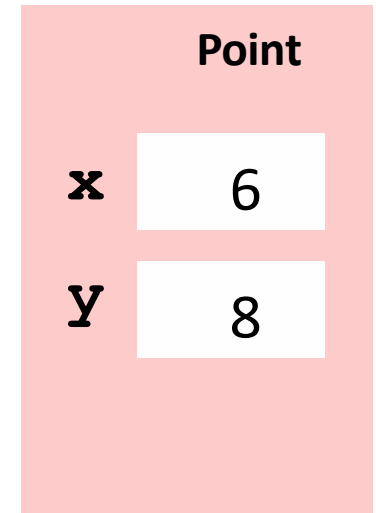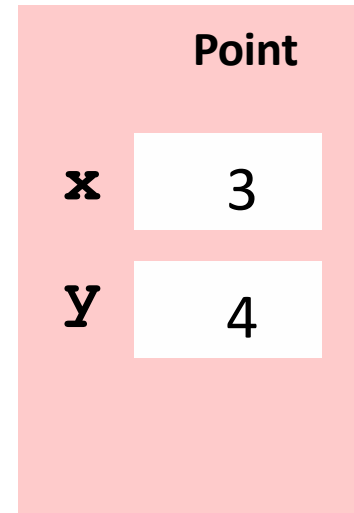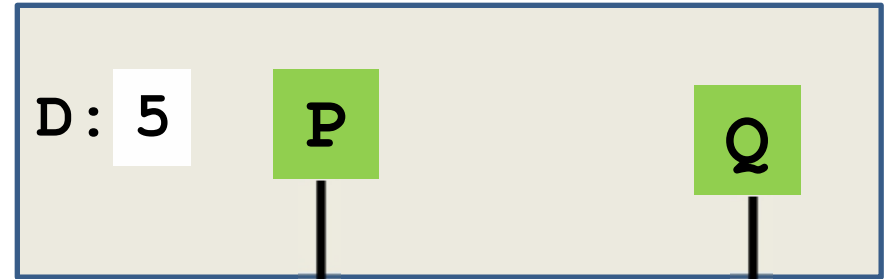

Visualizing a Method Call

```
P = Point(3,4)  
Q = Point(6,8)  
● D = P.Dist(Q)
```

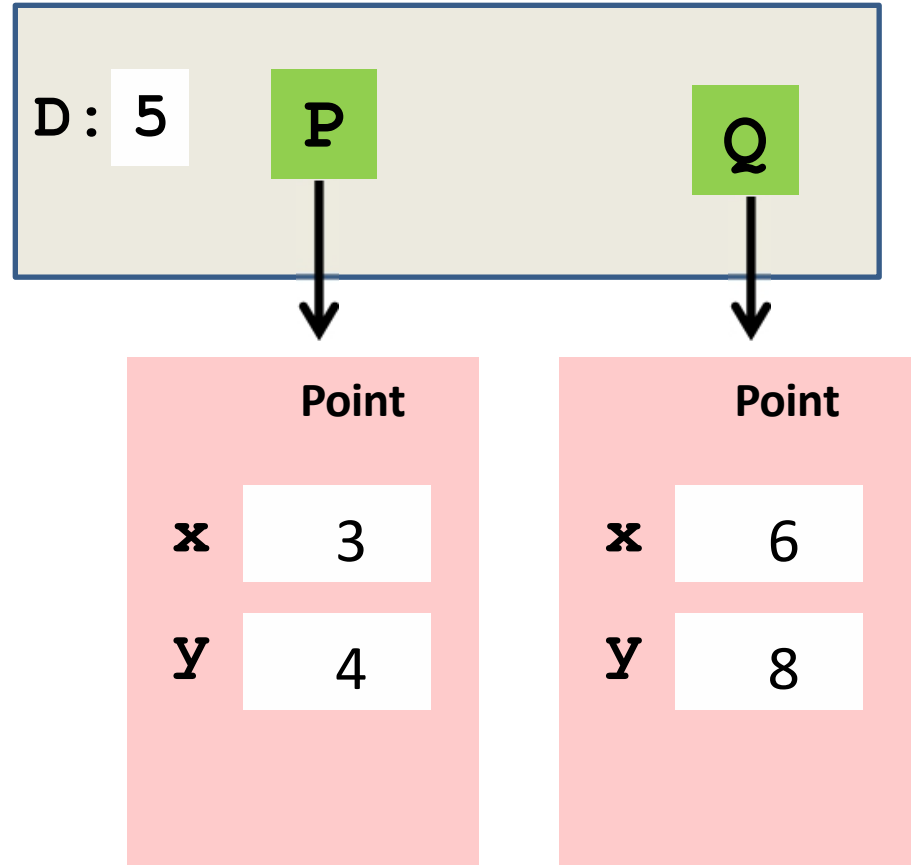

Checking Things Out

```
>>> P1 = RandomPoint(-10,10)
>>> P2 = RandomPoint(-10,10)
>>> M = Midpoint(P1,P2)
>>> print M.Dist(P1)
4.29339610681
>>> print M.Dist(P2)
4.29339610681
```

Summary: Base Types vs Classes

Base Types

- Built into Python
- Instances are values
- Instantiate w/ Literals
- Immutable

Classes


- Defined in Modules
- Instances are objects
- Instantiate w/ constructors
- Mutable

A Note on Copying an Object

There is a difference between creating an alias and creating a genuine second copy of an object.

This Does Not Create a Copy...


```
>>> Q = Point(3,4)
>>> P = Q
```

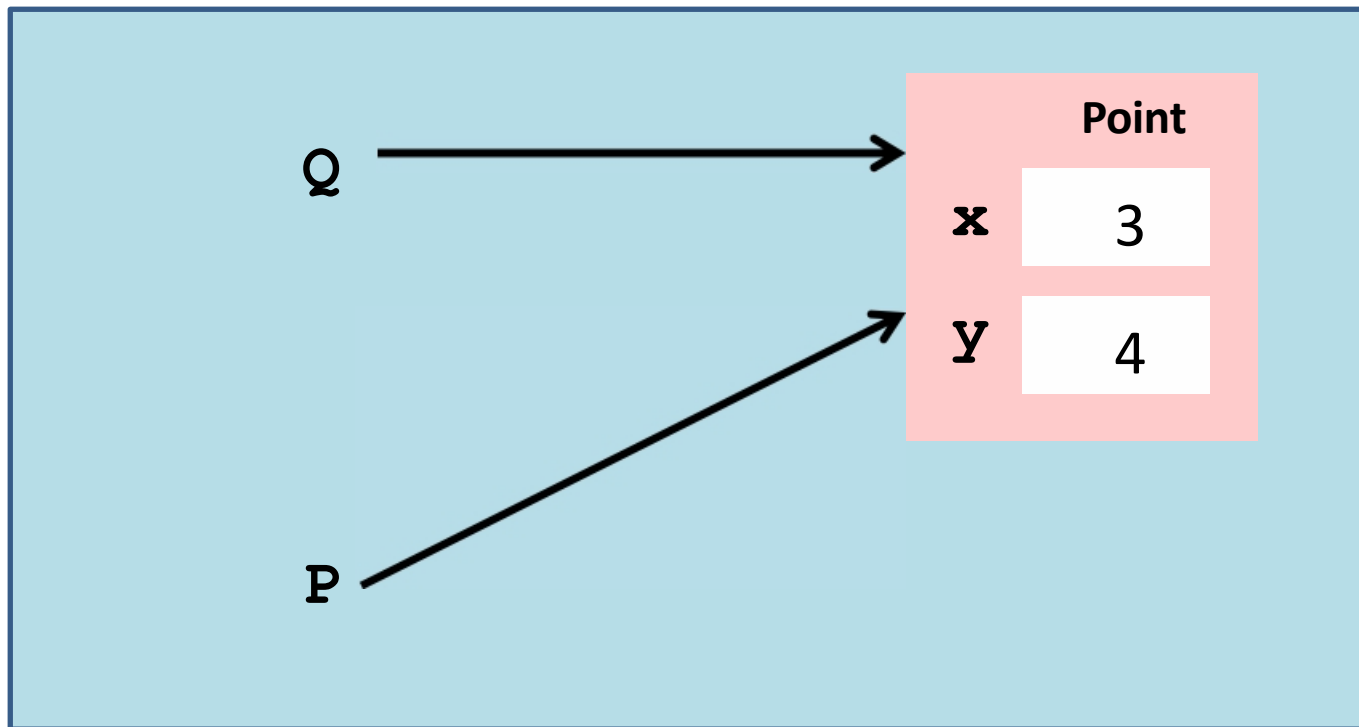

It creates an alias, not a copy.


This Does Create a Copy...

```
>>> Q = Point(3,4)
>>> P = Point(Q.x,Q.y)
```

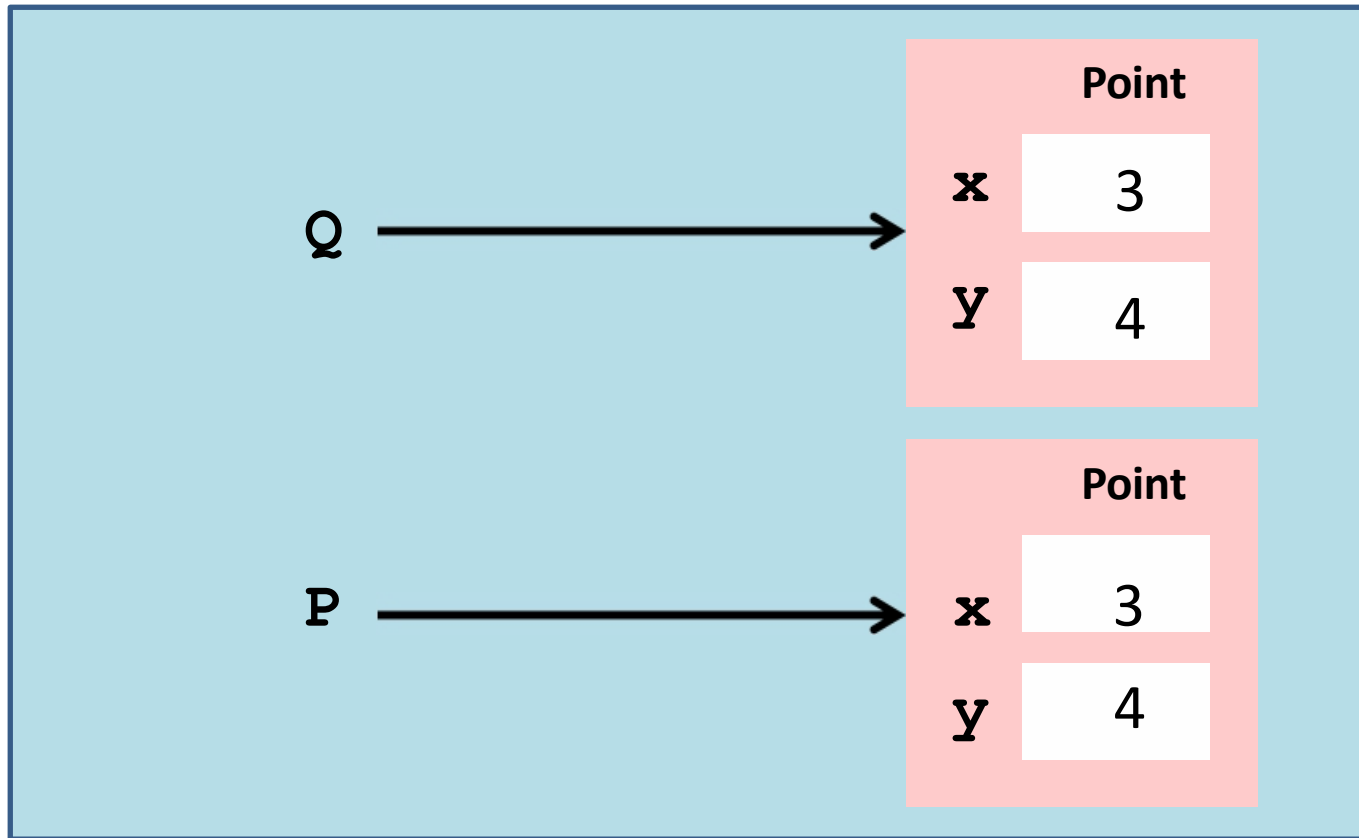

And This Also Creates a Copy...

```
>>> Q = Point(3, 4)
>>> P = copy(Q)
```

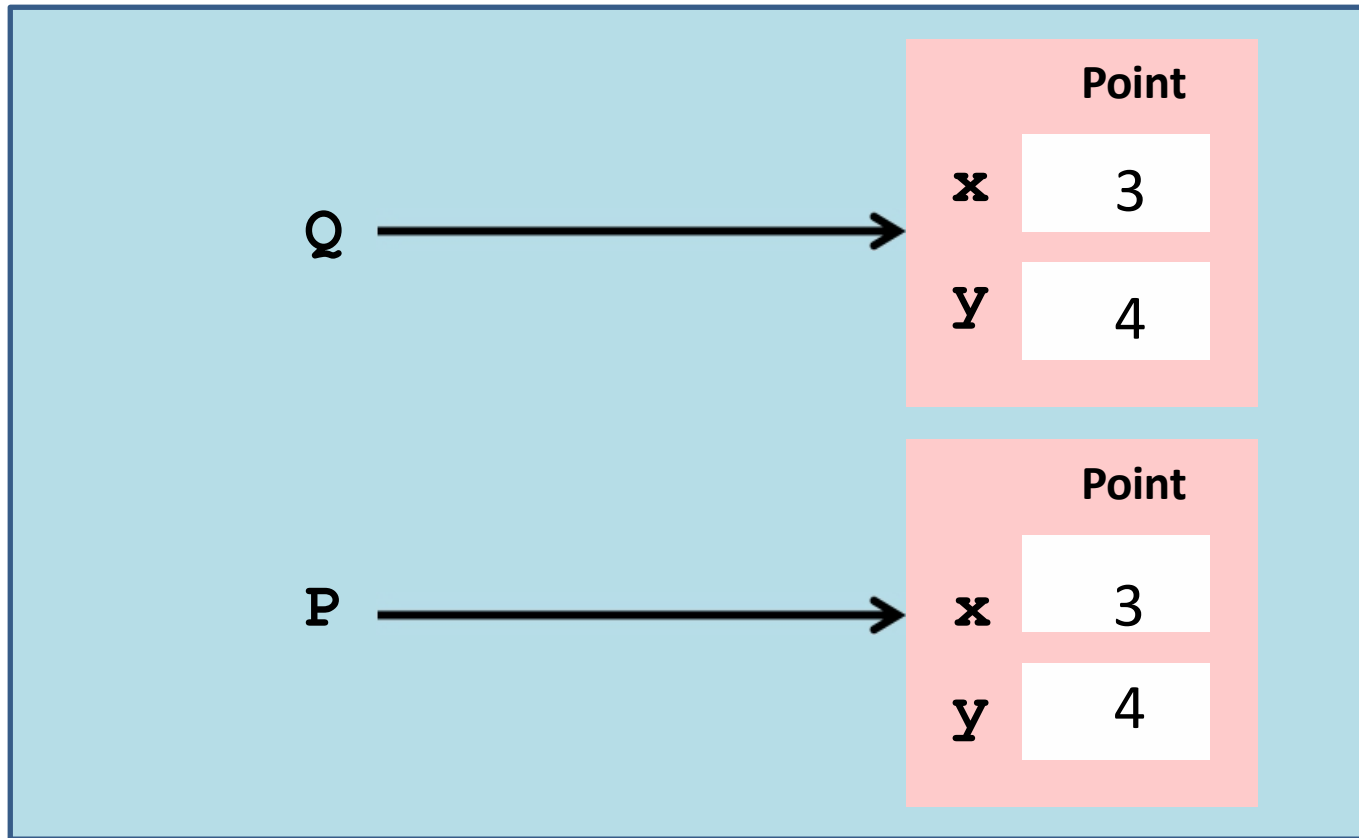

The function `copy` must be imported.

The Module copy

```
from copy import copy
```

Import this function and use it to make copies of objects.

deepcopy is another useful function from this module—more later.

Using copy

```
>>> Q = Point(3,4)
>>> P1 = copy(Q)
>>> P1.x = 5
>>> print Q
( 3.000, 4.000)
>>> print P1
( 5.000, 4.000)
```

We are modifying **P1**, but **Q** remains the same

Methods vs Functions

It is important to understand the differences between methods and functions, i.e., how they are defined and how they are invoked.

A >>Function<< that Returns the Distance Between Two Points

```
def Dist(P1,P2):  
    """ Returns the distance from P1 to P2.  
    PreC: P1 and P2 are points  
    """  
    d = sqrt((P1.x-P2.x)**2+(P1.y-P2.y)**2)  
    return d
```


Methods and (Regular) Functions

```
def Dist(self, other):  
    dx = self.x - other.x  
    dy = self.y - other.y  
    D = sqrt(dx**2+dy**2)  
    return D
```

```
>>> P = Point(3,4)  
>>> Q = Point(6,8)  
>>> P.Dist(Q)  
5.0
```

```
def Dist(P,Q):  
    dx = P.x - Q.x  
    dy = P.y - Q.y  
    D = sqrt(dx**2+dy**2)  
    return D
```

```
>>> P = Point(3,4)  
>>> Q = Point(6,8)  
>>> Dist(Q,P)  
5.0
```

Demonstration!

- Download files ShowPointClass.py and ThePointClass.py from Canvas.
- Run the python file ShowPointClass.py
- **TODO:**
 - Modify the script ShowPointClass.py to display distances from
 - Midpoint M to P, and
 - Midpoint M to Q