

QQCatalyst API Walkthrough

To utilize the API, you must first have two sets of credentials:

1. QQCatalyst login credentials with Username and Password.
2. ClientIdentifier and ClientSecret credentials provided by Vertafore. To obtain these API credentials, send a request to orangepartnerprogram@vertafore.com with your QQ ID.
 - a. To obtain your QQ ID, login to QQCatalyst, hover over your username in the top right corner, and select My Account. Your QQ ID will be displayed on the top row.

Once you have secured your credentials:


- Open an API development platform like [Postman](#).
 - Version 6.4.4 is used in the examples.
- Create a new **Collection** and give it whatever name you prefer.



CREATE A NEW COLLECTION

Name

QQCatalyst API

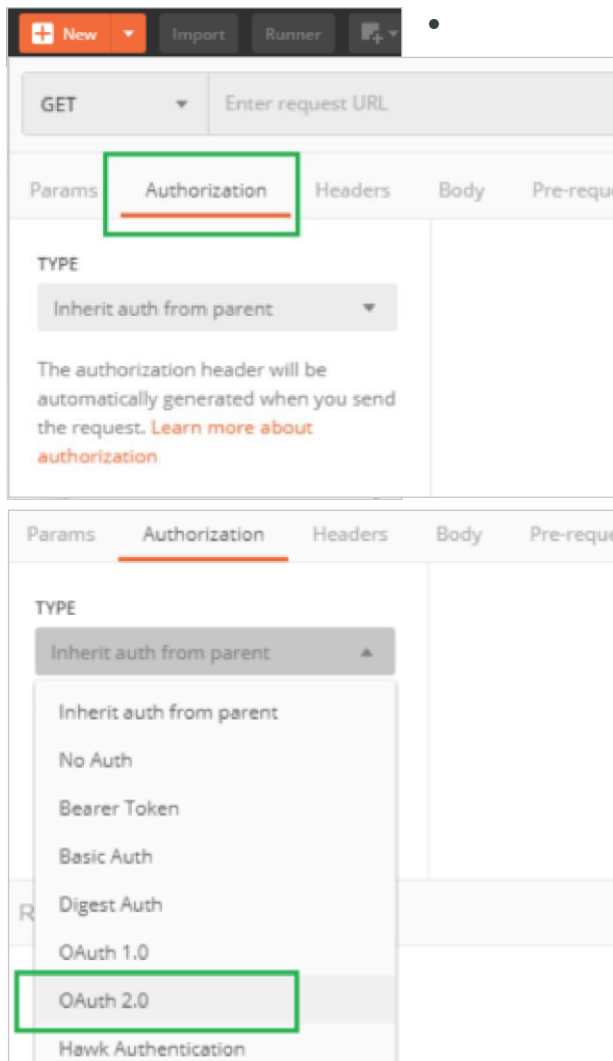

Right click on your **Collection** and select **Add Request**.

- Name the request and click save.
- Select the **Authorization** tab.

- Change the **Type** dropdown to **OAuth 2.0**.

Params Authorization Headers Body Pre-request Script Tests Cookies Code

TYPE
OAuth 2.0

The authorization data will be automatically generated when you send the request. [Learn more about authorization](#)

Add authorization data to
Request Headers

Preview Request

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. [Learn more about variables](#)

Access Token
gAAAAGU7D-0fDu5DXa6vse85vHD3nhLP... Available Tokens

Get New Access Token

- Select **Get New Access Token**.
- Fill the popup window with the following information:
 - **Token Name:**
<Token Name>
 - **Access Token URL:**
<https://login.qqcatalyst.com/oauth/token> (if you are unable to authenticate, please try <https://app.qqcatalyst.com/oauth/token>, instead)
 - **Username:**
<Your QQCatalyst Username>
 - **Password:**
<Your QQCatalyst Password>
 - **Client ID:**
<Your ClientIdentifier>
 - **Client Secret:**
<Your ClientSecret>
 - **Client Authentication:**
Select "Send as Basic Auth header"

GET NEW ACCESS TOKEN

Token Name
Test Token

Grant Type
Password Credentials

Access Token URL ⓘ
<https://login.qqcatalyst.com/oauth/token>

Username
tcampbell@vertafore.com

Password
.....
☐ Show Password

Client ID ⓘ
Client ID



Client Secret ⓘ
Client Secret

Scope ⓘ
e.g. read:org

Client Authentication
Send as Basic Auth header

Request Token

- Click **Request Token**.
- On the following screen, scroll to the bottom and select **Use Token**.

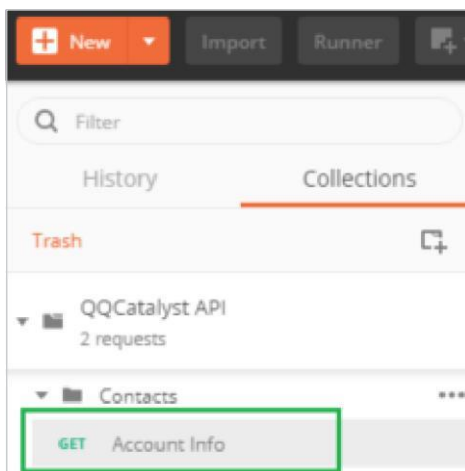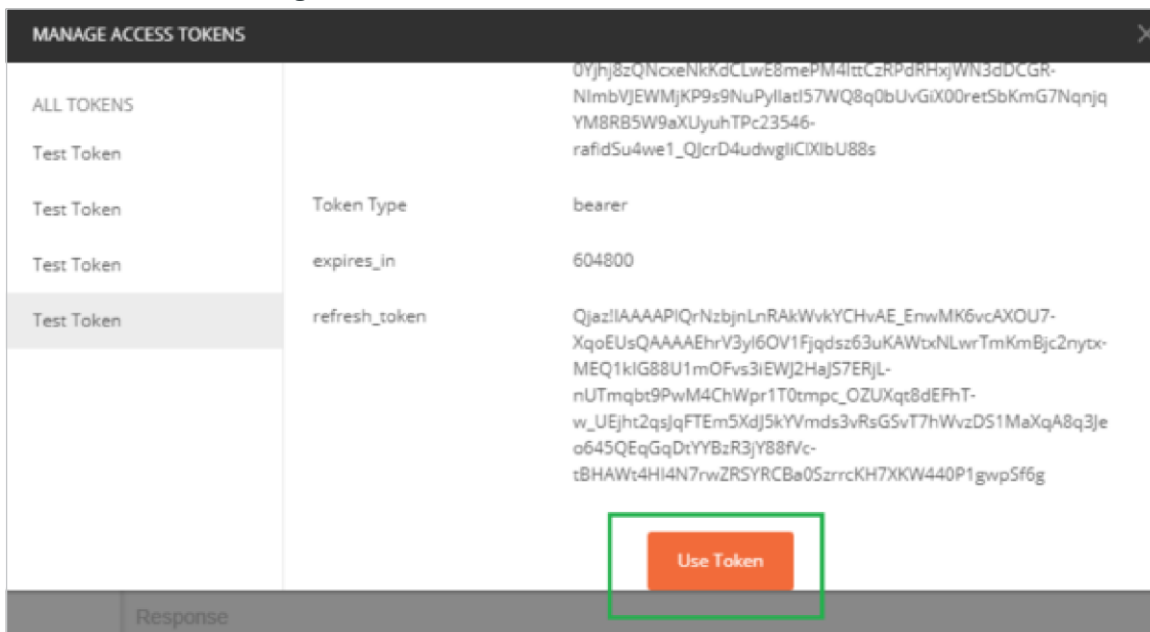

You are now able to make QQCatalyst API calls using the [API Documentation](#).

- Click the **Request** you made on the left toolbar.
- In this example, we're using this call: <http://api.qgcatalyst.com/Help/Api/GETv1-ContactscontactID-AccountInfo>
 - Change the HTTP method to whichever function you'd like to perform. (for example, GET)
 - Fill in the URL of the call. Standard call structure starts with <http://api.qgcatalyst.com/v1/>, then is followed by the URL info from the [API Documentation](#) page. (for example, Customers/ {customerID}/Employers)

Account Info Examples (1)

GET http://api.qqcatalyst.com/v1/Contacts/8965/AccountInfo Send Save

Params Authorization Headers (1) Body Pre-request Script Tests Cookies Code

- Select **Send**.

Account Info Example

GET http://api.qqcatalyst.com/v1/Contacts/8965/AccountInfo Send Save

Params Authorization Headers (1) Body Pre-request Script Tests Cookies

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body Cookies Headers (9) Test Results Status: 200 OK Time: 366 ms Size: 686 B Save

Pretty Raw Preview JSON ≡

```

1  {
2    "CustomerID": 8965,
3    "CustomerNo": "",
4    "AgentID": 8932,
5    "Agent": "Tim Campbell",
6    "CsrID": null,
7    "CSR": "",
8    "CustomerPriorityID": 2,
9    "CustomerPriority": "Normal",
10   "CustomerSince": "2018-09-05T00:00:00",
11   "UserID": null,
12   "UserPassword": null,
13   "Type": "P",
14   "OfficeID": 1,
15   "CPAccess": null,
16   "Name": "Bothell",
17   "CustomerSourceID": null,
18   "CustomerSource": null,
19   "SourceDetail": null,
20   "CreatedByID": 8932,
21   "CreatedByName": "Tim Campbell",
22   "CustomerSinceString": "09/05/2018"
23 }

```

- The response should populate in the **Body** window.