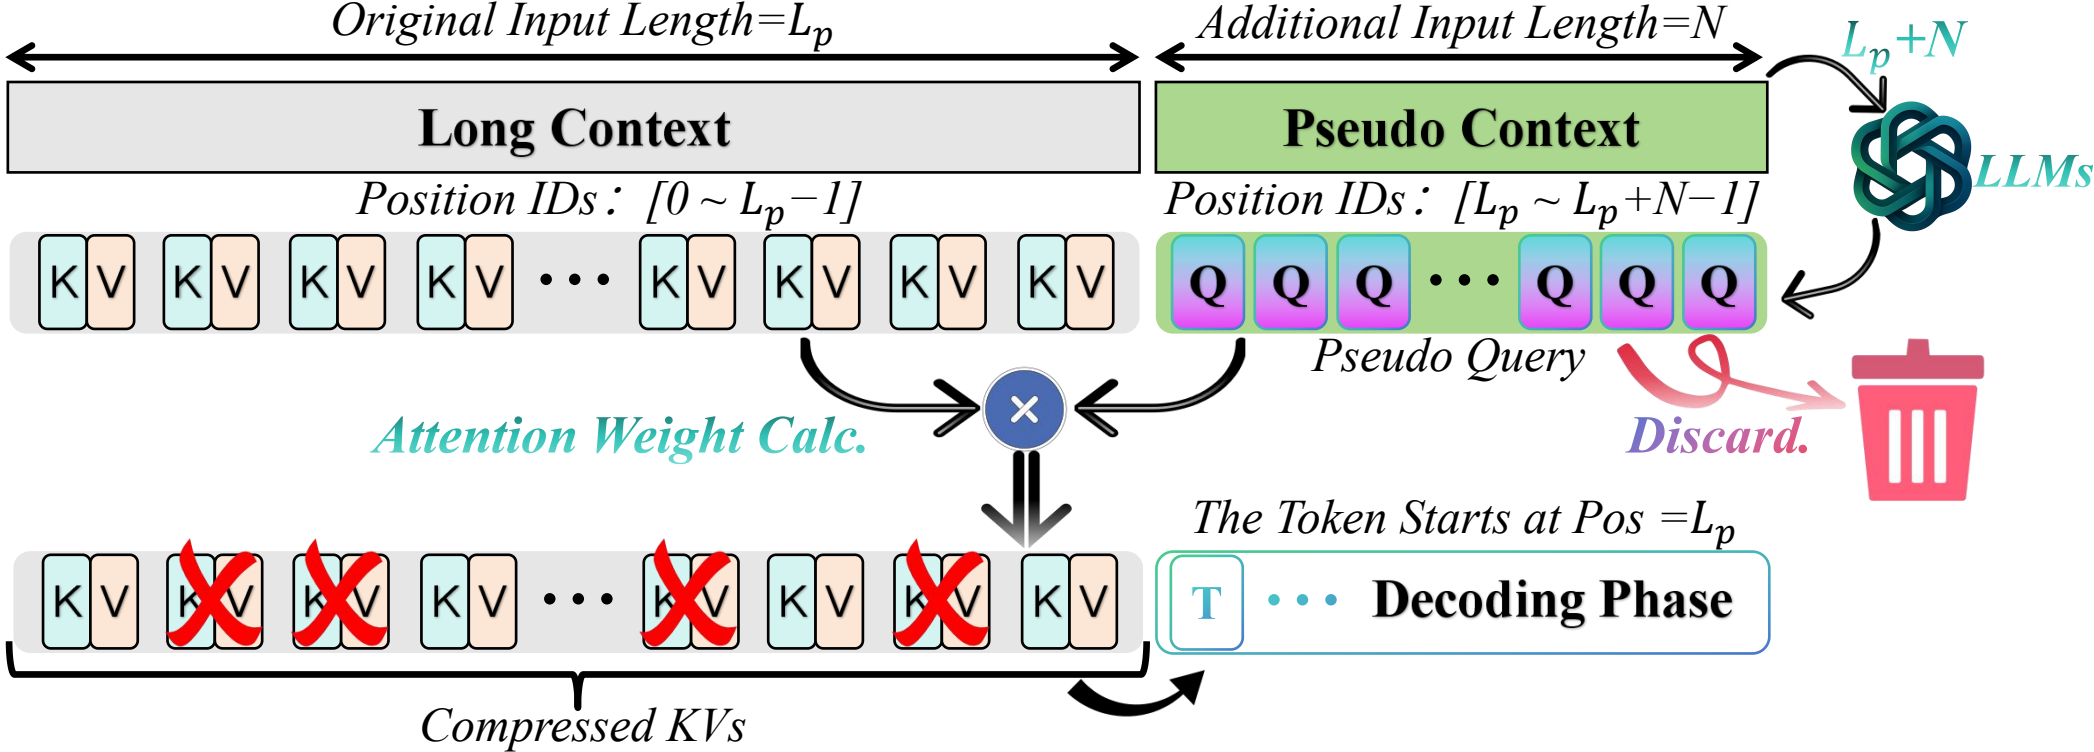
Original Input Length=L_p
Additional Input Length=N
L_p+N
Long Context
Pseudo Context
LLMs
Position IDs: [0 ~ L_p−1]
Position IDs: [L_p ~ L_p+N−1]
K V K V K V K V ··· K V K V K V K V
Q Q Q ··· Q Q Q
Pseudo Query
Attention Weight Calc.
Discard.
The Token Starts at Pos =L_p
T ··· Decoding Phase
Compressed KVs