
AHI1: allele−specific read alignments across stimulation

Variant chr6:135465851:C>T (isoLASER 0−based); tested part chr6:135495813−135495898:− (0−based, half−open). Yellow: tested part.


REF C: RAW assigned inclusion 65/137 (47.4%)

0 hours | donors: 21,31,36,48 | test dPSI: −5.2 pp
Normalized inclusion (test): 67/141 (47.5%)
Raw alignments overlapping window: 74/137

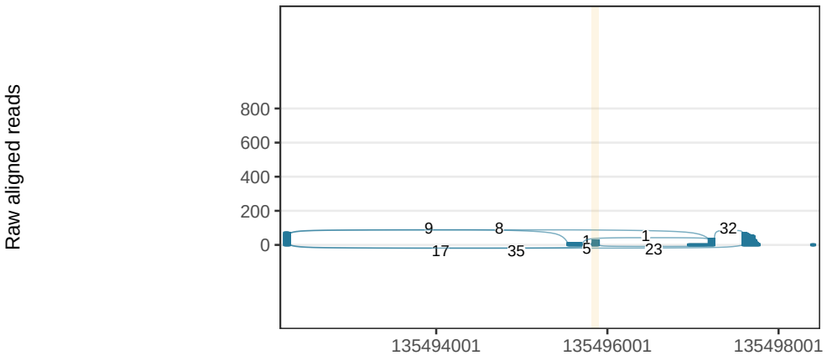


REF C: RAW assigned inclusion 82/140 (58.6%)

1 hours | donors: 21,48 | test dPSI: −23.5 pp
Normalized inclusion (test): 82/139 (59.0%)
Raw alignments overlapping window: 48/140

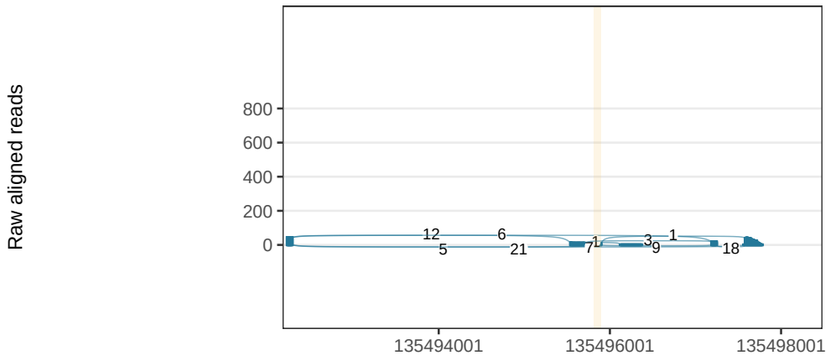


REF C: RAW assigned inclusion 140/294 (47.6%)

6 hours | donors: 31,36,48 | test dPSI: −29.1 pp
Normalized inclusion (test): 140/294 (47.6%)
Raw alignments overlapping window: 123/294

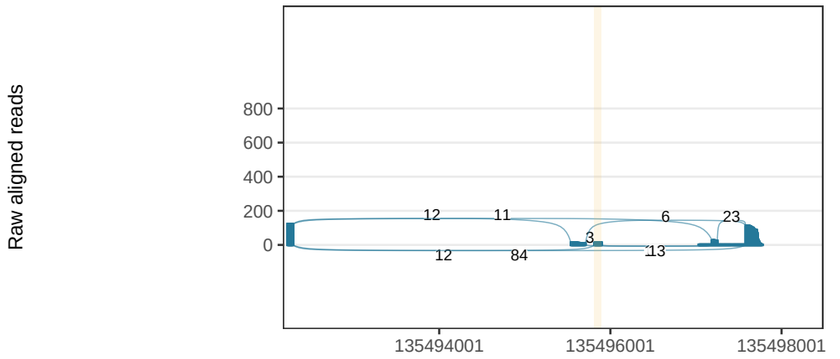


ALT T: RAW assigned inclusion 148/348 (42.5%)

Normalized inclusion (test): 145/343 (42.3%)
Raw alignments overlapping window: 318/348

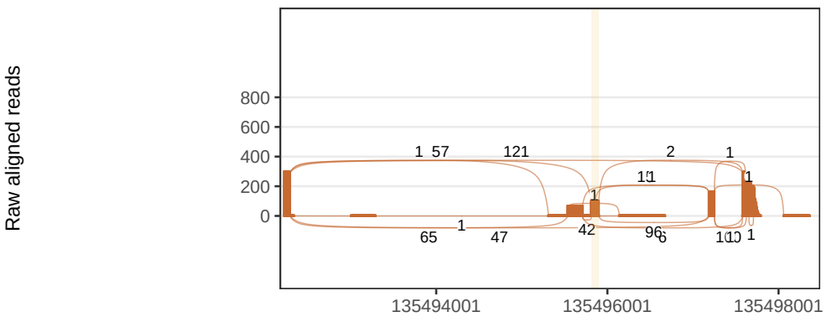


ALT T: RAW assigned inclusion 125/347 (36.0%)

Normalized inclusion (test): 123/347 (35.4%)
Raw alignments overlapping window: 311/347

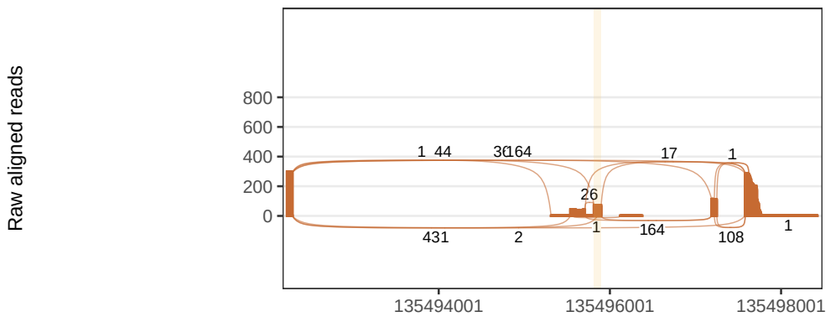


ALT T: RAW assigned inclusion 156/851 (18.3%)


Normalized inclusion (test): 157/850 (18.5%)
Raw alignments overlapping window: 784/851

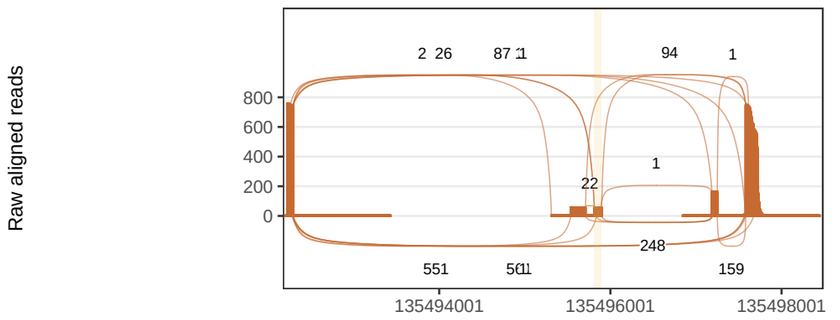


Representative transcript structures

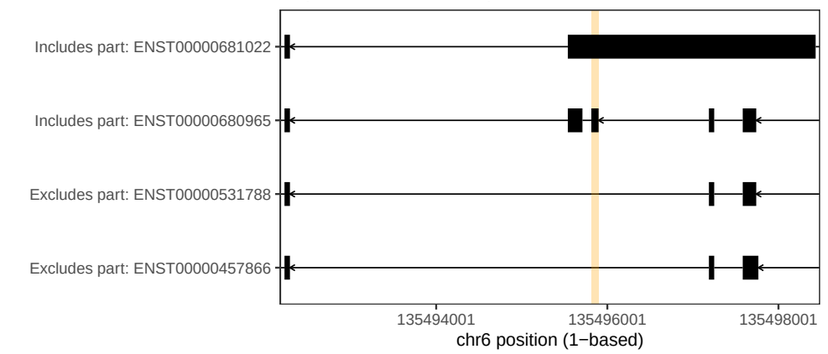

Representative transcript structures

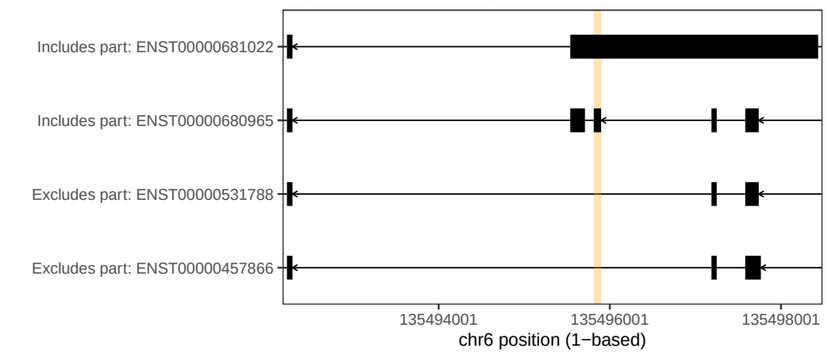

Representative transcript structures

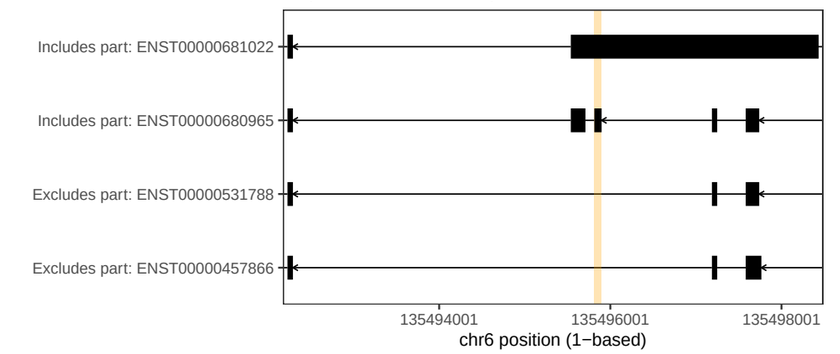

Coverage and arc labels are raw read counts; all six tracks share a y scale. Arcs: every junction with >=1 read.
Raw inclusion describes recorded reads. Normalized inclusion is from rescaled, rounded donor tables used for AMI and dPSI.
Inclusion uses transcript assignment; a read may not reach the tested part. Normalized counts are not additional sequenced reads.