PARK7: allele−specific read alignments across stimulation

Variant chr1:7961717:T>C (isoLASER 0−based); tested part chr1:7961747−7961793:+ (0−based, half−open). Yellow: tested part.

REF T: raw inclusion 261/381 (68.5%)

0 hours | donors: 21,48 | test dPSI: −8.0 pp
Normalized inclusion (test): 262/382 (68.6%)
Raw alignments overlapping window: 381/381

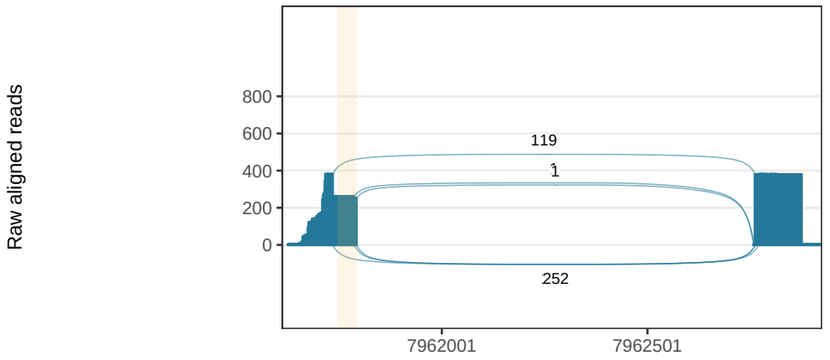

REF T: raw inclusion 508/695 (73.1%)

1 hours | donors: 21,48 | test dPSI: −19.1 pp
Normalized inclusion (test): 508/695 (73.1%)
Raw alignments overlapping window: 695/695

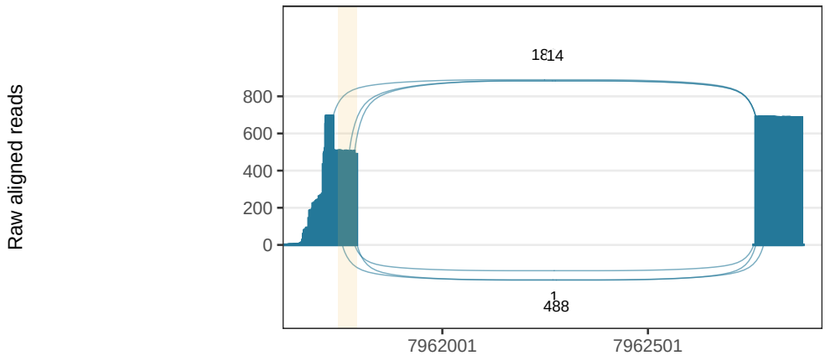

REF T: raw inclusion 465/669 (69.5%)

6 hours | donors: 21,48 | test dPSI: −10.2 pp
Normalized inclusion (test): 464/669 (69.4%)
Raw alignments overlapping window: 669/669

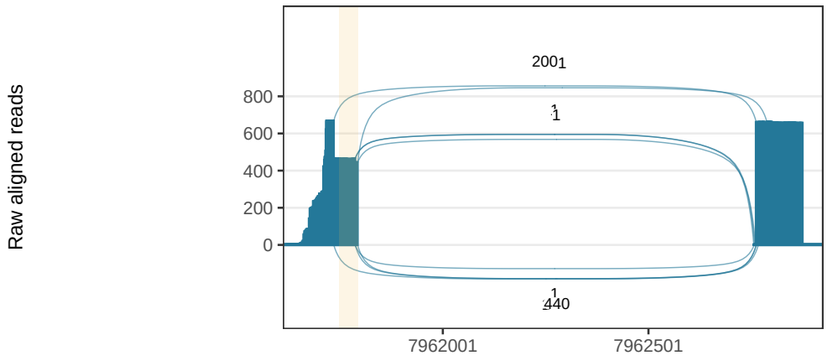

ALT C: raw inclusion 150/247 (60.7%)

Normalized inclusion (test): 149/246 (60.6%)
Raw alignments overlapping window: 247/247

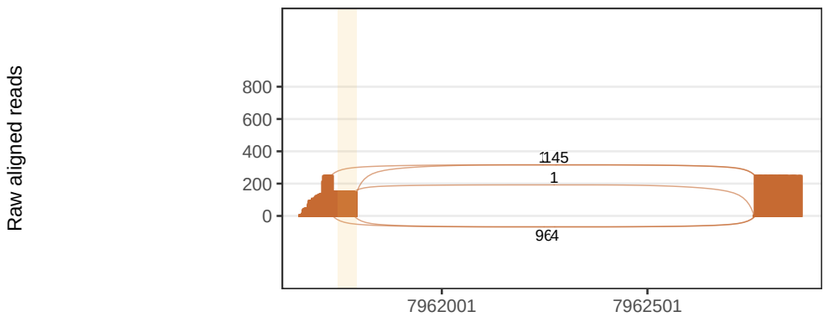

ALT C: raw inclusion 183/339 (54.0%)

Normalized inclusion (test): 183/339 (54.0%)
Raw alignments overlapping window: 339/339

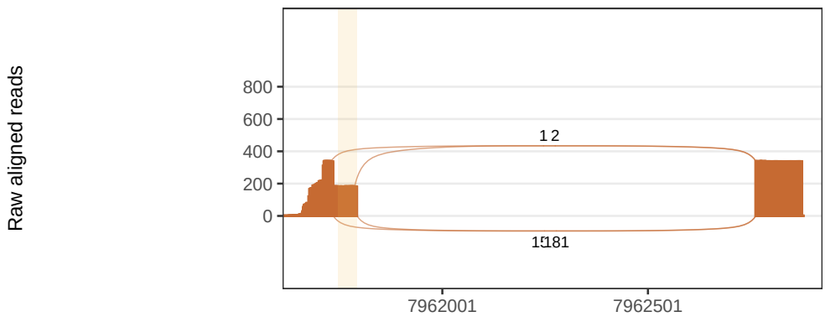

ALT C: raw inclusion 210/354 (59.3%)

Normalized inclusion (test): 210/355 (59.2%)
Raw alignments overlapping window: 354/354

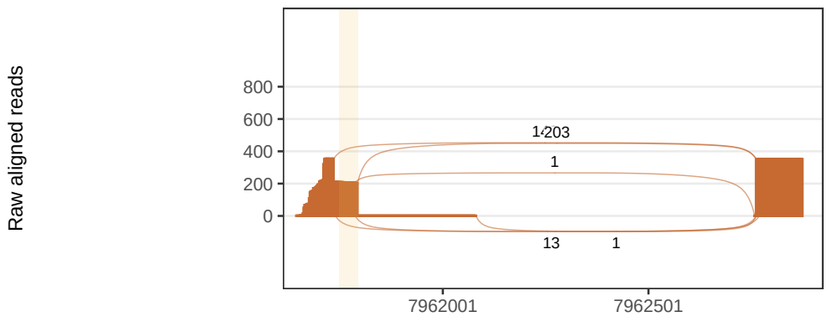

Representative transcript structures

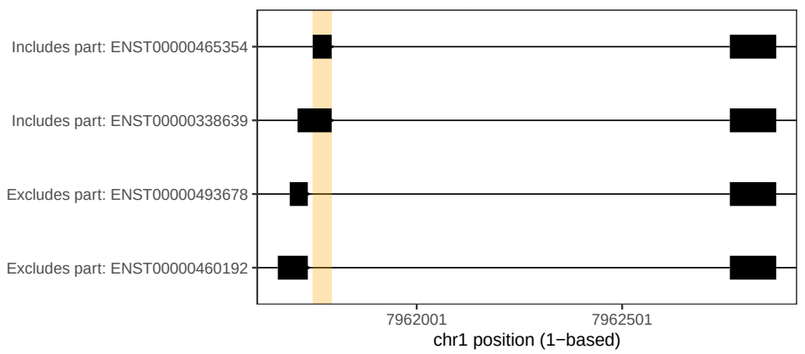

Representative transcript structures

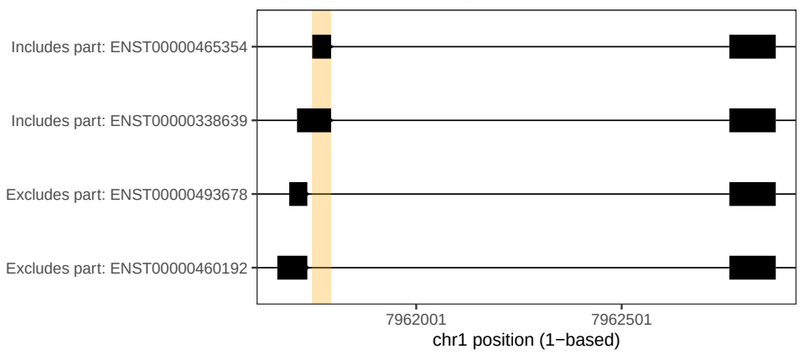

Representative transcript structures

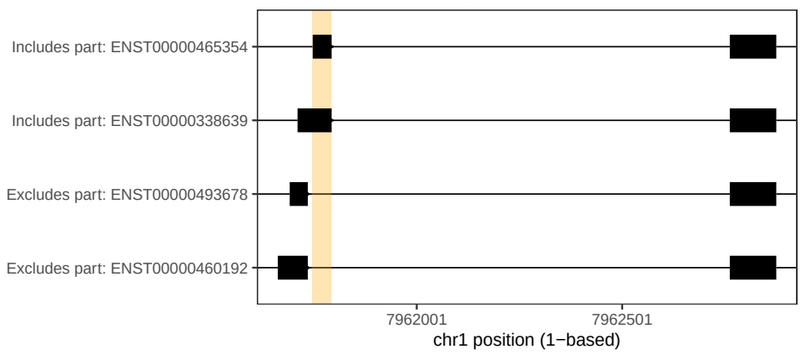

Coverage and arc labels are raw read counts; all six tracks share a y scale. Arcs: every junction with >=1 read.
Raw inclusion describes recorded reads. Normalized inclusion is from rescaled, rounded donor tables used for AMI and dPSI.
Inclusion is each read's own alignment: >= 10 aligned bases in the part, or a junction spanning it. Normalized counts are not additional sequenced reads.