# ZNF749: allele−specific read alignments across stimulation

Variant chr19:57435555:G>C (isoLASER 0−based); tested part chr19:57438101−57438456:+ (0−based, half−open). Yellow: tested part.

### REF G: raw inclusion 45/56 (80.4%)

0 hours | donors: 21,36,48 | test dPSI: −25.5 pp
Normalized inclusion (test): 44/55 (80.0%)
Raw alignments overlapping window: 56/56

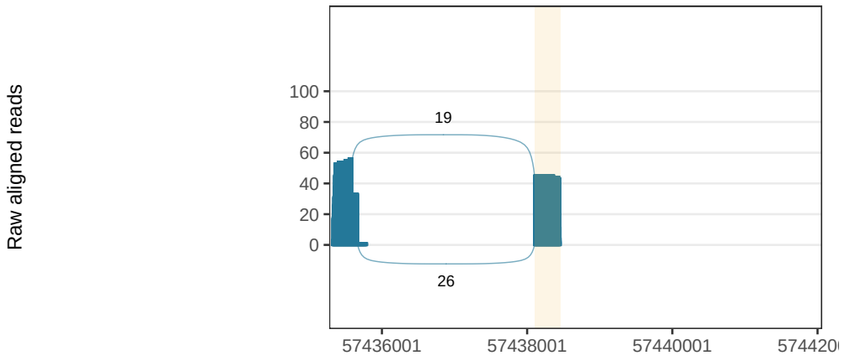


### REF G: raw inclusion 39/51 (76.5%)

1 hours | donors: 21,36 | test dPSI: −7.8 pp
Normalized inclusion (test): 38/51 (74.5%)
Raw alignments overlapping window: 51/51

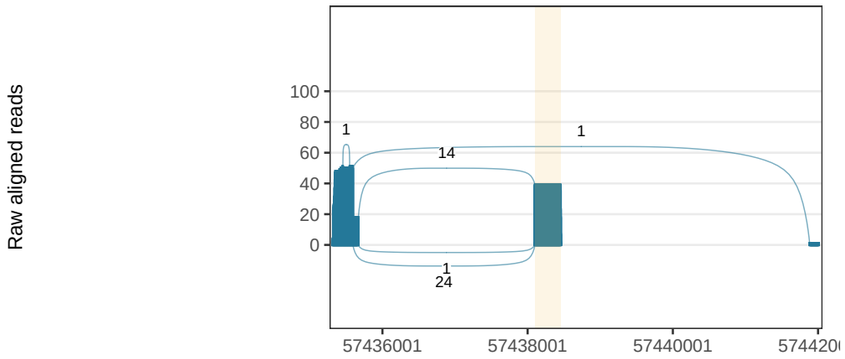


### REF G: raw inclusion 72/84 (85.7%)

6 hours | donors: 21,48 | test dPSI: −74.1 pp
Normalized inclusion (test): 72/84 (85.7%)
Raw alignments overlapping window: 84/84

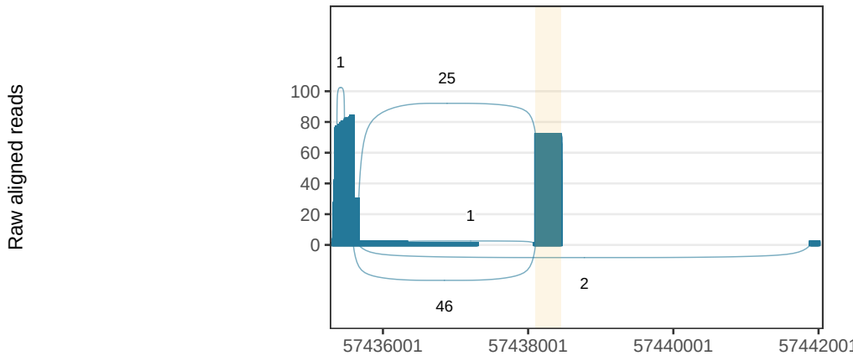


### ALT C: raw inclusion 15/31 (48.4%)

Normalized inclusion (test): 18/33 (54.5%)
Raw alignments overlapping window: 31/31

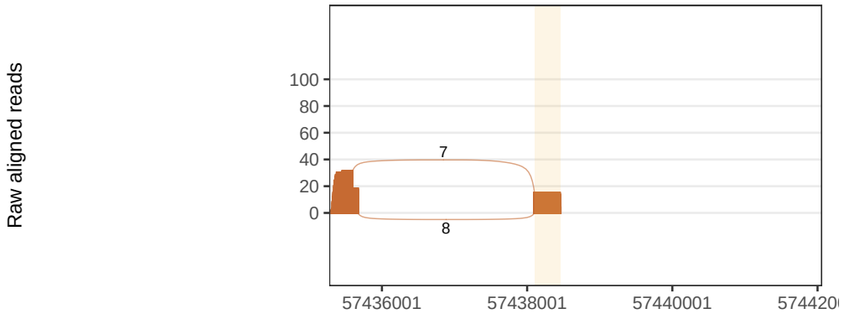


### ALT C: raw inclusion 19/30 (63.3%)

Normalized inclusion (test): 20/30 (66.7%)
Raw alignments overlapping window: 30/30

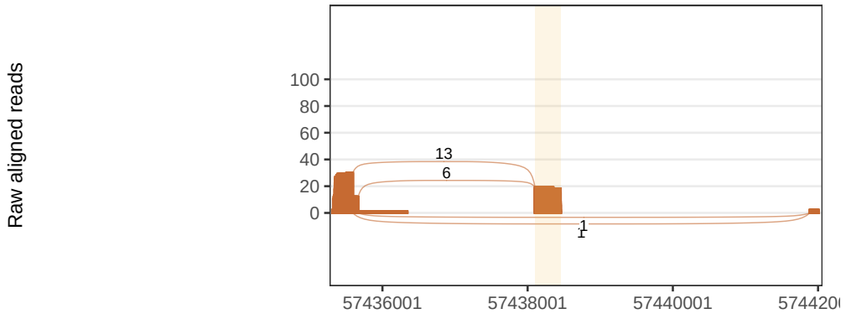


### ALT C: raw inclusion 6/44 (13.6%)

Normalized inclusion (test): 5/43 (11.6%)
Raw alignments overlapping window: 44/44

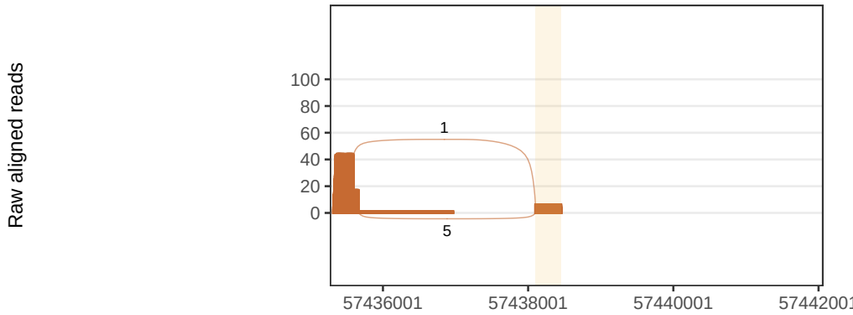


### Representative transcript structures

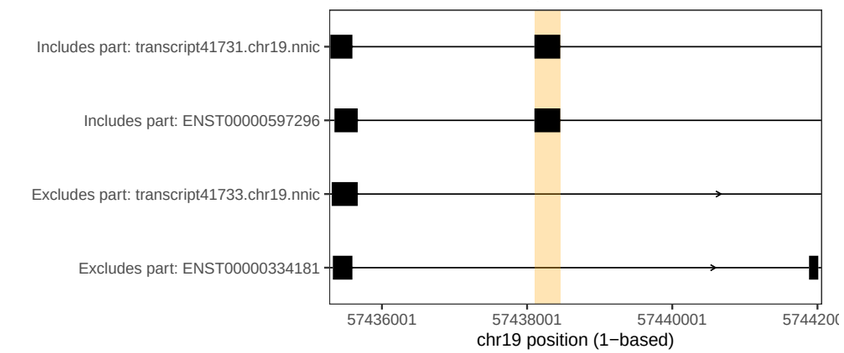


### Representative transcript structures

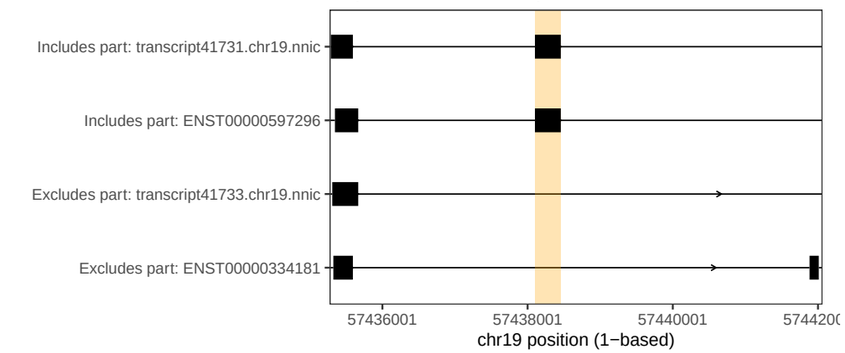


### Representative transcript structures

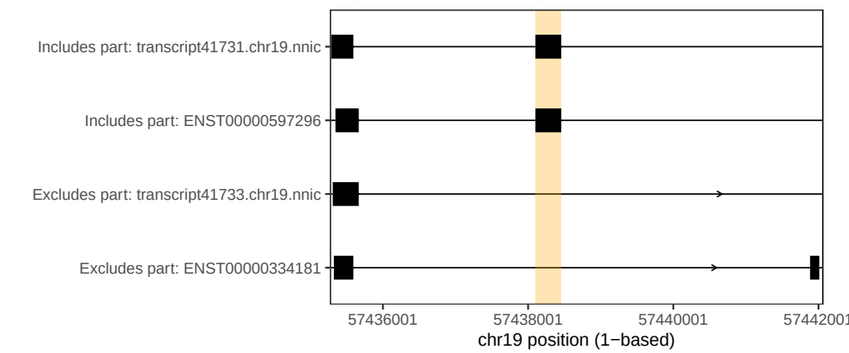


Coverage and arc labels are raw read counts; all six tracks share a y scale. Arcs: every junction with >=1 read.
Raw inclusion describes recorded reads. Normalized inclusion is from rescaled, rounded donor tables used for AMI and dPSI.
Inclusion is each read's own alignment: >= 10 aligned bases in the part, or a junction spanning it. Normalized counts are not additional sequenced reads.