JETBRAINS

Your AI Agent In Any Editor

Anna Zhdan
Principal Engineer

Back to summer 2025

How things looked like

IDEs

AI Agents

Custom Plugins

The perfect scenario

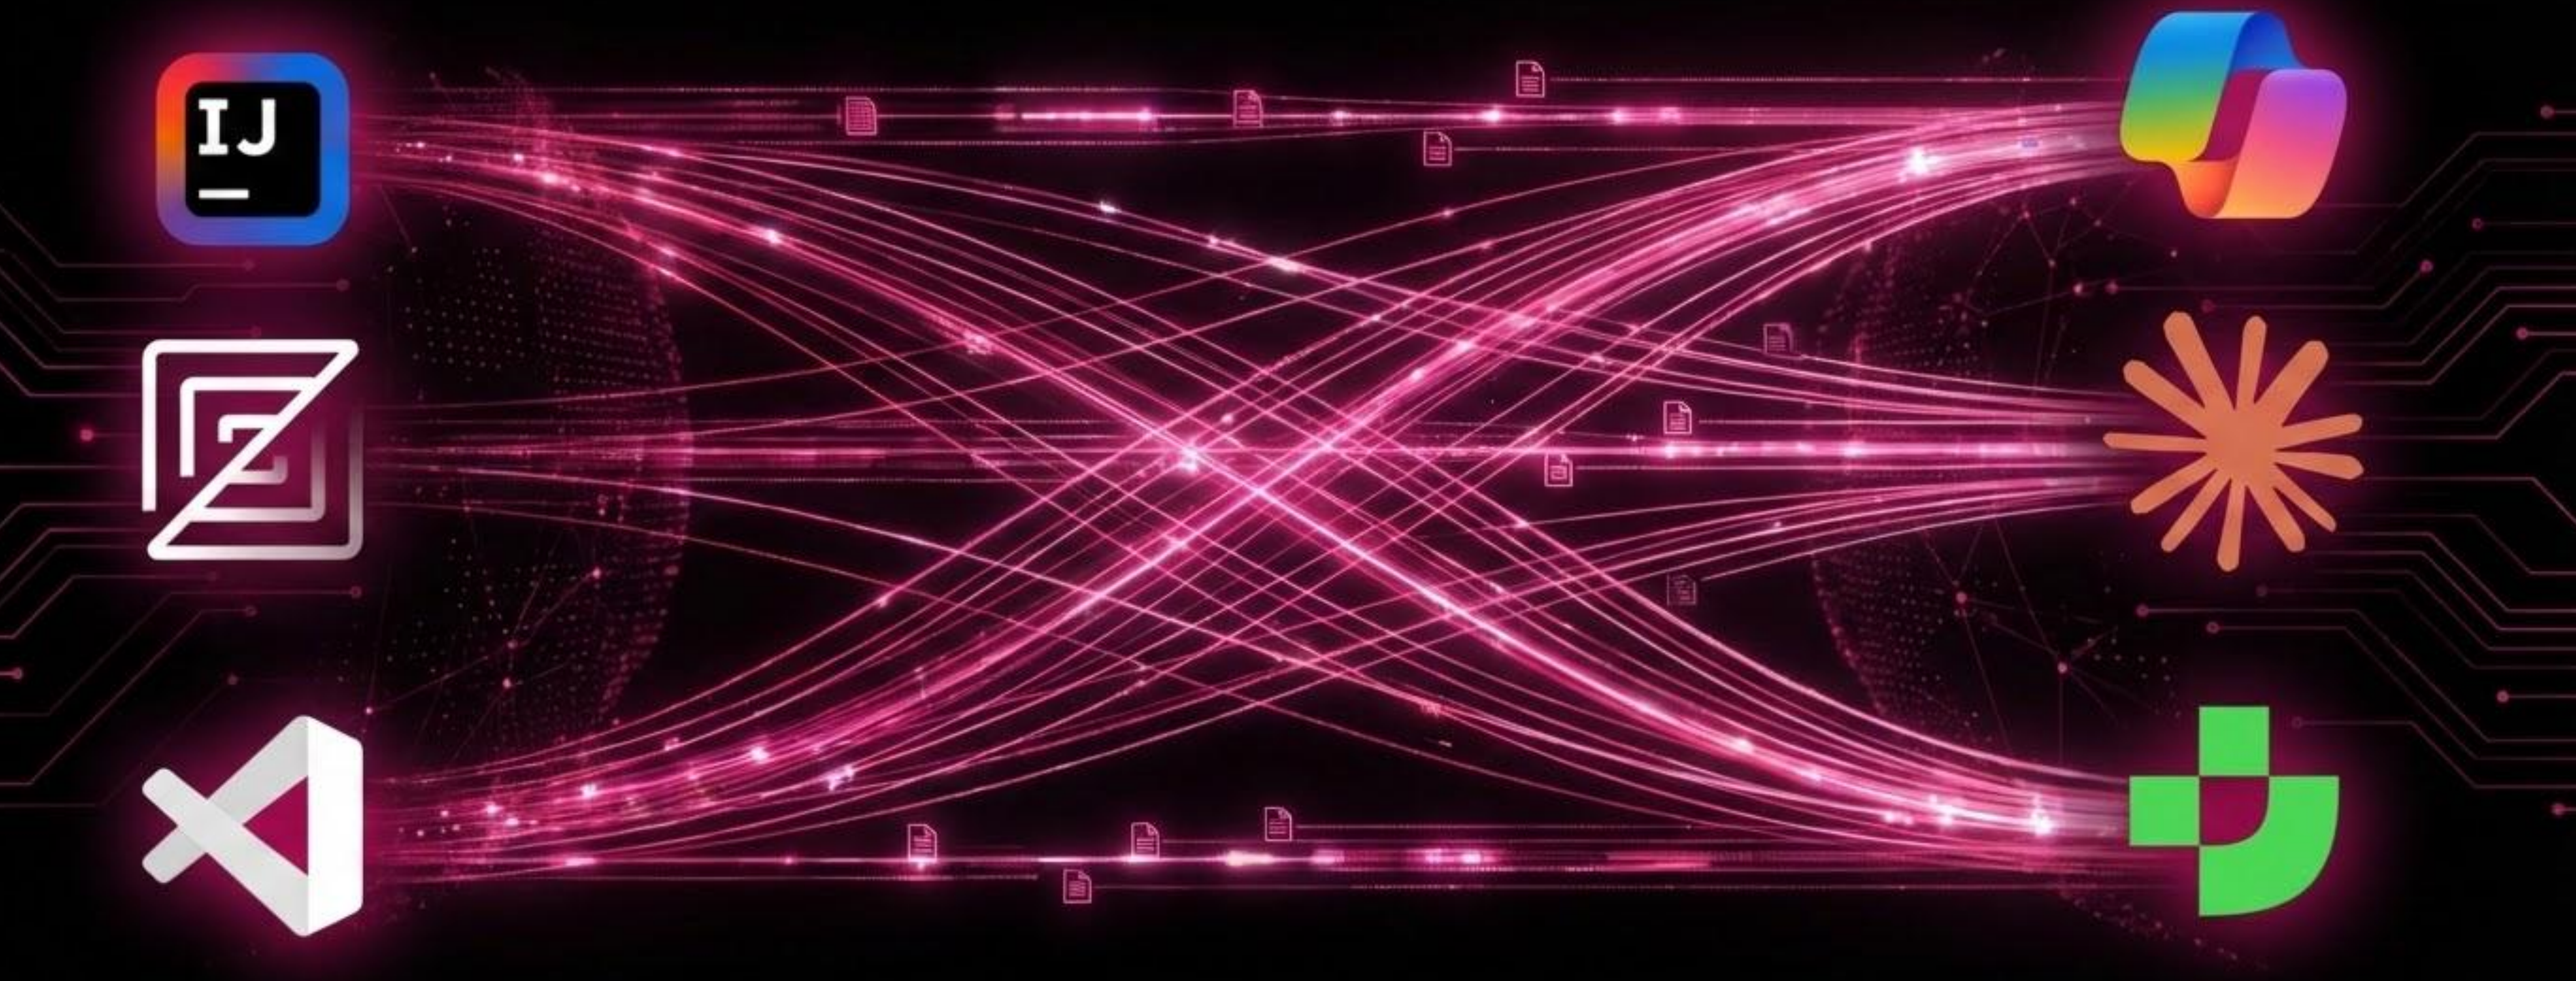

Agent/Client Protocol

Agent Client Protocol

- JSON RPC
- Stdio
- Client starts agent process and then communicates with it
- WebSocket for remote

ACP: initialization

- Establish connection
- Agree on capabilities
- Get authentication methods

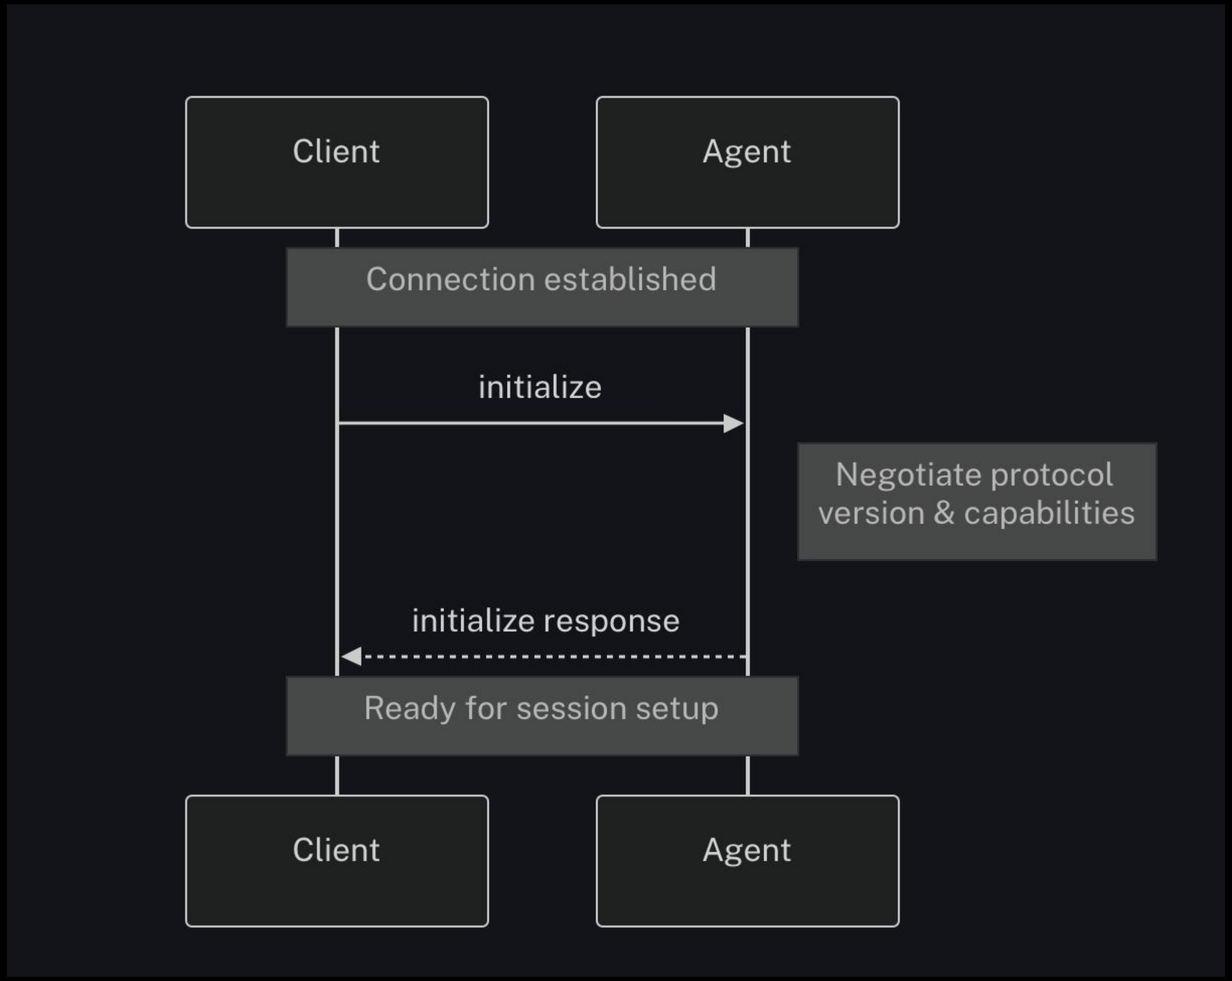

ACP: session setup

- Setup MCP
- Setup mode and model
- Get available commands

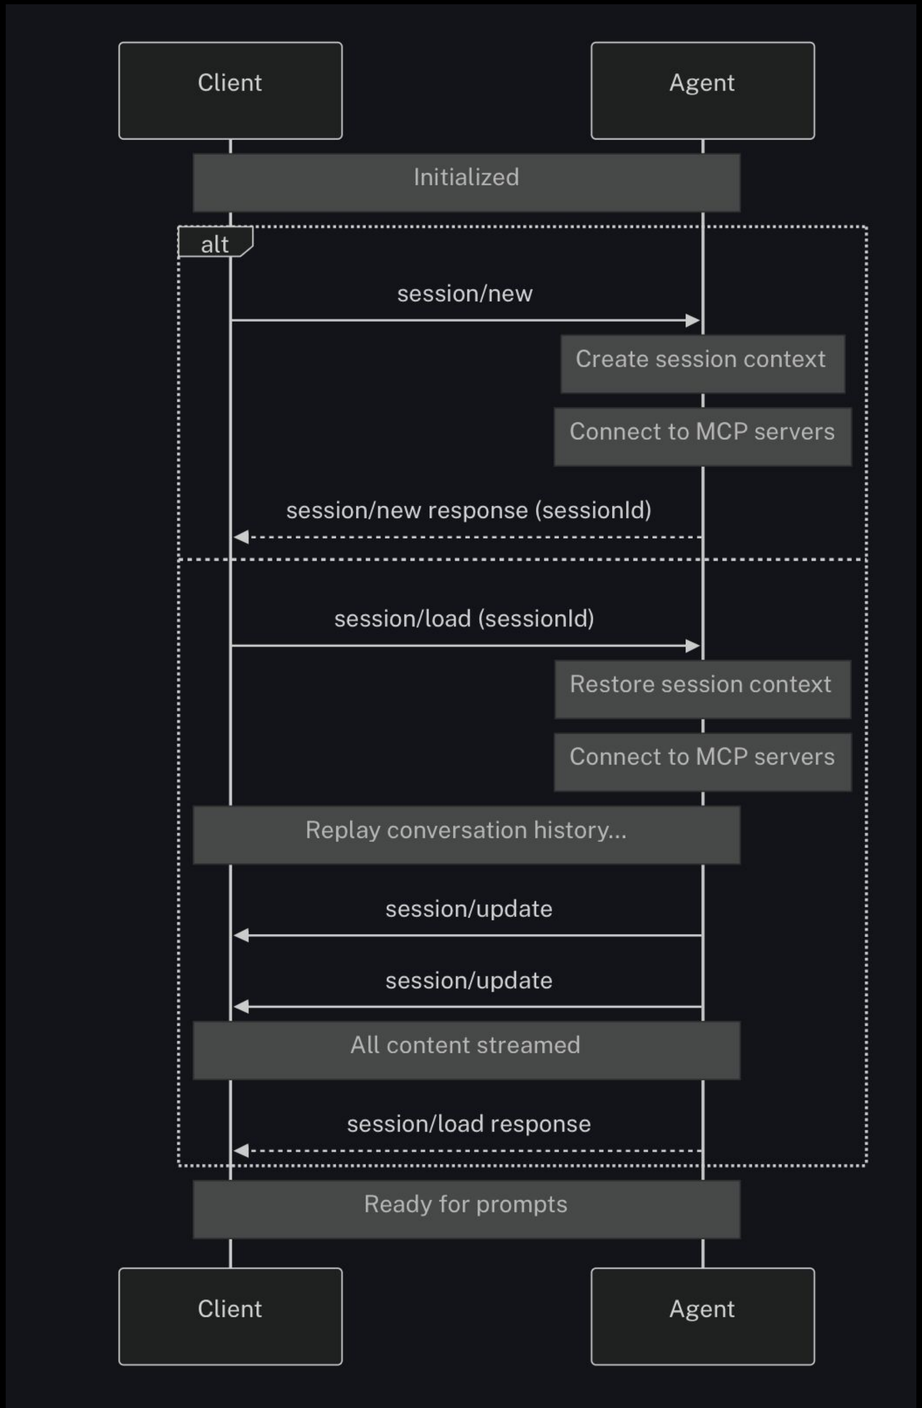

ACP: prompt turn

- Client sends prompt
- Agent streams events (tool calls, file diffs, ...)
- Agent requests permissions
- Agents returns a response to the original prompt call
- User can stop prompt execution at any time

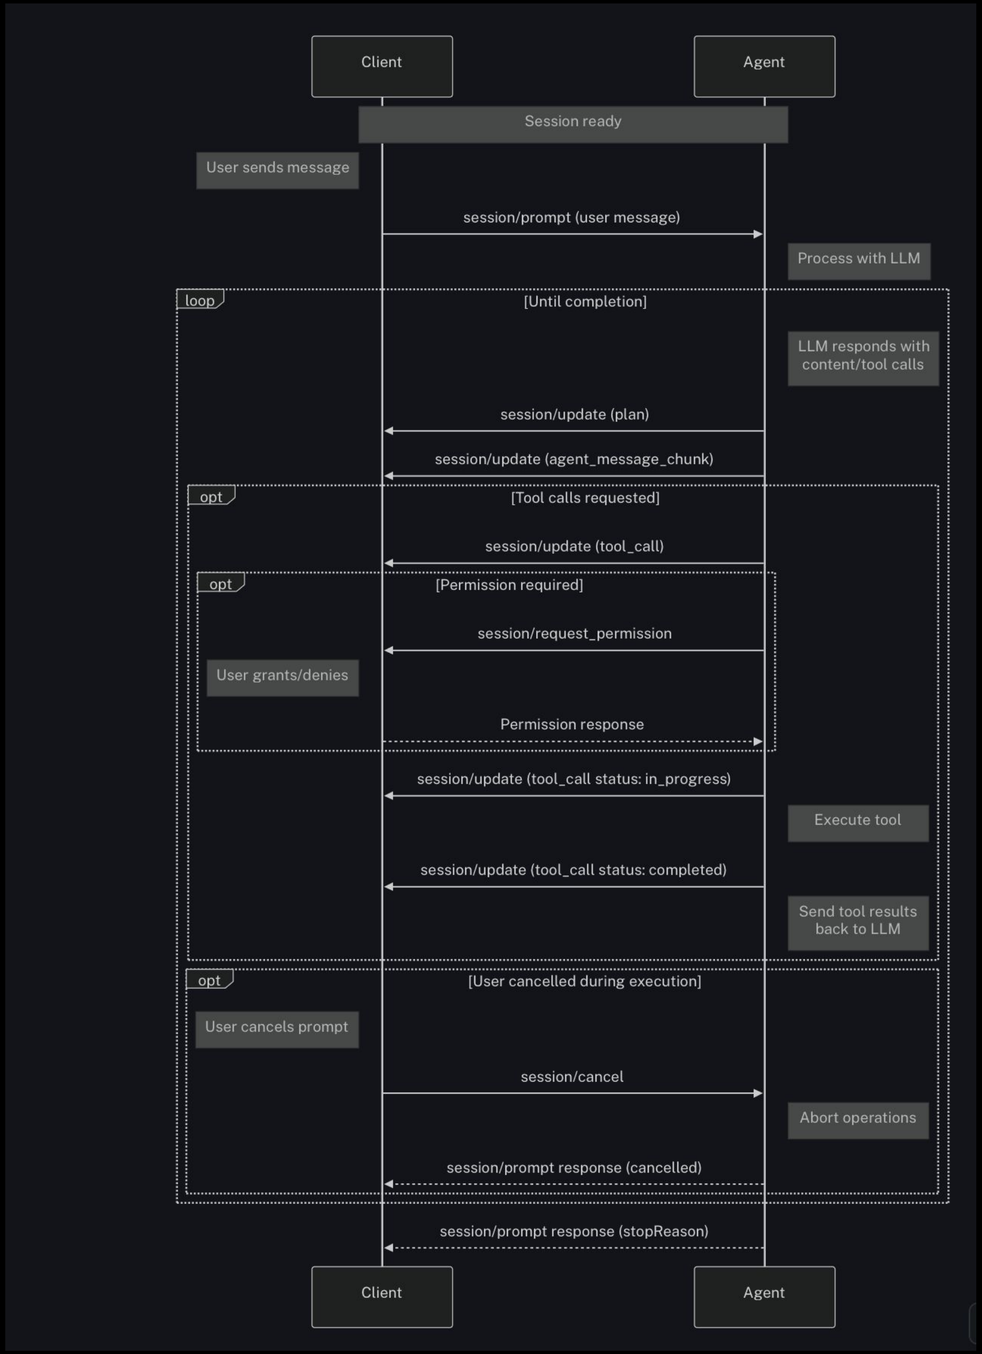

Agents

goose

OpenCode

Gemini CLI

Codex
(via adapter)

Claude Code
(via adapter)

Junie

Kimi CLI

Clients

Zed

Emacs
Plugins

JETBRAINS

neovim

Neovim
Plugins

Obsidian
Plugins

marimo

Python Notebooks

Configuring the agent

```
{
  "agent_servers": {
    "droid": {
      "command": "droid",
      "args": ["exec", "--output-format", "acp"]
    }
  }
}
```

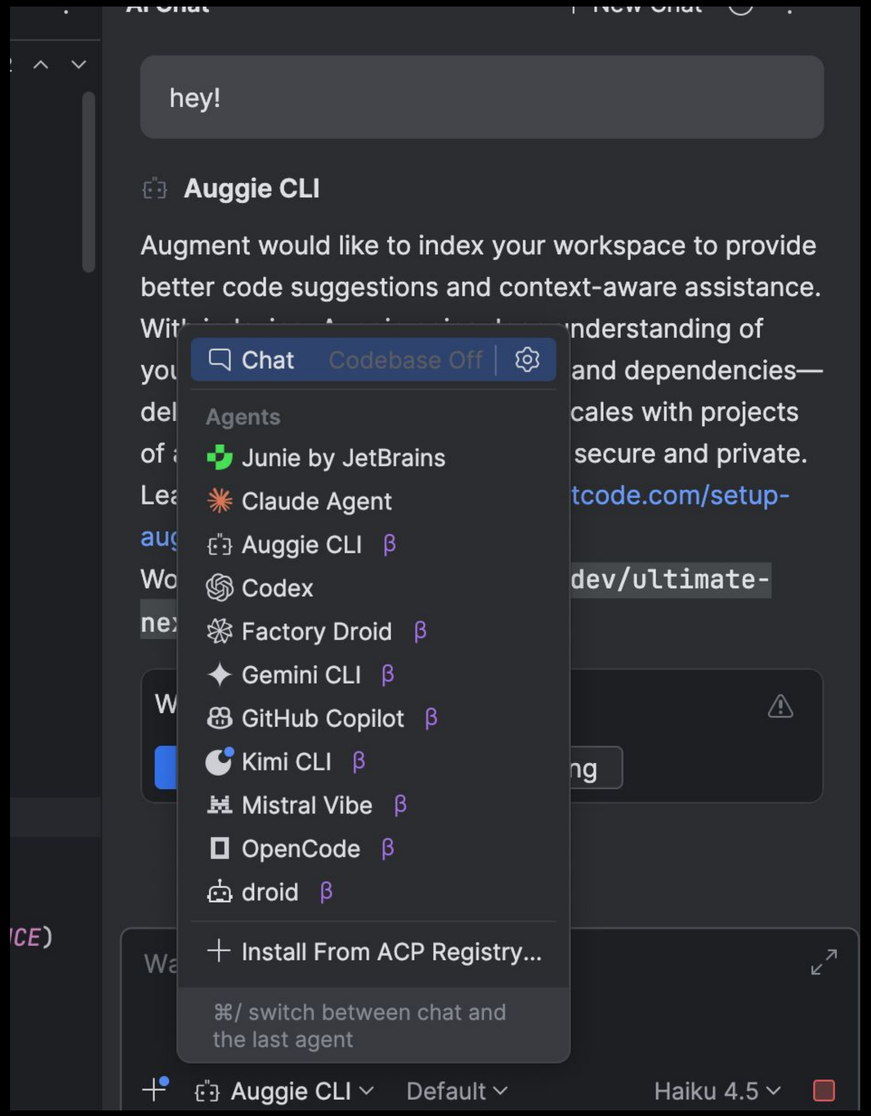

Agents registry

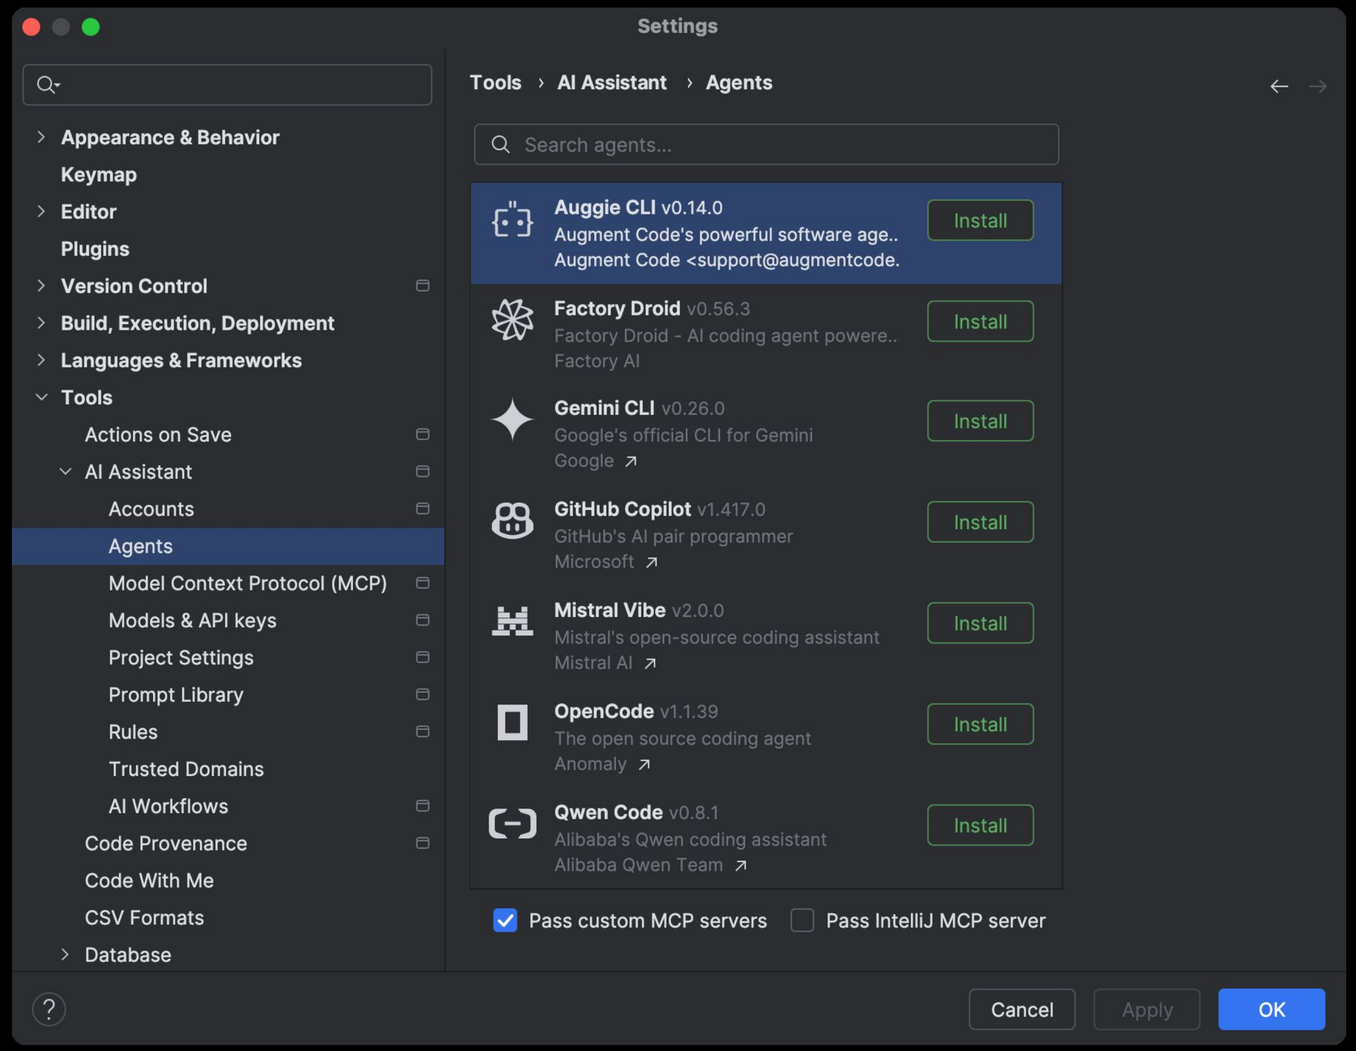

ACP: user’s perspective

01. Pick agents from the registry
02. Use them in your AI Chat in the IDE

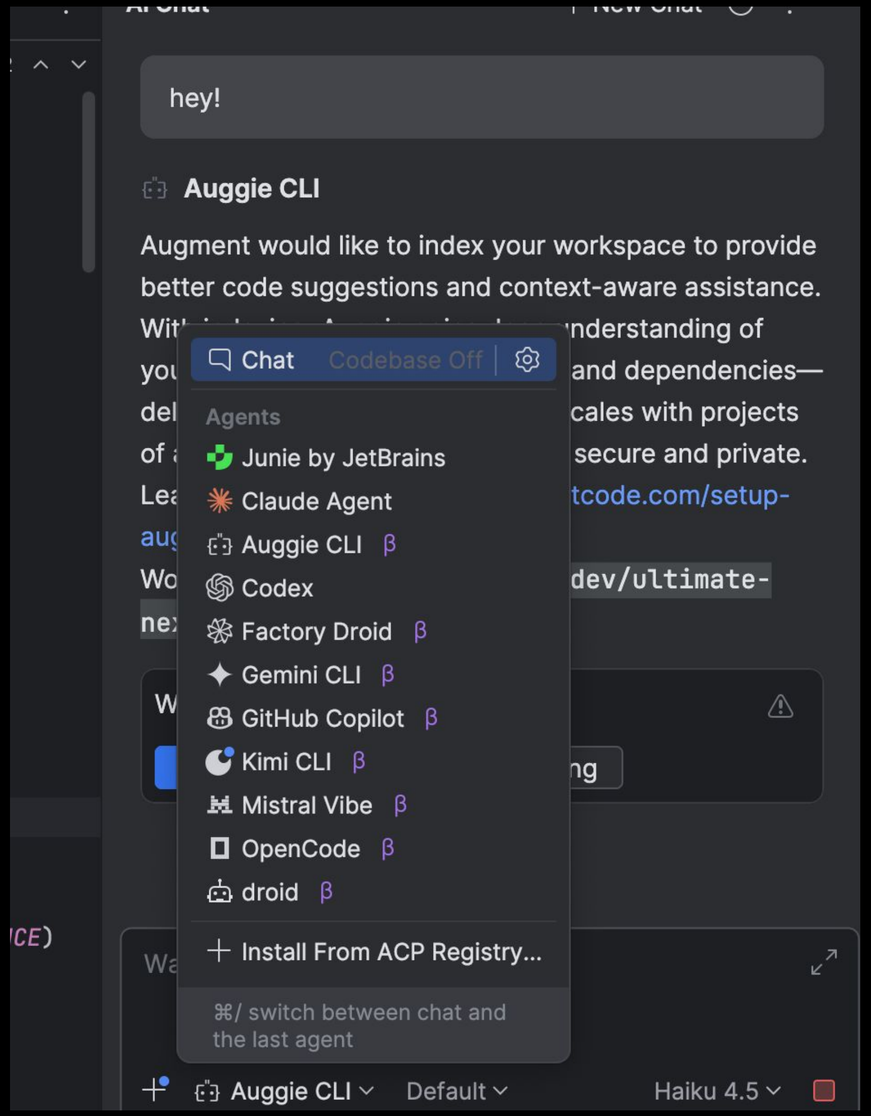

ACP: agent author’s perspective

01. Implement ACP support
02. Publish agent as npm package or binary
03. Send PR to the https://github.com/agentclientprotocol/registry

ACP: enterprise’s perspective

01. Setup custom registry URL via IDE settings provisioning
02. Publish only agents allowed by the company policy
03. Add your company’s custom agents

Future plans

- Remote agents
- Next edit suggestions
- Code review agents

Thank you!

Anna Zhdan
anna.zhdan@jetbrains.com