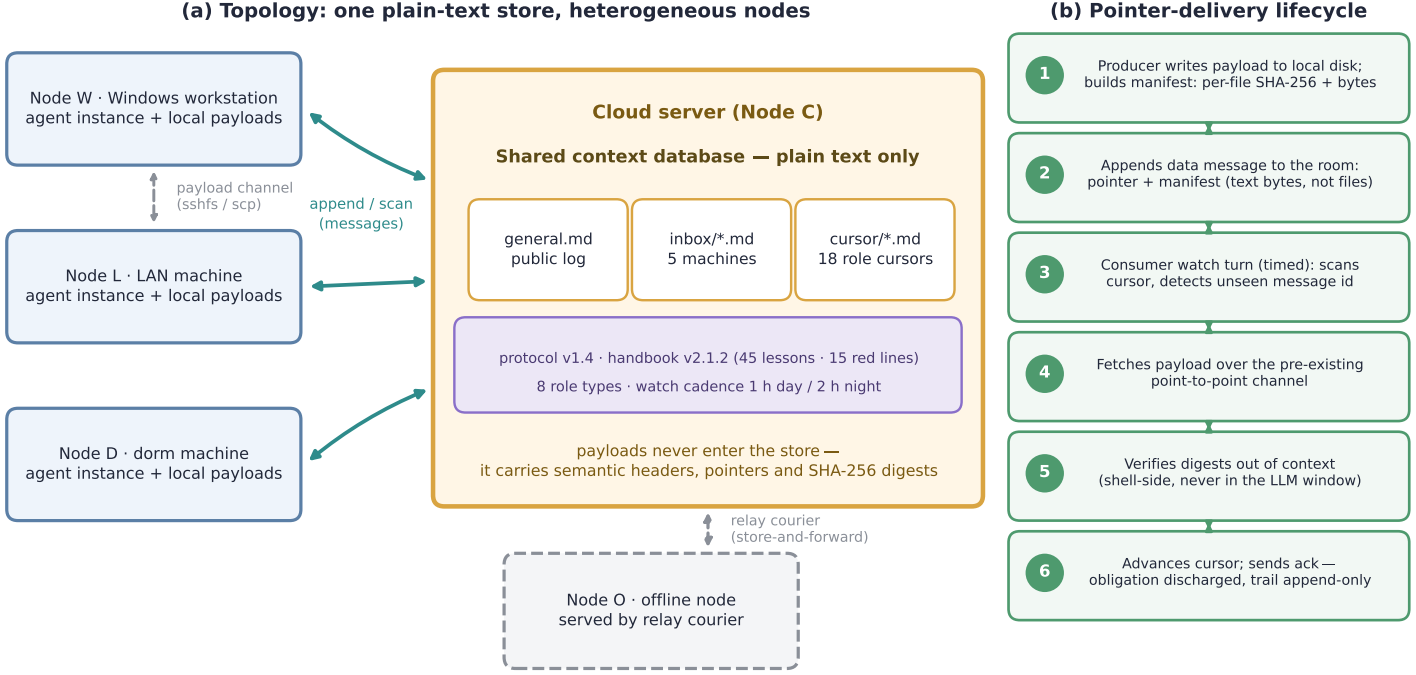
(a) Topology: one plain-text store, heterogeneous nodes
Node W · Windows workstation
agent instance + local payloads
payload channel
(sshfs / scp)
Node L · LAN machine
agent instance + local payloads
Node D · dorm machine
agent instance + local payloads
append / scan
(messages)
Cloud server (Node C)
Shared context database — plain text only
general.md
public log
inbox/*.md
5 machines
cursor/*.md
18 role cursors
protocol v1.4 · handbook v2.1.2 (45 lessons · 15 red lines)
8 role types · watch cadence 1 h day / 2 h night
payloads never enter the store —
it carries semantic headers, pointers and SHA-256 digests
relay courier
(store-and-forward)
Node O · offline node
served by relay courier
teal solid = message channel (append / scan) · grey dashed = payload channel (pre-existing sshfs / scp, out-of-band)
(b) Pointer-delivery lifecycle
1
Producer writes payload to local disk;
builds manifest: per-file SHA-256 + bytes
2
Appends data message to the room:
pointer + manifest (text bytes, not files)
3
Consumer watch turn (timed): scans
cursor, detects unseen message id
4
Fetches payload over the pre-existing
point-to-point channel
5
Verifies digests out of context
(shell-side, never in the LLM window)
6
Advances cursor; sends ack —
obligation discharged, trail append-only