

BSc Population Health Dissertation (18/19)

BSc Population Health Dissertation (18/19)

```
##### Package Library #####  
#####
```

```
library(data.table)
```

```
## Warning: package 'data.table' was built under R version 3.4.4
```

```
library(readr)
```

```
## Warning: package 'readr' was built under R version 3.4.4
```

```
library(foreign)
```

```
## Warning: package 'foreign' was built under R version 3.4.4
```

```
library(haven)
```

```
## Warning: package 'haven' was built under R version 3.4.4
```

```
library(grid)  
library(gridExtra)  
library(factoextra)
```

```
## Loading required package: ggplot2
```

```
## Warning: package 'ggplot2' was built under R version 3.4.4
```

```
## Welcome! Related Books: `Practical Guide To Cluster Analysis in R` at https://goo.gl/13EFCZ
```

```
library(PerformanceAnalytics)
```

```
## Loading required package: xts
```

```
## Warning: package 'xts' was built under R version 3.4.4
```

```
## Loading required package: zoo
```

```
## Warning: package 'zoo' was built under R version 3.4.4
```

```
##  
## Attaching package: 'zoo'
```

```
## The following objects are masked from 'package:base':  
##  
## as.Date, as.Date.numeric
```

```
##  
## Attaching package: 'xts'
```

```
## The following objects are masked from 'package:data.table':  
##  
## first, last
```

```
##  
## Attaching package: 'PerformanceAnalytics'
```

```
## The following object is masked from 'package:graphics':  
##  
## legend
```

```
library(factoextra)  
library(ca)
```

```
## Warning: package 'ca' was built under R version 3.4.4
```

```
library(highcharter)
```

```
## Highcharts (www.highcharts.com) is a Highsoft software product which is
```

```
## not free for commercial and Governmental use
```

```
library(tidyverse)
```

```
## — Attaching packages —————  
—— tidyverse 1.2.1 ———
```

```
## ✓ tibble 1.4.2      ✓ dplyr 0.7.8  
## ✓ tidyr 0.8.2       ✓ stringr 1.3.1  
## ✓ purrr 0.2.5       ✓ forcats 0.3.0
```

```
## Warning: package 'tidyr' was built under R version 3.4.4
```

```
## Warning: package 'purrr' was built under R version 3.4.4
```

```
## Warning: package 'dplyr' was built under R version 3.4.4
```

```
## Warning: package 'stringr' was built under R version 3.4.4
```

```
## — Conflicts —
## tidyverse_conflicts() —
## ✖ dplyr::between() masks data.table::between()
## ✖ dplyr::combine() masks gridExtra::combine()
## ✖ dplyr::filter() masks stats::filter()
## ✖ dplyr::first() masks xts::first(), data.table::first()
## ✖ dplyr::lag() masks stats::lag()
## ✖ dplyr::last() masks xts::last(), data.table::last()
## ✖ purrr::transpose() masks data.table::transpose()
```

```
library(rwars)
library(Matching)
```

```
## Warning: package 'Matching' was built under R version 3.4.4
```

```
## Loading required package: MASS
```

```
## Warning: package 'MASS' was built under R version 3.4.4
```

```
##
## Attaching package: 'MASS'
```

```
## The following object is masked from 'package:dplyr':
##
## select
```

```
## ##
## ## Matching (Version 4.9-3, Build Date: 2018-05-03)
## ## See http://sekhon.berkeley.edu/matching for additional documentation.
## ## Please cite software as:
## ## Jasjeet S. Sekhon. 2011. ``Multivariate and Propensity Score Matching
## ## Software with Automated Balance Optimization: The Matching package for R.''
## ## Journal of Statistical Software, 42(7): 1-52.
## ##
```

```
library(Hmisc)
```

```
## Loading required package: lattice
```

```
## Warning: package 'lattice' was built under R version 3.4.4
```

```
## Loading required package: survival
```

```
## Warning: package 'survival' was built under R version 3.4.4
```

```
## Loading required package: Formula
```

```
## Warning: package 'Formula' was built under R version 3.4.4
```

```
##  
## Attaching package: 'Hmisc'
```

```
## The following objects are masked from 'package:dplyr':  
##  
##      src, summarize
```

```
## The following objects are masked from 'package:base':  
##  
##      format.pval, units
```

```
library(dplyr)  
library(tableone)
```

```
## Warning: package 'tableone' was built under R version 3.4.4
```

```
library(stargazer)
```

```
## Warning: package 'stargazer' was built under R version 3.4.4
```

```
##  
## Please cite as:
```

```
## Hlavac, Marek (2018). stargazer: Well-Formatted Regression and Summary Statistics  
Tables.
```

```
## R package version 5.2.2. https://CRAN.R-project.org/package=stargazer
```

```
##### Write in 2005-2015 datasets #####  
#####  
  
hse05 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse05ai.dta")  
  
hse06 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse06ai.dta")  
  
hse07 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse07ai.dta")  
  
hse08 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse08ai.dta")  
  
hse09 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse09ai.dta")  
  
hse10 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse10ai.dta")  
  
hse11 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse2011ai.dta"  
)  
  
hse12 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse2012ai.dta"  
)  
  
hse13 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse2013ai.dta"  
)  
  
hse14 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse2014ai.dta"  
)  
  
hse15 = read_dta("/Users/vincentmay/Desktop/Dissertation/Codes/dataset/hse2015ai.dta"  
)
```

Part 1/3: Data Preparation

```
##### Data Preparation -- Get variables needed
#####

# In this section, variables in interest are selected.
# Children are filtered from the datasets by "age", which is further converted to three age groups

hse05.pc <- c("syslom", "diaslom", "sex", "tenureb", "age", "ethinda", "hhsz", "addnum", "imd2004",
             "birthwt", "porftvg", "gor", "sys2om", "sys3om", "dias2om", "dias3om")
hse05.mk2 <- hse05[,hse05.pc]
colnames(hse05.mk2)[6] <- "origin"
colnames(hse05.mk2)[9] <- "imd"
hse05.mk2$year <- 05
hse05.mk2$aggr <- ifelse(hse05.mk2$age > 10 & hse05.mk2$age < 16 , 3,
                        ifelse(hse05.mk2$age > 4 & hse05.mk2$age < 11 , 2,
                              ifelse(hse05.mk2$age > 1 & hse05.mk2$age < 5 , 1, 0
)))
hse05.mk2$porftvg <- ifelse(hse05.mk2$porftvg > 5, 6, hse05.mk2$porftvg)
hse05.2 <- -c(which(hse05.mk2$aggr == 0))
hse05.mk2 <- hse05.mk2[hse05.2,]
hse05.mk2$age <- NULL

hse06.pc <- c("syslom", "diaslom", "sex", "tenureb", "age", "ethinda", "hhsz", "addnum", "imd2004",
             "birthwt", "porftvg", "gor06", "sys2om", "sys3om", "dias2om", "dias3om")
hse06.mk2 <- hse06[,hse06.pc]
colnames(hse06.mk2)[6] <- "origin"
colnames(hse06.mk2)[9] <- "imd"
colnames(hse06.mk2)[12] <- "gor"
hse06.mk2$year <- 06
hse06.mk2$aggr <- ifelse(hse06.mk2$age > 10 & hse06.mk2$age < 16 , 3,
                        ifelse(hse06.mk2$age > 4 & hse06.mk2$age < 11 , 2,
                              ifelse(hse06.mk2$age > 1 & hse06.mk2$age < 5 , 1, 0
)))
hse06.mk2$porftvg <- ifelse(hse06.mk2$porftvg > 5, 6, hse06.mk2$porftvg)
hse06.2 <- -c(which(hse06.mk2$aggr == 0))
hse06.mk2 <- hse06.mk2[hse06.2,]
hse06.mk2$age <- NULL

hse07.pc <- c("syslom", "diaslom", "sex", "tenureb", "age", "ethinda", "hhsz", "addnum", "imd2007",
             "birthwt", "porftvg", "gor07", "sys2om", "sys3om", "dias2om", "dias3om")
hse07.mk2 <- hse07[,hse07.pc]
colnames(hse07.mk2)[6] <- "origin"
colnames(hse07.mk2)[7] <- "hhsz"
colnames(hse07.mk2)[9] <- "imd"
colnames(hse07.mk2)[12] <- "gor"
hse07.mk2$year <- 07
hse07.mk2$aggr <- ifelse(hse07.mk2$age > 10 & hse07.mk2$age < 16 , 3,
                        ifelse(hse07.mk2$age > 4 & hse07.mk2$age < 11 , 2,
                              ifelse(hse07.mk2$age > 1 & hse07.mk2$age < 5 , 1, 0
)))
hse07.mk2$porftvg <- ifelse(hse07.mk2$porftvg > 5, 6, hse07.mk2$porftvg)
hse07.2 <- -c(which(hse07.mk2$aggr == 0))
```

```

hse07.mk2 <- hse07.mk2[hse07.2,]
hse07.mk2$age <- NULL

hse08.pc <- c("syslom","diaslom","sex","tenureb","age","origin","hhszize","addnum","qi
md",
             "birthwt","porftvg","GOR","sys2om","sys3om","dias2om","dias3om")
hse08.mk2 <- hse08[,hse08.pc]
colnames(hse08.mk2)[9] <- "imd"
colnames(hse08.mk2)[12] <- "gor"
hse08.mk2$year <- 08
hse08.mk2$aggr <- ifelse(hse08.mk2$age > 10 & hse08.mk2$age < 16 , 3,
                        ifelse(hse08.mk2$age > 4 & hse08.mk2$age < 11 , 2,
                              ifelse(hse08.mk2$age > 1 & hse08.mk2$age < 5 , 1, 0
)))
hse08.mk2$porftvg <- ifelse(hse08.mk2$porftvg > 5, 6, hse08.mk2$porftvg)
hse08.2 <- -c(which(hse08.mk2$aggr == 0))
hse08.mk2 <- hse08.mk2[hse08.2,]
hse08.mk2$age <- NULL

hse09.pc <- c("syslom","diaslom","sex","tenureb","age","origin","hhszize","addnum","IM
D2007",
             "birthwt","porftvg","GOR07","sys2om","sys3om","dias2om","dias3om")
hse09.mk2 <- hse09[,hse09.pc]
colnames(hse09.mk2)[9] <- "imd"
colnames(hse09.mk2)[12] <- "gor"
hse09.mk2$year <- 09
hse09.mk2$aggr <- ifelse(hse09.mk2$age > 10 & hse09.mk2$age < 16 , 3,
                        ifelse(hse09.mk2$age > 4 & hse09.mk2$age < 11 , 2,
                              ifelse(hse09.mk2$age > 1 & hse09.mk2$age < 5 , 1, 0
)))
hse09.mk2$porftvg <- ifelse(hse09.mk2$porftvg > 5, 6, hse09.mk2$porftvg)
hse09.2 <- -c(which(hse09.mk2$aggr == 0))
hse09.mk2 <- hse09.mk2[hse09.2,]
hse09.mk2$age <- NULL

hse10.pc <- c("syslom","diaslom","sex","tenureb","age","origin","hhszize","addnum","im
d2007",
             "birthwt","porftvg","gor1","sys2om","sys3om","dias2om","dias3om")
hse10.mk2 <- hse10[,hse10.pc]
colnames(hse10.mk2)[9] <- "imd"
colnames(hse10.mk2)[12] <- "gor"
hse10.mk2$year <- 10
hse10.mk2$aggr <- ifelse(hse10.mk2$age > 10 & hse10.mk2$age < 16 , 3,
                        ifelse(hse10.mk2$age > 4 & hse10.mk2$age < 11 , 2,
                              ifelse(hse10.mk2$age > 1 & hse10.mk2$age < 5 , 1, 0
)))
hse10.mk2$porftvg <- ifelse(hse10.mk2$porftvg > 5, 6, hse10.mk2$porftvg)
hse10.2 <- -c(which(hse10.mk2$aggr == 0))
hse10.mk2 <- hse10.mk2[hse10.2,]
hse10.mk2$age <- NULL

hse11.pc <- c("syslom","diaslom","Sex","tenureb","Age","Origin","HHSzize","addnum","qi
md",
             "BirthWt","porftvg","gor1","sys2om","sys3om","dias2om","dias3om")

```

```

hse11.mk2 <- hse11[,hse11.pc]
colnames(hse11.mk2)[3] <- "sex"
colnames(hse11.mk2)[6] <- "origin"
colnames(hse11.mk2)[7] <- "hhsize"
colnames(hse11.mk2)[9] <- "imd"
colnames(hse11.mk2)[10] <- "birthwt"
colnames(hse11.mk2)[12] <- "gor"
hse11.mk2$year <- 11
hse11.mk2$aggr <- ifelse(hse11.mk2$Age > 10 & hse11.mk2$Age < 16 , 3,
                        ifelse(hse11.mk2$Age > 4 & hse11.mk2$Age < 11 , 2,
                              ifelse(hse11.mk2$Age > 1 & hse11.mk2$Age < 5 , 1, 0
)))
hse11.mk2$porftvg <- ifelse(hse11.mk2$porftvg > 5, 6, hse11.mk2$porftvg)
hse11.2 <- -c(which(hse11.mk2$aggr == 0))
hse11.mk2 <- hse11.mk2[hse11.2,]
hse11.mk2$Age <- NULL

hse12.pc <- c("syslom","diaslom","Sex","tenureb","Age","Origin","HHSIZE","Addnum","qi
md",
             "BirthWt",             "gor1","sys2om","sys3om","dias2om","dias3om")
hse12.mk2 <- hse12[,hse12.pc]
colnames(hse12.mk2)[3] <- "sex"
colnames(hse12.mk2)[6] <- "origin"
colnames(hse12.mk2)[7] <- "hhsize"
colnames(hse12.mk2)[8] <- "addnum"
colnames(hse12.mk2)[9] <- "imd"
colnames(hse12.mk2)[10] <- "birthwt"
colnames(hse12.mk2)[11] <- "gor"
hse12.mk2$porftvg <- NA
hse12.mk2$year <- 12
hse12.mk2$aggr <- ifelse(hse12.mk2$Age > 10 & hse12.mk2$Age < 16 , 3,
                        ifelse(hse12.mk2$Age > 4 & hse12.mk2$Age < 11 , 2,
                              ifelse(hse12.mk2$Age > 1 & hse12.mk2$Age < 5 , 1, 0
)))
hse12.mk2$porftvg <- ifelse(hse12.mk2$porftvg > 5, 6, hse12.mk2$porftvg)
hse12.2 <- -c(which(hse12.mk2$aggr == 0))
hse12.mk2 <- hse12.mk2[hse12.2,]
hse12.mk2$Age <- NULL

hse13.pc <- c("SYS1OM","DIAS1OM","Sex","tenureb","Age","Origin","HHSIZE","Addnum","qi
md",
             "BirthWt","porftvg","gor1","SYS2OM","SYS3OM","DIAS2OM","DIAS3OM")
hse13.mk2 <- hse13[,hse13.pc]
colnames(hse13.mk2)[1] <- "syslom"
colnames(hse13.mk2)[2] <- "diaslom"
colnames(hse13.mk2)[3] <- "sex"
colnames(hse13.mk2)[6] <- "origin"
colnames(hse13.mk2)[7] <- "hhsize"
colnames(hse13.mk2)[8] <- "addnum"
colnames(hse13.mk2)[9] <- "imd"
colnames(hse13.mk2)[10] <- "birthwt"
colnames(hse13.mk2)[12] <- "gor"
colnames(hse13.mk2)[13] <- "sys2om"
colnames(hse13.mk2)[14] <- "sys3om"
colnames(hse13.mk2)[15] <- "dias2om"
colnames(hse13.mk2)[16] <- "dias3om"

```



```

hse13.mk2$year <- 13
hse13.mk2$aggr <- ifelse(hse13.mk2$Age > 10 & hse13.mk2$Age < 16 , 3,
                        ifelse(hse13.mk2$Age > 4 & hse13.mk2$Age < 11 , 2,
                        ifelse(hse13.mk2$Age > 1 & hse13.mk2$Age < 5 , 1, 0
                        )))
hse13.mk2$porftvg <- ifelse(hse13.mk2$porftvg > 5, 6, hse13.mk2$porftvg)
hse13.2 <- -c(which(hse13.mk2$aggr == 0))
hse13.mk2 <- hse13.mk2[hse13.2,]
hse13.mk2$Age <- NULL

hse14.pc <- c("SYS10M","DIAS10M","Sex","tenureb","Age90","origin2","HHSIZE9","Addnum",
,"qimd",
            "BirthWt","PorFV05","gor1","SYS2OM","SYS3OM","DIAS2OM","DIAS3OM")
hse14.mk2 <- hse14[,hse14.pc]
colnames(hse14.mk2)[1] <- "sys1om"
colnames(hse14.mk2)[2] <- "dias1om"
colnames(hse14.mk2)[3] <- "sex"
colnames(hse14.mk2)[6] <- "origin"
colnames(hse14.mk2)[7] <- "hhszize"
colnames(hse14.mk2)[8] <- "addnum"
colnames(hse14.mk2)[9] <- "imd"
colnames(hse14.mk2)[10] <- "birthwt"
colnames(hse14.mk2)[11] <- "porftvg"
colnames(hse14.mk2)[12] <- "gor"
colnames(hse14.mk2)[13] <- "sys2om"
colnames(hse14.mk2)[14] <- "sys3om"
colnames(hse14.mk2)[15] <- "dias2om"
colnames(hse14.mk2)[16] <- "dias3om"
hse14.mk2$year <- 14
hse14.mk2$aggr <- ifelse(hse14.mk2$Age90 > 10 & hse14.mk2$Age90 < 16 , 3,
                        ifelse(hse14.mk2$Age90 > 4 & hse14.mk2$Age90 < 11 , 2,
                        ifelse(hse14.mk2$Age90 > 1 & hse14.mk2$Age90 < 5 , 1,
0)))
hse14.2 <- -c(which(hse14.mk2$aggr == 0))
hse14.mk2 <- hse14.mk2[hse14.2,]
hse14.mk2$Age90 <- NULL

hse15.pc <- c("SYS10M","DIAS10M","Sex","tenureb","Ag015g4","origin2","HHSIZE6","addnu
m","qimd",
            "BirthWt","PorFV05b","Gor1","SYS2OM","SYS3OM","DIAS2OM","DIAS3OM")
hse15.mk2 <- hse15[,hse15.pc]
colnames(hse15.mk2)[1] <- "sys1om"
colnames(hse15.mk2)[2] <- "dias1om"
colnames(hse15.mk2)[3] <- "sex"
colnames(hse15.mk2)[6] <- "origin"
colnames(hse15.mk2)[7] <- "hhszize"
colnames(hse15.mk2)[9] <- "imd"
colnames(hse15.mk2)[10] <- "birthwt"
colnames(hse15.mk2)[11] <- "porftvg"
colnames(hse15.mk2)[12] <- "gor"
colnames(hse15.mk2)[13] <- "sys2om"
colnames(hse15.mk2)[14] <- "sys3om"
colnames(hse15.mk2)[15] <- "dias2om"
colnames(hse15.mk2)[16] <- "dias3om"
hse15.mk2$year <- 15
hse15.mk2$aggr <- ifelse(hse15.mk2$Ag015g4 > 0, hse15.mk2$Ag015g4, 0)

```

```
hse15.2 <- -c(which(hse15.mk2$aggr == 0))
hse15.mk2 <- hse15.mk2[hse15.2,]
hse15.mk2$Ag015g4 <- NULL
```

```
##### Data Preparation -- Merge (Row bind) the datasets #####
```

```
hse.mk20 <- rbind(hse05.mk2, hse06.mk2)
hse.mk20 <- rbind(hse.mk20, hse07.mk2)
hse.mk20 <- rbind(hse.mk20, hse08.mk2)
hse.mk20 <- rbind(hse.mk20, hse09.mk2)
hse.mk20 <- rbind(hse.mk20, hse10.mk2)
hse.mk20 <- rbind(hse.mk20, hse11.mk2)
hse.mk20 <- rbind(hse.mk20, hse12.mk2)
hse.mk20 <- rbind(hse.mk20, hse13.mk2)
hse.mk20 <- rbind(hse.mk20, hse14.mk2)
hse.mk20 <- rbind(hse.mk20, hse15.mk2)
```

```
##### Data Preparation -- Convert the missing values to NAs & Keep only the valid BP measurements #####
```

```
# As some of the missing observations are recorded as negative number or huge number in the datasets
# This step ensures those cases are marked as NAs rather than continuous number

colnames(hse.mk20)
```

```
## [1] "syslom" "diaslom" "sex" "tenureb" "origin" "hhsiz" "addnum"
## [8] "imd" "birthwt" "porftvg" "gor" "sys2om" "sys3om" "dias2om"
## [15] "dias3om" "year" "aggr"
```

```
range(hse.mk20$sex)
```

```
## [1] 1 2
```

```
range(hse.mk20$tenureb)
```

```
## [1] -9 6
```

```
range(hse.mk20$origin)
```

```
## [1] -9 18
```

```
range(hse.mk20$hhsiz)
```

```
## [1] 2 12
```

```
range(hse.mk20$addnum)
```

```
## [1] 1 56
```

```
range(hse.mk20$imd)
```

```
## [1] 1 5
```

```
range(hse.mk20$birthwt, na.rm = T)
```

```
## [1] -1.00 7.14
```

```
range(hse.mk20$porftvg, na.rm = T)
```

```
## [1] -9 6
```

```
range(hse.mk20$gor)
```

```
## [1] 1 9
```

```
range(hse.mk20$year)
```

```
## [1] 5 15
```

```
range(hse.mk20$aggr)
```

```
## [1] 1 3
```

```
range(hse.mk20$syslom)
```

```
## [1] -9 186
```

```
range(hse.mk20$sys2om)
```

```
## [1] -9 996
```

```
range(hse.mk20$sys3om)
```

```
## [1] -9 194
```

```
range(hse.mk20$diaslom)
```

```
## [1] -9 131
```

```
range(hse.mk20$dias2om)
```

```
## [1] -9 135
```

```
range(hse.mk20$dias3om)
```

```
## [1] -9 140
```

```
# tenureb, origin, birthwt, porftvg, & six BP measurements have negative/huge values  
# birthwt, porftvg have NA values originally which require to be imputed later.
```

```
#          Covert the missing values to NAs
```

```
hse.mk20$tenureb <- ifelse(hse.mk20$tenureb < 0, NA, hse.mk20$tenureb)  
hse.mk20$origin <- ifelse(hse.mk20$origin < 0, NA, hse.mk20$origin)  
hse.mk20$birthwt <- ifelse(hse.mk20$birthwt < 0, NA, hse.mk20$birthwt)  
hse.mk20$porftvg <- ifelse(hse.mk20$porftvg < 0, NA, hse.mk20$porftvg)
```

```
#          Keep only the valid measurements
```

```
#          Note: As children aged from 2-4 do not have valid BP measurements, so they are  
dropped from the analysis at this step
```

```
hse.mk20.pc <- -c(which(hse.mk20$syslom < 0 | hse.mk20$syslom > 200 |  
                      hse.mk20$sys2om < 0 | hse.mk20$sys2om > 200 |  
                      hse.mk20$sys3om < 0 | hse.mk20$sys3om > 200 |  
                      hse.mk20$diaslom < 0 | hse.mk20$diaslom > 200 |  
                      hse.mk20$dias2om < 0 | hse.mk20$dias2om > 200 |  
                      hse.mk20$dias3om < 0 | hse.mk20$dias3om > 200))  
hse.mk20 <- hse.mk20[hse.mk20.pc,]
```

```
#          Last check
```

```
colnames(hse.mk20)
```

```
## [1] "syslom" "diaslom" "sex"      "tenureb" "origin" "hhsizes" "addnum"  
## [8] "imd"    "birthwt" "porftvg" "gor"     "sys2om" "sys3om" "dias2om"  
## [15] "dias3om" "year"    "aggr"
```

```
range(hse.mk20$sex)
```

```
## [1] 1 2
```

```
range(hse.mk20$tenureb, na.rm = T)
```

```
## [1] 1 6
```

```
range(hse.mk20$origin, na.rm = T)
```

```
## [1] 1 18
```

```
range(hse.mk20$hhszsize)
```

```
## [1] 2 11
```

```
range(hse.mk20$addnum)
```

```
## [1] 1 56
```

```
range(hse.mk20$imd)
```

```
## [1] 1 5
```

```
range(hse.mk20$birthwt, na.rm = T)
```

```
## [1] 0.91 6.75
```

```
range(hse.mk20$porftvg, na.rm = T)
```

```
## [1] 0 6
```

```
range(hse.mk20$gor)
```

```
## [1] 1 9
```

```
range(hse.mk20$year)
```

```
## [1] 5 15
```

```
range(hse.mk20$aggr)
```

```
## [1] 2 3
```

```
range(hse.mk20$syslom, na.rm = T)
```

```
## [1] 51 183
```

```
range(hse.mk20$sys2om, na.rm = T)
```

```
## [1] 52 187
```

```
range(hse.mk20$sys3om, na.rm = T)
```

```
## [1] 53 194
```

```
range(hse.mk20$dias1om, na.rm = T)
```

```
## [1] 31 131
```

```
range(hse.mk20$dias2om, na.rm = T)
```

```
## [1] 31 135
```

```
range(hse.mk20$dias3om, na.rm = T)
```

```
## [1] 30 140
```

```
##### Data Preparation -- Average the BP for each row  
w #####
```


```
# Looking into the distribution of BP measurements
```

```
x1 <- hse.mk20$sys1om  
range(hse.mk20$sys1om, na.rm = T)
```

```
## [1] 51 183
```

```
hist(x1, freq = FALSE, main = "Distribution of First Time Systolic Blood Pressure Measurement",  
      , xlab = "First Time Systolic Blood Pressure",  
      , ylab = "Frequency")
```

Distribution of First Time Systolic Blood Pressure Measurement

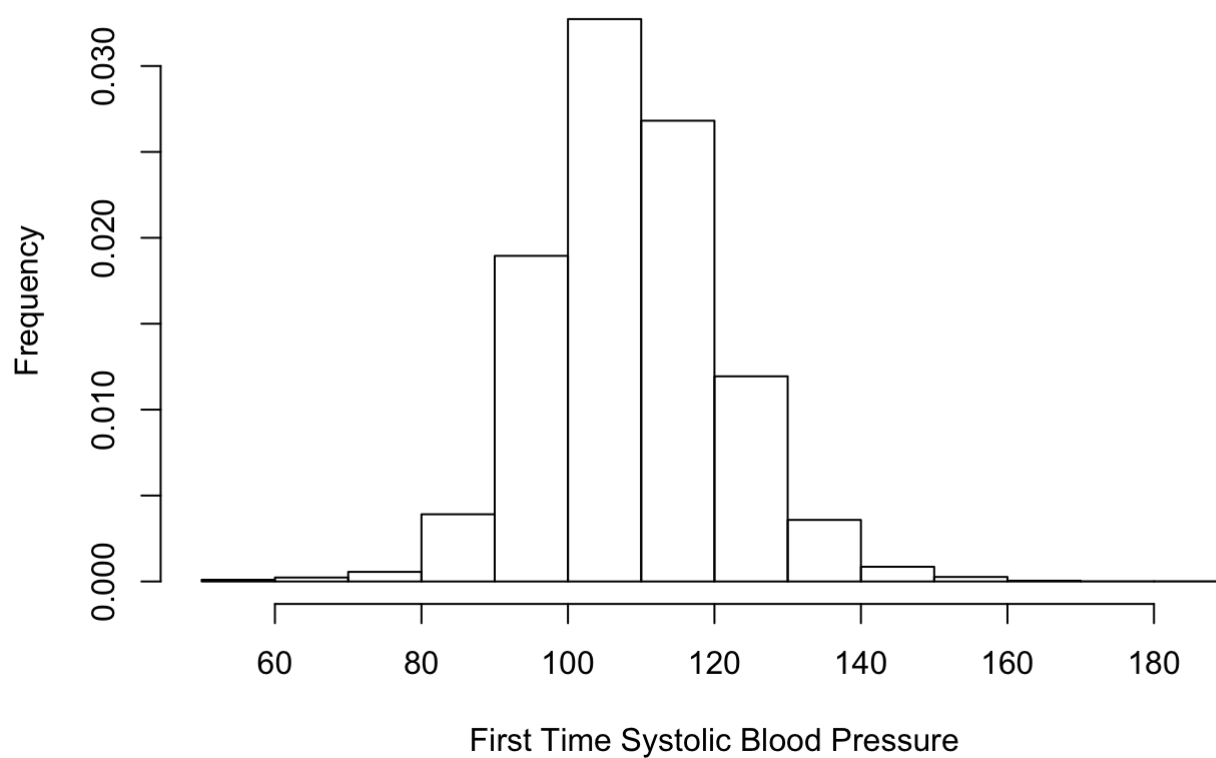


```
x2 <- hse.mk20$sys2om  
range(hse.mk20$sys2om, na.rm = T)
```

```
## [1] 52 187
```

```
hist(x2, freq = FALSE, main = "Distribution of Second Time Systolic Blood Pressure Me  
asurement"  
      , xlab = "Second Time Systolic Blood Pressure"  
      , ylab = "Frequency")
```

Distribution of Second Time Systolic Blood Pressure Measurement

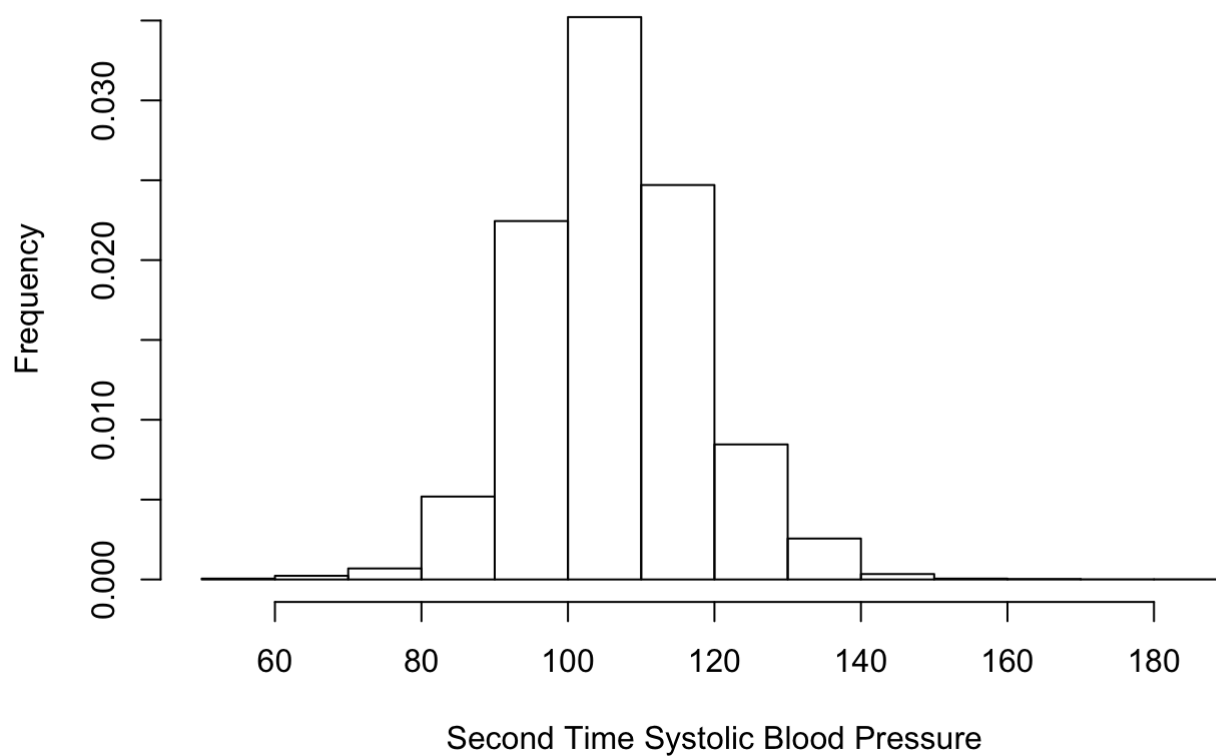


```
x3 <- hse.mk20$sys3om  
range(hse.mk20$sys3om, na.rm = T)
```

```
## [1] 53 194
```

```
hist(x3, freq = FALSE, main = "Distribution of Third Time Systolic Blood Pressure Mea  
surement"  
      , xlab = "Third Time Systolic Blood Pressure"  
      , ylab = "Frequency")
```


Distribution of Third Time Systolic Blood Pressure Measurement

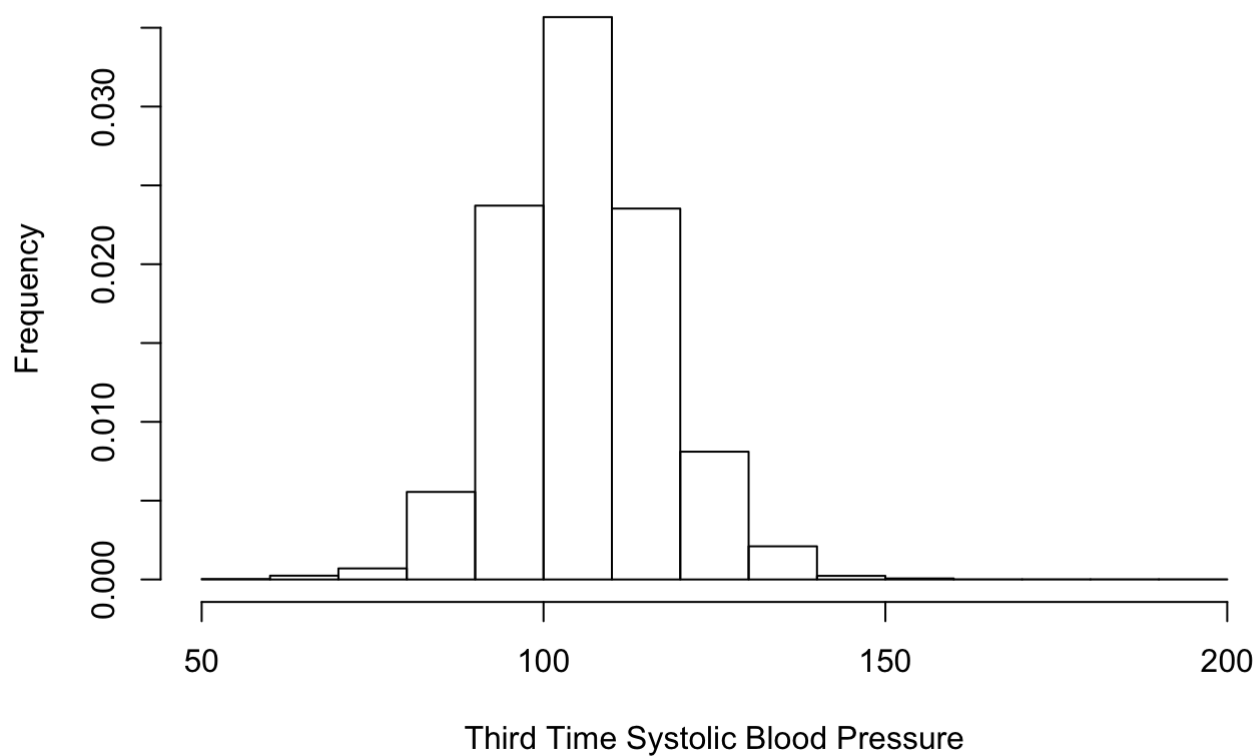


```
x4 <- hse.mk20$diaslom  
range(hse.mk20$diaslom, na.rm = T)
```

```
## [1] 31 131
```

```
hist(x4, freq = FALSE, main = "Distribution of First Time Diastolic Blood Pressure Me  
asurement"  
      , xlab = "First Time Diastolic Blood Pressure"  
      , ylab = "Frequency")
```

Distribution of First Time Diastolic Blood Pressure Measurement

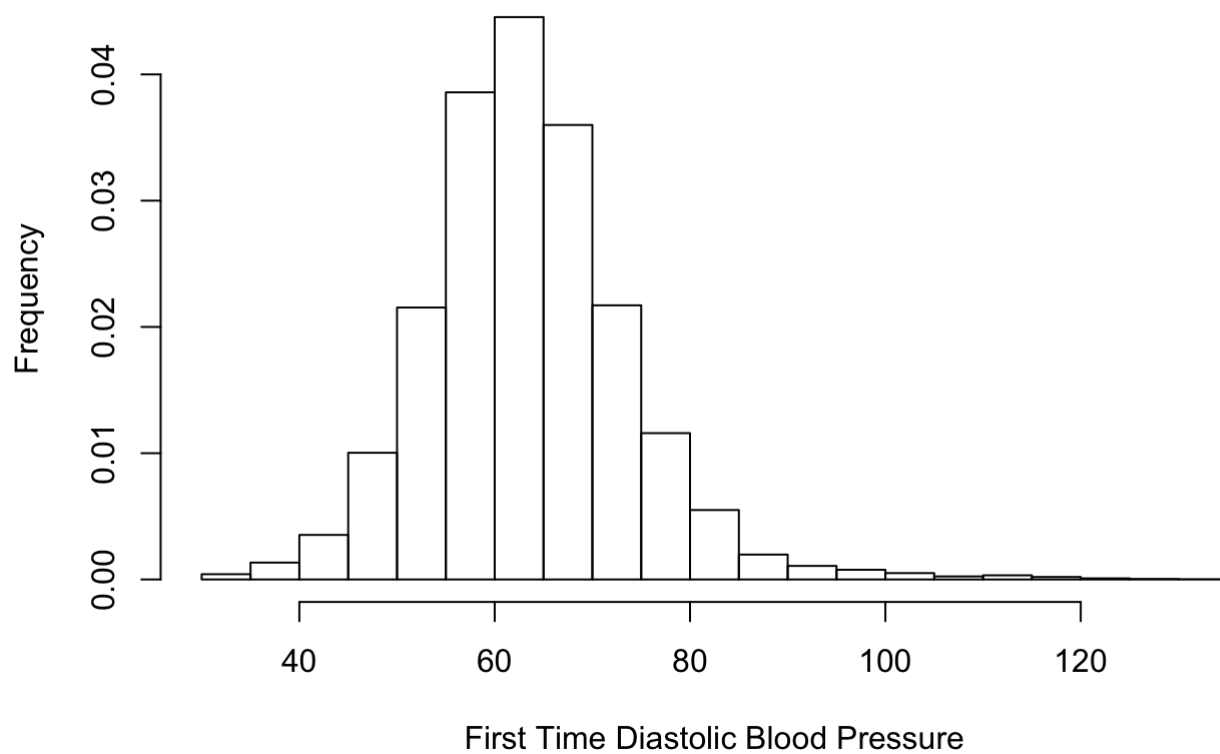


```
x5 <- hse.mk20$dias2om
range(hse.mk20$dias2om, na.rm = T)
```

```
## [1] 31 135
```

```
hist(x5, freq = FALSE, main = "Distribution of Second Time Diastolic Blood Pressure Measurement",
      , xlab = "Second Time Diastolic Blood Pressure",
      , ylab = "Frequency")
```

Distribution of Second Time Diastolic Blood Pressure Measurement

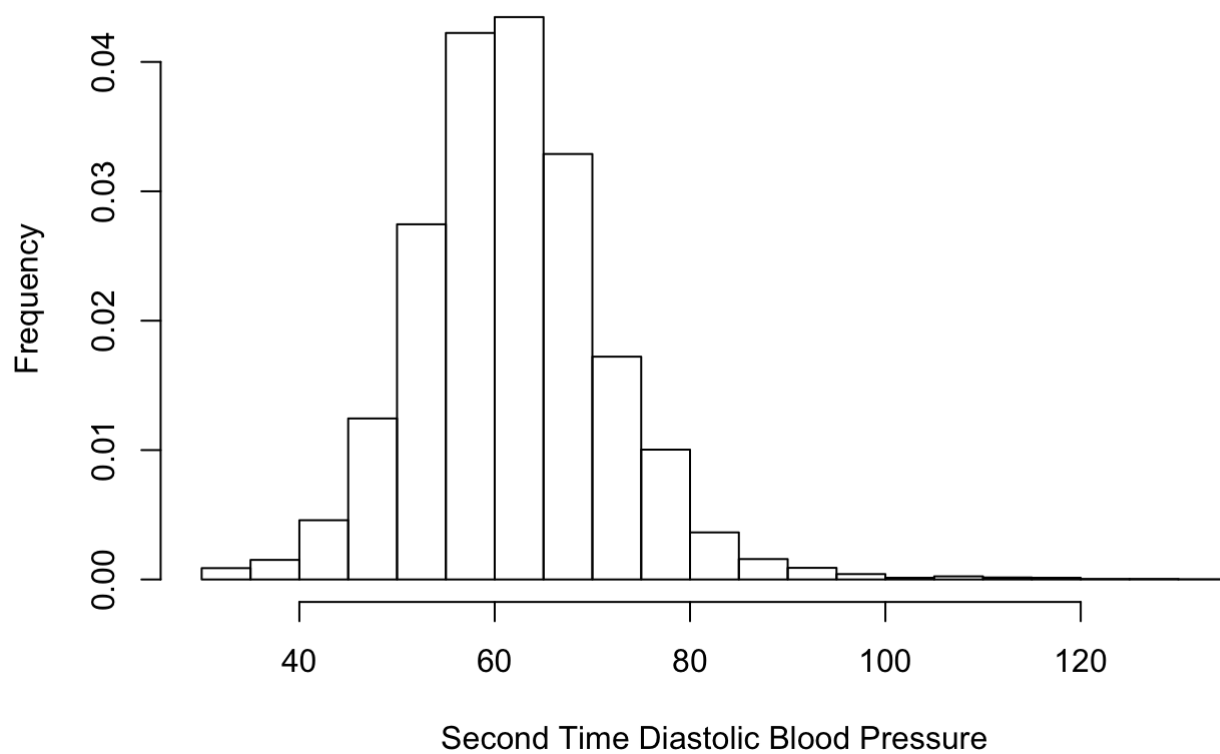


```
x6 <- hse.mk20$dias3om  
range(hse.mk20$dias3om, na.rm = T)
```

```
## [1] 30 140
```

```
hist(x6, freq = FALSE, main = "Distribution of Third Time Diastolic Blood Pressure Me  
asurement"  
      , xlab = "Third Time Diastolic Blood Pressure"  
      , ylab = "Frequency")
```

Distribution of Third Time Diastolic Blood Pressure Measurement

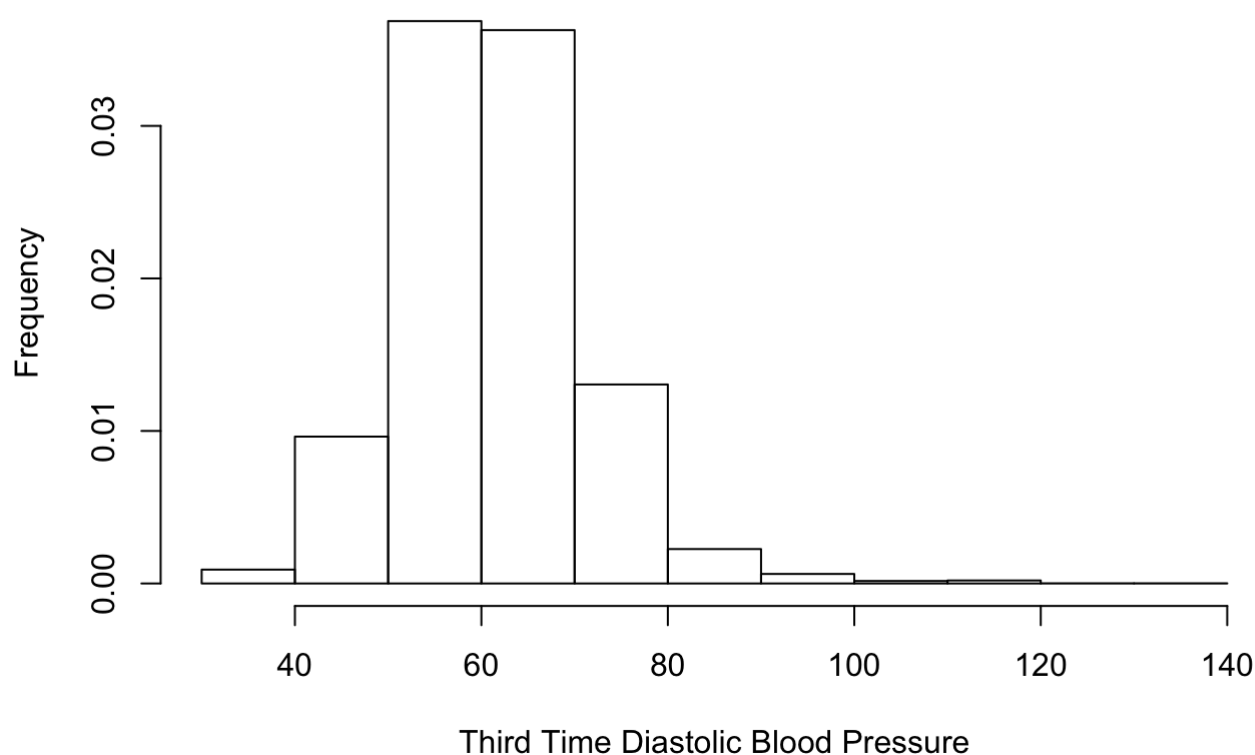

```
#      Get the average of the diastolic and systolic measurements for each row

hse.mk20$sysavg <- NA
hse.mk20$diaavg <- NA

for ( i in 1 : dim(hse.mk20)[1] ) {
  hse.mk20$sysavg[i] <- (hse.mk20$sys1om[i] + hse.mk20$sys2om[i] + hse.mk20$sys3om[i]) / 3
  hse.mk20$diaavg[i] <- (hse.mk20$dias1om[i] + hse.mk20$dias2om[i] + hse.mk20$dias3om[i]) / 3
}
hse.mk20$sys1om <- NULL
hse.mk20$sys2om <- NULL
hse.mk20$sys3om <- NULL
hse.mk20$dias1om <- NULL
hse.mk20$dias2om <- NULL
hse.mk20$dias3om <- NULL
```

```
##### Data Preparation -- Get the hypertensive group
#####

# Calculate .95 quantiles of the systolic and diastolic bp for each of age group,
# if the child's systolic / diastolic bp is higher than .95 age group's threshold,
# the child is classified as hypertensive

# systolic bp comparison for age group 2
hse.mk20$sys.hyper2 <- NA
hse.mk20$sys.hyper2 <- ifelse(hse.mk20$aggr == 2, hse.mk20$sysavg, NA)
range(hse.mk20$sys.hyper2, na.rm = T)
```

```
## [1] 66.33333 148.33333
```

```
quantile(hse.mk20$sys.hyper2, .95, na.rm = T)
```

```
##      95%
## 120.6667
```

```
hse.mk20$sys.hyper2.mk <- NA
hse.mk20$sys.hyper2.mk <- ifelse(hse.mk20$sys.hyper2 >= quantile(hse.mk20$sys.hyper2,
.95, na.rm = T)[1], 1, 0)
length(which(hse.mk20$sys.hyper2.mk == 1 ))
```

```
## [1] 240
```

```
# group 3
hse.mk20$sys.hyper3 <- NA
hse.mk20$sys.hyper3 <- ifelse(hse.mk20$aggr == 3, hse.mk20$sysavg, NA)
range(hse.mk20$sys.hyper3, na.rm = T)
```

```
## [1] 66 186
```

```
quantile(hse.mk20$sys.hyper3, .95, na.rm = T)
```

```
##      95%
## 129.6667
```

```
hse.mk20$sys.hyper3.mk <- NA
hse.mk20$sys.hyper3.mk <- ifelse(hse.mk20$sys.hyper3 >= quantile(hse.mk20$sys.hyper3,
.95, na.rm = T)[1], 1, 0)
length(which(hse.mk20$sys.hyper3.mk == 1 ))
```

```
## [1] 225
```

```
# diastolic bp comparison for age group 2
hse.mk20$dia.hyper2 <- NA
hse.mk20$dia.hyper2 <- ifelse(hse.mk20$aggr == 2, hse.mk20$diaavg, NA)
range(hse.mk20$dia.hyper2, na.rm = T)
```

```
## [1] 34.66667 102.00000
```

```
quantile(hse.mk20$dia.hyper2, .95, na.rm = T)
```

```
## 95%
## 77.33333
```

```
hse.mk20$dia.hyper2.mk <- NA
hse.mk20$dia.hyper2.mk <- ifelse(hse.mk20$dia.hyper2 >= quantile(hse.mk20$dia.hyper2,
.95, na.rm = T)[1], 1, 0)
length(which(hse.mk20$dia.hyper2.mk == 1 ))
```

```
## [1] 247
```

```
# group 3
hse.mk20$dia.hyper3 <- NA
hse.mk20$dia.hyper3 <- ifelse(hse.mk20$aggr == 3, hse.mk20$diaavg, NA)
range(hse.mk20$dia.hyper3, na.rm = T)
```

```
## [1] 35.66667 114.33333
```

```
quantile(hse.mk20$dia.hyper3, .95, na.rm = T)
```

```
## 95%
## 77
```

```
hse.mk20$dia.hyper3.mk <- NA
hse.mk20$dia.hyper3.mk <- ifelse(hse.mk20$dia.hyper3 >= quantile(hse.mk20$dia.hyper3,
.95, na.rm = T)[1], 1, 0)
length(which(hse.mk20$dia.hyper3.mk == 1 ))
```

```
## [1] 229
```

```

#           Get the hypertensive group
#   if the child is classified as hypertensive by one of the age groups' threshold
#   then the child is hypertensive

hse.mk20$sys.hyper2.mk <- ifelse(is.na(hse.mk20$sys.hyper2.mk), 0, hse.mk20$sys.hyper
2.mk)
hse.mk20$sys.hyper3.mk <- ifelse(is.na(hse.mk20$sys.hyper3.mk), 0, hse.mk20$sys.hyper
3.mk)

hse.mk20$dia.hyper2.mk <- ifelse(is.na(hse.mk20$dia.hyper2.mk), 0, hse.mk20$dia.hyper
2.mk)
hse.mk20$dia.hyper3.mk <- ifelse(is.na(hse.mk20$dia.hyper3.mk), 0, hse.mk20$dia.hyper
3.mk)

hse.mk20$hyper <- NA
hse.mk20$hyper <- ifelse(hse.mk20$sys.hyper2.mk == 1 | hse.mk20$sys.hyper3.mk == 1
                        | hse.mk20$dia.hyper2.mk == 1 | hse.mk20$dia.hyper3.mk == 1 ,1
, 0)
length(which(hse.mk20$hyper == 1 ))

```

```
## [1] 781
```

```

#           Delete used rows
hse.mk20$sys.hyper2 <- NULL
hse.mk20$sys.hyper2.mk <- NULL
hse.mk20$sys.hyper3 <- NULL
hse.mk20$sys.hyper3.mk <- NULL

hse.mk20$dia.hyper2 <- NULL
hse.mk20$dia.hyper2.mk <- NULL
hse.mk20$dia.hyper3 <- NULL
hse.mk20$dia.hyper3.mk <- NULL

```

```

##### Data Preparation -- Multiple Imputation #####
#####

hse.mk50 <- hse.mk20

# Multiple imputation
set.seed(1)
hse.mk50.mi <- aregImpute(~ hyper + sex + tenureb + origin + hhsize + addnum + imd +
  birthwt +
                        porftvg + gor + aggr + year + sysavg + diaavg, data = hse.mk50, n.impute = 50, nk=0)

```

```
## Iteration 1
```

```
Iteration 2
```

```
Iteration 3
```

```
Iteration 4
```

```
Iteration 5
```

```
Iteration 6
```

```
Iteration 7
```

```
Iteration 8
```

```
Iteration 9
```

```
Iteration 10
```

```
Iteration 11
```

```
Iteration 12
```

```
Iteration 13
```

```
Iteration 14
```

```
Iteration 15
```

```
Iteration 16
```

```
Iteration 17
```

```
Iteration 18
```

```
Iteration 19
```

```
Iteration 20
```

```
Iteration 21
```

```
Iteration 22
```

```
Iteration 23
```

```
Iteration 24
```

```
Iteration 25
```

```
Iteration 26
```

```
Iteration 27
```

```
Iteration 28
```

```
Iteration 29
```

```
Iteration 30
```

```
Iteration 31
```

```
Iteration 32
```

```
Iteration 33
```

```
Iteration 34
```

```
Iteration 35
```

```
Iteration 36
```

```
Iteration 37
```

```
Iteration 38
```

```
Iteration 39
```

```
Iteration 40
```

```
Iteration 41
```

```
Iteration 42
```

```
Iteration 43
```

```
Iteration 44
```

```
Iteration 45
```

```
Iteration 46
```

```
Iteration 47
```

```
Iteration 48
```

```
Iteration 49
```

```
Iteration 50
```

```
Iteration 51
```

```
Iteration 52
```

```
Iteration 53
```



```
# Retrieve the imputed values
hse.mk50.mi.r <- impute.transcan(hse.mk50.mi, data = hse.mk50, imputation=1, list.out=TRUE, pr=FALSE, check=FALSE)

# Arrange the columns accordingly
hse.mk60 <- hse.mk50
hse.mk60$tenureb <- hse.mk50.mi.r$tenureb
hse.mk60$origin <- hse.mk50.mi.r$origin
hse.mk60$birthwt <- hse.mk50.mi.r$birthwt
hse.mk60$porftvg <- hse.mk50.mi.r$porftvg
```

Part 2/3: The Effect of Deprivation – Propensity Analysis

```
##### Propensity Analysis #####
#####

# Covert the ordinal scale of treatment variable (imd) to binary scale
hse.mk90 <- hse.mk60

hse.mk90$imd <- ifelse(hse.mk90$imd == 1, 0,
                      ifelse(hse.mk90$imd == 2, 0,
                            ifelse(hse.mk90$imd == 3, NA,
                                  ifelse(hse.mk90$imd == 4, 1,
                                          ifelse(hse.mk90$imd == 5, 1, NA))))))

table(hse.mk90$imd)
```

```
##
##      0      1
## 3834 3500
```

```
hse.mk90 <- hse.mk90[complete.cases(hse.mk90), ]

# Compute the Propensity scores

reg <- glm(imd ~ sex + tenureb + origin + hhsize + addnum + birthwt + porftvg + gor +
aggr + year + hyper + sysavg + diaavg,
          family=binomial, data=hse.mk90)

hse.mk90$fit.value <- fitted.values(reg)

# Propensity Scores Matching & Average Treatment Effect on Treated
set.seed(9)
matching.vars <- cbind(hse.mk90$fit.value)
psm <- Match(Y=hse.mk90$hyper, Tr=hse.mk90$imd, X=matching.vars, Weight = 2, replace=
T, ties = F)
summary.Match(psm)
```

```
##
## Estimate... 0.022286
## SE..... 0.0068587
## T-stat..... 3.2493
## p.val..... 0.001157
##
## Original number of observations..... 7334
## Original number of treated obs..... 3500
## Matched number of observations..... 3500
## Matched number of observations (unweighted). 3500
```

```
# 1 -- Estimate effect of deprivation on hypertention (significant)
# Balance test
MatchBalance(imd ~ sex + tenureb + origin + hhsize + addnum + birthwt + porftvg + gor
+ aggr + year,
              match.out=psm, data=hse.mk90)
```

```

##
## ***** (V1) sex *****
##
## Before Matching      After Matching
## mean treatment..... 1.5037      1.5037
## mean control..... 1.4877      1.492
## std mean diff..... 3.1942      2.3426
##
## mean raw eQQ diff..... 0.016      0.011714
## med raw eQQ diff..... 0      0
## max raw eQQ diff..... 1      1
##
## mean eCDF diff..... 0.0079865      0.0058571
## med eCDF diff..... 0.0079865      0.0058571
## max eCDF diff..... 0.015973      0.011714
##
## var ratio (Tr/Co)..... 1.0006      1.0002
## T-test p-value..... 0.17182      0.32829
##
##
## ***** (V2) tenureb *****
##
## Before Matching      After Matching
## mean treatment..... 3      3
## mean control..... 2.2074      3.0534
## std mean diff..... 72.057      -4.857
##
## mean raw eQQ diff..... 0.79486      0.091714
## med raw eQQ diff..... 0      0
## max raw eQQ diff..... 2      2
##
## mean eCDF diff..... 0.13247      0.015286
## med eCDF diff..... 0.025672      0.0094286
## max eCDF diff..... 0.37393      0.036286
##
## var ratio (Tr/Co)..... 1.6377      0.99882
## T-test p-value..... < 2.22e-16      0.00075071
## KS Bootstrap p-value.. < 2.22e-16      0.002
## KS Naive p-value..... < 2.22e-16      0.019938
## KS Statistic..... 0.37393      0.036286
##
##
## ***** (V3) origin *****
##
## Before Matching      After Matching
## mean treatment..... 2.5954      2.5954
## mean control..... 1.5579      2.5931
## std mean diff..... 29.841      0.065741
##
## mean raw eQQ diff..... 1.0397      0.208
## med raw eQQ diff..... 0      0
## max raw eQQ diff..... 8      3
##
## mean eCDF diff..... 0.05764      0.011556
## med eCDF diff..... 0.054904      0.008
## max eCDF diff..... 0.17234      0.056286
##
## var ratio (Tr/Co)..... 2.9274      0.88627
## T-test p-value..... < 2.22e-16      0.97455
## KS Bootstrap p-value.. < 2.22e-16      < 2.22e-16

```

```

## KS Naive p-value..... < 2.22e-16          3.0581e-05
## KS Statistic.....          0.17234          0.056286
##
##
## ***** (V4) hhsize *****
##                               Before Matching      After Matching
## mean treatment.....          4.1154          4.1154
## mean control.....          4.0733          4.0854
## std mean diff.....          3.3495          2.3847
##
## mean raw eQQ diff.....      0.31371          0.21686
## med  raw eQQ diff.....          0          0
## max  raw eQQ diff.....          2          2
##
## mean eCDF diff.....          0.031313          0.021686
## med  eCDF diff.....          0.019654          0.012286
## max  eCDF diff.....          0.08692          0.057143
##
## var ratio (Tr/Co).....          1.8639          1.4864
## T-test p-value.....          0.10453          0.27388
## KS Bootstrap p-value.. < 2.22e-16          < 2.22e-16
## KS Naive p-value.....      1.9688e-12          2.176e-05
## KS Statistic.....          0.08692          0.057143
##
##
## ***** (V5) addnum *****
##                               Before Matching      After Matching
## mean treatment.....          16.173          16.173
## mean control.....          16.138          15.981
## std mean diff.....          0.29106          1.6216
##
## mean raw eQQ diff.....      0.23829          0.41086
## med  raw eQQ diff.....          0          0
## max  raw eQQ diff.....          7          7
##
## mean eCDF diff.....          0.004676          0.0082653
## med  eCDF diff.....          0.0033611          0.0074286
## max  eCDF diff.....          0.014439          0.02
##
## var ratio (Tr/Co).....          0.97605          0.96926
## T-test p-value.....          0.90149          0.49575
## KS Bootstrap p-value..          0.654          0.324
## KS Naive p-value.....          0.8401          0.48581
## KS Statistic.....          0.014439          0.02
##
##
## ***** (V6) birthwt *****
##                               Before Matching      After Matching
## mean treatment.....          3.273          3.273
## mean control.....          3.4102          3.2945
## std mean diff.....          -21.734          -3.4168
##
## mean raw eQQ diff.....      0.13688          0.036406
## med  raw eQQ diff.....          0.12          0.03
## max  raw eQQ diff.....          0.61          1.01
##
## mean eCDF diff.....          0.041907          0.0094731
## med  eCDF diff.....          0.03573          0.0074286

```

```

## max eCDF diff..... 0.10735 0.028286
##
## var ratio (Tr/Co)..... 1.124 0.94777
## T-test p-value..... < 2.22e-16 0.14283
## KS Bootstrap p-value.. < 2.22e-16 0.098
## KS Naive p-value..... < 2.22e-16 0.12156
## KS Statistic..... 0.10735 0.028286
##
##
## ***** (V7) porftvg *****
## Before Matching After Matching
## mean treatment..... 3.3503 3.3503
## mean control..... 3.7071 3.3551
## std mean diff..... -20.595 -0.28035
##
## mean raw eQQ diff..... 0.356 0.027143
## med raw eQQ diff..... 0 0
## max raw eQQ diff..... 2 1
##
## mean eCDF diff..... 0.050973 0.0038776
## med eCDF diff..... 0.046684 0.0028571
## max eCDF diff..... 0.082217 0.010286
##
## var ratio (Tr/Co)..... 1.1073 0.99687
## T-test p-value..... < 2.22e-16 0.90495
## KS Bootstrap p-value.. < 2.22e-16 0.754
## KS Naive p-value..... 3.6161e-11 0.99256
## KS Statistic..... 0.082217 0.010286
##
##
## ***** (V8) gor *****
## Before Matching After Matching
## mean treatment..... 4.5314 4.5314
## mean control..... 5.7019 4.6463
## std mean diff..... -45.935 -4.5076
##
## mean raw eQQ diff..... 1.1694 0.20971
## med raw eQQ diff..... 1 0
## max raw eQQ diff..... 2 1
##
## mean eCDF diff..... 0.13005 0.023302
## med eCDF diff..... 0.15121 0.022286
## max eCDF diff..... 0.20502 0.054857
##
## var ratio (Tr/Co)..... 1.0171 0.9681
## T-test p-value..... < 2.22e-16 0.030398
## KS Bootstrap p-value.. < 2.22e-16 < 2.22e-16
## KS Naive p-value..... < 2.22e-16 5.3308e-05
## KS Statistic..... 0.20502 0.054857
##
##
## ***** (V9) aggr *****
## Before Matching After Matching
## mean treatment..... 2.4651 2.4651
## mean control..... 2.4982 2.4669
## std mean diff..... -6.6214 -0.34364
##
## mean raw eQQ diff..... 0.032857 0.0017143

```

```
## med   raw eQQ diff.....      0      0
## max   raw eQQ diff.....      1      1
##
## mean  eCDF diff.....      0.016516      0.00085714
## med   eCDF diff.....      0.016516      0.00085714
## max   eCDF diff.....      0.033031      0.0017143
##
## var ratio (Tr/Co).....      0.99518      0.99953
## T-test p-value.....      0.0046814      0.88537
##
##
## ***** (V10) year *****
##                               Before Matching      After Matching
## mean treatment.....      9.5771      9.5771
## mean control.....      9.4567      9.6457
## std mean diff.....      3.6404      -2.0727
##
## mean raw eQQ diff.....      0.122      0.29371
## med   raw eQQ diff.....      0      0
## max   raw eQQ diff.....      2      2
##
## mean eCDF diff.....      0.01185      0.025571
## med   eCDF diff.....      0.0098061      0.029143
## max   eCDF diff.....      0.026924      0.052571
##
## var ratio (Tr/Co).....      1.0419      1.1387
## T-test p-value.....      0.11591      0.36114
## KS Bootstrap p-value..      0.058      < 2.22e-16
## KS Naive p-value.....      0.14088      0.0001259
## KS Statistic.....      0.026924      0.052571
##
##
## Before Matching Minimum p.value: < 2.22e-16
## Variable Name(s): tenureb origin hhsize birthwt porftvg gor   Number(s): 2 3 4 6 7
8
##
## After Matching Minimum p.value: < 2.22e-16
## Variable Name(s): origin hhsize gor year   Number(s): 3 4 8 10
```

```
# Regression with a matched dataset
# Create a new dataset after matching
hse.mk.FX <- rbind(hse.mk90[psm$index.control,],hse.mk90[psm$index.treated,])
summary(lm(hyper ~ imd,data=hse.mk.FX))
```

```
##
## Call:
## lm(formula = hyper ~ imd, data = hse.mk.FX)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.10257 -0.10257 -0.08029 -0.08029  0.91971
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.080286   0.004869   16.490 < 2e-16 ***
## imd          0.022286   0.006886    3.237  0.00122 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.288 on 6998 degrees of freedom
## Multiple R-squared:  0.001495,    Adjusted R-squared:  0.001352
## F-statistic: 10.48 on 1 and 6998 DF,  p-value: 0.001215
```

```
ATT <- lm(hyper ~ imd + sex + tenureb + origin + hhsize + addnum + birthwt + porftvg
+ gor + aggr + year, data=hse.mk.FX)
summary(ATT)
```

```
##
## Call:
## lm(formula = hyper ~ imd + sex + tenureb + origin + hhsize +
##      addnum + birthwt + porftvg + gor + aggr + year, data = hse.mk.FX)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.16450 -0.10761 -0.08654 -0.06556  0.97932
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.1395696   0.0349176    3.997 6.48e-05 ***
## imd          0.0221899   0.0068732    3.228 0.001250 **
## sex         -0.0308265   0.0069319   -4.447 8.84e-06 ***
## tenureb      0.0057732   0.0031735    1.819 0.068928 .
## origin      -0.0013636   0.0009946   -1.371 0.170411
## hhsize       0.0040579   0.0030191    1.344 0.178965
## addnum      -0.0001641   0.0003052   -0.538 0.590886
## birthwt     -0.0018254   0.0054132   -0.337 0.735967
## porftvg     -0.0003412   0.0020389   -0.167 0.867110
## gor         -0.0034047   0.0013706   -2.484 0.013010 *
## aggr         0.0073019   0.0069384    1.052 0.292657
## year        -0.0037710   0.0011371   -3.316 0.000917 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2873 on 6988 degrees of freedom
## Multiple R-squared:  0.008242,    Adjusted R-squared:  0.006681
## F-statistic: 5.279 on 11 and 6988 DF,  p-value: 2.3e-08
```

```
stargazer(ATT, title="Average Treatment Effect on Treated", align=TRUE, out ="Table 1  
- Average Treatment Effect on Treated.txt")
```



```

##
## % Table created by stargazer v.5.2.2 by Marek Hlavac, Harvard University. E-mail:
## hlavac at fas.harvard.edu
## % Date and time: Tue, Mar 05, 2019 - 12:48:27
## % Requires LaTeX packages: dcolumn
## \begin{table}[!htbp] \centering
##   \caption{Average Treatment Effect on Treated}
##   \label{}
## \begin{tabular}{@{\extracolsep{5pt}}lD{.}{.}{-3} }
## \hline
## \hline \hline
## & \multicolumn{1}{c}{\textit{Dependent variable:}} \hline
## \cline{2-2}
## \hline & \multicolumn{1}{c}{hyper} \hline
## \hline \hline
## imd & 0.022^{***} \hline
## & (0.007) \hline
## & \hline
## sex & -0.031^{***} \hline
## & (0.007) \hline
## & \hline
## tenureb & 0.006^{*} \hline
## & (0.003) \hline
## & \hline
## origin & -0.001 \hline
## & (0.001) \hline
## & \hline
## hhsize & 0.004 \hline
## & (0.003) \hline
## & \hline
## addnum & -0.0002 \hline
## & (0.0003) \hline
## & \hline
## birthwt & -0.002 \hline
## & (0.005) \hline
## & \hline
## porftvg & -0.0003 \hline
## & (0.002) \hline
## & \hline
## gor & -0.003^{**} \hline
## & (0.001) \hline
## & \hline
## aggr & 0.007 \hline
## & (0.007) \hline
## & \hline
## year & -0.004^{***} \hline
## & (0.001) \hline
## & \hline
## Constant & 0.140^{***} \hline
## & (0.035) \hline
## & \hline
## \hline \hline
## Observations & \multicolumn{1}{c}{7,000} \hline
## R^2 & \multicolumn{1}{c}{0.008} \hline
## Adjusted R^2 & \multicolumn{1}{c}{0.007} \hline
## Residual Std. Error & \multicolumn{1}{c}{0.287 (df = 6988)} \hline
## F Statistic & \multicolumn{1}{c}{5.279^{***} (df = 11; 6988)} \hline

```

```
## \hline
## \hline \[-1.8ex]
## \textit{Note:} & \multicolumn{1}{r}{ $\hat{*}$ $p$<$0.1;  $\hat{**}$ $p$<$0.05;  $\hat{***}$ $p$<$0.01} \\
## \end{tabular}
## \end{table}
```

```
# Baseline patient characteristics BEFORE propensity score matching
attr(hse.mk90$birthwt, "class") <- c("numeric")

hse.mk90.bn <- hse.mk90[c(hse.mk90$imd == 0),]
myVars <- c("sex", "tenureb", "origin", "hhsz", "birthwt", "porftvg", "gor", "aggr",
"year")
catVars <- c("sex", "tenureb", "origin", "hhsz", "porftvg", "gor", "aggr", "year")
tbl <- CreateTableOne(vars = myVars, data = hse.mk90.bn, factorVars = catVars)
tbl
```

```
##
##                                Overall
##      n                        3834
##      sex = 2 (%)              1870 (48.8)
##      tenureb (%)
##          1                    449 (11.7)
##          2                    2768 (72.2)
##          3                     15 ( 0.4)
##          4                    577 (15.0)
##          5                     25 ( 0.7)
##      origin (%)
##          1                    3407 (88.9)
##          2                     42 ( 1.1)
##          3                    109 ( 2.8)
##          4                     81 ( 2.1)
##          5                     19 ( 0.5)
##          6                     19 ( 0.5)
##          7                     24 ( 0.6)
##          8                     38 ( 1.0)
##          9                     27 ( 0.7)
##         10                     6 ( 0.2)
##         11                     5 ( 0.1)
##         12                     9 ( 0.2)
##         13                     16 ( 0.4)
##         14                     16 ( 0.4)
##         15                     9 ( 0.2)
##         16                     4 ( 0.1)
##         17                     1 ( 0.0)
##         18                     2 ( 0.1)
##      hhsize (%)
##          2                    138 ( 3.6)
##          3                    691 (18.0)
##          4                   2049 (53.4)
##          5                    733 (19.1)
##          6                    179 ( 4.7)
##          7                     24 ( 0.6)
##          8                     16 ( 0.4)
##          9                     3 ( 0.1)
##         10                     1 ( 0.0)
##      birthwt (mean (SD)) 3.41 (0.60)
##      porftvg (%)
##          0                    156 ( 4.1)
##          1                    124 ( 3.2)
##          2                    670 (17.5)
##          3                    850 (22.2)
##          4                    728 (19.0)
##          5                    549 (14.3)
##          6                    757 (19.7)
##      gor (%)
##          1                    184 ( 4.8)
##          2                    404 (10.5)
##          3                    351 ( 9.2)
##          4                    420 (11.0)
##          5                    293 ( 7.6)
##          6                    547 (14.3)
##          7                    264 ( 6.9)
##          8                    798 (20.8)
```

```
##          9          573 (14.9)
##  aggr = 3 (%)    1910 (49.8)
##  year (%)
##          5          362 ( 9.4)
##          6          662 (17.3)
##          7          317 ( 8.3)
##          8          613 (16.0)
##         10          337 ( 8.8)
##         11          325 ( 8.5)
##         12          297 ( 7.7)
##         13          330 ( 8.6)
##         14          312 ( 8.1)
##         15          279 ( 7.3)
```

```
hse.mk90.by <- hse.mk90[c(hse.mk90$imd == 1),]
myVars <- c("sex", "tenureb", "origin", "hhsz", "birthwt", "porftvg", "gor", "aggr",
"year")
catVars <- c("sex", "tenureb", "origin", "hhsz", "porftvg", "gor", "aggr", "year")
tab2 <- CreateTableOne(vars = myVars, data = hse.mk90.by, factorVars = catVars)
tab2
```

```
##
## Overall
## n 3500
## sex = 2 (%) 1763 (50.4)
## tenureb (%)
## 1 234 ( 6.7)
## 2 1394 (39.8)
## 3 30 ( 0.9)
## 4 1823 (52.1)
## 5 18 ( 0.5)
## 6 1 ( 0.0)
## origin (%)
## 1 2507 (71.6)
## 2 117 ( 3.3)
## 3 260 ( 7.4)
## 4 158 ( 4.5)
## 5 36 ( 1.0)
## 6 13 ( 0.4)
## 7 29 ( 0.8)
## 8 31 ( 0.9)
## 9 73 ( 2.1)
## 10 49 ( 1.4)
## 11 41 ( 1.2)
## 12 18 ( 0.5)
## 13 66 ( 1.9)
## 14 44 ( 1.3)
## 15 22 ( 0.6)
## 16 20 ( 0.6)
## 17 4 ( 0.1)
## 18 12 ( 0.3)
## hhsize (%)
## 2 296 ( 8.5)
## 3 765 (21.9)
## 4 1310 (37.4)
## 5 711 (20.3)
## 6 270 ( 7.7)
## 7 100 ( 2.9)
## 8 36 ( 1.0)
## 9 7 ( 0.2)
## 10 4 ( 0.1)
## 11 1 ( 0.0)
## birthwt (mean (SD)) 3.27 (0.63)
## porftvg (%)
## 0 275 ( 7.9)
## 1 144 ( 4.1)
## 2 736 (21.0)
## 3 772 (22.1)
## 4 604 (17.3)
## 5 436 (12.5)
## 6 533 (15.2)
## gor (%)
## 1 424 (12.1)
## 2 642 (18.3)
## 3 435 (12.4)
## 4 322 ( 9.2)
## 5 365 (10.4)
## 6 208 ( 5.9)
```

```
##      7      570 (16.3)
##      8      310 ( 8.9)
##      9      224 ( 6.4)
## aggr = 3 (%)    1628 (46.5)
## year (%)
##      5      305 ( 8.7)
##      6      613 (17.5)
##      7      263 ( 7.5)
##      8      596 (17.0)
##     10      293 ( 8.4)
##     11      233 ( 6.7)
##     12      262 ( 7.5)
##     13      335 ( 9.6)
##     14      284 ( 8.1)
##     15      316 ( 9.0)
```

```
# Baseline patient characteristics AFTER propensity score matching
attr(hse.mk.FX$birthwt, "class") <- c("numeric")

hse.mk.FX.an <- hse.mk.FX[c(hse.mk.FX$imd == 0),]
myVars <- c("sex", "tenureb", "origin", "hhsz", "birthwt", "porftvg", "gor", "aggr",
"year")
catVars <- c("sex", "tenureb", "origin", "hhsz", "porftvg", "gor", "aggr", "year")
tab3 <- CreateTableOne(vars = myVars, data = hse.mk.FX.an, factorVars = catVars)
tab3
```

```
##
##                                Overall
##      n                        3500
##      sex = 2 (%)              1722 (49.2)
##      tenureb (%)
##          1                    107 ( 3.1)
##          2                   1564 (44.7)
##          3                     10 ( 0.3)
##          4                   1673 (47.8)
##          5                     146 ( 4.2)
##      origin (%)
##          1                   2704 (77.3)
##          2                     39 ( 1.1)
##          3                   156 ( 4.5)
##          4                   103 ( 2.9)
##          5                     28 ( 0.8)
##          6                     36 ( 1.0)
##          7                     54 ( 1.5)
##          8                     62 ( 1.8)
##          9                     46 ( 1.3)
##         10                     10 ( 0.3)
##         11                      8 ( 0.2)
##         12                     11 ( 0.3)
##         13                   102 ( 2.9)
##         14                     67 ( 1.9)
##         15                     26 ( 0.7)
##         16                     34 ( 1.0)
##         18                     14 ( 0.4)
##      hhsize (%)
##          2                   169 ( 4.8)
##          3                   692 (19.8)
##          4                  1691 (48.3)
##          5                   679 (19.4)
##          6                   189 ( 5.4)
##          7                    50 ( 1.4)
##          8                    28 ( 0.8)
##          9                     2 ( 0.1)
##      birthwt (mean (SD)) 3.29 (0.65)
##      porftvg (%)
##          0                   258 ( 7.4)
##          1                   197 ( 5.6)
##          2                   690 (19.7)
##          3                   762 (21.8)
##          4                   615 (17.6)
##          5                   448 (12.8)
##          6                   530 (15.1)
##      gor (%)
##          1                   420 (12.0)
##          2                   585 (16.7)
##          3                   377 (10.8)
##          4                   434 (12.4)
##          5                   265 ( 7.6)
##          6                   481 (13.7)
##          7                   212 ( 6.1)
##          8                   424 (12.1)
##          9                   302 ( 8.6)
##      aggr = 3 (%)          1634 (46.7)
```

##	year (%)	
##	5	286 (8.2)
##	6	516 (14.7)
##	7	195 (5.6)
##	8	647 (18.5)
##	10	377 (10.8)
##	11	331 (9.5)
##	12	354 (10.1)
##	13	305 (8.7)
##	14	266 (7.6)
##	15	223 (6.4)

```
hse.mk.FX.ay <- hse.mk.FX[c(hse.mk.FX$imd == 1),]  
myVars <- c("sex", "tenureb", "origin", "hhsiz", "birthwt", "porftvg", "gor", "aggr",  
"year")  
catVars <- c("sex", "tenureb", "origin", "hhsiz", "porftvg", "gor", "aggr", "year")  
tab4 <- CreateTableOne(vars = myVars, data = hse.mk.FX.ay, factorVars = catVars)  
tab4
```



```
##
## Overall
## n 3500
## sex = 2 (%) 1763 (50.4)
## tenureb (%)
## 1 234 ( 6.7)
## 2 1394 (39.8)
## 3 30 ( 0.9)
## 4 1823 (52.1)
## 5 18 ( 0.5)
## 6 1 ( 0.0)
## origin (%)
## 1 2507 (71.6)
## 2 117 ( 3.3)
## 3 260 ( 7.4)
## 4 158 ( 4.5)
## 5 36 ( 1.0)
## 6 13 ( 0.4)
## 7 29 ( 0.8)
## 8 31 ( 0.9)
## 9 73 ( 2.1)
## 10 49 ( 1.4)
## 11 41 ( 1.2)
## 12 18 ( 0.5)
## 13 66 ( 1.9)
## 14 44 ( 1.3)
## 15 22 ( 0.6)
## 16 20 ( 0.6)
## 17 4 ( 0.1)
## 18 12 ( 0.3)
## hhsize (%)
## 2 296 ( 8.5)
## 3 765 (21.9)
## 4 1310 (37.4)
## 5 711 (20.3)
## 6 270 ( 7.7)
## 7 100 ( 2.9)
## 8 36 ( 1.0)
## 9 7 ( 0.2)
## 10 4 ( 0.1)
## 11 1 ( 0.0)
## birthwt (mean (SD)) 3.27 (0.63)
## porftvg (%)
## 0 275 ( 7.9)
## 1 144 ( 4.1)
## 2 736 (21.0)
## 3 772 (22.1)
## 4 604 (17.3)
## 5 436 (12.5)
## 6 533 (15.2)
## gor (%)
## 1 424 (12.1)
## 2 642 (18.3)
## 3 435 (12.4)
## 4 322 ( 9.2)
## 5 365 (10.4)
## 6 208 ( 5.9)
```

```
##          7          570 (16.3)
##          8          310 ( 8.9)
##          9          224 ( 6.4)
##   aggr = 3 (%)      1628 (46.5)
##   year (%)
##          5          305 ( 8.7)
##          6          613 (17.5)
##          7          263 ( 7.5)
##          8          596 (17.0)
##         10          293 ( 8.4)
##         11          233 ( 6.7)
##         12          262 ( 7.5)
##         13          335 ( 9.6)
##         14          284 ( 8.1)
##         15          316 ( 9.0)
```

Part 3/3: Propensity Analysis – Sensitivity Test

```
##### Sensitivity Test #####
#####
```

```
# If one treated observation matches more than one control observation,
# the matched dataset will include the multiple matched control observations and
# the matched data will be weighted to reflect the multiple matches.
# The sum of the weighted observations will still equal the original number of observations.
```

```
# Propensity Scores Matching & Average Treatment Effect on Treated
psm <- Match(Y=hse.mk90$hyper, Tr=hse.mk90$imd, X=matching.vars, Weight = 2, replace=
T, ties = T, version = "fast")
summary.Match(psm)
```

```
##
## Estimate... 0.012049
## SE..... 0.007091
## T-stat..... 1.6991
## p.val..... 0.089297
##
## Original number of observations..... 7334
## Original number of treated obs..... 3500
## Matched number of observations..... 3500
## Matched number of observations (unweighted). 20087
```

```
# Balance test
MatchBalance(imd ~ sex + tenureb + origin + hhsize + addnum + birthwt + porftvg + gor
+ aggr + year,
             match.out=psm, data=hse.mk90)
```

```

##
## ***** (V1) sex *****
##               Before Matching           After Matching
## mean treatment.....      1.5037           1.5037
## mean control.....        1.4877           1.5007
## std mean diff.....       3.1942           0.61003
##
## mean raw eQQ diff.....     0.016           0.0025887
## med  raw eQQ diff.....      0              0
## max  raw eQQ diff.....      1              1
##
## mean eCDF diff.....       0.0079865       0.0012944
## med  eCDF diff.....       0.0079865       0.0012944
## max  eCDF diff.....       0.015973       0.0025887
##
## var ratio (Tr/Co).....     1.0006           0.99995
## T-test p-value.....       0.17182         0.7996
##
##
## ***** (V2) tenureb *****
##               Before Matching           After Matching
## mean treatment.....        3              3
## mean control.....         2.2074         3.0358
## std mean diff.....       72.057         -3.251
##
## mean raw eQQ diff.....     0.79486       0.09429
## med  raw eQQ diff.....      0              0
## max  raw eQQ diff.....      2              2
##
## mean eCDF diff.....       0.13247       0.015715
## med  eCDF diff.....       0.025672      0.014387
## max  eCDF diff.....       0.37393       0.046548
##
## var ratio (Tr/Co).....     1.6377           0.97841
## T-test p-value..... < 2.22e-16       0.026233
## KS Bootstrap p-value.. < 2.22e-16     < 2.22e-16
## KS Naive p-value..... < 2.22e-16     < 2.22e-16
## KS Statistic.....         0.37393       0.046548
##
##
## ***** (V3) origin *****
##               Before Matching           After Matching
## mean treatment.....        2.5954         2.5954
## mean control.....         1.5579         2.6006
## std mean diff.....       29.841         -0.14787
##
## mean raw eQQ diff.....     1.0397         0.2062
## med  raw eQQ diff.....      0              0
## max  raw eQQ diff.....      8              3
##
## mean eCDF diff.....       0.05764       0.011456
## med  eCDF diff.....       0.054904      0.0074177
## max  eCDF diff.....       0.17234       0.067954
##
## var ratio (Tr/Co).....     2.9274           0.88175
## T-test p-value..... < 2.22e-16       0.94322
## KS Bootstrap p-value.. < 2.22e-16     < 2.22e-16

```

```

## KS Naive p-value..... < 2.22e-16          < 2.22e-16
## KS Statistic.....      0.17234              0.067954
##
##
## ***** (V4) hhsize *****
##                               Before Matching      After Matching
## mean treatment.....      4.1154              4.1154
## mean control.....      4.0733              4.099
## std mean diff.....      3.3495              1.3024
##
## mean raw eQQ diff.....    0.31371            0.18519
## med  raw eQQ diff.....      0                0
## max  raw eQQ diff.....      2                2
##
## mean eCDF diff.....      0.031313           0.018519
## med  eCDF diff.....      0.019654           0.012769
## max  eCDF diff.....      0.08692            0.066162
##
## var ratio (Tr/Co).....    1.8639              1.456
## T-test p-value.....      0.10453            0.55249
## KS Bootstrap p-value.. < 2.22e-16          < 2.22e-16
## KS Naive p-value.....    1.9688e-12         < 2.22e-16
## KS Statistic.....      0.08692            0.066162
##
##
## ***** (V5) addnum *****
##                               Before Matching      After Matching
## mean treatment.....      16.173             16.173
## mean control.....      16.138             15.845
## std mean diff.....      0.29106            2.7792
##
## mean raw eQQ diff.....    0.23829            0.35033
## med  raw eQQ diff.....      0                0
## max  raw eQQ diff.....      7                7
##
## mean eCDF diff.....      0.004676           0.0074
## med  eCDF diff.....      0.0033611          0.0060238
## max  eCDF diff.....      0.014439           0.02529
##
## var ratio (Tr/Co).....    0.97605            0.99963
## T-test p-value.....      0.90149            0.23925
## KS Bootstrap p-value..    0.664             < 2.22e-16
## KS Naive p-value.....      0.8401           5.2664e-06
## KS Statistic.....      0.014439            0.02529
##
##
## ***** (V6) birthwt *****
##                               Before Matching      After Matching
## mean treatment.....      3.273              3.273
## mean control.....      3.4102              3.285
## std mean diff.....     -21.734             -1.9001
##
## mean raw eQQ diff.....    0.13688            0.02292
## med  raw eQQ diff.....      0.12             0.02
## max  raw eQQ diff.....      0.61             0.76
##
## mean eCDF diff.....      0.041907           0.005864
## med  eCDF diff.....      0.03573            0.0036342

```

```

## max eCDF diff..... 0.10735 0.027431
##
## var ratio (Tr/Co)..... 1.124 0.94607
## T-test p-value..... < 2.22e-16 0.41783
## KS Bootstrap p-value.. < 2.22e-16 < 2.22e-16
## KS Naive p-value..... < 2.22e-16 5.4572e-07
## KS Statistic..... 0.10735 0.027431
##
##
## ***** (V7) porftvg *****
## Before Matching After Matching
## mean treatment..... 3.3503 3.3503
## mean control..... 3.7071 3.3414
## std mean diff..... -20.595 0.51541
##
## mean raw eQQ diff..... 0.356 0.023149
## med raw eQQ diff..... 0 0
## max raw eQQ diff..... 2 1
##
## mean eCDF diff..... 0.050973 0.003307
## med eCDF diff..... 0.046684 0.0034848
## max eCDF diff..... 0.082217 0.005974
##
## var ratio (Tr/Co)..... 1.1073 0.97935
## T-test p-value..... < 2.22e-16 0.82628
## KS Bootstrap p-value.. < 2.22e-16 0.47
## KS Naive p-value..... 3.6161e-11 0.866
## KS Statistic..... 0.082217 0.005974
##
##
## ***** (V8) gor *****
## Before Matching After Matching
## mean treatment..... 4.5314 4.5314
## mean control..... 5.7019 4.638
## std mean diff..... -45.935 -4.1806
##
## mean raw eQQ diff..... 1.1694 0.16717
## med raw eQQ diff..... 1 0
## max raw eQQ diff..... 2 1
##
## mean eCDF diff..... 0.13005 0.018575
## med eCDF diff..... 0.15121 0.01384
## max eCDF diff..... 0.20502 0.043809
##
## var ratio (Tr/Co)..... 1.0171 0.97652
## T-test p-value..... < 2.22e-16 0.044839
## KS Bootstrap p-value.. < 2.22e-16 < 2.22e-16
## KS Naive p-value..... < 2.22e-16 < 2.22e-16
## KS Statistic..... 0.20502 0.043809
##
##
## ***** (V9) aggr *****
## Before Matching After Matching
## mean treatment..... 2.4651 2.4651
## mean control..... 2.4982 2.4581
## std mean diff..... -6.6214 1.4074
##
## mean raw eQQ diff..... 0.032857 0.0056255

```

```
## med   raw eQQ diff.....      0      0
## max   raw eQQ diff.....      1      1
##
## mean  eCDF diff.....      0.016516      0.0028128
## med   eCDF diff.....      0.016516      0.0028128
## max   eCDF diff.....      0.033031      0.0056255
##
## var ratio (Tr/Co).....      0.99518      1.0022
## T-test p-value.....      0.0046814      0.55567
##
##
## ***** (V10) year *****
##                               Before Matching      After Matching
## mean treatment.....      9.5771      9.5771
## mean control.....      9.4567      9.6538
## std mean diff.....      3.6404      -2.3165
##
## mean raw eQQ diff.....      0.122      0.19864
## med   raw eQQ diff.....      0      0
## max   raw eQQ diff.....      2      2
##
## mean eCDF diff.....      0.01185      0.01724
## med   eCDF diff.....      0.0098061      0.020287
## max   eCDF diff.....      0.026924      0.029322
##
## var ratio (Tr/Co).....      1.0419      1.1376
## T-test p-value.....      0.11591      0.31231
## KS Bootstrap p-value..      0.07      < 2.22e-16
## KS Naive p-value.....      0.14088      6.3149e-08
## KS Statistic.....      0.026924      0.029322
##
##
## Before Matching Minimum p.value: < 2.22e-16
## Variable Name(s): tenureb origin hhsize birthwt porftvg gor   Number(s): 2 3 4 6 7
8
##
## After Matching Minimum p.value: < 2.22e-16
## Variable Name(s): tenureb origin hhsize addnum birthwt gor year   Number(s): 2 3 4
5 6 8 10
```

```
ATT.S <- lm(hyper ~ imd + sex + tenureb + origin + hhsize + addnum + birthwt + porftv
g + gor + aggr + year, data=hse.mk.FX)
summary(ATT.S)
```

```
##
## Call:
## lm(formula = hyper ~ imd + sex + tenureb + origin + hhsize +
##      addnum + birthwt + porftvg + gor + aggr + year, data = hse.mk.FX)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.16450 -0.10761 -0.08654 -0.06556  0.97932
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.1395696  0.0349176   3.997 6.48e-05 ***
## imd          0.0221899  0.0068732   3.228 0.001250 **
## sex         -0.0308265  0.0069319  -4.447 8.84e-06 ***
## tenureb      0.0057732  0.0031735   1.819 0.068928 .
## origin      -0.0013636  0.0009946  -1.371 0.170411
## hhsize       0.0040579  0.0030191   1.344 0.178965
## addnum      -0.0001641  0.0003052  -0.538 0.590886
## birthwt     -0.0018254  0.0054132  -0.337 0.735967
## porftvg     -0.0003412  0.0020389  -0.167 0.867110
## gor         -0.0034047  0.0013706  -2.484 0.013010 *
## aggr         0.0073019  0.0069384   1.052 0.292657
## year        -0.0037710  0.0011371  -3.316 0.000917 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.2873 on 6988 degrees of freedom
## Multiple R-squared:  0.008242,    Adjusted R-squared:  0.006681
## F-statistic: 5.279 on 11 and 6988 DF,  p-value: 2.3e-08
```

```
stargazer(ATT.S, title="Sensitivity Test", align=TRUE, out = "Table 2 - Sensitivity Te
st.txt")
```

```

##
## % Table created by stargazer v.5.2.2 by Marek Hlavac, Harvard University. E-mail:
## hlavac at fas.harvard.edu
## % Date and time: Tue, Mar 05, 2019 - 12:49:29
## % Requires LaTeX packages: dcolumn
## \begin{table}[!htbp] \centering
##   \caption{Sensitivity Test}
##   \label{}
## \begin{tabular}{@{\extracolsep{5pt}}lD{.}{.}{-3} }
## \hline \hline
## & \multicolumn{1}{c}{\textit{Dependent variable:}} \hline
## \cline{2-2}
## \hline & \multicolumn{1}{c}{hyper} \hline
## \hline \hline
## imd & 0.022^{***} \hline
## & (0.007) \hline
## & \hline
## sex & -0.031^{***} \hline
## & (0.007) \hline
## & \hline
## tenureb & 0.006^{*} \hline
## & (0.003) \hline
## & \hline
## origin & -0.001 \hline
## & (0.001) \hline
## & \hline
## hhsize & 0.004 \hline
## & (0.003) \hline
## & \hline
## addnum & -0.0002 \hline
## & (0.0003) \hline
## & \hline
## birthwt & -0.002 \hline
## & (0.005) \hline
## & \hline
## porftvg & -0.0003 \hline
## & (0.002) \hline
## & \hline
## gor & -0.003^{**} \hline
## & (0.001) \hline
## & \hline
## aggr & 0.007 \hline
## & (0.007) \hline
## & \hline
## year & -0.004^{***} \hline
## & (0.001) \hline
## & \hline
## Constant & 0.140^{***} \hline
## & (0.035) \hline
## & \hline
## \hline \hline
## Observations & \multicolumn{1}{c}{7,000} \hline
## R^2 & \multicolumn{1}{c}{0.008} \hline
## Adjusted R^2 & \multicolumn{1}{c}{0.007} \hline
## Residual Std. Error & \multicolumn{1}{c}{0.287 (df = 6988)} \hline
## F Statistic & \multicolumn{1}{c}{5.279^{***} (df = 11; 6988)} \hline

```



```
## \hline
## \hline \[-1.8ex]
## \textit{Note:} & \multicolumn{1}{r}{\mathcal{P}^*\leq 0.1; \mathcal{P}^{**}\leq 0.05; \mathcal{P}^{***}\leq 0.01} \\
## \end{tabular}
## \end{table}
```