


(a) the audited setting

strict zero re-prefill: no context token enters the student

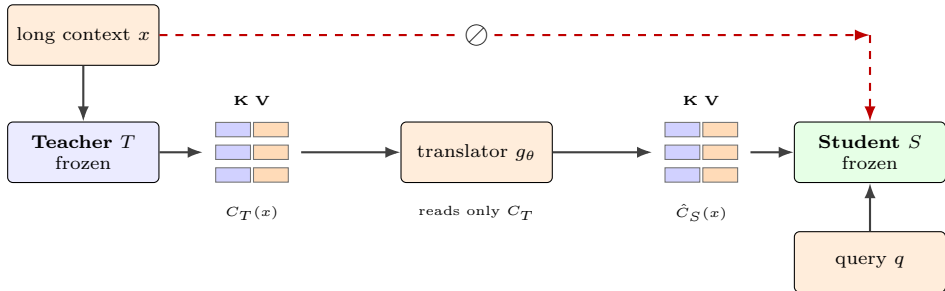

baseline: student self-prefill $S(q \mid C_S(x))$

upper bound: teacher full prefill $T(q \mid C_T(x))$

score: gold-letter probability;

CHG = gold(handoff) – gold(self-prefill)

(b) three questions that can fail independently, each with its own instrument and gate

	Question	Instrument	Gate (fixed rule)	Outcome
H1	Is a foreign cache consumed without loss?	Identity control: the student's own cache through the full pipeline	per-sample logit cosine = 1 †	pass: 0.99998
H2	Does any translator reach replacement level?	Seven mapper families; calibration 10–200 on one fixed evaluation set	95% CI lower bound > $-\epsilon$, $\epsilon=0.02$ ††	not met on the primary pair (best -0.138); one near-chance cross-architecture row clears it with zero gain
H3	Does the cache carry student-readable advantage?	Oracle probes: teacher infraction, layer window, oc-tant; native content as control	some configuration's interval excludes 0 on the positive side ††	none