


we think about
exclusion & inclusion
& 1st character only

main()

Input, output

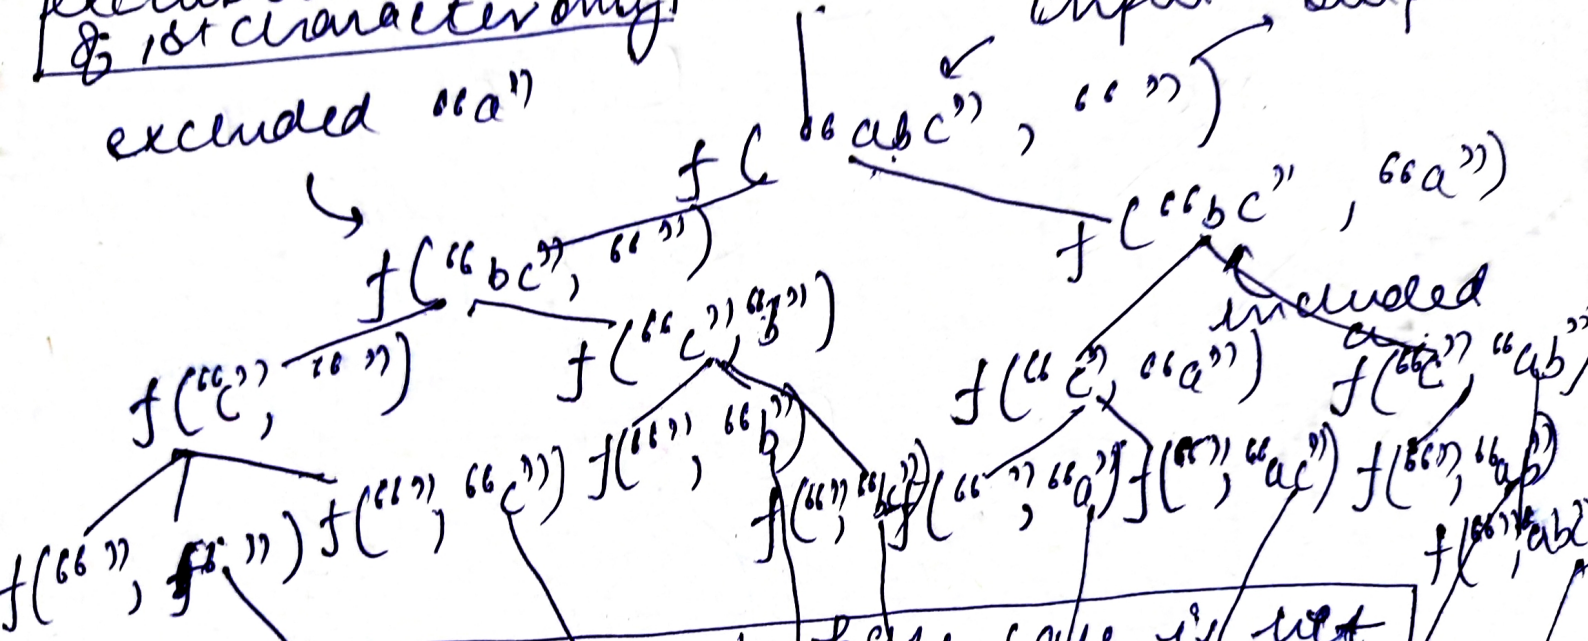

if input is empty base case is met
and we print the output that is
the second parameter.

Just look at all base cases ever print
by us

""	"c"	"b"	"bc"	"a"	"ac"	"ab"	"abc"
1	2	3	4	5	6	7	8