

Faster generic IND-CCA secure KEM using encrypt-then-MAC

Anonymous Submission

Abstract. ML-KEM is a lattice-based IND-CCA secure key encapsulation mechanism (KEM) standardized by NIST in FIPS 203. ML-KEM achieves chosen-ciphertext security by applying the Fujisaki-Okamoto transformation to an IND-CPA secure public-key encryption (PKE) scheme. The Fujisaki-Okamoto transformation uses de-randomization and re-encryption to ensure ciphertext non-malleability, but because ML-KEM’s underlying PKE encryption is significantly slower than the underlying PKE decryption, ML-KEM’s decapsulation performance is dominated by re-encryption. In this paper, we propose an alternative generic IND-CCA secure KEM transformation that applies the encrypt-then-MAC pattern to an OW-PCA secure PKE and an existentially unforgeable MAC. Compared to the Fujisaki-Okamoto transformation, our encrypt-then-MAC transformation replaces de-randomization and re-encryption with computing a MAC tag. We then implemented ML-KEM⁺ by applying the encrypt-then-MAC transformation to the PKE sub-routines of ML-KEM and a wide selection of MACs including Poly1305, GMAC, CMAC, and KMAC. At the cost of minimal increase in encapsulation CPU cycles (+1.8%) and ciphertext size (+2.1%), ML-KEM⁺ achieves massive reduction of decapsulation CPU cycles (-72.2%) compared to ML-KEM. We also implemented key exchange protocols and measured realistic network round trip time (RTT), where ML-KEM⁺ reduces RTT by 23.9%-39.5% compared to ML-KEM.

Keywords: Key encapsulation mechanism, message authentication code, post-quantum cryptography, lattice cryptography, Fujisaki-Okamoto transformation

1 Introduction

A key encapsulation mechanism (KEM) [Sho01] is a cryptographic primitive that allows two parties to establish a shared secret over an insecure channel. The desired security standard for a KEM is called indistinguishability under chosen-ciphertext attack (IND-CCA). Intuitively speaking, IND-CCA security requires that no efficient adversary can distinguish a pseudorandom shared secret from a uniformly random bit string of equal length, even with access to a decapsulation oracle throughout the attack. However, building a provably IND-CCA secure KEM is tremendously difficult. Early attempts without formal proofs, such as RSA encryption defined in PKCS#1 v1.5 [Kal98], were later shown to be vulnerable to practical chosen-ciphertext attacks [Ble98]. In recent decades, the most viable approach has been to start with cryptographic primitives possessing weaker security properties, such as a public-key encryption (PKE) scheme with one-way security under chosen-plaintext attack (OW-CPA), then add steps to achieve *ciphertext non-malleability* [BN00]. Some of the earliest proposals for generic IND-CCA secure constructions include OAEP [BR94], Fujisaki-Okamoto transformation [FO99][FO13], REACT [OP01b], and GEM [CHJ⁺02].

On the other hand, chosen-ciphertext security is a solved problem in symmetric cryptography. It is well understood that, by combining an IND-CPA secure symmetric encryption scheme with an existentially unforgeable message authentication code (MAC) in a pattern called encrypt-then-MAC [Kra01], one can build an authenticated encryption

scheme [BN00] that achieves IND-CCA security. While this technique cannot be directly applied in the context of public-key cryptography due to the lack of a shared symmetric key between the two communicating parties, the concept of authenticating ciphertext using a MAC still has strong merits. Abdalla, Rogaway, and Bellare proposed DHIES (also known as “Hashed ElGamal”)[ABR99][ABR01], a hybrid public-key encryption (HPKE) scheme whose IND-CCA security reduces to the Gap Diffie-Hellman assumption [OP01a] under the random oracle model. The technique behind DHIES is to derive both the shared secret and a symmetric MAC key by hashing a random PKE plaintext, encrypting the PKE plaintext, then authenticating the PKE ciphertext using the previously derived MAC key. When the Gap Diffie-Hellman assumption holds and the MAC is existentially unforgeable, no efficient adversary can recover the decryption of an unknown ciphertext even with access to a decryption oracle because it cannot produce a valid tag for such unknown ciphertext.

1.1 Our contribution

Encrypt-then-MAC: a generic IND-CCA secure KEM transformation In this paper, we propose a generic IND-CCA secure KEM using techniques adapted from DHIES. We call our proposed scheme the encrypt-then-MAC transformation due to the conceptual similarity to the namesake symmetric encryption technique for achieving authenticated encryption. We prove that the IND-CCA security of the encrypt-then-MAC transformation reduces tightly to the OW-PCA security of the underlying PKE and the existential unforgeability of the underlying MAC. In addition, we argue that the encrypt-then-MAC transformation can be instantiated with one-time MAC for further performance improvements.

ML-KEM⁺: an instantiation of encrypt-then-MAC transformation with ML-KEM’s PKE sub-routines. We implemented ML-KEM⁺ by applying our encrypt-then-MAC transformation to ML-KEM’s PKE sub-routines. Compared with ML-KEM, which is based on the U^\perp variant (implicit rejection with rigidity) of the modular Fujisaki-Okamoto KEM transformation, ML-KEM⁺ demonstrates massive performance improvements in decapsulation while only incurring minimal performance penalty in encapsulation runtime and ciphertext size. On an AMD EPYC 9R14 CPU, ML-KEM⁺ with Poly1305 achieves between 72%-80% reduction of CPU cycles needed for decapsulation while only incurring 2%-7% increase of CPU cycles needed for encapsulation (see Table 1).

Table 1: ML-KEM⁺ achieves large performance improvements in decapsulation at the cost of minimal penalty in encapsulation performance and ciphertext size

	Encap (ccl/tick)	Decap (ccl/tick)	CT size (bytes)
ML-KEM ⁺ -512 (Poly1305)	93157 (+1.8%)	33733 (-72.2%)	784 (+2.1%)
ML-KEM ⁺ -512 (GMAC)	97369 (+6.5%)	37725 (-68.9%)	784 (+2.1%)
ML-KEM ⁺ -512 (CMAC)	99739 (+9.0%)	40117 (-66.9%)	784 (+2.1%)
ML-KEM ⁺ -512 (KMAC-256)	101009 (+10.4%)	40741 (-66.4%)	784 (+2.1%)

Performance improvements in practical key exchange. We also implemented the three Kyber key exchange protocols described in [BDK⁺18] using ML-KEM⁺ and ML-KEM. Compared to ML-KEM, ML-KEM⁺ achieves 24%-28% reduction of round trip time in unauthenticated key exchange (KE), 29%-35% in unilaterally authenticated key exchange (UAKE), and 35%-48% reduction in mutually authenticated key exchange (AKE). See Table 2 for a summary of round trip times.

Table 2: ML-KEM⁺ achieves substantial RTT savings despite increased encapsulation cost and ciphertext size

	KE RTT (μs)	UAKE RTT (μs)	AKE RTT (μs)
ML-KEM ⁺ -512 (Poly1305)	70 (-23.9%)	103 (-29.0%)	133 (-39.5%)
ML-KEM ⁺ -512 (GMAC)	73 (-20.7%)	106 (-26.9%)	139 (-36.8%)
ML-KEM ⁺ -512 (CMAC)	75 (-18.5%)	108 (-25.5%)	143 (-35.0%)
ML-KEM ⁺ -512 (KMAC-256)	76 (-17.4%)	109 (-24.8%)	145 (-34.1%)

1.2 Related works

Optimal Asymmetric Encryption Padding (OAEP) [BR94][BDPR98] is a generic chosen-ciphertext secure PKE. Under the random oracle model, the chosen-ciphertext security of the OAEP encryption scheme reduces to the one-wayness of the input trapdoor permutation. Although it was discovered that there exist trapdoor permutations with which the OAEP encryption scheme does not achieve full IND-CCA security [Sho02], Fujisaki et al. later proved that the OAEP is IND-CCA secure when combined with the RSA trapdoor permutation [FOPS01][RSA78]. RSA-OAEP was standardized in PKCS#1 v2 [MKJR16] and is currently the most recommended of all RSA-based encryption schemes. Unfortunately, OAEP’s requirement for a trapdoor permutation is immensely difficult to satisfy, and no other practical instantiation saw widespread adoption to this day.

The **Fujisaki-Okamoto transformation** [FO99][FO13] is another generic chosen-ciphertext secure transformation. While Fujisaki and Okamoto originally proposed a hybrid public-key encryption scheme whose IND-CCA security reduces non-tightly to the OW-CPA security of the underlying PKE and the IND-CPA security of the symmetric encryption scheme. Later works [Den03][HHK17][DNR04][HHM22][BP18] tightened the security reduction, accounted for imperfect correctness, adapted the original proposal to build a KEM, and proved its security in the quantum random oracle model (QROM).

$\text{KEM}_m^\mathcal{L}.\text{KeyGen}()$	$\text{KEM}_m^\mathcal{L}.\text{Encap}(\text{pk})$	$\text{KEM}_m^\mathcal{L}.\text{Decap}(\text{sk}, c)$
1: $(\text{pk}, \text{sk}') \xleftarrow{\$} \text{PKE}.\text{KeyGen}()$ 2: $z \xleftarrow{\$} \mathcal{M}$ 3: $\text{sk} \leftarrow (\text{sk}', \text{pk}, z)$ 4: return (pk, sk)	1: $m \xleftarrow{\$} \mathcal{M}$ 2: $r \leftarrow G(m)$ 3: $c \leftarrow \text{PKE}.\text{Enc}(\text{pk}, m, r)$ 4: $K \leftarrow H(m)$ 5: return (c, K)	1: $\hat{m} \leftarrow \text{PKE}.\text{Dec}(\text{sk}', c)$ 2: $\hat{r} \leftarrow G(\hat{m})$ 3: $\hat{c} \leftarrow \text{PKE}.\text{Enc}(\text{pk}, \hat{m}, \hat{r})$ 4: if $\hat{c} = c$ then 5: $K \leftarrow H(\hat{m})$ 6: else 7: $K \leftarrow H(z, c)$ 8: end if 9: return K

Figure 1: The $U_m^\mathcal{L}$ variant of Fujisaki-Okamoto transformation is used in ML-KEM

The modular Fujisaki-Okamoto KEM transformation is remarkably successful because of the simplicity of its construction, the tightness of the security bound, and the proven (though non-tight) security against quantum adversaries. It was adopted by many submissions to NIST’s post-quantum cryptography competition, including Kyber [BDK⁺18], Saber [DKRV18], FrodoKEM [BCD⁺16], and classic McEliece [ABC⁺20] among others. The $U_m^\mathcal{L}$ variant of the Fujisaki-Okamoto transformation (see Figure 1) is adopted in ML-KEM.

However, the Fujisaki-Okamoto transformation is not perfect. Because it uses de-randomization and re-encryption for achieving ciphertext non-malleability, the Fujisaki-Okamoto transformation suffers from the following two problems:

- **Computational inefficiency.** The decapsulation routine needs to re-encrypt the decryption to ensure ciphertext has not been tempered with. For input PKE whose encryption routine carries substantial computational cost, such as most lattice-based cryptosystems, re-encryption slows down decapsulation significantly.
- **Side-channel vulnerability.** Re-encryption also introduces side-channels that can leak information about the decrypted PKE plaintext. As demonstrated in [UXT⁺22][RRCB19][TUX⁺23], these side-channels can be converted into efficient plaintext-checking attacks that can fully recover the secret key.

The rest of the paper is organized as follows. In Section 2, we define and discuss the preliminary concepts and theorems. In Section 3, we present our encrypt-then-MAC transformation in details, prove its security results, and discuss its relationship to the ElGamal cryptosystem. In Section 4, we present ML-KEM⁺, an instantiation of the encrypt-then-MAC transformation using ML-KEM's PKE sub-routines, then discuss some implementation rationales. In Section 5, we benchmark and compare the performance of individual KEM routines and key exchange round trip times between ML-KEM⁺ and ML-KEM.

2 Preliminaries

2.1 Public-key encryption scheme

Syntax. A public-key encryption scheme $\text{PKE}(\text{KeyGen}, \text{Enc}, \text{Dec})$ is a collection of three routines defined over some plaintext space \mathcal{M} and some ciphertext space \mathcal{C} . Key generation $(\text{pk}, \text{sk}) \xleftarrow{\$} \text{KeyGen}()$ is a randomized routine that returns a keypair. The encryption routine $\text{Enc} : (\text{pk}, m) \mapsto c$ encrypts the input plaintext under the input public key. The decryption routine $\text{Dec} : (\text{sk}, c) \mapsto m$ decrypts the input ciphertext under the input secret key. Where the encryption routine is randomized, we denote the randomness by a coin $r \in \mathcal{R}$, where \mathcal{R} is called the coin space. The decryption routine is assumed to always be deterministic. Some decryption routines can detect malformed ciphertext and output the rejection symbol \perp accordingly.

Correctness. Following the definition in [DNR04], a PKE is δ -correct if:

$$E \left[\max_{m \in \mathcal{M}} P \left[\text{Dec}(\text{sk}, c) \neq m \mid c \xleftarrow{\$} \text{Enc}(\text{pk}, m) \right] \right] \leq \delta$$

Where the expectation is taken with respect to the probability distribution of all possible keypairs $(\text{pk}, \text{sk}) \xleftarrow{\$} \text{PKE}.\text{KeyGen}()$. For many lattice-based cryptosystems, including ML-KEM, decryption failures could leak information about the secret key, although the probability of a decryption failure is low enough that classical adversaries cannot exploit decryption failure more than they can defeat the underlying lattice problem.

Security. The security of public-key encryption is conventionally discussed within the context of adversarial games played between a challenger and an adversary [GM82]. There are two main types of games: in the one-wayness game, the adversary is given a random encryption, then asked to produce the correct decryption; in the indistinguishability game, the adversary is given the encryption of one of two adversary-chosen plaintexts, then asked to decide which of the plaintexts corresponds with the given encryption. Depending on the attack model, the adversary may have access to various oracles. Within the context of public-key cryptography, adversaries are always assumed to have the public key with which

they can mount chosen-plaintext attack (CPA). If the adversary has access to a plaintext-checking oracle (PCO) [OP01b] then it can mount plaintext-checking attack (PCA). Where the adversary has access to a decryption oracle, it can mount chosen-ciphertext attacks (CCA).

OW-ATK Game	IND-ATK Game	$\mathcal{O}_{\text{PCO}}(m, c)$
1: $(\mathbf{pk}, \mathbf{sk}) \xleftarrow{\$} \text{KeyGen}(1^\lambda)$	1: $(\mathbf{pk}, \mathbf{sk}) \xleftarrow{\$} \text{KeyGen}(1^\lambda)$	1: return $\llbracket m = \text{Dec}(\mathbf{sk}, c) \rrbracket$
2: $m^* \xleftarrow{\$} \mathcal{M}$	2: $(m_0, m_1) \xleftarrow{\$} A^{\mathcal{O}_{\text{ATK}}}(1^\lambda, \mathbf{pk})$	
3: $c^* \xleftarrow{\$} \text{Enc}(\mathbf{pk}, m^*)$	3: $b \xleftarrow{\$} \{0, 1\}$	
4: $\hat{m} \xleftarrow{\$} A^{\mathcal{O}_{\text{ATK}}}(1^\lambda, \mathbf{pk}, c^*)$	4: $c^* \xleftarrow{\$} \text{Enc}(\mathbf{pk}, m_b)$	$\mathcal{O}_{\text{Dec}}(c)$
5: return $\llbracket \hat{m} = m^* \rrbracket$	5: $\hat{b} \xleftarrow{\$} A^{\mathcal{O}_{\text{ATK}}}(1^\lambda, \mathbf{pk}, c^*)$	1: return $\text{Dec}(\mathbf{sk}, c)$
	6: return $\llbracket \hat{b} = b \rrbracket$	

Figure 2: The one-way game, indistinguishability game, plaintext-checking oracle (PCO), and decryption oracle. $\text{ATK} \in \{\text{CPA}, \text{PCA}, \text{CCA}\}$

The advantage of an adversary in the OW-ATK game is the probability that it outputs the correct decryption. The advantage of an adversary in the IND-ATK game is defined below. A PKE is OW-ATK/IND-ATK secure if no efficient adversary has non-negligible advantage in the corresponding security game.

$$\text{Adv}_{\text{IND-ATK}}(A) = \left| P[\hat{b} = b] - \frac{1}{2} \right|$$

2.2 Key encapsulation mechanism (KEM)

Syntax A key encapsulation mechanism $\text{KEM}(\text{KeyGen}, \text{Encap}, \text{Decap})$ is a collection of three routines defined over some ciphertext space \mathcal{C} and some key space \mathcal{K} . The key generation routine takes the security parameter 1^λ and outputs a keypair $(\mathbf{pk}, \mathbf{sk}) \xleftarrow{\$} \text{KeyGen}(1^\lambda)$. $\text{Encap}(\mathbf{pk})$ is a probabilistic routine that takes a public key \mathbf{pk} and outputs a pair of values (c, K) where $c \in \mathcal{C}$ is the ciphertext (also called encapsulation) and $K \in \mathcal{K}$ is the shared secret (also called session key). $\text{Decap}(\mathbf{sk}, c)$ is a deterministic routine that takes the secret key \mathbf{sk} and the encapsulation c and returns the shared secret K if the ciphertext is valid. Some KEM constructions use explicit rejection, where if c is invalid then Decap will return a rejection symbol \perp ; other KEM constructions use implicit rejection, where if c is invalid then Decap will return a fake session key that depends on the ciphertext and some other secret values.

Security The security of KEMs is similarly discussed in adversarial games (Figure 3), although the win conditions differ slightly from the win conditions of a PKE's indistinguishability game. In a KEM's indistinguishability game, an adversary is given the public key and a challenge ciphertext, then asked to distinguish a pseudorandom shared secret K_0 associated with the challenge ciphertext from a truly random bit string of equal length.

The decapsulation oracle $\mathcal{O}^{\text{Decap}}$ takes a ciphertext c and returns the output of the Decap routine using the secret key. The advantage $\epsilon_{\text{IND-CCA}}$ of an IND-CCA adversary $\mathcal{A}_{\text{IND-CCA}}$ is defined by the adversary's ability to correctly distinguish the two cases beyond blind guess:

$$\text{Adv}_{\text{IND-CCA}}(A) = \left| P[A^{\mathcal{O}^{\text{Decap}}}(a^\lambda, \mathbf{pk}, c^*, K_b) = b] - \frac{1}{2} \right|$$

IND-ATK game	$\mathcal{O}_{\text{Decap}}(c)$
1: $(\text{pk}, \text{sk}) \xleftarrow{\$} \text{KeyGen}(1^\lambda)$	1: return $\text{Decap}(\text{sk}, c)$
2: $(c^*, K_0) \xleftarrow{\$} \text{Encap}(\text{pk})$	
3: $K_1 \xleftarrow{\$} \mathcal{K}$	
4: $b \xleftarrow{\$} \{0, 1\}$	
5: $\hat{b} \xleftarrow{\$} A^{\mathcal{O}_{\text{ATK}}}(1^\lambda, \text{pk}, c^*, K_b)$	
6: return $\llbracket \hat{b} = b \rrbracket$	

Figure 3: IND-ATK game for KEM and decapsulation oracle $\mathcal{O}_{\text{Decap}}$

178 A KEM is IND-ATK secure if no efficient adversary has non-negligible advantage in the
 179 corresponding security game.

180 2.3 Message authentication code (MAC)

181 A message authentication code $\text{MAC}(\text{KeyGen}, \text{Sign}, \text{Verify})$ is a collection of routines defined
 182 over some key space \mathcal{K} , some message space \mathcal{M} , and some tag space \mathcal{T} . The signing
 183 routine $\text{Sign}(k, m)$ authenticates the message m under the secret key k by producing a tag
 184 t (also called digest). The verification routine $\text{Verify}(k, m, t)$ takes the triplet of secret
 185 key, message, and tag, and outputs 1 if the message-tag pair is valid under the secret key,
 186 or 0 otherwise. Many MAC constructions are deterministic. For these constructions it is
 187 simpler to denote the signing routine by $t \leftarrow \text{MAC}(k, m)$ and perform verification using a
 188 simple comparison.

189 The security of a MAC is defined in an adversarial game in which an adversary, with
 190 access to some signing oracle $\mathcal{O}_{\text{sign}}(m)$, tries to forge a new valid message-tag pair that
 191 has never been queried before. The existential unforgeability under chosen message attack
 192 (EUF-CMA) game is shown below:

EUF-CMA game
1: $k^* \xleftarrow{\$} \mathcal{K}$
2: $(\hat{m}, \hat{t}) \xleftarrow{\$} \mathcal{A}^{\mathcal{O}_{\text{sign}}}()$
3: return $\llbracket \text{Verify}(k^*, \hat{m}, \hat{t}) \wedge (\hat{m}, \hat{t}) \notin \mathcal{O}_{\text{sign}} \rrbracket$

Figure 4: The existential forgery game

193 The advantage $\text{Adv}_{\text{EUF-CMA}}$ of the existential forgery adversary is the probability that it
 194 wins the EUF-CMA game. Some MACs are one-time existentially unforgeable, meaning
 195 that each secret key can be used to authenticate only a single message. The corresponding
 196 security game is modified such that the signing oracle will only answer a single signing
 197 query.

198 3 The encrypt-then-MAC transformation

199 In this section we introduce the encrypt-then-MAC transformation that transforms an OW-
 200 PCA secure PKE and an one-time existentially unforgeable MAC into an IND-CCA secure
 201 KEM. Our scheme mainly differs from DHIES in its versatility and input requirement.

Whereas the IND-CCA security of DHIES reduces specifically to the Gap Diffie-Hellman assumption, the chosen-ciphertext security of the encrypt-then-MAC KEM reduces more generally to the OW-PCA security [OP01b] of the input scheme (we will show in Section 3.2 that the Gap Diffie-Hellman assumption implies OW-PCA security). In addition, we propose that because each call to encapsulation samples a fresh PKE plaintext, the encrypt-then-MAC KEM can be instantiated with one-time secure MAC such as Poly1305 (M. Abdalla et al. originally proposed to use HMAC and CBC-MAC, which are many-time secure MAC but less efficient than one-time MAC, see Section 4.1), which greatly improves the computational efficiency of the scheme. A summary of encapsulation data flow is illustrated in Figure 5.

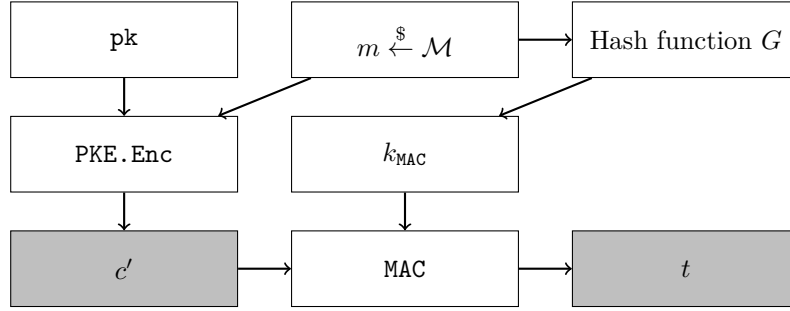


Figure 5: Combining PKE with MAC using encrypt-then-MAC to ensure ciphertext integrity

In Section 3.1 we reduce the IND-CCA security of the KEM tightly to the OW-PCA security of the underlying PKE, and non-tightly to the unforgeability of the MAC. In Section 3.2, we show that the “Hashed ElGamal” cryptosystem in [ABR01] is a special case of the encrypt-then-MAC transformation by reducing the OW-PCA security of the ElGamal cryptosystem to the Gap Diffie-Hellman assumption.

Let \mathcal{B}^* denote the set of finite bit strings. Let $\text{PKE}(\text{KeyGen}, \text{Enc}, \text{Dec})$ be a public-key encryption scheme defined over message space \mathcal{M} and ciphertext space \mathcal{C} . Let $\text{MAC} : \mathcal{K}_{\text{MAC}} \times \mathcal{B}^* \rightarrow \mathcal{T}$ be a deterministic message authentication code that takes a key $k \in \mathcal{K}_{\text{MAC}}$, some message $m \in \mathcal{B}^*$, and outputs a digest $t \in \mathcal{T}$. Let $G : \mathcal{M} \rightarrow \mathcal{K}_{\text{MAC}}$ be a hash function that maps from PKE’s plaintext space to MAC’s key space. Let $H : \mathcal{B}^* \rightarrow \mathcal{K}_{\text{KEM}}$ be a hash function that maps bit strings into the set of possible shared secrets. The encrypt-then-MAC transformation $\text{EtM}[\text{PKE}, \text{MAC}, G, H]$ constructs a key encapsulation mechanism $\text{KEM}_{\text{EtM}}(\text{KeyGen}, \text{Encap}, \text{Decap})$, whose routines are described in Figure 6.

The key generation routine of KEM_{EtM} is largely identical to that of the PKE, only a secret value z is sampled as the implicit rejection symbol. In the encapsulation routine, a MAC key is derived from the randomly sampled plaintext $k \leftarrow G(m)$, then used to sign the unauthenticated ciphertext c' . Finally, the unauthenticated ciphertext c' and the tag t combine into the authenticated ciphertext c that would be transmitted to the peer. In the decapsulation routine, the decryption \hat{m} of the unauthenticated ciphertext is used to re-derive the MAC key \hat{k} , which is then used to re-compute the tag \hat{t} . The ciphertext is considered valid if and only if the recomputed tag is identical to the input tag.

Since the encrypt-then-MAC transformation removes re-encryption in decapsulation, there is no longer the need for fixing the pseudorandom coin r in the PKE’s encryption routine. If the input PKE is already rigid, then the shared secret may be derived from hashing the PKE plaintext alone. However, if the input PKE is not rigid, then the shared secret must be derived from hashing both the PKE plaintext and the PKE ciphertext.

The chosen-ciphertext security of the encrypt-then-MAC scheme can be intuitively argued through an adversary’s inability to learn additional information from the decap-

$\text{KEM}_{\text{EtM}}.\text{KeyGen}()$	$\text{KEM}_{\text{EtM}}.\text{Decap}(\text{sk}, c)$
1: $(\text{pk}, \text{sk}') \xleftarrow{\$} \text{PKE}.\text{KeyGen}()$ 2: $z \xleftarrow{\$} \mathcal{M}$ 3: $\text{sk} \leftarrow (\text{sk}', z)$ 4: return (pk, sk)	1: $(c', t) \leftarrow c$ 2: $(\text{sk}', z) \leftarrow \text{sk}$ 3: $\hat{m} \leftarrow \text{PKE}.\text{Dec}(\text{sk}', c')$ 4: $\hat{k} \leftarrow G(\hat{m})$ 5: if $\text{MAC}(\hat{k}, c') \neq t$ then 6: $K \leftarrow H(z, c')$ 7: else 8: $K \leftarrow H(\hat{m}, c')$ 9: end if 10: return K
$\text{KEM}_{\text{EtM}}.\text{Encap}(\text{pk})$	
1: $m \xleftarrow{\$} \mathcal{M}$ 2: $k \leftarrow G(m)$ 3: $c' \xleftarrow{\$} \text{PKE}.\text{Enc}(\text{pk}, m)$ 4: $t \leftarrow \text{MAC}(k, c')$ 5: $K \leftarrow H(m, c')$ 6: $c \leftarrow (c', t)$ 7: return (c, K)	

Figure 6: The encrypt-then-MAC transformation builds a KEM KEM_{EtM} using a $\text{PKE}(\text{KeyGen}, \text{Enc}, \text{Dec})$, a MAC , and two hash functions G, H

240 sulation oracle. For an adversary A to produce a valid tag t for some unauthenticated
241 ciphertext c' under the symmetric key $k \leftarrow G(\text{Dec}(\text{sk}', c'))$ implies that A must either
242 know the symmetric key k or produce a forgery. Under the random oracle model, A also
243 cannot know k without knowing its preimage $\text{Dec}(\text{sk}', c')$, so A must either have produced
244 c' honestly, or have broken the one-way security of PKE . This means that the decapsulation
245 oracle will not give out information on decryptions that the adversary does not already
246 know.

247 However, a decapsulation oracle can still give out some information: for a known
248 plaintext m , all possible encryptions $c' \xleftarrow{\$} \text{Enc}(\text{pk}, m)$ can be correctly signed, while
249 ciphertexts that don't decrypt back to m cannot be correctly signed. This means that a
250 decapsulation oracle can be converted into a plaintext-checking oracle (see Figure 7), so
251 every chosen-ciphertext attack against the KEM can be converted into a plaintext-checking
252 attack against the underlying PKE.

$\text{PCO}(m, c)$
1: $k \leftarrow G(m)$ 2: $t \leftarrow \text{MAC}(k, c)$ 3: return $\llbracket \mathcal{O}^{\text{Decap}}((c, t)) = H(m, c) \rrbracket$

Figure 7: With the encrypt-then-MAC transformation, every chosen-ciphertext attack against the KEM implies a plaintext-checking attack against the underlying PKE

253 On the other hand, if the underlying PKE is OW-PCA secure and the underlying
254 MAC is one-time existentially unforgeable, then the encrypt-then-MAC KEM is IND-CCA
255 secure:

256 **Theorem 1.** *For every IND-CCA adversary A against KEM_{EtM} that makes q decapsulation*
257 *queries, there exists an OW-PCA adversary B who makes at least q plaintext-checking queries*

258 against the underlying PKE, and an one-time existential forgery adversary C against the
 259 underlying MAC such that

$$\text{Adv}_{\text{IND-CCA}}(A) \leq q \cdot \text{Adv}_{\text{OT-MAC}}(C) + 2 \cdot \text{Adv}_{\text{OW-PCA}}(B)$$

260 Theorem 1 naturally flows into an equivalence relationship between the security of the
 261 KEM and the security of the PKE:

262 **Lemma 1.** *KEM_{EtM} is IND-CCA secure if and only if the input PKE is OW-PCA secure*

263 3.1 Proof of theorem 1

264 We will prove Theorem 1 using a sequence of game. A summary of the the sequence of
 265 games can be found in Figure 8 and 9. From a high level we made three incremental
 266 modifications to the IND-CCA game for KEM_{EtM} : replace true decapsulation with simulated
 267 decapsulation, replace the pseudorandom MAC key $k^* \leftarrow G(m^*)$ with a truly random
 268 MAC key $k^* \xleftarrow{\$} \mathcal{K}_{\text{MAC}}$, and finally replace pseudorandom shared secret $K_0 \leftarrow H(m^*, c')$
 269 with a truly random shared secret $K_0 \xleftarrow{\$} \mathcal{K}_{\text{KEM}}$. A OW-PCA adversary can then simulate
 270 the modified IND-CCA game for the KEM adversary, and the advantage of the OW-PCA
 271 adversary is associated with the probability of certain behaviors of the KEM adversary.

272 *Proof.* *Game 0* is the standard IND-CCA game for KEMs. The decapsulation oracle
 273 $\mathcal{O}^{\text{Decap}}$ executes the decapsulation routine using the challenge keypair and return the
 274 results faithfully. The queries made to the hash oracles $\mathcal{O}^G, \mathcal{O}^H$ are recorded to their
 275 respective tapes $\mathcal{L}^G, \mathcal{L}^H$.

276 *Game 1* is identical to game 0 except that the true decapsulation oracle $\mathcal{O}^{\text{Decap}}$ is replaced
 277 with a simulated oracle $\mathcal{O}_1^{\text{Decap}}$. Instead of directly decrypting c' as in the decapsulation
 278 routine, the simulated oracle searches through the tape \mathcal{L}^G to find a matching query (\tilde{m}, \tilde{k})
 279 such that \tilde{m} is the decryption of c' . The simulated oracle then uses \tilde{k} to validate the tag t
 280 against c' .

281 If the simulated oracle accepts the queried ciphertext as valid, then there is a matching
 282 query that also validates the tag, which means that the queried ciphertext is honestly
 283 generated. Therefore, the true oracle must also accept the queried ciphertext. On the other
 284 hand, if the true oracle rejects the queried ciphertext (and output the implicit rejection
 285 $H(z, c')$), then the tag is simply invalid under the MAC key $k = G(\text{Dec}(\text{sk}', c'))$. Therefore,
 286 there could not have been a matching query that also validates the tag, and the simulated
 287 oracle must also rejects the queried ciphertext.

288 This means that from the adversary A 's perspective, game 1 and game 0 differ only
 289 when the true oracle accepts while the simulated oracle rejects, which means that t is a
 290 valid tag for c' under $k = G(\text{Dec}(\text{sk}', c'))$, but k has never been queried. Under the random
 291 oracle model, such k is a uniformly random sample of \mathcal{K}_{MAC} that the adversary does not
 292 know, so for A to produce a valid tag is to produce a forgery against the MAC under an
 293 unknown and uniformly random key. Furthermore, the security game does not include a
 294 signing oracle, so this is a zero-time forgery. While zero-time forgery is not a standard
 295 security definition for a MAC, we can bound it by the advantage of a one-time forgery
 296 adversary C :

$$P \left[\mathcal{O}^{\text{Decap}}(c) \neq \mathcal{O}_1^{\text{Decap}}(c) \right] \leq \text{Adv}_{\text{OT-MAC}}(C)$$

297 Across all q decapsulation queries, the probability that at least one query is a forgery
 298 is thus at most $q \cdot P \left[\mathcal{O}^{\text{Decap}}(c) \neq \mathcal{O}_1^{\text{Decap}}(c) \right]$. By the difference lemma:

$$\text{Adv}_{G_0}(A) - \text{Adv}_{G_1}(A) \leq q \cdot \text{Adv}_{\text{OT-MAC}}(C)$$

IND-CCA game for KEM_{EtM}	$\mathcal{O}^{\text{Decap}}(c)$
1: $(\text{pk}, \text{sk}) \xleftarrow{\$} \text{KEM}_{\text{EtM}}.\text{KeyGen}()$ 2: $m^* \xleftarrow{\$} \mathcal{M}$ 3: $c' \xleftarrow{\$} \text{PKE}.\text{Enc}(\text{pk}, m^*)$ 4: $k^* \leftarrow G(m^*)$ \triangleright Game 0-1 5: $k^* \xleftarrow{\$} \mathcal{K}_{\text{MAC}}$ \triangleright Game 2-3 6: $t \leftarrow \text{MAC}(k^*, c')$ 7: $c^* \leftarrow c' t$ 8: $K_0 \leftarrow H(m^*, c')$ \triangleright Game 0-2 9: $K_0 \xleftarrow{\$} \mathcal{K}_{\text{KEM}}$ \triangleright Game 3 10: $K_1 \xleftarrow{\$} \mathcal{K}_{\text{KEM}}$ 11: $b \xleftarrow{\$} \{0, 1\}$ 12: $\hat{b} \leftarrow A^{\mathcal{O}^{\text{Decap}}}(\text{pk}, c^*, K_b)$ \triangleright Game 0 13: $\hat{b} \leftarrow A^{\mathcal{O}_1^{\text{Decap}}}(\text{pk}, c^*, K_b)$ \triangleright Game 1-3 14: return $\llbracket \hat{b} = b \rrbracket$	1: $(c', t) \leftarrow c$ 2: $\hat{m} = \text{Dec}(\text{sk}', c')$ 3: $\hat{k} \leftarrow G(\hat{m})$ 4: if $\text{MAC}(\hat{k}, c') = t$ then 5: $K \leftarrow H(\hat{m}, c')$ 6: else 7: $K \leftarrow H(z, c')$ 8: end if 9: return K
	$\mathcal{O}_1^{\text{Decap}}(c)$
	1: $(c', t) \leftarrow c$ 2: if $\exists (\tilde{m}, \tilde{k}) \in \mathcal{L}^G : \tilde{m} = \text{Dec}(\text{sk}', c') \wedge \text{MAC}(\tilde{k}, c') = t$ then 3: $K \leftarrow H(\tilde{m}, c')$ 4: else 5: $K \leftarrow H(z, c')$ 6: end if 7: return K
$\mathcal{O}^G(m)$	
1: if $\exists (\tilde{m}, \tilde{k}) \in \mathcal{L}^G : \tilde{m} = m$ then 2: return \tilde{k} 3: end if 4: $k \xleftarrow{\$} \mathcal{K}_{\text{MAC}}$ 5: $\mathcal{L}^G \leftarrow \mathcal{L}^G \cup \{(m, k)\}$ 6: return k	
	$\mathcal{O}^H(m, c)$
	1: if $\exists (\tilde{m}, \tilde{c}, \tilde{K}) \in \mathcal{L}^H : \tilde{m} = m \wedge \tilde{c} = c$ then 2: return \tilde{K} 3: end if 4: $K \xleftarrow{\$} \mathcal{K}_{\text{KEM}}$ 5: $\mathcal{L}^H \leftarrow \mathcal{L}^H \cup \{(m, c, K)\}$ 6: return K

Figure 8: Sequence of games

299 *Game 2* is identical to game 1, except that the challenger samples a uniformly random
300 MAC key $k^* \xleftarrow{\$} \mathcal{K}_{\text{MAC}}$ instead of deriving it from m^* . From A 's perspective the two games
301 are indistinguishable, unless A queries G with the value of m^* . Denote the probability
302 that A queries G with m^* by $P[\text{QUERY } G]$, then:

$$\text{Adv}_{G_1}(A) - \text{Adv}_{G_2}(A) \leq P[\text{QUERY } G]$$

303 *Game 3* is identical to game 2, except that the challenger samples a uniformly random
304 shared secret $K_0 \xleftarrow{\$} \mathcal{K}_{\text{KEM}}$ instead of deriving it from m^* and c' . From A 's perspective the
305 two games are indistinguishable, unless A queries H with (m^*, \cdot) . Denote the probability
306 that A queries H with (m^*, \cdot) by $P[\text{QUERY } H]$, then:

$$\text{Adv}_{G_2}(A) - \text{Adv}_{G_3}(A) \leq P[\text{QUERY } H]$$

307 Since in game 3, both K_0 and K_1 are uniformly random and independent of all other
308 variables, no adversary can have any advantage: $\text{Adv}_{G_3}(A) = 0$.

309 We will bound $P[\text{QUERY } G]$ and $P[\text{QUERY } H]$ by constructing a OW-PCA adversary B
310 against the underlying PKE that uses A as a sub-routine. B 's behaviors are summarized

$B(\text{pk}, c^*)$	$\mathcal{O}_B^{\text{Decap}}(c)$
1: $z \xleftarrow{\$} \mathcal{M}$ 2: $k \xleftarrow{\$} \mathcal{K}_{\text{MAC}}$ 3: $t \leftarrow \text{MAC}(k, c'^*)$ 4: $c^* \leftarrow (c'^*, t)$ 5: $K \xleftarrow{\$} \mathcal{K}_{\text{KEM}}^{\text{Decap}}$ 6: $\hat{b} \leftarrow A^{\mathcal{O}_B^{\text{Decap}}, \mathcal{O}_B^G, \mathcal{O}_B^H}(\text{pk}, c^*, K)$ 7: if $\text{ABORT}(m)$ then 8: return m 9: end if	1: $(c', t) \leftarrow c$ 2: if $\exists (\tilde{m}, \tilde{k}) \in \mathcal{L}^G : \text{PCO}(c', \tilde{m}) = 1 \wedge \text{MAC}(\tilde{k}, c') = t$ then 3: $K \leftarrow H(\tilde{m}, c')$ 4: else 5: $K \leftarrow H(z, c')$ 6: end if 7: return K
$\mathcal{O}_B^H(m, c)$	$\mathcal{O}_B^G(m)$
if $\text{PCO}(m, c'^*) = 1$ then $\text{ABORT}(m)$ end if if $\exists (\tilde{m}, \tilde{c}, \tilde{K}) \in \mathcal{L}^H : \tilde{m} = m \wedge \tilde{c} = c$ then return \tilde{K} end if $K \xleftarrow{\$} \mathcal{K}_{\text{KEM}}$ $\mathcal{L}^H \leftarrow \mathcal{L}^H \cup \{(m, c, K)\}$ return K	1: if $\text{PCO}(m, c'^*) = 1$ then 2: $\text{ABORT}(m)$ 3: end if 4: if $\exists (\tilde{m}, \tilde{k}) \in \mathcal{L}^G : \tilde{m} = m$ then 5: return \tilde{k} 6: end if 7: $k \xleftarrow{\$} \mathcal{K}_{\text{MAC}}$ 8: $\mathcal{L}^G \leftarrow \mathcal{L}^G \cup \{(m, k)\}$ 9: return k

Figure 9: OW-PCA adversary B simulates game 3 for IND-CCA adversary A

311 in Figure 9.

312 B simulates game 3 for A : receiving the public key pk and challenge encryption c'^* , B
313 samples random MAC key and session key to produce the challenge encapsulation, then
314 feeds it to A . When simulating the decapsulation oracle, B uses the plaintext-checking
315 oracle to look for matching queries in \mathcal{L}^G . When simulating the hash oracles, B uses the
316 plaintext-checking oracle to detect when $m^* = \text{Dec}(\text{sk}', c'^*)$ has been queried. When m^*
317 is queried, B terminates A and returns m^* to win the OW-PCA game. In other words:

$$P[\text{QUERY } G] \leq \text{Adv}_{\text{OW-PCA}}(B)$$

$$P[\text{QUERY } H] \leq \text{Adv}_{\text{OW-PCA}}(B)$$

318 Combining all equations above produce the desired security bound. \square

319 3.2 ElGamal is OW-PCA secure

320 We show that the DHAES/DHIES hybrid encryption scheme is a special case of the
321 encrypt-then-MAC transformation. Specifically, we will sketch a proof of the following
322 lemma:

323 **Lemma 2.** *For every OW-PCA adversary A against the ElGamal cryptosystem, there*
324 *exists a Gap Diffie-Hellman problem solver B such that:*

$$\text{Adv}_{\text{GapDH}}(B) = \text{Adv}_{\text{OW-PCA}}(A)$$

325 *In other words, ElGamal is OW-PCA secure under the Gap Diffie-Hellman assumption.*

Each ElGamal cryptosystem [Gam85] is parameterized by a cyclic group $G = \langle g \rangle$ of prime order $q > 2$. A summary of the routine is shown in Figure 10:

KeyGen()	Enc(pk = $g^x, m \in G$)	Dec(sk = $x, c = (w, v) \in G^2$)
1: $x \xleftarrow{\$} \mathbb{Z}_q$	Require: $m \in G$	1: $\hat{m} \leftarrow (w^x)^{-1} \cdot v$
2: $\text{sk} \leftarrow x$	1: $y \xleftarrow{\$} \mathbb{Z}_q$	2: return \hat{m}
3: $\text{pk} \leftarrow g^x$	2: $w \leftarrow g^y$	
4: return (pk, sk)	3: $v \leftarrow m \cdot (g^x)^y$	
	4: return $c = (w, v)$	

Figure 10: ElGamal cryptosystem

The security of ElGamal cryptosystem reduces to the conjectured intractability of the computational Diffie-Hellman problem and the decisional Diffie-Hellman problem:

Definition 1 (computational Diffie-Hellman problem (CDH)). Let $x, y \xleftarrow{\$} \mathbb{Z}_q$ be uniformly random samples. Given (g, g^x, g^y) , compute g^{xy} .

Definition 2 (decisional Diffie-Hellman problem (DDH)). Let $x, y, z \xleftarrow{\$} \mathbb{Z}_q$ be uniformly random samples. Let $h \xleftarrow{\$} \{g^z, g^{xy}\}$ be randomly chosen between g^z and g^{xy} . Given (g, g^x, g^y, h) , determine whether h is g^{xy} or g^z .

It is also conjectured in [ABR01] that for certain choice of cyclic group G , the computational Diffie-Hellman problem remains intractable even if the adversary has access to a restricted decisional Diffie-Hellman oracle. This assumption is captured in the Gap Diffie-Hellman problem:

Definition 3 (Gap Diffie-Hellman problem). Let $G = \langle g \rangle$ be a cyclic group of prime order $q > 2$. Let $x, y \xleftarrow{\$} \mathbb{Z}_q$ be uniformly random samples. Given (g, g^x, g^y) and a restricted DDH oracle $\mathcal{O}^{\text{DDH}} : (u, v) \mapsto \llbracket u^x = v \rrbracket$, compute g^{xy} .

We now present the proof for Lemma 2

Proof. We will prove by sequence of game. A summary can be found in Figure 11

$G_0 - G_2$	$\text{PCO}(m, c = (w, v))$
1: $x \xleftarrow{\$} \mathbb{Z}_q$	1: return $\llbracket m = (w^x)^{-1} \cdot v \rrbracket$
2: $m^* \xleftarrow{\$} G$	
3: $y \xleftarrow{\$} \mathbb{Z}_q, w \leftarrow g^y$	
4: $v \leftarrow m^* \cdot (g^x)^y$	$\triangleright G_0 - G_1$ $\text{PCO}_1(m, c = (w, v))$
5: $v \xleftarrow{\$} G$	$\triangleright G_2$ 1: return $\llbracket (w^x) = m^{-1} \cdot v \rrbracket$
6: $c^* \leftarrow (w, v)$	
7: $\hat{m} \xleftarrow{\$} A^{\text{PCO}}(g^x, c^*)$	$\triangleright G_0$
8: $\hat{m} \xleftarrow{\$} A^{\text{PCO}_1}(g^x, c^*)$	$\triangleright G_1 - G_2$
9: return $\llbracket \hat{m} = m^* \rrbracket$	$\triangleright G_0 - G_1$
10: return $\llbracket \hat{m} = w^{-x} \cdot v \rrbracket$	$\triangleright G_2$

Figure 11: Lemma 2 sequence of games

344 *Game 0* is the OW-PCA game. Adversary A has access to the plaintext-checking oracle
 345 PCO and wins the game if it can correctly recover the challenge plaintext m^* .

346 *Game 1* is identical to game 0, except that the formulation of the PCO is changed.
 347 When servicing the plaintext-checking query $(m, c = (w, v))$, PCO_1 checks whether w^x is
 348 equal to $m^{-1} \cdot v$. Observe that in the cyclic group G , the algebraic expressions in PCO and
 349 PCO_1 are equivalent, which means that PCO_1 behaves identically to PCO .

350 *Game 2* is identical to game 1 except for two modifications: first, when computing
 351 the challenge ciphertext, v is no longer computed from m^* but is randomly sampled;
 352 second, the win condition changed from $\hat{m} = m^*$ to $\hat{m} = w^{-x} \cdot v$. Notice that in game 0-1,
 353 $v \stackrel{\$}{\leftarrow} m^* \cdot (g^x)^y$ follows uniform random distribution on the cyclic group G because m^* is
 354 uniformly random in the cyclic group, so adversary A retains its advantage in “recovering
 355 the decryption” when v becomes truly uniformly random in the cyclic group. It is easy to
 356 verify that the two win conditions are equivalent. Up to this point, we have simply moved
 357 things around, and game 0 through game 2 are algebraically equivalent:

$$\text{Adv}_0(A) = \text{Adv}_1(A) = \text{Adv}_2(A)$$

358 The Gap Diffie-Hellman adversary B can perfectly simulate game 2 for A (see Figure
 359 12): B receives as the Gap Diffie-Hellman problem inputs g^x and g^y . g^x simulates an
 360 ElGamal public key, where as g^y simulates the first component of the challenge ciphertext.
 361 As in game 2, the second component of the challenge ciphertext can be randomly sampled.
 362 Finally, the PCO_1 from game 2 can be perfectly simulated using the restricted DDH oracle
 363 \mathcal{O}^{DDH} .

$B^{\mathcal{O}^{\text{DDH}}}(g, g^x, g^y)$	$\mathcal{O}^{\text{DDH}}(u, v)$
1: $w \leftarrow g^y$	1: return $\llbracket u^x = v \rrbracket$
2: $v \stackrel{\$}{\leftarrow} G$	
3: $c^* \leftarrow (w, v)$	
4: $\hat{m} \stackrel{\$}{\leftarrow} A^{\text{PCO}_2}(g^x, c^*)$	$\text{PCO}_2(m, c = (w, v))$
5: return $\hat{m}^{-1} \cdot v$	1: return $\mathcal{O}^{\text{DDH}}(w, m^{-1} \cdot v)$

Figure 12: Gap Diffie-Hellman adversary B simulates game 2 for A

364 If A wins game 2, then its output is $\hat{m} = w^{-x} \cdot v = g^{-xy} \cdot v$, so $m^{-1} \cdot v$ is g^{xy} , the
 365 correct answer to the Gap Diffie-Hellman problem. In other words, B solves its Gap
 366 Diffie-Hellman problem if and only if A wins the simulated game 2.

$$\text{Adv}_2(A) = \text{Adv}_{\text{GapDH}}(B)$$

367

□

368 4 Practical instantiation with ML-KEM

369 ML-KEM is an IND-CCA secure key encapsulation mechanism standardized by NIST in
 370 FIPS 203 [oST24]. The chosen-ciphertext security of ML-KEM is achieved in two steps.
 371 First, ML-KEM constructs a PKE (called K-PKE, see Figure 13) whose IND-CPA security
 372 reduces to the conjectured intractability of the decisional Module Learning with Error
 373 (MLWE) problem. Then, the U_m^ℓ variant of the Fujisaki-Okamoto transformation is applied
 374 to convert the IND-CPA secure PKE into an IND-CCA secure KEM (see Figure 14).

K-PKE.KeyGen()	K-PKE.Enc(pk, m)	K-PKE.Dec(sk, c)
1: $A \xleftarrow{\$} R_q^{k \times k}$ 2: $\mathbf{s} \xleftarrow{\$} \mathcal{X}_{\eta_1}^k$ 3: $\mathbf{e} \xleftarrow{\$} \mathcal{X}_{\eta_1}^k$ 4: $\mathbf{t} \leftarrow \mathbf{A}\mathbf{s} + \mathbf{e}$ 5: $\mathbf{pk} \leftarrow (A, \mathbf{t})$ 6: $\mathbf{sk} \leftarrow \mathbf{s}$ 7: return (pk, sk)	Ensure: $\mathbf{pk} = (A, \mathbf{t})$ Ensure: $m \in R_2$ 1: $\mathbf{r} \xleftarrow{\$} \mathcal{X}_{\eta_1}^k$ 2: $\mathbf{e}_1 \xleftarrow{\$} \mathcal{X}_{\eta_2}^k$ 3: $e_2 \xleftarrow{\$} \mathcal{X}_{\eta_2}$ 4: $\mathbf{c}_1 \leftarrow \mathbf{A}\mathbf{r} + \mathbf{e}_1$ 5: $c_2 \leftarrow \mathbf{t}^\top \mathbf{r} + e_2 + m \cdot \lfloor \frac{q}{2} \rfloor$ 6: return (\mathbf{c}_1, c_2)	Ensure: $c = (c_1, c_2)$ Ensure: $\mathbf{sk} = \mathbf{s}$ 1: $\hat{m} \leftarrow c_2 - \mathbf{c}_1^\top \cdot \mathbf{s}$ 2: $\hat{m} \leftarrow \text{Round}(\hat{m})$ 3: return \hat{m}

Figure 13: K-PKE is an IND-CPA secure PKE based on the conjectured intractability of the Module Learning with Error (MWLE) problem

ML-KEM.KeyGen()	ML-KEM.Decap(sk, c)
1: $(\mathbf{pk}, \mathbf{sk}') \xleftarrow{\$} \text{K-PKE.KeyGen}()$ 2: $h \leftarrow \text{SHA3-256}(\mathbf{pk})$ 3: $z \xleftarrow{\$} \mathcal{M}$ 4: $\mathbf{sk} \leftarrow (\mathbf{sk}', \mathbf{pk}, h, z)$ 5: return (pk, sk)	1: $\hat{m} \leftarrow \text{K-PKE.Dec}(\mathbf{sk}', c)$ 2: $(\bar{K}, \hat{r}) \leftarrow \text{SHA3-512}(\hat{m}, h)$ 3: $\hat{c} \leftarrow \text{K-PKE.Enc}(\mathbf{pk}, \hat{m}, \hat{r})$ 4: if $\hat{c} = c$ then 5: $K \leftarrow \bar{K}$ 6: else 7: $K \leftarrow \text{SHA3-256}(c, z)$ 8: end if 9: return K
ML-KEM.Encap(pk)	
1: $m \xleftarrow{\$} \mathcal{M}$ 2: $h \leftarrow \text{SHA3-256}(\mathbf{pk})$ 3: $(K, r) \leftarrow \text{SHA3-512}(m, h)$ 4: $c \leftarrow \text{K-PKE.Enc}(\mathbf{pk}, m, r)$ 5: return (c, K)	

Figure 14: ML-KEM uses the $U_m^\mathcal{L}$ variant of the modular Fujisaki-Okamoto KEM transformation

We applied the encrypt-then-MAC transformation to the K-PKE routines of ML-KEM. The resulting KEM is called ML-KEM⁺ (See Figure 15).

When applying our encrypt-then-MAC transformation to K-PKE, we modified the routines described in Figure 6 such that the public key is added into the derivation of the MAC key and the shared secret. There are two main reasons behind this modification. First, in a realistic key exchange scenario, the public key will be generated by one party while the random PKE plaintext is sampled by the other party. Hashing both the public key and the plaintext ensures that both parties in a key exchange have inputs into deriving the shared secret. The second reason is to prevent a dictionary attack on the MAC key. If the MAC key is derived on plaintext alone, then an adversary can pre-compute a large dictionary mapping MAC keys to the corresponding PKE plaintext. Upon receiving the ciphertext, the adversary can search through the MAC keys and recover the PKE plaintext. Adding the public key into the derivation of the MAC key will dramatically increase the space requirement and render such dictionary attack infeasible in practice.

We also modified how the shared secret is derived: instead of hashing the entire

ML-KEM ⁺ .KeyGen()	ML-KEM ⁺ .Decap(sk, c)
1: $z \xleftarrow{\$} \{0, 1\}^{256}$ 2: $(pk, sk') \xleftarrow{\$} \text{K-PKE.KeyGen}()$ 3: $h \leftarrow H(pk)$ 4: $sk \leftarrow (sk' pk h z)$ 5: return (pk, sk)	Require: Secret key $sk = (sk' pk h z)$ Require: Ciphertext $c = (c' t)$ 1: $(sk', pk, h, z) \leftarrow sk$ 2: $(c', t) \leftarrow c$ 3: $\hat{m} \leftarrow \text{K-PKE.Dec}(sk', c')$ 4: $(\bar{K}, \hat{k}) \leftarrow G(\hat{m} h)$ 5: $\hat{t} \leftarrow \text{MAC}(\hat{k}, c')$ 6: if $\hat{t} = t$ then 7: $K \leftarrow \text{KDF}(\bar{K} t)$ 8: else 9: $K \leftarrow \text{KDF}(z t)$ 10: end if 11: return K
ML-KEM ⁺ .Encap(pk)	
1: $m \xleftarrow{\$} \{0, 1\}^{256}$ 2: $(\bar{K}, k) \leftarrow G(m H(pk))$ 3: $c' \xleftarrow{\$} \text{K-PKE.Enc}(pk, m)$ 4: $t \leftarrow \text{MAC}(k, c')$ 5: $K \leftarrow \text{KDF}(\bar{K} t)$ 6: $c \leftarrow (c', t)$ 7: return (c, K)	

Figure 15: ML-KEM⁺ applies our encrypt-then-MAC transformation to K-PKE. G is SHA3-512, H is SHA3-256, KDF is Shake256

390 ciphertext, we hashed the MAC tag, which essentially functions as a hash of the ciphertext
391 and thus serves the same purpose. On the other hand, because ML-KEM ciphertext sizes
392 range from 768 bytes to 1568 bytes while the tag size is fixed at 16 bytes, applying the
393 KDF to the tag instead of the entire ciphertext further yields meaningful performance
394 improvements.

395 4.1 Choosing a message authenticator

396 For implementation, we instantiated the MAC with a selection that covered a wide range
397 of MAC designs, including Poly1305 [Ber05], GMAC [MV04], CMAC [IK03][BR05], and
398 KMAC [Gro13].

399 Poly1305 and GMAC are both Carter-Wegman style authenticators [WC81] that
400 compute the tag using finite field arithmetic. Generically speaking, Carter-Wegman MAC
401 operates by breaking the message into message blocks that can then be parsed into finite
402 field elements. The tag is computed by evaluating a polynomial whose coefficients are the
403 message blocks and whose indeterminate is the secret key.

404 Specifically, Poly1305 operates in the prime field \mathbb{F}_q where $q = 2^{130} - 5$ whereas GMAC
405 operates in the binary field $\mathbb{F}_{2^{128}}$. In OpenSSL's implementation, standalone Poly1305 is
406 a one-time secure MAC, whereas GMAC uses a nonce and AES as the PRF and is thus
407 many-time secure (in OpenSSL GMAC is AES-256-GCM except all data is fed into the
408 "associated data" section and thus not encrypted).

409 CMAC is based on the CBC-MAC with the block cipher instantiated from AES-256.
410 To compute a CMAC tag, the message is first broke into 128-bit blocks with appropriate
411 padding. Each block is first XOR'd with the previous block's output, then encrypted under
412 AES using the symmetric key. The final output is XOR'd with a sub key derived from the
413 symmetric key, before being encrypted for one last time.

414 KMAC is based on the SHA-3 family of sponge functions [oST15]. We chose KMAC-
415 256, which uses Shake256 as the underlying extendable output functions. KMAC allows
416 variable-length key and tag, but we chose the 256 bits for key length and 128 bits for tag

size for consistency with other authenticators.

Remark. Unfortunately Poly1305, GMAC, and CMAC all use tag size of 128 bits with no straightforward ways to increase the tag size. We suspect this small tag size to be unsuitable for instantiation with ML-KEM-768 and ML-KEM-1024 due to their higher security target (192-bit and 256-bit security respectively). Consequently, we only instantiate with ML-KEM-512, with a target 128-bit security level.

5 Performance comparison

We measured the real-world performance of the individual routines of our ML-KEM⁺ construction, as well as the round trip time of performing key exchange over a network in a variety of authentication modes. Our implementation extended from the reference implementation by the PQCrystals team [BDK⁺24]. All C code is compiled with GCC 11.4.1 and OpenSSL 3.0.8. All binaries are executed on an AWS c7a.medium instance (AMD EPYC 9R14 CPU at 3.7 GHz and 1 GB of RAM) in the `us-west-2` region.

5.1 MAC performance

To isolate the performance characteristics of each authenticator in our instantiation of ML-KEM⁺ we measured the CPU cycles needed for each authenticator to compute a tag on random inputs whose sizes correspond to the ciphertext sizes of ML-KEM. The measurements are summarized in Table 3.

Table 3: CPU cycles needed to compute tag on various input sizes

Input size: 768 bytes		
MAC	Median (ccl/tick)	Average (ccl/tick)
Poly1305	909	2823
GMAC	3899	4859
CMAC	6291	6373
KMAC	6373	7791

5.2 Individual routine performance

Compared to the U_m^x variant of Fujisaki-Okamoto transformed used in ML-KEM, the encrypt-then-MAC transformation achieves massive CPU cycle count reduction in decapsulation while incurring only a minimal increase of encapsulation cycle count and ciphertext size. Since K-PKE.Enc carries significantly more computational complexity than K-PKE.Dec or any MAC we chose, the performance advantage of the encrypt-then-MAC transformation over the U_m^x transformation is dominated by the runtime saving gained from replacing *re-encryption* with MAC. A comparison between ML-KEM and variations of the ML-KEM⁺ can be found in Table 4.

Remark. We also included the performance of Kyber as it is submitted to the third round of the NIST PQC standardization project, which differs from ML-KEM by deriving the shared secret from hashing the public key, the PKE plaintext, and the PKE ciphertext, while ML-KEM derives its shared secret by hashing only the public key and the PKE plaintext. This results in ML-KEM having meaningful performance improvement in encapsulation over Kyber, though the performance difference in decapsulation is negligible.

5.3 Key exchange protocols

The CRYSTALS-Kyber team [BDK⁺18] proposed three key exchange protocols: `Kyber.KE` for a passively secure ephemeral key exchange, `Kyber.UAKE` for unilaterally authenticated

Table 4: CPU cycles of each KEM routine

128-bit security		Encap cycles/tick		Decap cycles/tick	
size parameters (bytes)		Median	Average	Median	Average
pk size	800	91467	92065	121185	121650
sk size	1632	97811	98090	119937	120299
ct size	768	93157	93626	33733	33908
KeyGen cycles/tick		97369	97766	37725	37831
Median	75945	99739	99959	40117	39943
Average	76171	101009	101313	40741	40916

key exchange, and `Kyber.AKE` for mutually authenticated key exchange. First formally proposed in [BCK98] and later analyzed in [CK01], these key exchange protocols all achieve weak forward secrecy, and the authenticated key exchange protocols are resistant to certain categories of active adversaries (e.g. Man-in-the-Middle attacks).

We implemented each of the three Kyber key exchange protocols using `ML-KEM+` and `ML-KEM`, then measured the round trip time of each handshake. We denote the party who sends the first message to be the client and the other party to be the server. Round trip time (RTT) is defined to be the time interval between the moment before the client starts generating ephemeral keypairs and the moment after the client derives the final session key. All experiments are run on a pair of AWS c7a.medium instances both located in the `us-west-2` region. For each experiment, a total of 10,000 rounds of key exchange are performed, with the median and average round trip time (measured in microsecond) recorded.

Remark. Using KEM for authentication is especially interesting within the context of post-quantum cryptography: post-quantum KEM schemes usually enjoy better performance characteristics than post-quantum signature schemes with faster runtime, smaller memory footprint, and smaller communication sizes. KEMTLS [SSW20] was proposed in 2020 as an alternative to existing TLS handshake protocols, and many experimental implementations have demonstrated the performance advantage.

5.3.1 Unauthenticated key exchange

In unauthenticated key exchange (KE), a single pair of ephemeral keypair $(\mathbf{pk}_e, \mathbf{sk}_e) \xleftarrow{\$} \text{KeyGen}()$ is generated by the client. The client transmits the ephemeral public key \mathbf{pk}_e to the server, who runs the encapsulation routine $(c_e, K_e) \xleftarrow{\$} \text{Encap}(\mathbf{pk}_e)$ and transmits the ciphertext c_e back to the client. The client finally decapsulates the ciphertext to recover the shared secret $K_e \leftarrow \text{Decap}(\mathbf{sk}_e, c_e)$. The key exchange routines are summarized in Figure 16. The key derivation function is instantiated using Shake256, and the final session key is 256 bits in length. The RTT comparison is summarized in Table 5

$\text{KE}_C()$	$\text{KE}_S()$
1: $(\mathbf{pk}_e, \mathbf{sk}_e) \xleftarrow{\$} \text{KeyGen}()$	1: $\mathbf{pk}_e \leftarrow \text{read}()$
2: $\text{send}(\mathbf{pk}_e)$	2: $(c_e, K_e) \xleftarrow{\$} \text{Encap}(\mathbf{pk}_e)$
3: $c_e \leftarrow \text{read}()$	3: $\text{send}(c_e)$
4: $K_e \leftarrow \text{Decap}(\mathbf{sk}_e, c_e)$	4: $K \leftarrow \text{KDF}(K_e)$
5: $K \leftarrow \text{KDF}(K)$	5: return K
6: return K	

Figure 16: Unauthenticated key exchange (KE) routines

Table 5: KE RTT comparison

KEM variant	Client TX bytes	Server TX bytes	RTT (μs)	
			Median	Average
ML-KEM-512	800	768	92	97
ML-KEM ⁺ -512 w/ Poly1305	800	784	70	72
ML-KEM ⁺ -512 w/ GMAC	800	784	73	76
ML-KEM ⁺ -512 w/ CMAC	800	784	75	79
ML-KEM ⁺ -512 w/ KMAC	800	784	76	78

5.3.2 Unilaterally authenticated key exchange

In unilaterally authenticated key exchange (UAKE), the authenticating party proves its identity to the other party by demonstrating possession of a secret key that corresponds to a published long-term public key. In this implementation, the client possesses the long-term public key \mathbf{pk}_S of the server, and the server authenticates itself by correctly decrypting the challenge encryption sent by the client. UAKE routines are summarized in Figure 17.

UAKE _c (\mathbf{pk}_S)	UAKE _s (\mathbf{sk}_S)
Require: Server's long-term \mathbf{pk}_S 1: $(\mathbf{pk}_e, \mathbf{sk}_e) \xleftarrow{\$} \text{KeyGen}()$ 2: $(c_S, K_S) \xleftarrow{\$} \text{Encap}(\mathbf{pk}_S)$ 3: send (\mathbf{pk}_e, c_S) 4: $c_e \leftarrow \text{read}()$ 5: $K_e \leftarrow \text{Decap}(\mathbf{sk}_e, c_e)$ 6: $K \leftarrow \text{KDF}(K_e \ K_S)$ 7: return K	Require: Server's long-term \mathbf{sk}_S 1: $(\mathbf{pk}_e, c_S) \leftarrow \text{read}()$ 2: $K_S \leftarrow \text{Decap}(\mathbf{sk}_S, c_S)$ 3: $(c_e, K_e) \xleftarrow{\$} \text{Encap}(\mathbf{pk}_e)$ 4: send (c_e) 5: $K \leftarrow \text{KDF}(K_e \ K_S)$ 6: return K

Figure 17: Unilaterally authenticated key exchange (UAKE) routines

In addition to the long-term key, the client will also generate an ephemeral keypair as it does in an unauthenticated key exchange, and the session key is derived by applying the KDF to the concatenation of both the ephemeral shared secret and the shared secret encapsulated under server's long-term key. This helps the key exchange to achieve weak forward secrecy [CK01]. Performance data is summarized in Table 6.

Table 6: UAKE RTT comparison

KEM variant	Client TX bytes	Server TX bytes	RTT (μs)	
			Median	Average
ML-KEM-512	1568	768	145	151
ML-KEM ⁺ -512 w/ Poly1305	1584	784	103	106
ML-KEM ⁺ -512 w/ GMAC	1584	784	106	110
ML-KEM ⁺ -512 w/ CMAC	1584	784	108	112
ML-KEM ⁺ -512 w/ KMAC	1584	784	109	113

5.3.3 Mutually authenticated key exchange (AKE)

Mutually authenticated key exchange is largely identical to unilaterally authenticated key exchange, except for that client authentication is required. This means that client possesses server's long-term public key and its own long-term secret key, while the server possesses client's long-term public key and its own long-term secret key. The session key is derived

by applying KDF onto the concatenation of shared secrets produced under the ephemeral keypair, server's long-term keypair, and client's long-term keypair, in this order. the key exchange routines are described in Figure 18 and the performance data summarized in Table 7.

$\text{AKE}_C(\text{pk}_S, \text{sk}_C)$	$\text{AKE}_S(\text{sk}_S, \text{pk}_C)$
Require: Server's long-term pk_S	Require: Server's long-term sk_S
Require: Client's long-term sk_C	Require: Client's long-term pk_C
1: $(\text{pk}_e, \text{sk}_e) \xleftarrow{\$} \text{KeyGen}()$	1: $(\text{pk}_e, c_S) \leftarrow \text{read}()$
2: $(c_S, K_S) \xleftarrow{\$} \text{Encap}(\text{pk}_S)$	2: $K_S \leftarrow \text{Decap}(\text{sk}_S, c_S)$
3: send (pk_e, c_S)	3: $(c_e, K_e) \xleftarrow{\$} \text{Encap}(\text{pk}_e)$
4: $(c_e, c_C) \leftarrow \text{read}()$	4: $(c_C, K_C) \xleftarrow{\$} \text{Encap}(\text{pk}_C)$
5: $K_e \leftarrow \text{Decap}(\text{sk}_e, c_e)$	5: send (c_e, c_C)
6: $K_C \leftarrow \text{Decap}(\text{sk}_e, c_C)$	6: $K \leftarrow \text{KDF}(K_e \ K_S \ K_C)$
7: $K \leftarrow \text{KDF}(K_e \ K_S \ K_C)$	7: return K
8: return K	

Figure 18: Mutually authenticated key exchange (AKE) routines

Table 7: AKE RTT comparison

KEM variant	Client TX bytes	Server TX bytes	RTT (μs)	
			Median	Average
ML-KEM-512	1568	1536	220	213
ML-KEM ⁺ -512 w/ Poly1305	1584	1568	133	138
ML-KEM ⁺ -512 w/ GMAC	1584	1568	139	143
ML-KEM ⁺ -512 w/ CMAC	1584	1568	143	148
ML-KEM ⁺ -512 w/ KMAC	1584	1568	145	151

6 Conclusions and future works

The encrypt-then-MAC transformation is a generic KEM construction whose IND-CCA security reduces to the OW-PCA security of the input PKE and the one-time existential unforgeability of the input MAC in the random oracle model. Compared to the Fujisaki-Okamoto transformation, the encrypt-then-MAC replaces the computationally expensive re-encryption with computing a MAC tag. At the cost of minimal increase in encapsulation cost and ciphertext size, the encrypt-then-MAC substantially improves the efficiency of the decapsulation routine. Where the input PKE's encryption is slower than decryption, the encrypt-then-MAC KEM achieves meaningful time savings in practical key exchange protocols.

Unfortunately, ML-KEM's K-PKE subroutines are not OW-PCA secure. In fact, as Chris Peikert pointed out in [Pei14], most lattice-based cryptosystems are not OW-PCA secure due to the search-decision equivalence of lattice problems. While we applied the encrypt-then-MAC transformation to K-PKE for performance comparison, ML-KEM⁺ is not chosen-ciphertext secure, and should not be used in production systems. The natural questions is thus to find a suitable cryptosystem to apply the encrypt-then-MAC transformation to.

Code-based cryptosystems. Because the general problem of decoding a linear code is proven NP hard [BMvT78], code-based cryptosystems does not suffer from the inherent search-decision equivalence of lattice problems and thus be viable candidates with OW-PCA

security. Unfortunately, among the code-based submissions to NIST PQC, HQC [MAB⁺18] and BIKE [ABB⁺22] are known to be vulnerable to key-recovery plaintext-checking attacks (KR-PCA) [TUX⁺23]. On the other hand, classic McEliece [ABC⁺20] seems to be PCA secure and thus a viable candidate, although in classic McEliece, the decoding routine is more expensive than the encryption routine, so applying encrypt-then-MAC may not yield meaningful performance gains.

Isogeny-based cryptosystems. The intractability assumptions of isogeny-based cryptography resemble the classical Diffie-Hellman assumptions, and it seems possible to formulate a “Gap Diffie-Hellman assumption” in supersingular isogeny [FTTY18]. In fact, SIKE [ACC⁺17] also uses the Fujisaki-Okamoto transformation, and given the heavy computational cost of isogeny computation, replacing re-encryption with MAC will result in substantial performance improvements. While SIKE and SIDH were found to be insecure [CD23], other isogeny-based cryptosystem such as CSIDH [CLM⁺18] remains unaffected by the aforementioned attack and might be suitable candidates.

References

- [ABB⁺22] Nicolas Aragon, Paulo Barreto, Slim Bettaieb, Loïc Bidoux, Olivier Blazy, Jean-Christophe Deneuville, Philippe Gaborit, Santosh Ghosh, Shay Gueron, Tim Güneysu, et al. Bike: bit flipping key encapsulation. *NIST PQC Round 4*, 2022.
- [ABC⁺20] Martin R. Albrecht, Daniel J. Bernstein, Tung Chou, Carlos Cid, Jan Gilcher, Tanja Lange, Varun Maram, Ingo von Maurich, Rafael Misoczki, Ruben Niederhagen, Kenneth G. Paterson, Edoardo Persichetti, Christiane Peters, Peter Schwabe, Nicolas Sendrier, Jakub Szefer, Cen Jung Tjhai, Martin Tomlinson, and Wen Wang. Classic mceliece. Technical report, National Institute of Standards and Technology, 2020.
- [ABR99] Michel Abdalla, Mihir Bellare, and Phillip Rogaway. DHAES: an encryption scheme based on the diffie-hellman problem. *IACR Cryptol. ePrint Arch.*, page 7, 1999.
- [ABR01] Michel Abdalla, Mihir Bellare, and Phillip Rogaway. The oracle diffie-hellman assumptions and an analysis of DHIES. In David Naccache, editor, *Topics in Cryptology - CT-RSA 2001, The Cryptographer’s Track at RSA Conference 2001, San Francisco, CA, USA, April 8-12, 2001, Proceedings*, volume 2020 of *Lecture Notes in Computer Science*, pages 143–158. Springer, 2001.
- [ACC⁺17] Reza Azarderakhsh, Matthew Campagna, Craig Costello, Luca De Feo, Basil Hess, Amir Jalali, David Jao, Brian Koziel, Brian LaMacchia, Patrick Longa, et al. Supersingular isogeny key encapsulation. *Submission to the NIST Post-Quantum Standardization project*, 152:154–155, 2017.
- [BCD⁺16] Joppe W. Bos, Craig Costello, Léo Ducas, Ilya Mironov, Michael Naehrig, Valeria Nikolaenko, Ananth Raghunathan, and Douglas Stebila. Frodo: Take off the ring! practical, quantum-secure key exchange from LWE. In Edgar R. Weippl, Stefan Katzenbeisser, Christopher Kruegel, Andrew C. Myers, and Shai Halevi, editors, *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security, Vienna, Austria, October 24-28, 2016*, pages 1006–1018. ACM, 2016.
- [BCK98] Mihir Bellare, Ran Canetti, and Hugo Krawczyk. A modular approach to the design and analysis of authentication and key exchange protocols (extended

- abstract). In Jeffrey Scott Vitter, editor, *Proceedings of the Thirtieth Annual ACM Symposium on the Theory of Computing, Dallas, Texas, USA, May 23-26, 1998*, pages 419–428. ACM, 1998.
- [BDK⁺18] Joppe W. Bos, Léo Ducas, Eike Kiltz, Tancrede Lepoint, Vadim Lyubashevsky, John M. Schanck, Peter Schwabe, Gregor Seiler, and Damien Stehlé. CRYSTALS - kyber: A cca-secure module-lattice-based KEM. In *2018 IEEE European Symposium on Security and Privacy, EuroS&P 2018, London, United Kingdom, April 24-26, 2018*, pages 353–367. IEEE, 2018.
- [BDK⁺24] Joppe W. Bos, Léo Ducas, Eike Kiltz, Tancrede Lepoint, Vadim Lyubashevsky, John M. Schanck, Peter Schwabe, Gregor Seiler, and Damien Stehlé. official reference implementation of the kyber key encapsulation mechanism, 2024.
- [BDPR98] Mihir Bellare, Anand Desai, David Pointcheval, and Phillip Rogaway. Relations among notions of security for public-key encryption schemes. In Hugo Krawczyk, editor, *Advances in Cryptology - CRYPTO '98, 18th Annual International Cryptology Conference, Santa Barbara, California, USA, August 23-27, 1998, Proceedings*, volume 1462 of *Lecture Notes in Computer Science*, pages 26–45. Springer, 1998.
- [Ber05] Daniel J. Bernstein. The poly1305-aes message-authentication code. In Henri Gilbert and Helena Handschuh, editors, *Fast Software Encryption: 12th International Workshop, FSE 2005, Paris, France, February 21-23, 2005, Revised Selected Papers*, volume 3557 of *Lecture Notes in Computer Science*, pages 32–49. Springer, 2005.
- [Ble98] Daniel Bleichenbacher. Chosen ciphertext attacks against protocols based on the RSA encryption standard PKCS #1. In Hugo Krawczyk, editor, *Advances in Cryptology - CRYPTO '98, 18th Annual International Cryptology Conference, Santa Barbara, California, USA, August 23-27, 1998, Proceedings*, volume 1462 of *Lecture Notes in Computer Science*, pages 1–12. Springer, 1998.
- [BMvT78] Elwyn R. Berlekamp, Robert J. McEliece, and Henk C. A. van Tilborg. On the inherent intractability of certain coding problems (corresp.). *IEEE Trans. Inf. Theory*, 24(3):384–386, 1978.
- [BN00] Mihir Bellare and Chanathip Namprempre. Authenticated encryption: Relations among notions and analysis of the generic composition paradigm. In Tatsuaki Okamoto, editor, *Advances in Cryptology - ASIACRYPT 2000, 6th International Conference on the Theory and Application of Cryptology and Information Security, Kyoto, Japan, December 3-7, 2000, Proceedings*, volume 1976 of *Lecture Notes in Computer Science*, pages 531–545. Springer, 2000.
- [BP18] Daniel J. Bernstein and Edoardo Persichetti. Towards KEM unification. *IACR Cryptol. ePrint Arch.*, page 526, 2018.
- [BR94] Mihir Bellare and Phillip Rogaway. Optimal asymmetric encryption. In Alfredo De Santis, editor, *Advances in Cryptology - EUROCRYPT '94, Workshop on the Theory and Application of Cryptographic Techniques, Perugia, Italy, May 9-12, 1994, Proceedings*, volume 950 of *Lecture Notes in Computer Science*, pages 92–111. Springer, 1994.
- [BR05] John Black and Phillip Rogaway. CBC macs for arbitrary-length messages: The three-key constructions. *J. Cryptol.*, 18(2):111–131, 2005.

- [CD23] Wouter Castryck and Thomas Decru. An efficient key recovery attack on SIDH. In Carmit Hazay and Martijn Stam, editors, *Advances in Cryptology - EUROCRYPT 2023 - 42nd Annual International Conference on the Theory and Applications of Cryptographic Techniques, Lyon, France, April 23-27, 2023, Proceedings, Part V*, volume 14008 of *Lecture Notes in Computer Science*, pages 423–447. Springer, 2023.
- [CHJ⁺02] Jean-Sébastien Coron, Helena Handschuh, Marc Joye, Pascal Paillier, David Pointcheval, and Christophe Tymen. GEM: A generic chosen-ciphertext secure encryption method. In Bart Preneel, editor, *Topics in Cryptology - CT-RSA 2002, The Cryptographer’s Track at the RSA Conference, 2002, San Jose, CA, USA, February 18-22, 2002, Proceedings*, volume 2271 of *Lecture Notes in Computer Science*, pages 263–276. Springer, 2002.
- [CK01] Ran Canetti and Hugo Krawczyk. Analysis of key-exchange protocols and their use for building secure channels. In Birgit Pfitzmann, editor, *Advances in Cryptology - EUROCRYPT 2001, International Conference on the Theory and Application of Cryptographic Techniques, Innsbruck, Austria, May 6-10, 2001, Proceeding*, volume 2045 of *Lecture Notes in Computer Science*, pages 453–474. Springer, 2001.
- [CLM⁺18] Wouter Castryck, Tanja Lange, Chloe Martindale, Lorenz Panny, and Joost Renes. CSIDH: an efficient post-quantum commutative group action. In Thomas Peyrin and Steven D. Galbraith, editors, *Advances in Cryptology - ASIACRYPT 2018 - 24th International Conference on the Theory and Application of Cryptology and Information Security, Brisbane, QLD, Australia, December 2-6, 2018, Proceedings, Part III*, volume 11274 of *Lecture Notes in Computer Science*, pages 395–427. Springer, 2018.
- [Den03] Alexander W. Dent. A designer’s guide to kems. In Kenneth G. Paterson, editor, *Cryptography and Coding, 9th IMA International Conference, Cirencester, UK, December 16-18, 2003, Proceedings*, volume 2898 of *Lecture Notes in Computer Science*, pages 133–151. Springer, 2003.
- [DKRV18] Jan-Pieter D’Anvers, Angshuman Karmakar, Sujoy Sinha Roy, and Frederik Vercauteren. Saber: Module-lwr based key exchange, cpa-secure encryption and cca-secure KEM. In Antoine Joux, Abderrahmane Nitaj, and Tajjeeddine Rachidi, editors, *Progress in Cryptology - AFRICACRYPT 2018 - 10th International Conference on Cryptology in Africa, Marrakesh, Morocco, May 7-9, 2018, Proceedings*, volume 10831 of *Lecture Notes in Computer Science*, pages 282–305. Springer, 2018.
- [DNR04] Cynthia Dwork, Moni Naor, and Omer Reingold. Immunizing encryption schemes from decryption errors. In Christian Cachin and Jan Camenisch, editors, *Advances in Cryptology - EUROCRYPT 2004, International Conference on the Theory and Applications of Cryptographic Techniques, Interlaken, Switzerland, May 2-6, 2004, Proceedings*, volume 3027 of *Lecture Notes in Computer Science*, pages 342–360. Springer, 2004.
- [FO99] Eiichiro Fujisaki and Tatsuaki Okamoto. Secure integration of asymmetric and symmetric encryption schemes. In Michael J. Wiener, editor, *Advances in Cryptology - CRYPTO ’99, 19th Annual International Cryptology Conference, Santa Barbara, California, USA, August 15-19, 1999, Proceedings*, volume 1666 of *Lecture Notes in Computer Science*, pages 537–554. Springer, 1999.

- [FO13] Eiichiro Fujisaki and Tatsuaki Okamoto. Secure integration of asymmetric and symmetric encryption schemes. *J. Cryptol.*, 26(1):80–101, 2013.
- [FOPS01] Eiichiro Fujisaki, Tatsuaki Okamoto, David Pointcheval, and Jacques Stern. RSA-OAEP is secure under the RSA assumption. In Joe Kilian, editor, *Advances in Cryptology - CRYPTO 2001, 21st Annual International Cryptology Conference, Santa Barbara, California, USA, August 19-23, 2001, Proceedings*, volume 2139 of *Lecture Notes in Computer Science*, pages 260–274. Springer, 2001.
- [FTTY18] Atsushi Fujioka, Katsuyuki Takashima, Shintaro Terada, and Kazuki Yoneyama. Supersingular isogeny diffie-hellman authenticated key exchange. In Kwangsu Lee, editor, *Information Security and Cryptology - ICISC 2018 - 21st International Conference, Seoul, South Korea, November 28-30, 2018, Revised Selected Papers*, volume 11396 of *Lecture Notes in Computer Science*, pages 177–195. Springer, 2018.
- [Gam85] Taher El Gamal. A public key cryptosystem and a signature scheme based on discrete logarithms. *IEEE Trans. Inf. Theory*, 31(4):469–472, 1985.
- [GM82] Shafi Goldwasser and Silvio Micali. Probabilistic encryption and how to play mental poker keeping secret all partial information. In Harry R. Lewis, Barbara B. Simons, Walter A. Burkhard, and Lawrence H. Landweber, editors, *Proceedings of the 14th Annual ACM Symposium on Theory of Computing, May 5-7, 1982, San Francisco, California, USA*, pages 365–377. ACM, 1982.
- [Gro13] Joint Task Force Transformation Initiative Interagency Working Group. Security and privacy controls for federal information systems and organizations. Technical Report NIST Special Publication (SP) 800-53, Rev. 4, Includes updates as of January 22, 2015, National Institute of Standards and Technology, Gaithersburg, MD, 2013.
- [HHK17] Dennis Hofheinz, Kathrin Hövelmanns, and Eike Kiltz. A modular analysis of the fujisaki-okamoto transformation. In Yael Kalai and Leonid Reyzin, editors, *Theory of Cryptography - 15th International Conference, TCC 2017, Baltimore, MD, USA, November 12-15, 2017, Proceedings, Part I*, volume 10677 of *Lecture Notes in Computer Science*, pages 341–371. Springer, 2017.
- [HHM22] Kathrin Hövelmanns, Andreas Hülsing, and Christian Majenz. Failing gracefully: Decryption failures and the fujisaki-okamoto transform. In Shweta Agrawal and Dongdai Lin, editors, *Advances in Cryptology - ASIACRYPT 2022 - 28th International Conference on the Theory and Application of Cryptology and Information Security, Taipei, Taiwan, December 5-9, 2022, Proceedings, Part IV*, volume 13794 of *Lecture Notes in Computer Science*, pages 414–443. Springer, 2022.
- [IK03] Tetsu Iwata and Kaoru Kurosawa. OMAC: one-key CBC MAC. In Thomas Johansson, editor, *Fast Software Encryption, 10th International Workshop, FSE 2003, Lund, Sweden, February 24-26, 2003, Revised Papers*, volume 2887 of *Lecture Notes in Computer Science*, pages 129–153. Springer, 2003.
- [Kal98] Burt Kaliski. PKCS #1: RSA encryption version 1.5. *RFC*, 2313:1–19, 1998.
- [Kra01] Hugo Krawczyk. The order of encryption and authentication for protecting communications (or: How secure is ssl?). In Joe Kilian, editor, *Advances in Cryptology - CRYPTO 2001, 21st Annual International Cryptology Conference*,

- 705 *Santa Barbara, California, USA, August 19-23, 2001, Proceedings*, volume
706 2139 of *Lecture Notes in Computer Science*, pages 310–331. Springer, 2001.
- 707 [MAB⁺18] Carlos Aguilar Melchor, Nicolas Aragon, Slim Bettaieb, Loic Bidoux, Olivier
708 Blazy, Jean-Christophe Deneuvill, Philippe Gaborit, Edoardo Persichetti,
709 Gilles Zémor, and IC Bourges. Hamming quasi-cyclic (hqc). *NIST PQC Round*,
710 2(4):13, 2018.
- 711 [MKJR16] Kathleen Moriarty, Burt Kaliski, Jakob Jonsson, and Andreas Rusch. PKCS
712 #1: RSA Cryptography Specifications Version 2.2. RFC 8017, November 2016.
- 713 [MV04] David A. McGrew and John Viega. The security and performance of the
714 galois/counter mode (GCM) of operation. In Anne Canteaut and Kapalee
715 Viswanathan, editors, *Progress in Cryptology - INDOCRYPT 2004, 5th Inter-*
716 *national Conference on Cryptology in India, Chennai, India, December 20-22,*
717 *2004, Proceedings*, volume 3348 of *Lecture Notes in Computer Science*, pages
718 343–355. Springer, 2004.
- 719 [OP01a] Tatsuaki Okamoto and David Pointcheval. The gap-problems: A new class of
720 problems for the security of cryptographic schemes. In Kwangjo Kim, editor,
721 *Public Key Cryptography, 4th International Workshop on Practice and Theory*
722 *in Public Key Cryptography, PKC 2001, Cheju Island, Korea, February 13-15,*
723 *2001, Proceedings*, volume 1992 of *Lecture Notes in Computer Science*, pages
724 104–118. Springer, 2001.
- 725 [OP01b] Tatsuaki Okamoto and David Pointcheval. REACT: rapid enhanced-security
726 asymmetric cryptosystem transform. In David Naccache, editor, *Topics in*
727 *Cryptology - CT-RSA 2001, The Cryptographer’s Track at RSA Conference*
728 *2001, San Francisco, CA, USA, April 8-12, 2001, Proceedings*, volume 2020 of
729 *Lecture Notes in Computer Science*, pages 159–175. Springer, 2001.
- 730 [oST15] National Institute of Standards and Technology. Sha-3 standard: Permutation-
731 based hash and extendable-output functions. Technical Report Federal In-
732 formation Processing Standards Publication (FIPS) NIST FIPS 202, U.S.
733 Department of Commerce, Washington, D.C., 2015.
- 734 [oST24] National Institute of Standards and Technology. Module-lattice-based key-
735 encapsulation mechanism standard. Technical Report Federal Information
736 Processing Standards Publication (FIPS) NIST FIPS 203, U.S. Department of
737 Commerce, Washington, D.C., 2024.
- 738 [Pei14] Chris Peikert. Lattice cryptography for the internet. In Michele Mosca, editor,
739 *Post-Quantum Cryptography - 6th International Workshop, PQCrypto 2014,*
740 *Waterloo, ON, Canada, October 1-3, 2014. Proceedings*, volume 8772 of *Lecture*
741 *Notes in Computer Science*, pages 197–219. Springer, 2014.
- 742 [RRCB19] Prasanna Ravi, Sujoy Sinha Roy, Anupam Chattopadhyay, and Shivam Bhasin.
743 Generic side-channel attacks on cca-secure lattice-based PKE and KEM
744 schemes. *IACR Cryptol. ePrint Arch.*, page 948, 2019.
- 745 [RSA78] Ronald L. Rivest, Adi Shamir, and Leonard M. Adleman. A method for
746 obtaining digital signatures and public-key cryptosystems. *Commun. ACM*,
747 21(2):120–126, 1978.
- 748 [Sho01] Victor Shoup. A proposal for an ISO standard for public key encryption. *IACR*
749 *Cryptol. ePrint Arch.*, page 112, 2001.

- 750 [Sho02] Victor Shoup. OAEP reconsidered. *J. Cryptol.*, 15(4):223–249, 2002.
- 751 [SSW20] Peter Schwabe, Douglas Stebila, and Thom Wiggers. Post-quantum TLS
752 without handshake signatures. In Jay Ligatti, Xinming Ou, Jonathan Katz,
753 and Giovanni Vigna, editors, *CCS '20: 2020 ACM SIGSAC Conference on*
754 *Computer and Communications Security, Virtual Event, USA, November 9-13,*
755 *2020*, pages 1461–1480. ACM, 2020.
- 756 [TUX⁺23] Yutaro Tanaka, Rei Ueno, Keita Xagawa, Akira Ito, Junko Takahashi, and
757 Naofumi Homma. Multiple-valued plaintext-checking side-channel attacks on
758 post-quantum kems. *IACR Trans. Cryptogr. Hardw. Embed. Syst.*, 2023(3):473–
759 503, 2023.
- 760 [UXT⁺22] Rei Ueno, Keita Xagawa, Yutaro Tanaka, Akira Ito, Junko Takahashi, and
761 Naofumi Homma. Curse of re-encryption: A generic power/em analysis on post-
762 quantum kems. *IACR Trans. Cryptogr. Hardw. Embed. Syst.*, 2022(1):296–322,
763 2022.
- 764 [WC81] Mark N. Wegman and Larry Carter. New hash functions and their use in
765 authentication and set equality. *J. Comput. Syst. Sci.*, 22(3):265–279, 1981.