


有 0 位同学正在浏览当前页面

2-3 帮 Rails 项目穿上衣服“Bootstrap”

🔖 (/favorites?post_id=55)

目标

本章的作业目标，是要带领各位把目前的空项目，穿上“衣服”，让各位在做这个程序练习时，不再感到项目是在“裸奔”！

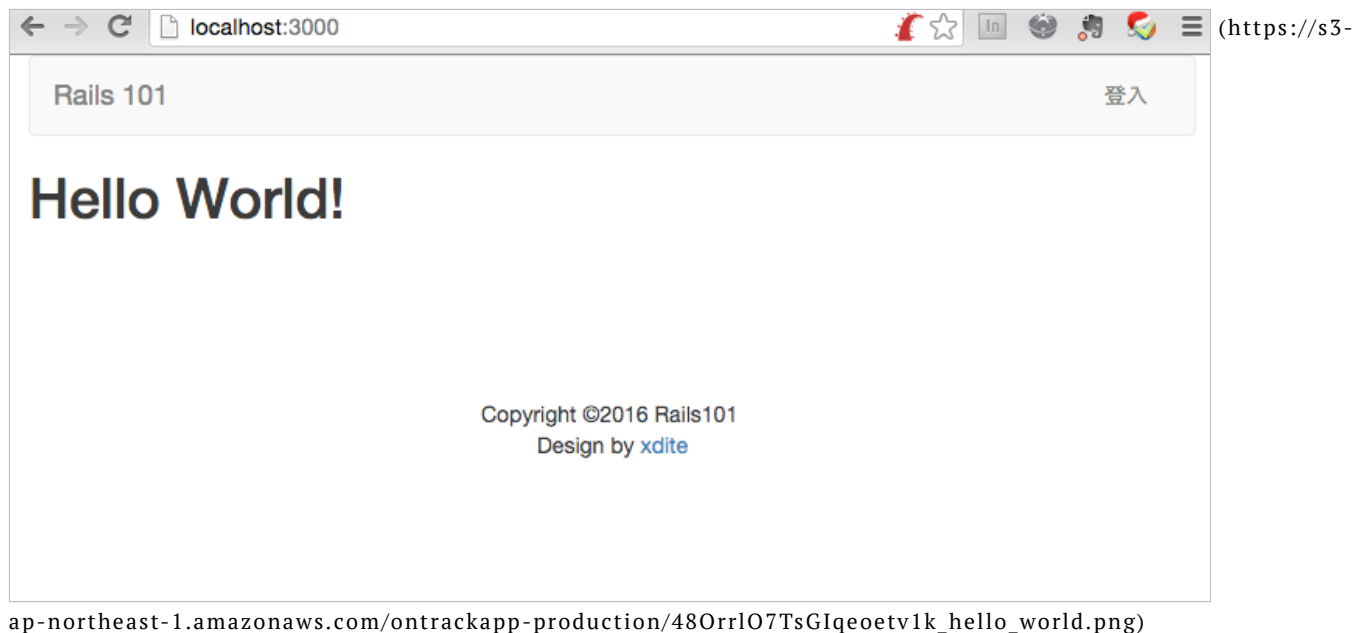

步骤

Step 0. git checkout -b ch01

这里我们要来示范一个 git 功能，输入：

```
git checkout -b ch01
```

等一下在这一章做的动作，我们 commit 进去的代码都会属于 ch01 这个分支。

Step 1. 帮项目穿上衣服 Bootstrap，挂上 bootstrap-sass 这个 gem

Bootstrap 是 Web 设计圈有名的 CSS 框架，提供了开发项目快速便利的元件素材，如按钮、下拉选单、表格等等样式。

在 Rails 上要帮项目穿上 Bootstrap，用的是 bootstrap-sass 这个套件。

在终端输入 `atom .` 打开atom编辑器，再打开 Gemfile 这个文件

修改 Gemfile，在 `group :development, :test do` 前一行加入 `gem 'bootstrap-sass'`



(https://s3-ap-northeast-1.amazonaws.com/ontrackapp-production/h5XvJCjtRYqcauTwQyds_bootstrap.png)

```
Gemfile
gem 'bootstrap-sass'
```

Rails 第三课: Rails 101 (/courses/3/syllabus) 🔍 搜索本课程教材

📖 概览 (/courses/3) 📖 教材 (/courses/3/syllabus)

📁 作业 (Step 2: bundle install) 📁 作业 (Step 3: bundle install)

🔍 FAQ (/courses/3/faqs) 📁 动态 (/courses/3/activities)

☆ 积分榜 (/courses/3/leaderboard)

(注意：每次修改完 Gemfile 都记得要 `command + s` 保存，然后执行 `bundle install`)

Step 3. 将 Bootstrap 的 CSS 套件装进项目里面

输入

```
mv app/assets/stylesheets/application.css app/assets/stylesheets/application.scss
```

将 application.css 更名为 application.scss

然后修改内容加入这两行

```
app/assets/stylesheets/application.scss

/*
 * ... (一堆注解)
 *= require_tree .
 *= require_self
 */

@import "bootstrap-sprockets";
@import "bootstrap";
```

```
1 /*
2  * This is a manifest file that'll be compiled into application.css, which will include all the files
3  * listed below.
4  *
5  * Any CSS and SCSS file within this directory, lib/assets/stylesheets, vendor/assets/stylesheets,
6  * or any plugin's vendor/assets/stylesheets directory can be referenced here using a relative path.
7  *
8  * You're free to add application-wide styles to this file and they'll appear at the bottom of the
9  * compiled file so the styles you add here take precedence over styles defined in any other CSS/SCSS
10 * files in this directory. Styles in this file should be added after the last require_* statement.
11 * It is generally better to create a new file per style scope.
12 *
13 *= require_tree .
14 *= require_self
15 */
16
17 @import "bootstrap-sprockets";
18 @import "bootstrap";
19
```


(https://s3-ap-northeast-1.amazonaws.com/ontrackapp-production/9bHBGGaQQGN3xmg0xUcW_application_scss_%E2%80%94_Users_xdite_Documents_projects_rails101.png)

Step 4. 将变更 commit 进去 git 里面。

```
git add .
```

```
git commit -m "add bootstrap to project"
```

对本页内容的感受如何?

 我要吐槽



So easy



还OK



崩溃了

← 上一页 (/posts/54)


🔍 可以使用 ← → 键进行翻页

下一页 → (/posts/56)

全栈营

课程资源

关于我们

 在线客服 (非技术答疑, 工作日10:00-19:00)

课程介绍

学习中心

公司介绍

(/pages/course_intro)(/dashboard)

(/pages/about)

教学团队

帮助文档

常见问题

(/pages/teachers) (http://docs.qzy.camp(/pages/faq)

学员心得

交流论坛

联系方式



新生大学 - 软件学院是李笑来对未来世界的实验计划, 旨在改变中国的计算机教育。
(http://www.xinshengdaxue.com/)

(/pages/students) (<http://forum.qzy.ca/>) (pages/contact)