

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Theory:

Programming in Jenkins:

Continuous Integration is a software development practice where members of a team integrate their work frequently, usually each person integrates at least daily leading to multiple integrations per day. Each integration is verified by an automated build (including test) to detect integration errors as quickly as possible.” In simple way, Continuous integration (CI) is the practice of frequently building and testing each change done to your code automatically. Jenkins is a self-contained, open-source automation server which can be used to automate all sorts of tasks related to building, testing, and delivering or deploying software.

Our first job will execute the shell commands. The freestyle project provides enough options and features to build the complex jobs that you will need in your projects.

Example 1

Example 1.1: Deploying a freestyle app in Jenkins

Creating a job:

Start building your software project

Create a job



Naming the job and setting it as freestyle:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Enter an item name

Example1

» Required field

- Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
- Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.
- Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.

OK

Selecting build type as “Execute shell”:

Build Steps

Add build step ^

Filter

- Execute Windows batch command
- Execute shell**
- Invoke Ant
- Invoke Gradle script
- Invoke top-level Maven targets
- Run with timeout
- Set build status to "pending" on GitHub commit

Entering a simple command for the shell execution:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Build Steps

≡ Execute shell ?

Command

See the list of available environment variables


```
echo "Hello TSEC"
```

Advanced ▾

Applying and saving the project configuration:



Building the project:

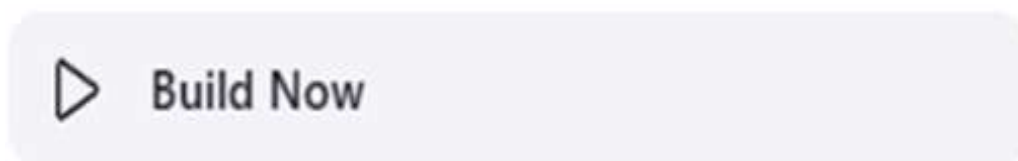

Console output (after building):


Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server



Example 1.2: Taking parameters through files

Contents of script example1.cmd:

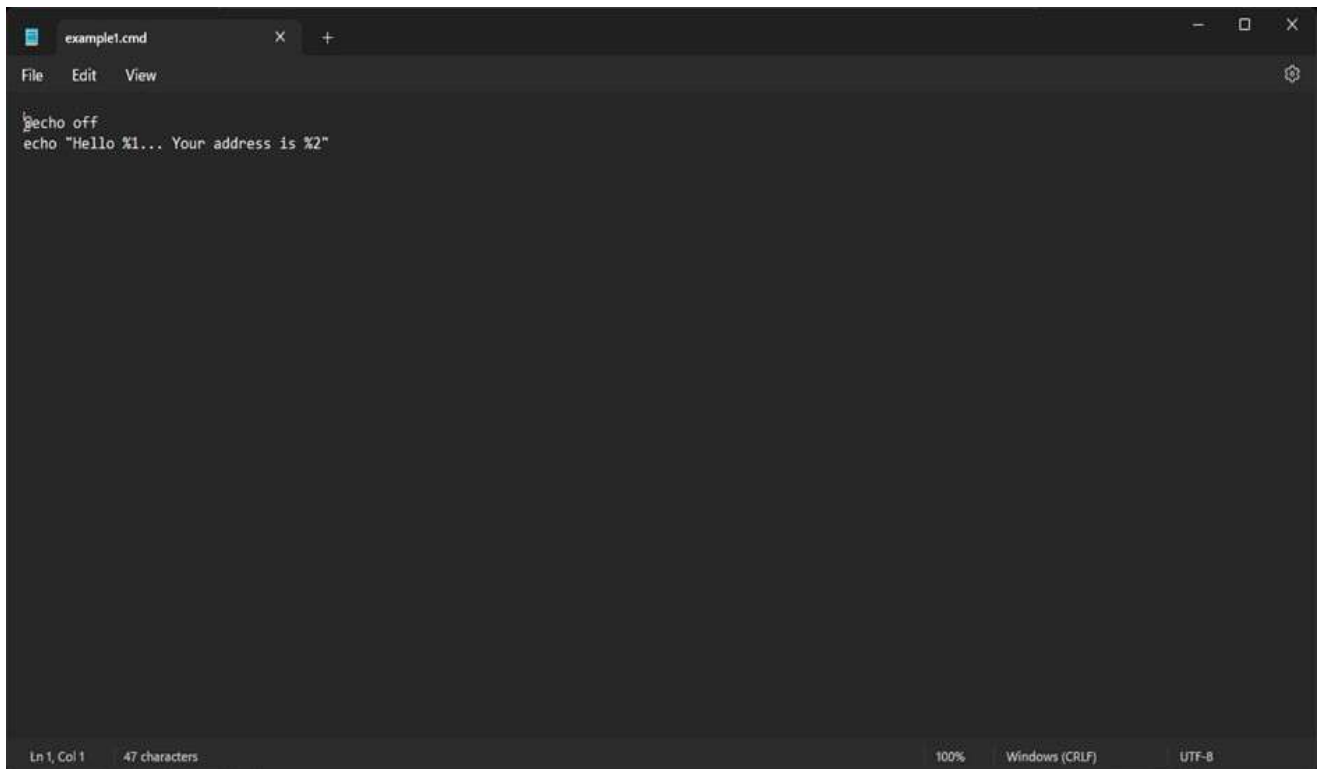A screenshot of a text editor window titled 'example1.cmd'. The window has a menu bar with 'File', 'Edit', and 'View'. The text inside the editor is: 'echo off' followed by 'echo "Hello %1... Your address is %2"'. The status bar at the bottom shows 'Ln 1, Col 1', '47 characters', '100%', 'Windows (CRLF)', and 'UTF-8'.

Executing script example1.cmd on the terminal:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

```
Microsoft Windows [Version 10.0.22621.3296]
(c) Microsoft Corporation. All rights reserved.

C:\Users\AI&DS 202>Microsoft Windows [Version 10.0.22631.3155] (c) Microsoft Corporation. All rights reserved.
'Microsoft' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example1.cmd
The system cannot find the path specified.

C:\Users\AI&DS 202>"Hello... Your address is "
'"Hello... Your address is "' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example1.cmd Tanishq
The system cannot find the path specified.

C:\Users\AI&DS 202>"Hello Tanishq... Your address is "
'"Hello Tanishq... Your address is "' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example1.cmd Tanishq Girgaon "Helle Tanishq... Your address is Gi
rgaon"
The system cannot find the path specified.
```

Modifying the Jenkins project to execute the script while supplying required parameters:



Console output after building the modified project:




Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Example 2

Example 2.1: Running a Java program under Jenkins


Creating a simple Java program:

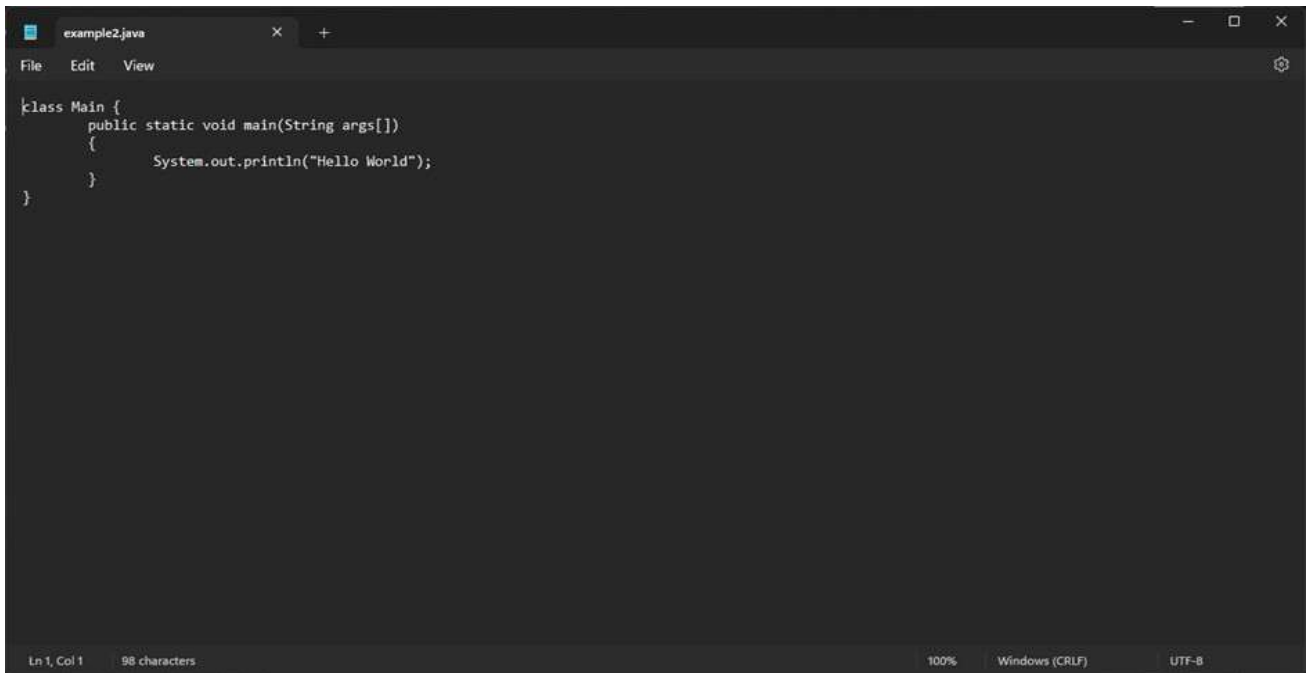A screenshot of an IDE window titled 'example2.java'. The code is as follows:

```
class Main {  
    public static void main(String args[])  
    {  
        System.out.println("Hello World");  
    }  
}
```

The status bar at the bottom indicates 'Ln 1, Col 1', '98 characters', '100%', 'Windows (CRLF)', and 'UTF-8'.

Compiling and running the program on the terminal:

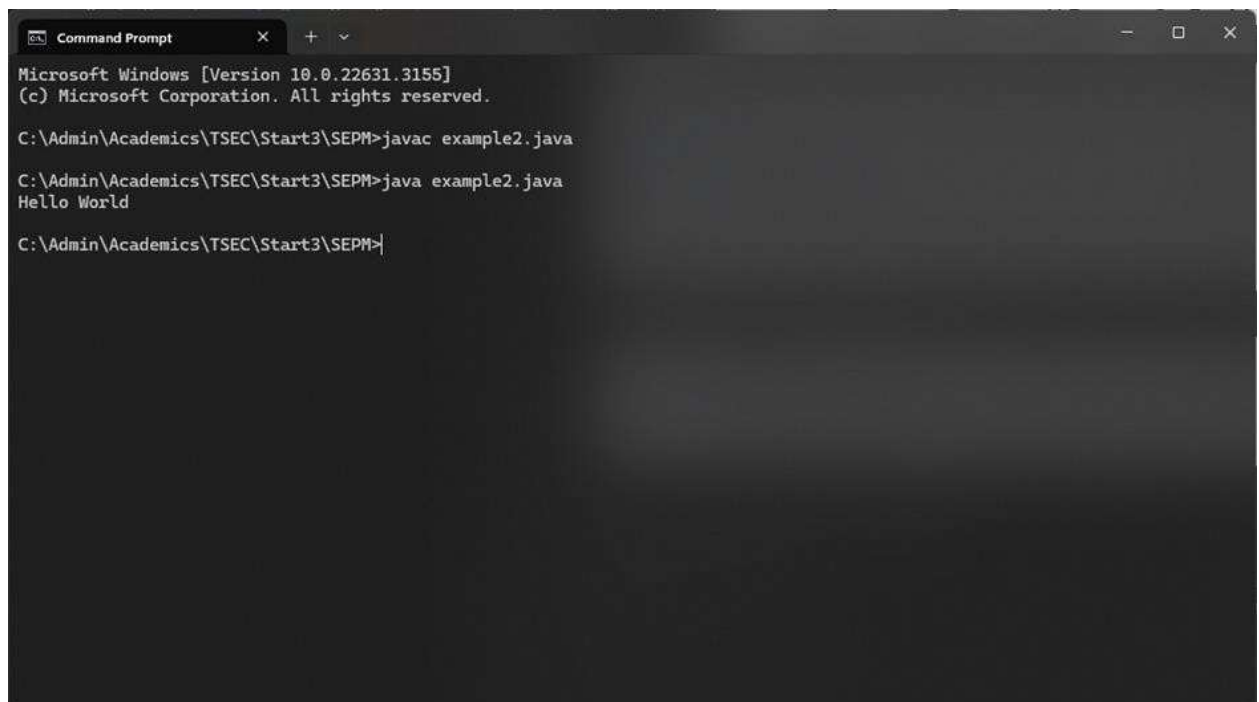A screenshot of a Windows Command Prompt window. The text shown is:

```
Microsoft Windows [Version 10.0.22631.3155]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Admin\Academics\TSEC\Start3\SEPM>javac example2.java  
  
C:\Admin\Academics\TSEC\Start3\SEPM>java example2.java  
Hello World  
  
C:\Admin\Academics\TSEC\Start3\SEPM>|
```

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Creating a new freestyle project:

Dashboard > All >

Enter an item name

Example2

* Required field

- Freestyle project**
Classic general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
- Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.
- Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.

If you want to create a new item from other existing, you can use this option:

OK

Configure new project:

Build Steps

Execute Windows batch command ?

Command

See [the list of available environment variables](#)

```
javac C:\Admin\Academics\TSEC\Start3\SEPM\example2.java
java C:\Admin\Academics\TSEC\Start3\SEPM\example2.java
```

Advanced ▾

Add build step ▾

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Console output after building:

Console Output

```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example2
[Example2] $ cmd /c call C:\WINDOWS\TEMP\jenkins15296462484398614135.bat

C:\ProgramData\Jenkins\jenkins\workspace\Example2>javac C:\Admin\Academics\TSEC\Start3\SEPH\example2.java

C:\ProgramData\Jenkins\jenkins\workspace\Example2>java C:\Admin\Academics\TSEC\Start3\SEPH\example2.java
Hello World

C:\ProgramData\Jenkins\jenkins\workspace\Example2>exit 0
Finished: SUCCESS
```


Example 3


Example 3.1: Parameterise build


Creating a new freestyle project:


Enter an item name


» Required field


**Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

**Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.



**Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

**Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

**Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.

**Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.


If you want to create a new item from other existing, you can use this option:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Enabling parameterisation and adding a String parameter:

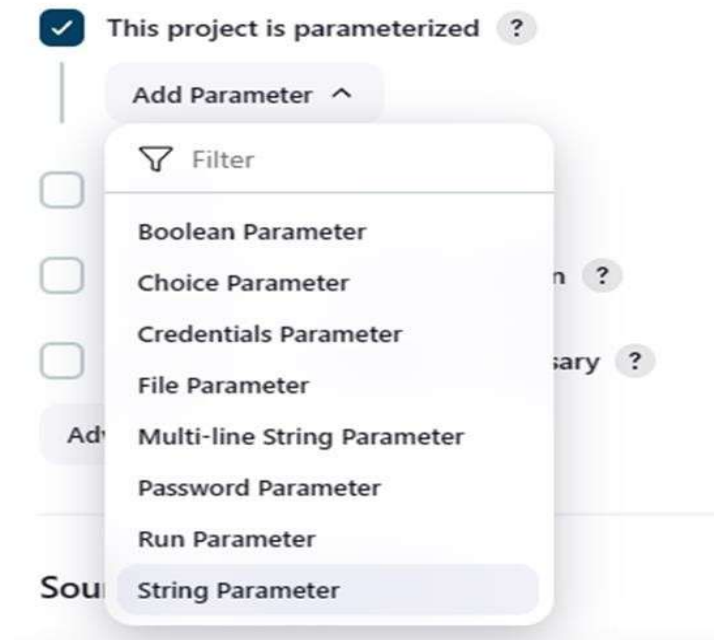

Configuring the string parameter as Fname:

A screenshot of the 'String Parameter' configuration form in Jenkins. The form is titled 'String Parameter' and has a close button (X) in the top right corner. It contains the following fields: 'Name' with the value 'Fname', 'Default Value' (empty), and 'Description' (empty). Below these fields, there is a 'Plain text' label and a 'Preview' link. At the bottom, there is a checkbox labeled 'Trim the string' which is currently unchecked.

Adding a choice parameter and configuring it as City with the following choices:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server



Creating a script which takes 2 arguments for name and city:

```
C:\Users\AI&DS 202>Microsoft Windows [Version 10.0.22631.3155] (c) Microsoft Corporation. All rights reserved.
'Microsoft' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH>example3.cnd
The system cannot find the path specified.

C:\Users\AI&DS 202>Hello your name is and your city is
'Hello' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH example3.cmd Tanishq
The system cannot find the path specified.

C:\Users\AI&DS 202>Hello your name is Tanishq and your city is
'Hello' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPM>example3.cmd Tansishq Bandra
The system cannot find the path specified.

C:\Users\AI&DS 202>Hello your name is Tanishq and your city is Bandra
'Hello' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\AI&DS 202>C:\Admin\Academics\TSEC\Start3\SEPH|
```

Configuring build steps:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Build Steps



The screenshot shows the 'Execute Windows batch command' step configuration in Jenkins. The 'Command' field contains the text: `C:\Admin\Academics\TSEC\Start3\SEPH\example3.cmd %Fname% %City%`. Below the command field is an 'Advanced' dropdown menu. At the bottom of the configuration area is an 'Add build step' button.

Entering parameters for build:

Project Example3

This build requires parameters:

Fname

Aditya

City

Bandra

 Build  Cancel

Console output after building:

✓ Console Output


```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example3
[Example3] $ cmd /c call C:\WINDOWS\TEMP\jenkins14094536165150906151.bat
C:\ProgramData\Jenkins\jenkins\workspace\Example3>C:\Admin\Academics\TSEC\Start3\SEPH\example3.cmd Siddhant Bandra
Hello your name is Siddhant and your city is Bandra
Finished: SUCCESS
```

Example 3.2: Running a Java program with parameters

Software Engineering & Project Management Lab Experiment No: - 05


Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Creating a Java program with an input argument:

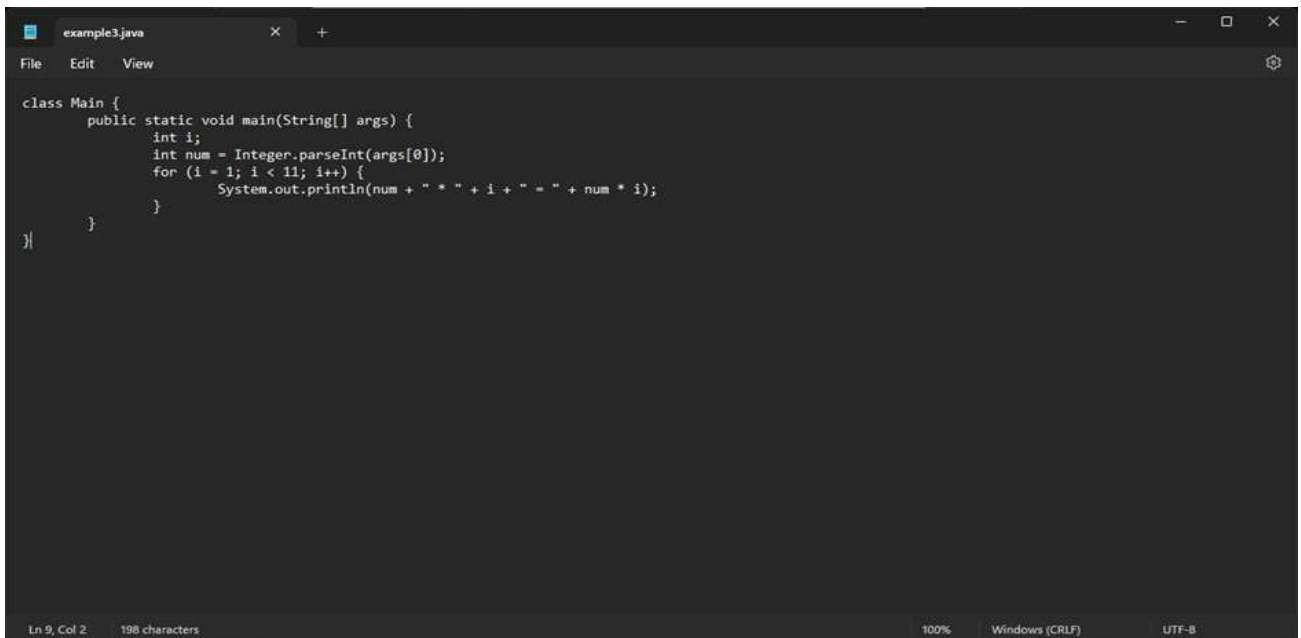

```
class Main {  
    public static void main(String[] args) {  
        int i;  
        int num = Integer.parseInt(args[0]);  
        for (i = 1; i < 11; i++) {  
            System.out.println(num + " * " + i + " = " + num * i);  
        }  
    }  
}
```

Testing the program on the terminal:

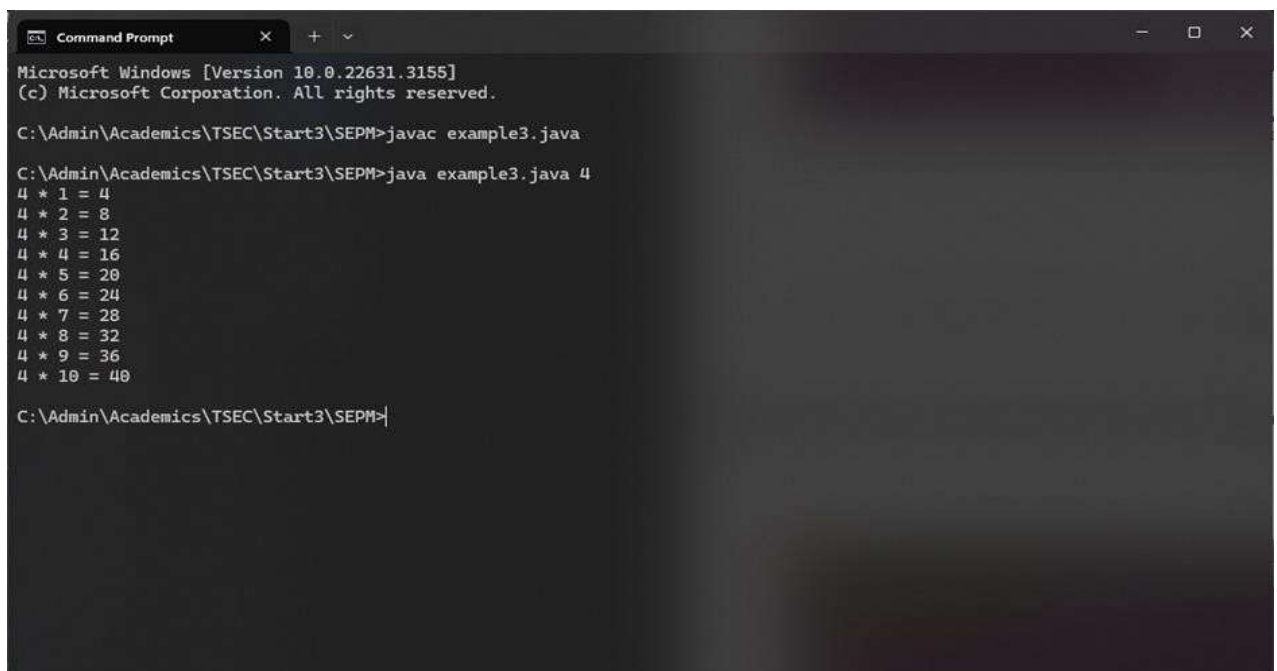

```
Microsoft Windows [Version 10.0.22631.3155]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Admin\Academics\TSEC\Start3\SEPM>javac example3.java  
  
C:\Admin\Academics\TSEC\Start3\SEPM>java example3.java 4  
4 * 1 = 4  
4 * 2 = 8  
4 * 3 = 12  
4 * 4 = 16  
4 * 5 = 20  
4 * 6 = 24  
4 * 7 = 28  
4 * 8 = 32  
4 * 9 = 36  
4 * 10 = 40  
  
C:\Admin\Academics\TSEC\Start3\SEPM>
```

Creating a new freestyle project:


Software Engineering & Project Management Lab Experiment No: - 05


Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server


Enter an item name


Example4


» Required field


**Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

**Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

**Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

**Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

**Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.

**Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.

If you want to create a new item from other existing, you can use this option:

OK

Parameterise the project by adding a string parameter as follows:

☒ This project is parameterized ?

String Parameter ?

Name ?

num

Default Value ?

Description ?

Plain text [Preview](#)

☐ Trim the string ?

Add Parameter

Configure the build steps:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Build Steps

Execute Windows batch command ?

Command

See [the list of available environment variables](#)

```
javac C:\Admin\Academics\TSEC\Start3\SEPM\example3.java
java C:\Admin\Academics\TSEC\Start3\SEPM\example3.java %num%
```

Advanced ▾

Add build step ▾

Entering the parameter for the build:

Project Example4

This build requires parameters:

num

25

Build

Cancel

Console output after building:

Console Output

```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example4
[Example4] $ cmd /c call C:\WINDOWS\TEMP\jenkins15119185770823247708.bat

C:\ProgramData\Jenkins\jenkins\workspace\Example4>javac C:\Admin\Academics\TSEC\Start3\SEPM\example3.java

C:\ProgramData\Jenkins\jenkins\workspace\Example4>java C:\Admin\Academics\TSEC\Start3\SEPM\example3.java 25
25 * 1 = 25
25 * 2 = 50
25 * 3 = 75
25 * 4 = 100
25 * 5 = 125
25 * 6 = 150
25 * 7 = 175
25 * 8 = 200
25 * 9 = 225
25 * 10 = 250

C:\ProgramData\Jenkins\jenkins\workspace\Example4>exit 0
Finished: SUCCESS
```


Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Example 5

Example 5.1: Running a Python program

Creating a simple Python script:

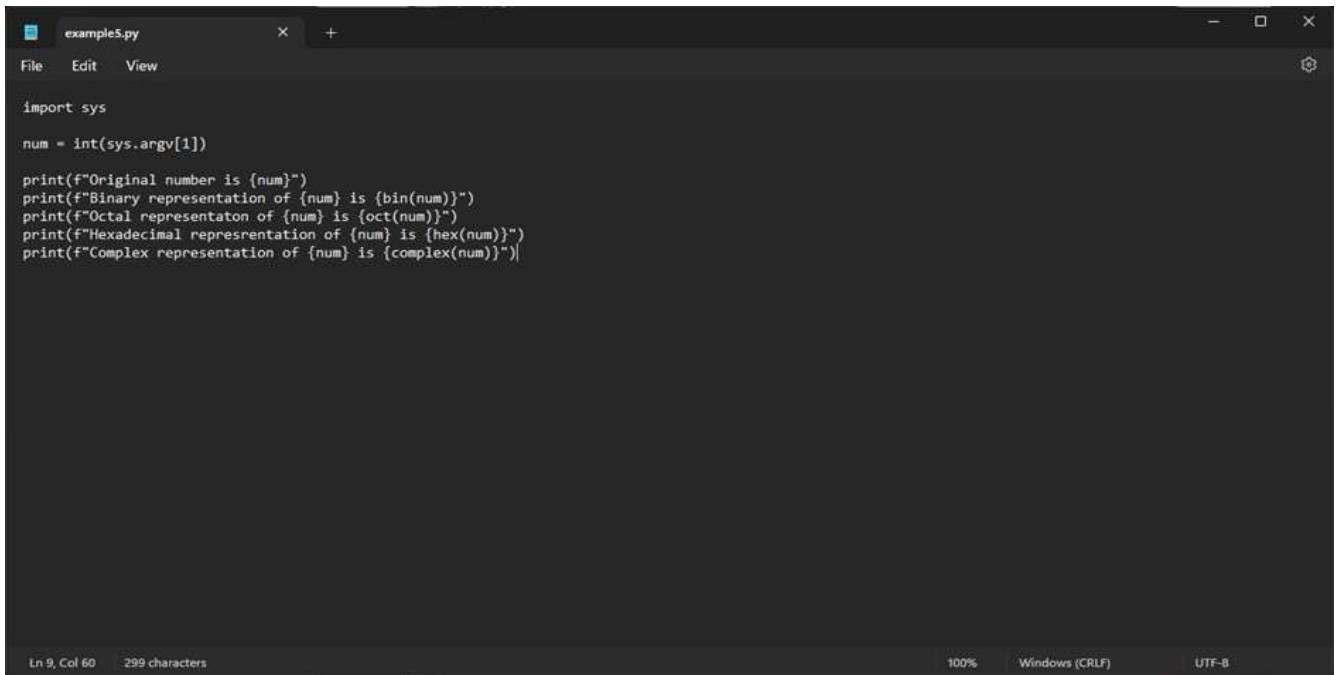

```
example5.py
File Edit View


import sys

num = int(sys.argv[1])

print(f"Original number is {num}")
print(f"Binary representation of {num} is {bin(num)}")
print(f"Octal representation of {num} is {oct(num)}")
print(f"Hexadecimal representation of {num} is {hex(num)}")
print(f"Complex representation of {num} is {complex(num)}")

Ln 9, Col 60 299 characters 100% Windows (CRLF) UTF-8
```

Running the Python script on the terminal:

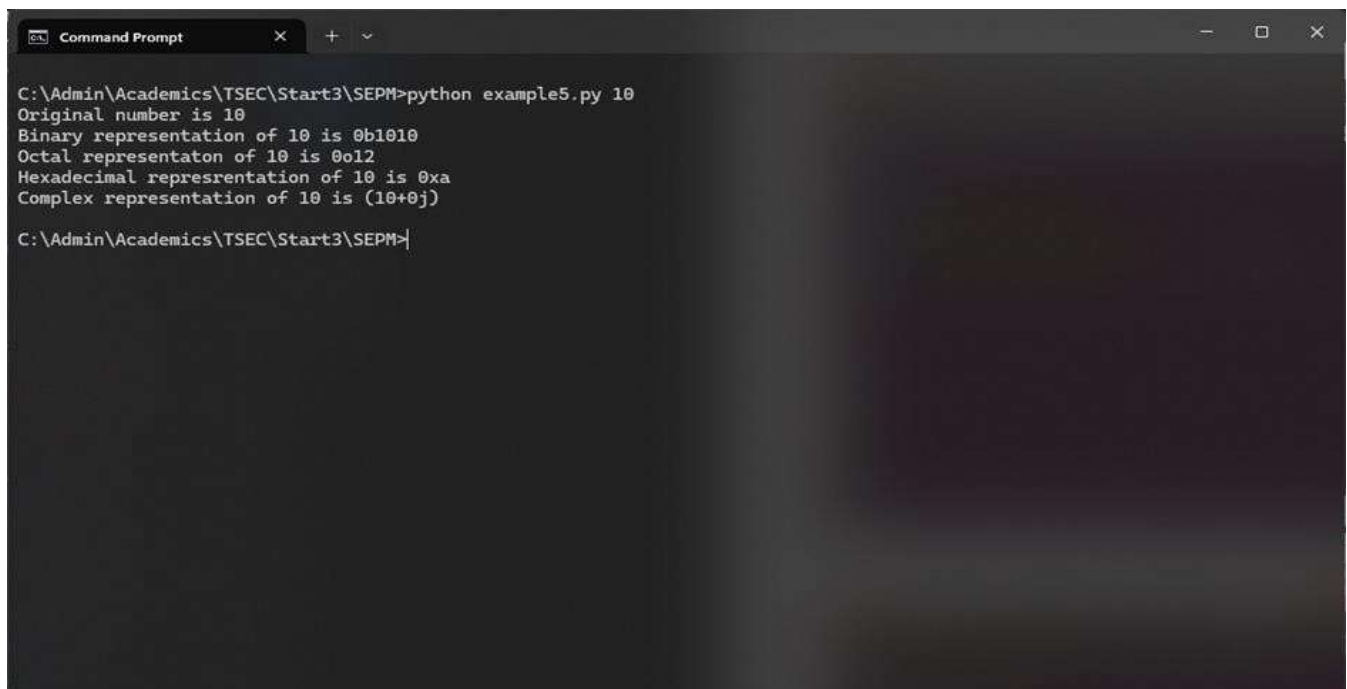

```
Command Prompt


C:\Admin\Academics\TSEC\Start3\SEPM>python example5.py 10
Original number is 10
Binary representation of 10 is 0b1010
Octal representation of 10 is 0o12
Hexadecimal representation of 10 is 0xa
Complex representation of 10 is (10+0j)

C:\Admin\Academics\TSEC\Start3\SEPM>
```


Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Creating a new freestyle project:

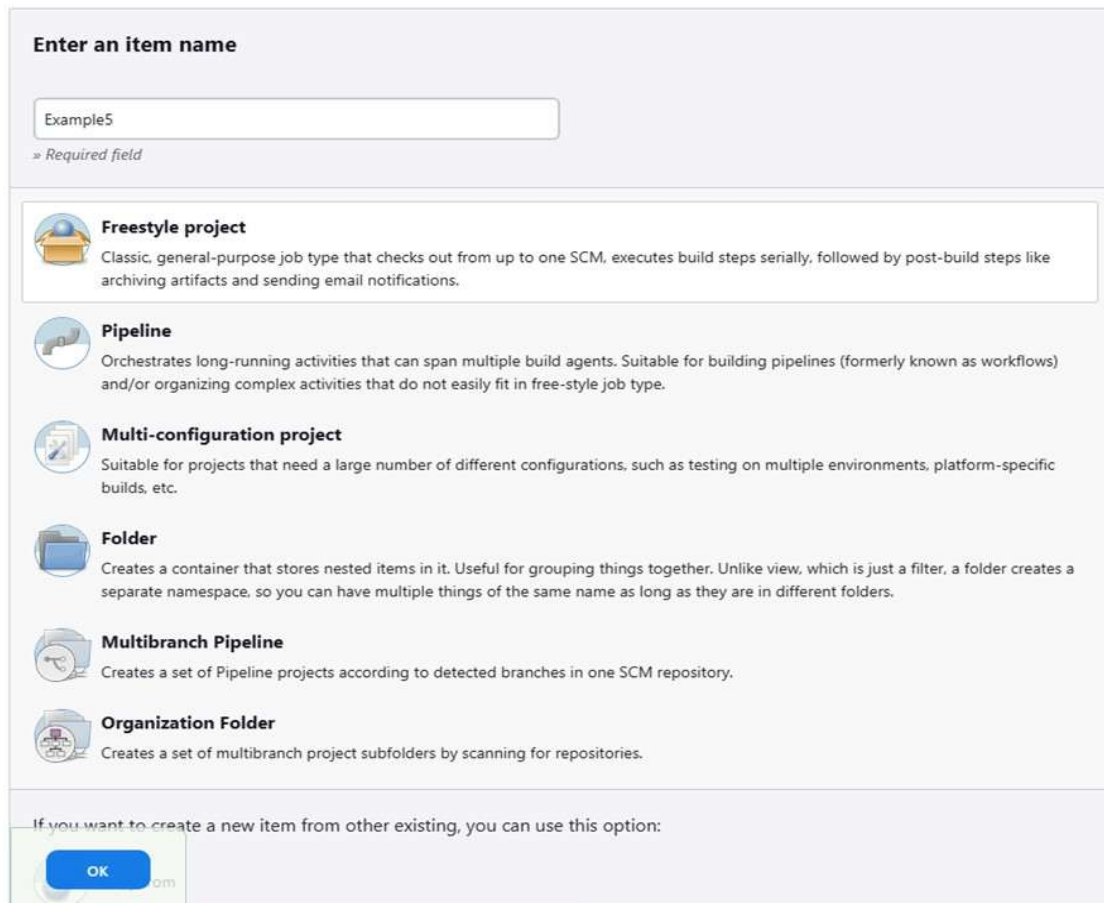

The screenshot shows the Jenkins 'Create new item' dialog. At the top, there is a text input field labeled 'Enter an item name' with the placeholder text 'Example5' and a note '» Required field'. Below this, there is a list of project types, each with an icon and a description:

- Freestyle project**: Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Pipeline**: Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**: Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**: Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
- Multibranch Pipeline**: Creates a set of Pipeline projects according to detected branches in one SCM repository.
- Organization Folder**: Creates a set of multibranch project subfolders by scanning for repositories.

At the bottom, there is a note: 'If you want to create a new item from other existing, you can use this option:' followed by a button labeled 'OK'.

Parameterising the project with a string parameter as follows:



The screenshot shows the Jenkins 'String Parameter' configuration dialog. It is titled 'String Parameter' and has a close button (X) in the top right corner. The dialog contains the following fields:

- Name**: A text input field with the value 'num'.
- Default Value**: A text input field.
- Description**: A text area.
- Plain text**: A checkbox labeled 'Preview'.
- Trim the string**: A checkbox.

At the bottom, there is a button labeled 'Add Parameter'.

Configuring the build steps:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Build Steps

Execute Windows batch command ?

Command

See [the list of available environment variables](#)

```
python C:\Admin\Academics\TSEC\Start3\SEPH\example5.py %num%
```

Advanced ▾

Add build step ▾

Setting the parameter for the build:

Project Example5

This build requires parameters:

num

10

▶ Build

Cancel

Console output after building:

✓ Console Output

```
Started by user Siddhant Chetlur
Running as SYSTEM
[EnvInject] - Loading node environment variables.
Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\Example5
[Example5] $ cmd /c call C:\WINDOWS\TEMP\jenkins11157306491994478222.bat

C:\ProgramData\Jenkins\jenkins\workspace\Example5>python C:\Admin\Academics\TSEC\Start3\SEPH\example5.py 10
Original number is 10
Binary representation of 10 is 0b1010
Octal representation of 10 is 0o12
Hexadecimal representation of 10 is 0xa
Complex representation of 10 is (10+0j)

C:\ProgramData\Jenkins\jenkins\workspace\Example5>exit 0
Finished: SUCCESS
```

Some Screenshots:

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

Configure

General
Build Triggers
Advanced Project Options
Pipeline

Advanced

Pipeline

Definition

Pipeline script

```
1 pipeline {
2   agent any
3
4   stages {
5     stage('Build') {
6       steps {
7         echo 'building.. this is the build phase'
8       }
9     }
10    stage('Test') {
11      steps {
12        echo 'testing.. this is the testing phase'
13      }
14    }
15    stage('Deploy') {
16      steps {
17        echo 'deploying.... This is the deployment phase'
18      }
19    }
20    stage('Postdeploy') {
21      steps {
22        echo 'postdeployment phase....'
23      }
24    }
25  }
26 }
27
```

☒ Use Groovy Sandbox

[Pipeline Syntax](#)

Save Apply

Jenkins

Dashboard > AIDS_Pipeline

Status

Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Rename

Pipeline Syntax

AIDS_Pipeline

Add description

Stage View

	Build	Test	Deploy	Postdeploy
Average stage times: (Average full run time ~507ms)	46ms	44ms	34ms	43ms
Feb 27 13:58 No Changes	46ms	44ms	34ms	43ms

Permalinks

- Last build (#1), 2 yr 0 mo ago
- Last stable build (#1), 2 yr 0 mo ago
- Last successful build (#1), 2 yr 0 mo ago
- Last completed build (#1), 2 yr 0 mo ago

Builds

Filter

February 27, 2023


#1 1:58 PM

localhost:8080/job/AIDS_Pipeline/1/

REST API Jenkins 2.492.2

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

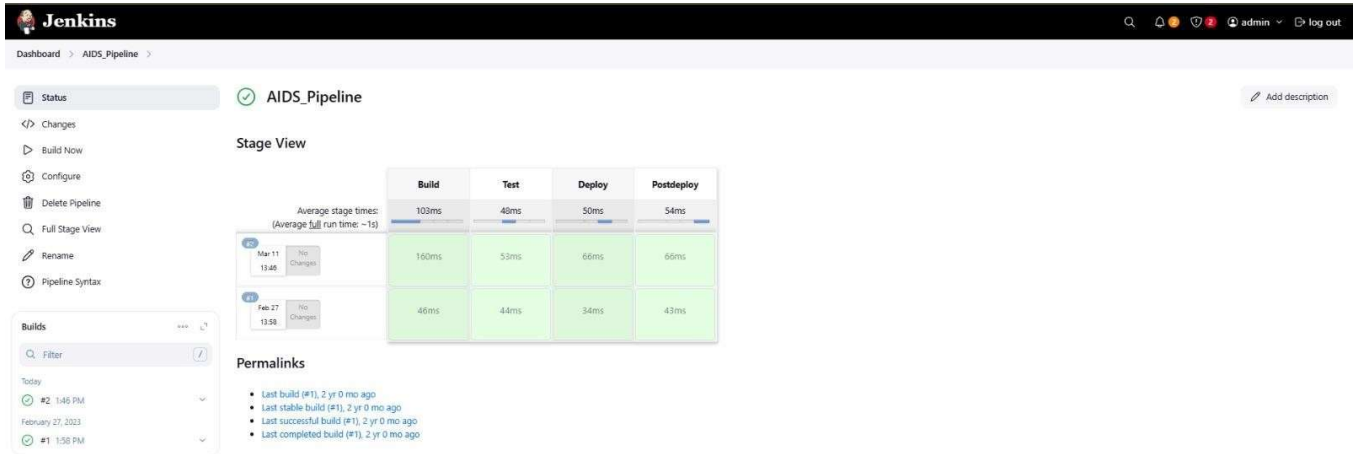


The Jenkins Dashboard for the **AIDS_Pipeline** shows the following details:

- Status:** ✔ AIDS_Pipeline
- Stage View:** A table showing stage execution times for two builds.
- Permalinks:** A list of recent build events.

	Build	Test	Deploy	Postdeploy
Average stage times: (Average full run time: ~1s)	103ms	40ms	50ms	54ms
Mar 11 11:48	160ms	53ms	66ms	66ms
Feb 27 13:58	46ms	44ms	34ms	43ms

- Last build (#1), 2 yr 0 mo ago
- Last stable build (#1), 2 yr 0 mo ago
- Last successful build (#1), 2 yr 0 mo ago
- Last completed build (#1), 2 yr 0 mo ago

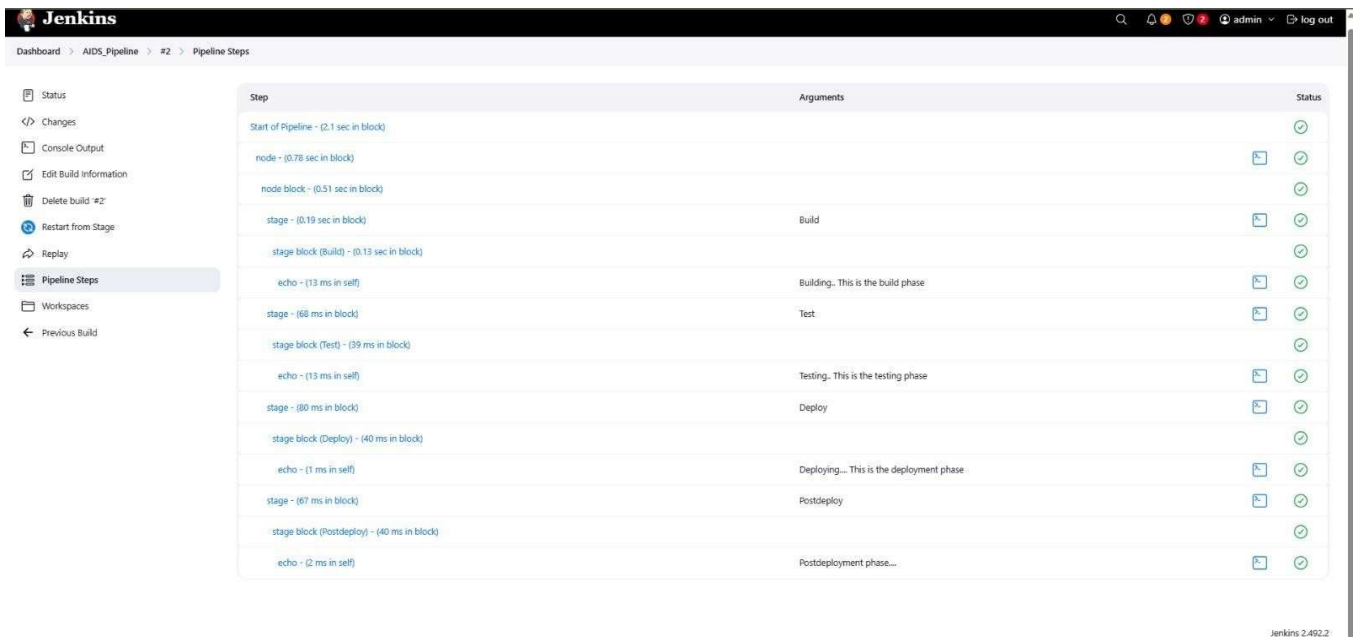

The Jenkins Pipeline Steps view for the **AIDS_Pipeline** shows the following steps:

Step	Arguments	Status
Start of Pipeline - (2.1 sec in block)		✔
node - (0.76 sec in block)		✔
node block - (0.51 sec in block)		✔
stage - (0.19 sec in block)	Build	✔
stage block (Build) - (0.13 sec in block)		✔
echo - (13 ms in self)	Building... This is the build phase	✔
stage - (68 ms in block)	Test	✔
stage block (Test) - (39 ms in block)		✔
echo - (13 ms in self)	Testing... This is the testing phase	✔
stage - (80 ms in block)	Deploy	✔
stage block (Deploy) - (40 ms in block)		✔
echo - (1 ms in self)	Deploying... This is the deployment phase	✔
stage - (67 ms in block)	Postdeploy	✔
stage block (Postdeploy) - (40 ms in block)		✔
echo - (2 ms in self)	Postdeployment phase...	✔

Software Engineering & Project Management Lab Experiment No: - 05

Aim: To Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, create a pipeline script to Test and deploy an application over the tomcat server

The screenshot shows the Jenkins Console Output for a pipeline build. The left sidebar contains navigation options: Status, Changes, Console Output (selected), View as plain text, Edit Build Information, Delete build #2, Restart from Stage, Replay, Pipeline Steps, Workspaces, and Previous Build. The main area displays the console output, which includes the following text:

```
Started by user admin
[Pipeline] start of Pipeline
[Pipeline] node
Running on Jenkins in C:\ProgramData\Jenkins\jenkins\workspace\AIDS_Pipeline
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Building.. This is the build phase
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Test)
[Pipeline] echo
Testing.. This is the testing phase
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Deploy)
[Pipeline] echo
Deploying.... This is the deployment phase
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Postdeploy)
[Pipeline] echo
Postdeployment phase....
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

REST API Jenkins 2.492.2

The screenshot shows the Jenkins Stage Logs (Build) for a build. The left sidebar contains navigation options: Changes, Build Now, Configure, Delete Pipeline, Full Stage View, Rename, and Pipeline Syntax. The main area displays the Stage View, which includes a table of stage times and a list of permalinks.

	Build	Test	Deploy	Postdeploy
Average stage times: (Average full run time: ~1s)	91ms	50ms	51ms	58ms
#3 Mar 11 13:47 No Changes	60ms	53ms	54ms	67ms
#2 Mar 11 13:48 No Changes	160ms	53ms	66ms	66ms
#1 Feb 27 13:58 No Changes	45ms	44ms	34ms	43ms

Permalinks

- Last build (#3), 27 ms ago
- Last stable build (#2), 1 min 40 sec ago
- Last successful build (#2), 1 min 40 sec ago
- Last completed build (#2), 1 min 40 sec ago

Conclusion: Thus, we have successfully Build the pipeline of jobs using Maven / Gradle / Ant in Jenkins, created a pipeline script to Test and deploy an application over the tomcat server.