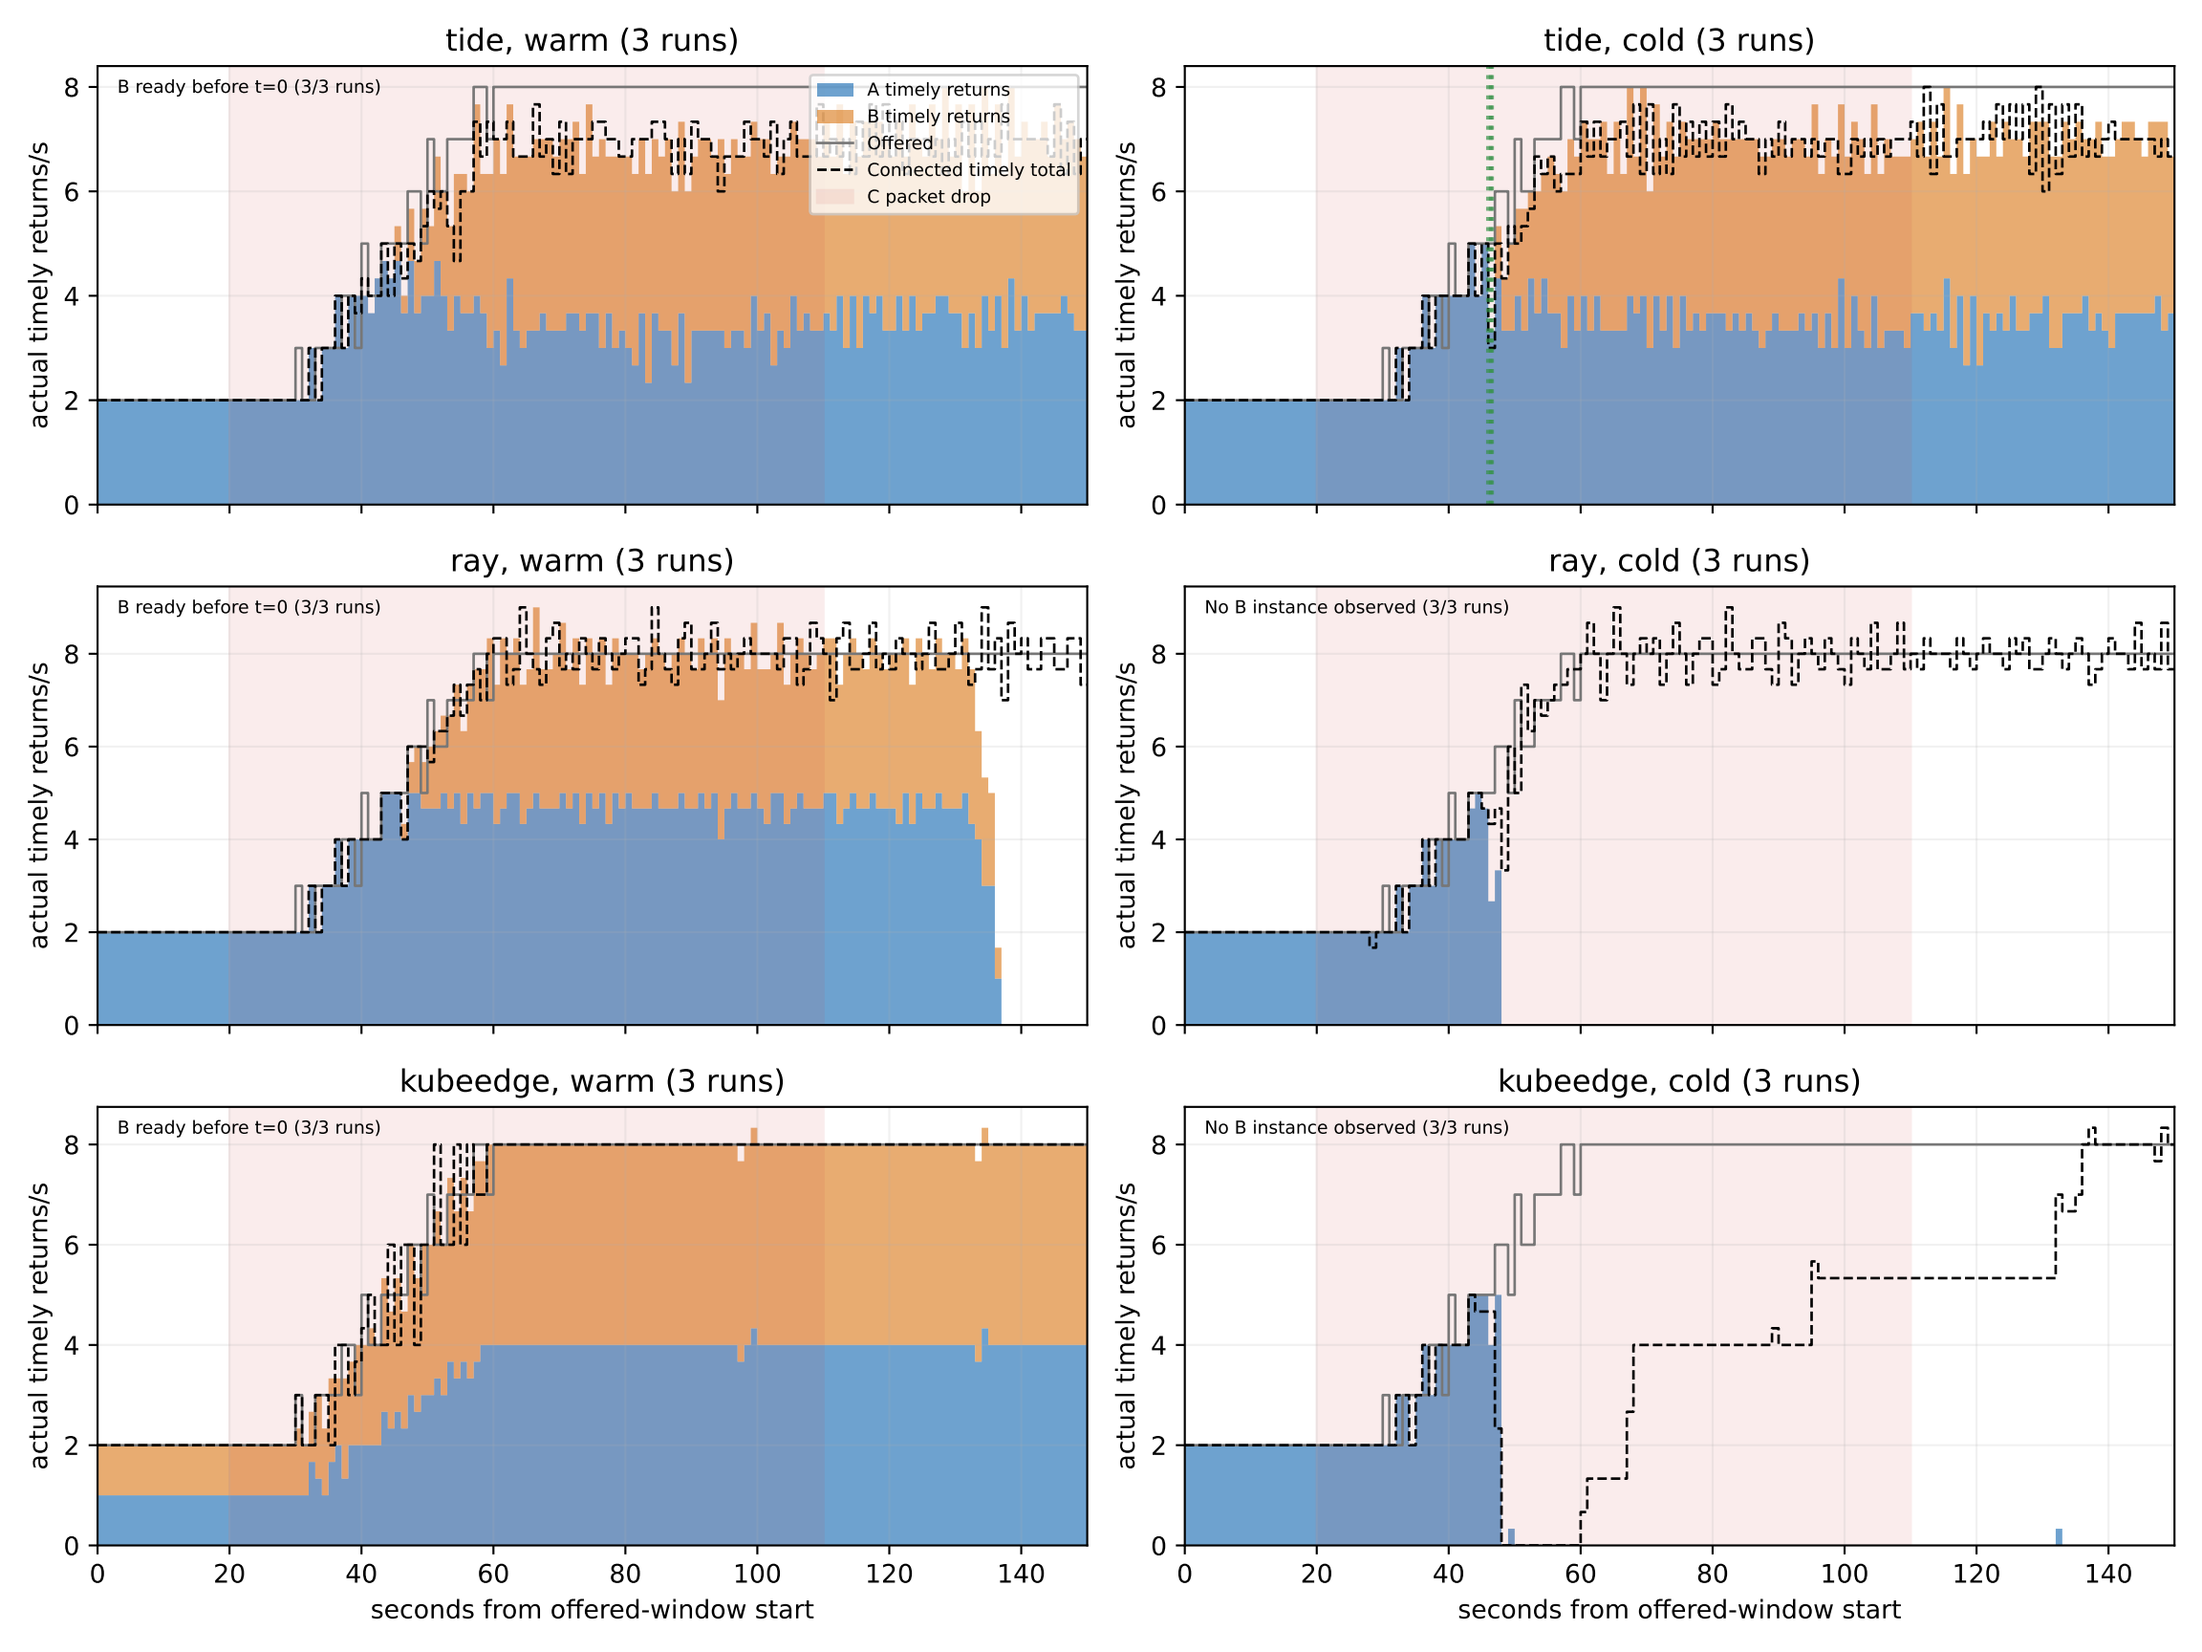
tide, warm (3 runs)
B ready before t=0 (3/3 runs)
A timely returns
B timely returns
Offered
Connected timely total
C packet drop
tide, cold (3 runs)
ray, warm (3 runs)
B ready before t=0 (3/3 runs)
ray, cold (3 runs)
No B instance observed (3/3 runs)
kubeedge, warm (3 runs)
B ready before t=0 (3/3 runs)
kubeedge, cold (3 runs)
No B instance observed (3/3 runs)
actual timely returns/s
seconds from offered-window start
0
2
4
6
8
0
20
40
60
80
100
120
140