Only MethodSource builds its parameters by running code
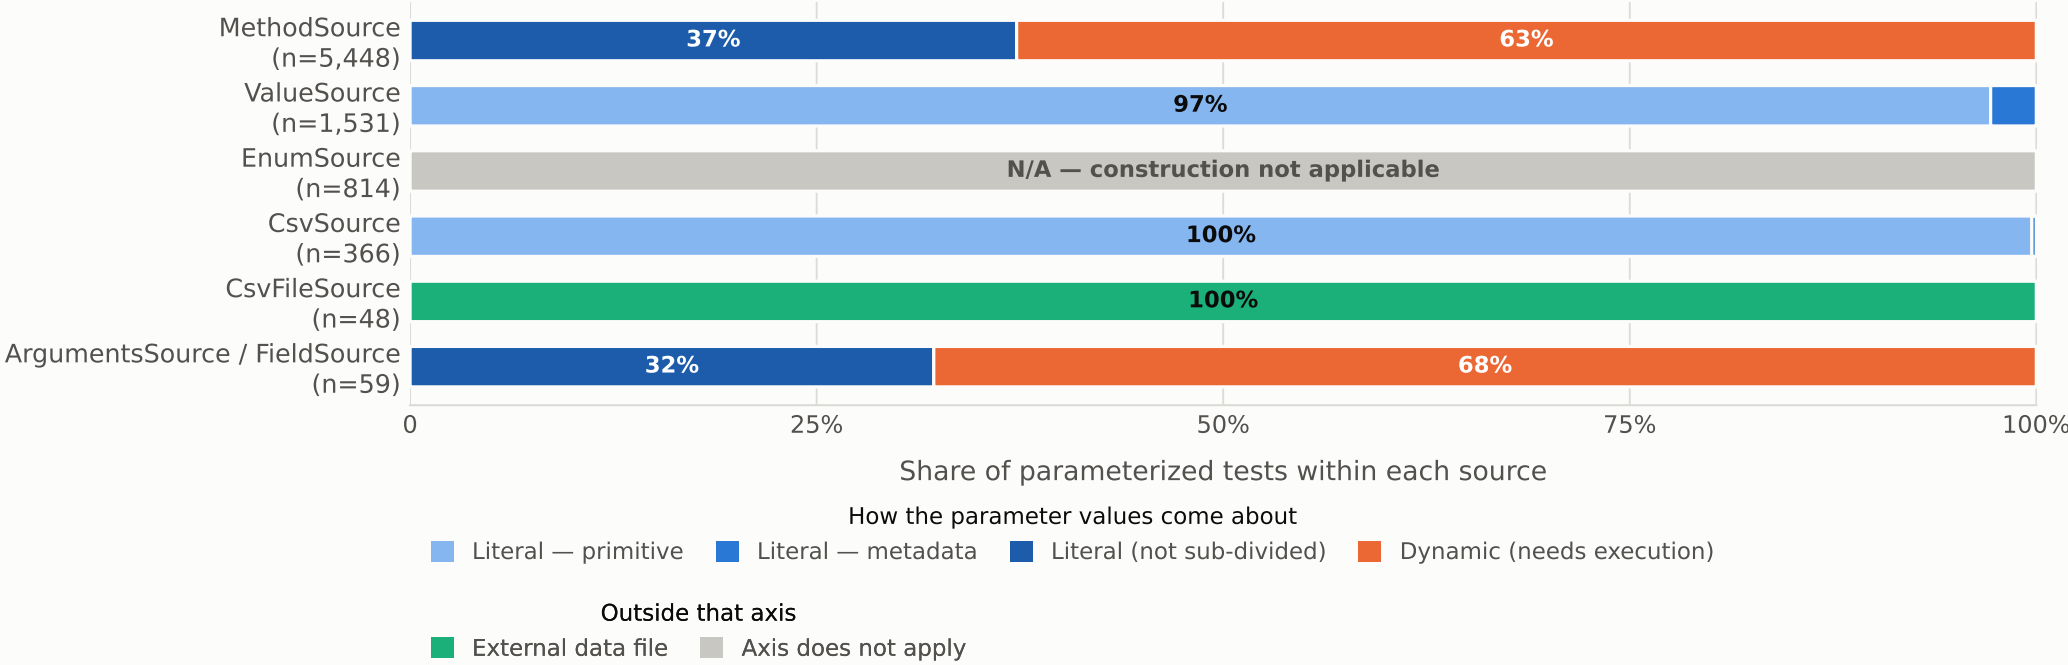
Blue = the parameter values are fixed at compile time; orange = producing them requires executing logic.
EnumSource has no construction dimension at all — its constants are declared, not built.