

## **Oracle® GoldenGate**

Logdump Reference for Oracle GoldenGate

12c (12.1.2)

**E41143-03**

August 2014

Documentation for system administrators and database administrators that describes how to work with the Logdump trail-reader utility

Copyright © 2013, 2014 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

---

---

# Contents

<b>Preface</b> .....	vii
Audience .....	vii
Documentation Accessibility .....	vii
Related Documents .....	vii
Conventions .....	viii
 <b>1 Using the Logdump Utility</b>	
1.1 Getting Started with Logdump .....	1-1
1.2 Viewing the First Record .....	1-1
1.2.1 Running Logdump .....	1-1
1.2.2 Setting Up the View .....	1-1
1.2.3 Opening a Trail File .....	1-2
1.3 Executing Basic Logdump Tasks .....	1-4
1.3.1 Finding the Next Good Record Header .....	1-4
1.3.2 Finding the Beginning, Middle, and End of a Transaction .....	1-5
1.3.3 Scanning for the End of a Transaction .....	1-5
1.3.4 Going to a Specific RBA in the File .....	1-5
1.3.5 Filtering Based on a Table or Data File Name .....	1-6
1.3.6 Removing the Current Filter Criteria .....	1-6
1.3.7 Filtering on Multiple Conditions .....	1-6
1.3.8 Count the Records in a Trail File .....	1-6
1.3.9 Saving Records to a New Trail File .....	1-6
1.3.10 Closing the Current File and Opening the Next One in the Trail .....	1-7
1.3.11 Keeping a Log of Your Session .....	1-7
1.3.12 Seeing the Current Logdump Environment .....	1-7
1.3.13 Getting Online Command Help .....	1-7
1.3.14 To Exit Logdump .....	1-7
1.4 Evaluating Transaction Size .....	1-7
1.5 Maintaining Command History .....	1-8
1.6 Viewing Logdump Command Information and Syntax .....	1-8
 <b>2 Logdump Commands</b>	
2.1 Logdump Command Summary .....	2-1
ARGETNONDATACHANGES   ARSTOPNONDATACHANGES .....	2-4
ASCIIDATA   EBCDICDATA .....	2-5

ASCIIDUMP   EBCDICDUMP .....	2-6
ASCIIHEADER   EBCDICHEADER .....	2-7
BEGIN .....	2-8
BULKIOSTATS .....	2-9
CALCTLFKEY .....	2-10
CD .....	2-11
COMPUTETIMESTAMP .....	2-12
COUNT .....	2-13
CTIME .....	2-18
DATAFILE .....	2-19
DECRYPT .....	2-20
DETAIL .....	2-21
DUMP .....	2-22
ENCRYPT .....	2-23
ENV .....	2-24
ESBLOCK .....	2-25
EXIT .....	2-26
FC .....	2-27
FILEHEADER .....	2-29
FILES .....	2-37
FILTER .....	2-38
FLOAT .....	2-44
GGSTOKEN .....	2-46
GHDR .....	2-47
HEADERTOKEN .....	2-48
HELP .....	2-50
HISTORY .....	2-51
INTERPRETINTERVAL .....	2-52
INTERPRETTIMESTAMP .....	2-53
LOG .....	2-54
NEXT .....	2-55
NEXTTRAIL .....	2-56
NOTIFY .....	2-57
OBEY .....	2-58
OPEN .....	2-59
POSITION .....	2-60
RECLEN .....	2-61
SAVE .....	2-62
SCANFORENDTRANS .....	2-64
SCANFORHEADER .....	2-65
SCANFORRBA .....	2-66
SCANFORTIME .....	2-67

SCANFORTYPE .....	2-68
SCANSROLLING .....	2-69
SHOW .....	2-70
SKIP .....	2-73
TIME .....	2-74
TIMEOFFSET .....	2-75
TMFBFOREIMAGE .....	2-76
TMFBFOREIMAGE .....	2-77
TMFGETRECADDR   NOTMFGETRECADDR .....	2-78
TMFIGNORERECCOUNT .....	2-79
TRAILFORMAT .....	2-80
TRANSBYTELIMIT .....	2-81
TRANSHIST .....	2-82
TRANSRECLIMIT .....	2-83
USERTOKEN .....	2-84
VOLUME .....	2-85
WRITELOG .....	2-86
X .....	2-87



---

---

# Preface

This guide contains guidelines for using the Oracle GoldenGate Logdump utility. This utility is mainly used by Oracle Support to resolve an Oracle GoldenGate support case. Experienced systems or database administrators who are familiar with the internal structures of Oracle GoldenGate trail records can use Logdump to troubleshoot and resolve errors or other problems encountered during processing.

## Audience

This guide is intended for the person or persons who are responsible for operating Oracle GoldenGate and maintaining its performance. This audience typically includes, but is not limited to, systems administrators and database administrators. It also is intended to help Oracle support technicians and other technical representatives when working with Oracle GoldenGate customers.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Related Documents

The Oracle GoldenGate documentation set includes the following components:

### HP NonStop Platform

- *Reference for Oracle GoldenGate for Mainframe for HP NonStop Guardian*
- *Administering Oracle GoldenGate for Mainframe for HP NonStop Guardian*

### Windows, UNIX, and Linux Platforms

- *Installing and Configuring Oracle GoldenGate for DB2 for i*
- *Installing and Configuring Oracle GoldenGate for DB2 LUW*

- *Installing and Configuring Oracle GoldenGate for DB2 z/OS*
- *Installing and Configuring Oracle GoldenGate for Informix*
- *Installing and Configuring Oracle GoldenGate for MySQL*
- *Installing and Configuring Oracle GoldenGate for NonStop SQL/MX*
- *Installing and Configuring Oracle GoldenGate for SQL Server*
- *Installing and Configuring Oracle GoldenGate for Oracle TimesTen*
- *Installing and Configuring Oracle GoldenGate for Oracle Database*
- *Installing and Configuring Oracle GoldenGate for Sybase*
- *Installing and Configuring Oracle GoldenGate for Teradata*
- *Administering Oracle GoldenGate for Windows and UNIX*
- *Reference for Oracle GoldenGate for Windows and UNIX*
- *Logdump Reference for Oracle GoldenGate*
- *Upgrading Oracle GoldenGate for Windows and UNIX*
- *Error Messages Reference for Oracle GoldenGate for Windows and UNIX*

#### **Other Oracle GoldenGate Products**

- *Administering Oracle GoldenGate Adapters*
- *Administering Oracle GoldenGate Director*
- *Administering Oracle GoldenGate Monitor*
- *Administering Oracle GoldenGate Veridata*

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, such as "From the File menu, select <b>Save</b> ." Boldface also is used for terms defined in text or in the glossary.
<i>italic</i> <i>italic</i>	Italic type indicates placeholder variables for which you supply particular values, such as in the parameter statement: <code>TABLE <i>table_name</i></code> . Italic type also is used for book titles and emphasis.
monospace MONOSPACE	Monospace type indicates code components such as user exits and scripts; the names of files and database objects; URL paths; and input and output text that appears on the screen. Uppercase monospace type is generally used to represent the names of Oracle GoldenGate parameters, commands, and user-configurable functions, as well as SQL commands and keywords.
UPPERCASE	Uppercase in the regular text font indicates the name of a utility unless the name is intended to be a specific case.
{ }	Braces within syntax enclose a set of options that are separated by pipe symbols, one of which must be selected, for example: <code>{<i>option1</i>   <i>option2</i>   <i>option3</i>}</code> .



Convention	Meaning
[ ]	Brackets within syntax indicate an optional element. For example in this syntax, the <i>SAVE</i> clause is optional: <code>CLEANUP REPLICAT group_name [, SAVE count]</code> . Multiple options within an optional element are separated by a pipe symbol, for example: <code>[option1   option2]</code> .



---

# Using the Logdump Utility

This chapter contains instructions for using the Logdump utility of Oracle GoldenGate. Logdump enables you to search for, filter, view, and save data that is stored in a trail or extract file.

---

**Note:** To avoid any adverse effects on the data or checkpoints in your trails, use Logdump only with guidance from an Oracle support analyst or an experienced Oracle GoldenGate user.

---

This chapter includes the following sections:

- [Section 1.1, "Getting Started with Logdump"](#)
- [Section 1.2, "Viewing the First Record"](#)
- [Section 1.3, "Executing Basic Logdump Tasks"](#)
- [Section 1.4, "Evaluating Transaction Size"](#)
- [Section 1.5, "Maintaining Command History"](#)
- [Section 1.6, "Viewing Logdump Command Information and Syntax"](#)

## 1.1 Getting Started with Logdump

This section introduces you to basic Logdump commands that enable you to open files, control the display, navigate through a file, and filter for specific information, among other basic tasks. It also illustrates and explains the components of a record.

## 1.2 Viewing the First Record

The steps in this section explain how to set up the Logdump environment and start viewing records.

### 1.2.1 Running Logdump

Run the `logdump` program from the Oracle GoldenGate installation location. Logdump command lines are numbered so that you can use edit and history commands.

### 1.2.2 Setting Up the View

The following commands set up a Logdump environment that shows the information most commonly used when analyzing Oracle GoldenGate trail records.

1. To view the record header with the data:

```
Logdump 1> GHDR ON
```

The record header contains information about the transaction.

2. To add column information:

```
Logdump 2> DETAIL ON
```

Column information includes the number and length in hex and ASCII.

3. To add hex and ASCII data values to the column information:

```
Logdump 3> DETAIL DATA
```

4. To view user tokens:

```
Logdump 4> USERTOKEN ON
```

User tokens are custom user-defined information that is specified in a `TABLE` or `FILE` mapping statement and stored in the trail file for specific purposes.

5. To view automatically generated tokens:

```
Logdump 4> GGSTOKEN ON
```

Oracle GoldenGate automatically generated tokens include the transaction ID (`XID`), the row id for DML operations, the fetching status (if applicable), and tag value.

6. To control how much record data is displayed:

```
Logdump 5> RECLEN length
```

### 1.2.3 Opening a Trail File

To open a trail file, complete the following steps:

1. Open a file with the following command:

```
Logdump 6> OPEN file_name
```

Where:

*file\_name* is either the relative name or fully qualified name of the file, including the file sequence number. For example:


```
open /home/ggs/dirdat/jd000000  
open $data01.gloggl.aa000000
```

2. To go to the first record and then move through records in sequence:


```
Logdump 7> NEXT
```

Alternatively, you can simply enter `N`.

Figure 1-1 Logdump Record as Seen on a Windows System

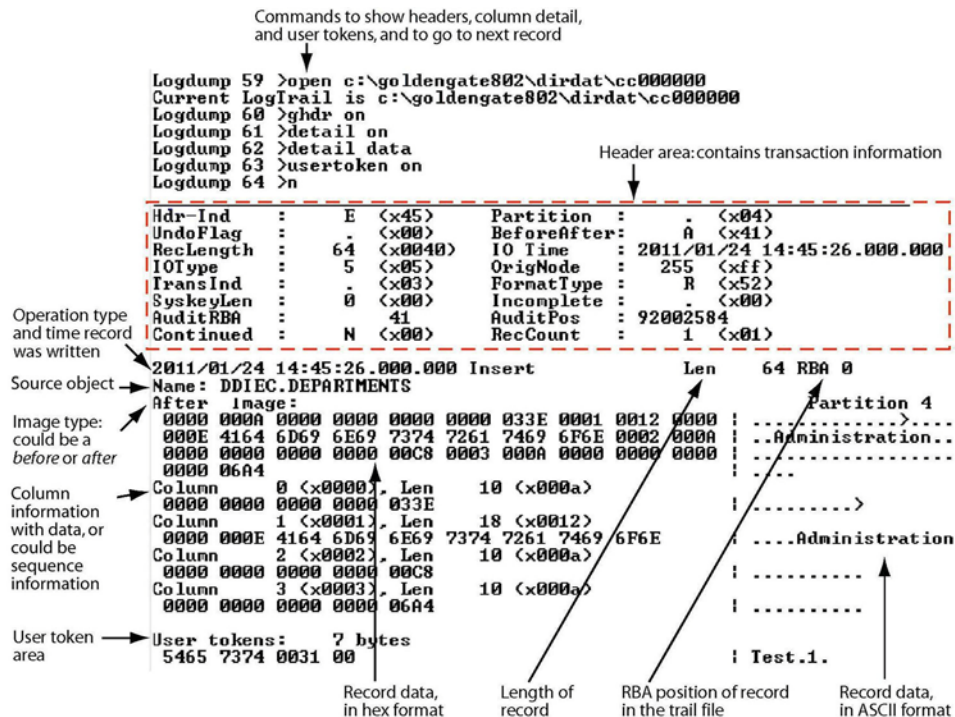

**Figure 1–2 Trail Record as Seen on NonStop**

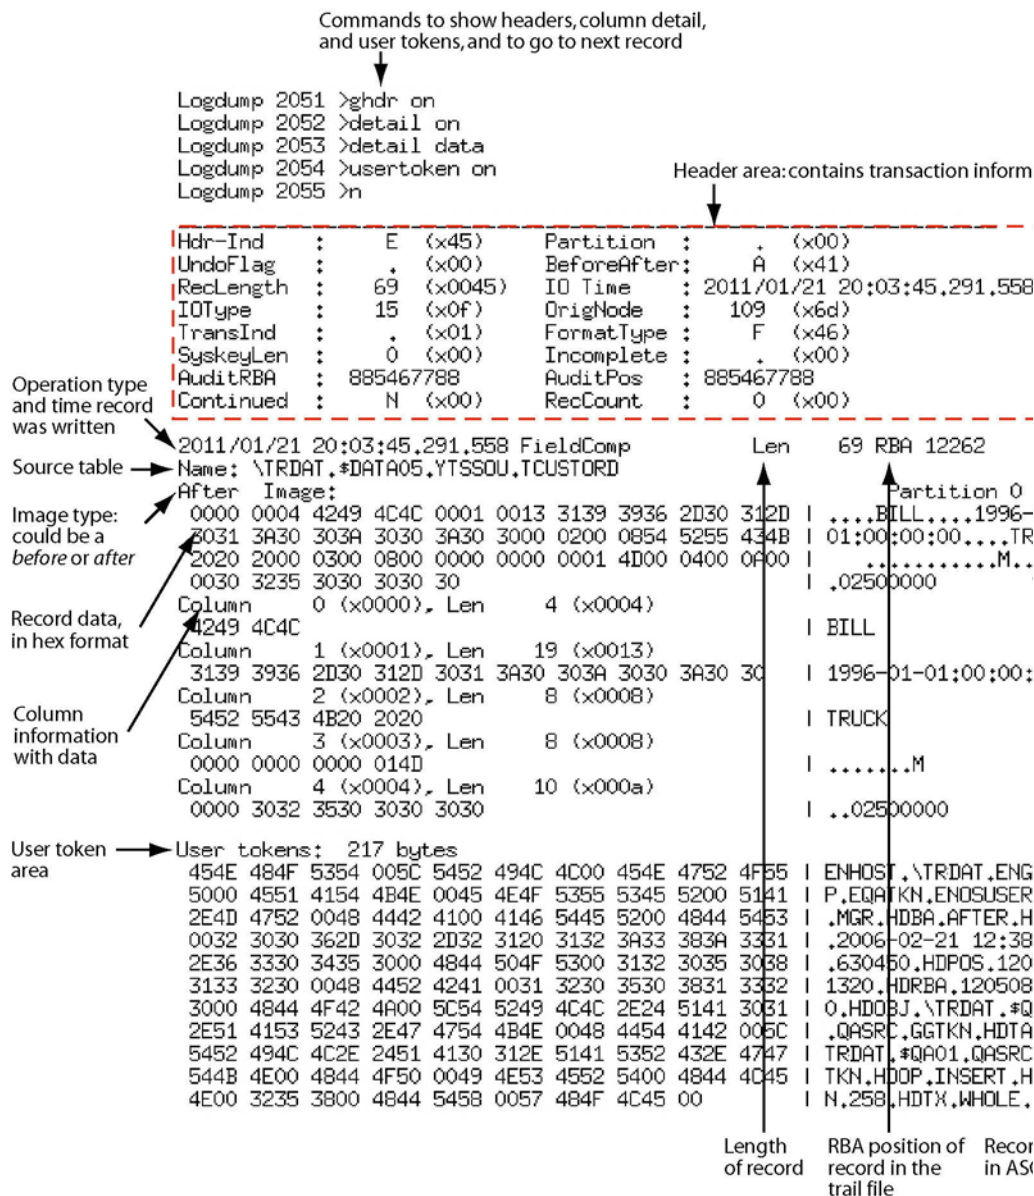

## 1.3 Executing Basic Logdump Tasks

The following are some basic tasks that can be performed with Logdump. For detailed information about the commands shown and other available options, see the alphabetical reference in [Chapter 2, "Logdump Commands."](#)

### 1.3.1 Finding the Next Good Record Header

To find the next good record header, enter the following command:

```
Logdump 8> SCANFORHEADER
```

Alternatively, you can simply enter SFH.

### 1.3.2 Finding the Beginning, Middle, and End of a Transaction

To find the beginning, middle, and end of a transaction, complete the following steps:

1. Show headers and detail.

```
Logdump 9> GHDR ON
Logdump 10> DETAIL ON
```

2. Go to the next record.

```
Logdump 11> N
```

3. View the TransInd field in the record header. The following table explains where the record is in relation to the transaction.

Transaction Indicator	Description
TransInd : . (x00)	First statement in transaction
TransInd : . (x01)	Statement in middle of transaction
TransInd : . (x02)	Last statement in transaction
TransInd : . (x03)	Sole statement in transaction

4. Move through subsequent records by pressing N, and refer to the TransInd field to determine where each one is within the transaction. When TransInd is either x02 or x03, the TransInd of the next record should be x00, starting a new transaction.

### 1.3.3 Scanning for the End of a Transaction

To scan for the end of a transaction, enter the following command:

```
Logdump 20> SCANFORENDTRANS
```

Alternatively, you can simply enter SFET.

The record shown will be the first one in the next transaction. To confirm, the TransInd field should be x00.

### 1.3.4 Going to a Specific RBA in the File

To go to a specific RBA in the file, you can do either of the following:

- To go to an RBA anywhere in the file:

```
Logdump 35> POS rba
Logdump 36> N
```

This displays the record located at that RBA.

- To go to the first record in the file:

```
Logdump 37> POS FIRST
```

Alternatively, you can enter the following command:

```
Logdump 37> POS 0
```

### 1.3.5 Filtering Based on a Table or Data File Name

To filter out everything except records containing a specific NonStop data file name, enter the following command:

```
Logdump 60> FILTER INCLUDE FILENAME $volume.subvolume.file
```

To filter out everything except records containing a specific table name:

- On a NonStop system:

```
Logdump 60> FILTER INCLUDE ANSINAME catalog.schema.table
```

- On a Windows or UNIX system:

```
Logdump 60> FILTER INCLUDE FILENAME [container | catalog] schema.table
```

Now, when you use the `N` command, you will only see records that satisfy this filter. Conversely, to filter out records containing a specific table or file name, but show everything else, use the `EXCLUDE` option instead of `INCLUDE`.

### 1.3.6 Removing the Current Filter Criteria

To remove the current filter criteria, enter the following command:

```
Logdump 62> FILTER CLEAR
```

### 1.3.7 Filtering on Multiple Conditions

To filter on multiple conditions, enter one of the following commands:

- Logdump 60> FILTER INCLUDE FILENAME \$volume.subvolume...file..; FILTER RECTYPE record\_type; FILTER MATCH ALL
- Logdump 60> FILTER INCLUDE ANSINAME catalog.schema.table; FILTER RECTYPE record\_type; FILTER MATCH ALL
- Logdump 65> FILTER INCLUDE FILENAME schema.table; FILTER RECTYPE record\_type; FILTER MATCH ALL

Use `MATCH ANY` or `MATCH ALL` depending on whether you want the search to match any or all of the filter conditions, respectively, when multiple conditions are specified. The preceding example filters on a name and record type, typically an operation type such as `INSERT`.

### 1.3.8 Count the Records in a Trail File

The following command shows a count summary followed by counts for each table or data file:

```
Logdump 67> COUNT
```

### 1.3.9 Saving Records to a New Trail File

To save the whole file, enter the following command, where *file* is the name of the new file:

```
Logdump 68> SAVE file
```

To save a subset of records, enter the following command:



```
Logdump 69> SAVE file n RECORDS
```

### 1.3.10 Closing the Current File and Opening the Next One in the Trail

To close the current file and open the next one in the trail, enter the following command:

```
Logdump 70> NEXTTRAIL
```

### 1.3.11 Keeping a Log of Your Session

To start logging, enter the following command:

```
Logdump 71> LOG TO filename.txt
```

To write text to the log:

```
Logdump 72> WRITELOG "text"
```

To stop logging:

```
Logdump 73> LOG STOP
```

### 1.3.12 Seeing the Current Logdump Environment

To see the current Logdump environment, enter the following command:

```
Logdump 74> ENV
```

This shows which features are enabled, such as filtering and header views, and it shows environment information such as the current trail and position.

### 1.3.13 Getting Online Command Help

To get online command help, enter the following command:

```
Logdump 75> HELP
```

### 1.3.14 To Exit Logdump

To exit Logdump, enter either of the following commands:

- Logdump 100> EXIT
- Logdump 100> QUIT

## 1.4 Evaluating Transaction Size

Use Logdump's TRANSHIST command in conjunction with other Logdump commands to determine whether or not your applications generate large transactions and to identify their relative size. TRANSHIST causes Logdump to track the size of transactions contained in a trail file or extract file in an internal history table. The transactions are ranked in descending order of size, in bytes. When the history table is full, the smallest transaction is removed to allow a larger transaction to be added to the list.

To use statistics generated by TRANSHIST, issue the following series of commands in Logdump:

1. Use `TRANSHIST` to set the size of the history table that tracks transaction size. The maximum size is 200 bytes. A value of 0 turns off the tracking.

```
TRANSHIST n
```

2. Use either the `TRANSRECLIMIT` or `TRANSBYTELIMIT` command to set a lower boundary for what is considered a normal sized transaction. These commands prevent normal-sized transactions from being tracked. Eliminating normal-sized transactions reduces the amount of data that must be reviewed.

```
{TRANSBYTELIMIT n bytes | TRANSRECLIMIT n records}
```

3. Use Logdump's `COUNT` command to display the statistics on transaction size, which appear at the end of the output and look like the following excerpt:

```
Transactions with at least 100 records or 100000 bytes
2011/02/01 09:31:24.000.000    00:00:00.000, Seq 0, RBA 13101
  Bytes/Trans .....    1168167
  Records/Trans ...      1001
  Files/Trans .....        1
2011/02/01 09:31:35.000.000    00:00:11.000, Seq 0, RBA 1205292
  Bytes/Trans .....    1168167
  Records/Trans ...      1001
  Files/Trans .....        1
```

Logdump scans the file(s) and reports the information.

4. Use Logdump's `POSITION RBA` command to go to each RBA listed in the `COUNT` output to find out the name of the table that generated the transaction. You can group these tables into their own processing group so that they do not affect processing of other tables that generate normal sized transactions.

## 1.5 Maintaining Command History

On Windows and UNIX systems, command history is stored in a file named `logdump.hst`. On NonStop systems, command history is stored in a file named `logduhst`. The file is created in the home location of the user who first started Logdump.

When Logdump starts up, it looks for the history file in one of the following locations, depending on the platform:

- The `USERPROFILE` environment variable.
- The `$HOME` environment variable.
- The default `$vol.subvol`.

If the file exists, Logdump loads the command history into a buffer. The command history buffer holds 400 commands. Upon termination of the Logdump session, the session's history is appended to the file.

## 1.6 Viewing Logdump Command Information and Syntax

To learn more about Logdump commands, see the alphabetical reference documentation in [Chapter 2, "Logdump Commands"](#).

---

# Logdump Commands

This chapter contains an alphabetical reference for syntax and usage of the Logdump utility commands.

For Logdump usage instructions, see [Chapter 1, "Using the Logdump Utility."](#)

## 2.1 Logdump Command Summary

The following are category summaries of the Logdump commands.

**Table 2–1 Working with Files**

Commands	Description
<a href="#">CD</a>	Sets the default directory, volume or subvolume.
<a href="#">DATAFILE</a>	Opens an Enscribe file from within Logdump.
<a href="#">LOG</a>	Writes a session log.
<a href="#">NEXTTRAIL</a>	Closes the current file and opens the next file in the trail sequence.
<a href="#">OPEN</a>	Opens a trail file or extract file.
<a href="#">POSITION</a>	Sets the read position in the file.
<a href="#">SAVE</a>	Writes record data to another file.
<a href="#">WRITELOG</a>	Writes text to a session log.
<a href="#">VOLUME</a>	Sets the default directory, volume or subvolume.

**Table 2–2 Viewing Information**

Command	Description
<a href="#">BULKIOSTATS</a>	Displays bulk I/O statistics.
<a href="#">COUNT</a>	Displays record count information.
<a href="#">FILES</a>	Displays file names in the current directory or subvolume.
<a href="#">ENV</a>	Displays current Logdump settings.
<a href="#">FILEHEADER</a>	Displays file header information.
<a href="#">NOTIFY</a>	Displays the number of records scanned, the trail position, and the record timestamp at specified intervals when using <a href="#">COUNT</a> and records are being suppressed from display through filtering options.

**Table 2–2 (Cont.) Viewing Information**

Command	Description
SHOW	Displays internal information such as the current Logdump environment, a list of Oracle GoldenGate record types, and current filter settings.
TIME	Displays the current time in local and GMT formats.

**Table 2–3 Selecting Data and Records**

Command	Description
BEGIN	Searches through a TMF or Oracle GoldenGate trail to locate a record at or near the specified time.
ARGETNONDATACHANGES   ARSTOPNONDATACHANGES	Includes or excludes records that did not result in a change to the database.
DUMP	Displays the specified number of bytes of data from the current position in the file.
FILTER	Filters the display of records.
NEXT	Displays the next record(s) in the file.
SCANFORENDTRANS	Finds a record that is the last record of, or the only record in, a transaction, and then displays the first record of the next transaction.
SCANFORHEADER	Finds the start of the next record header.
SCANFORRBA	Finds a specific relative byte address.
SCANFORTIME	Finds the next record with a specific timestamp.
SCANFORTYPE	Finds the next record of a specific type.
SKIP	Skips a specified number of records.
TMFBFOREIMAGE	Sets the <code>TMFARLIB</code> to fetch the before image of a record and display it with the after image.

**Table 2–4 Caking Conversions**

Command	Description
CALCTLFKEY	Calculates a unique key for TLF/PTLF records in ACI's BASE24 application.
COMPUTETIMESTAMP	Converts a datetime string to a Julian timestamp.
CTIME	Converts a C timestamp to an ASCII timestamp.
DECRYPT	Decrypts data before displaying it in Logdump.
ENCRYPT	Encrypts file data.
ESBLOCK	Displays NonStop entry-sequenced syskeys as a block number and record number.
FLOAT	Displays a number or hex string as a hex representation and a floating point number.
INTERPRETINTERVAL	Displays a 64-bit Julian interval as <code>dd-hh:mm:ss:ms:us</code> .
INTERPRETTIMESTAMP	Displays a 64-bit Julian timestamp in ASCII format.

**Table 2–5 Controlling the Logdump Environment**

Command	Description
ASCIIDATA   EBCDICDATA	Controls whether data is displayed in ASCII or EBCDIC format on an IBM mainframe.
ASCIIDUMP   EBCDICDUMP	Sets the character set on an IBM mainframe.
ASCIIHEADER   EBCDICHEADER	Controls whether the table name is displayed in ASCII or EBCDIC format on an IBM mainframe.
DETAIL	Controls the display of detailed record information.
GGSTOKEN	Controls the display of automatically generated token data.
GHDR	Controls the display of header information.
HEADERTOKEN	Controls the display of header token indicators.
RECLEN	Sets the maximum data output length.
SCANSROLLING	Controls whether a count notification displays on one line or multiple lines.
TIMEOFFSET	Sets the time offset from GMT.
TMFBFOREIMAGE	Controls whether or not the before image is displayed for update operations from TMF audit.
TMFGETRECADDR   NOTMFGETRECADDR	Controls Logdump's ability to call the <code>ARGETRECADDR()</code> function of <code>TMFARLIB</code> .
TMFIGNORERECCOUNT	Sets the number of records that the <code>TMFARLIB</code> can ignore before returning a <code>CURRENTPOSITION</code> record.
TRAILFORMAT	Sets the trail format to the old version (pre-Oracle GoldenGate 6.0) or the new version.
TRANSBYTELIMIT	Sets a byte-count threshold for what is defined as a normal-sized transaction.
TRANSHIST	Sets the size of the transaction history table that is used for tracking transaction size.
TRANSRECLIMIT	Sets a record-count threshold for what is defined as a normal-sized transaction.
USERTOKEN	Controls the display of user token data.

**Table 2–6 Miscellaneous Commands**

Command	Description
EXIT	Exits Logdump.
FC	Edits a previous command.
HELP	Shows syntax for Logdump commands.
HISTORY	Lists previously issued commands.
OBEY	Executes a series of commands stored in a file.
X	Executes a program from within Logdump.

---

## ARGETNONDATACHANGES | ARSTOPNONDATACHANGES

Use `ARGETNONDATACHANGES` and `ARSTOPNONDATACHANGES` when reading TMF trails to direct `TMFARLIB` to include or exclude records that did not result in a change to the database.

### Default

`ARGETNONDATACHANGES`

### Syntax

`ARGETNONDATACHANGES` | `ARSTOPNONDATACHANGES`

#### **ARGETNONDATACHANGES**

Includes non-change records.

#### **ARSTOPNONDATACHANGES**

Suppresses non-change records.

## ASCIIDATA | EBCDICDATA

Use ASCIIDATA or EBCDICDATA to control whether record data is displayed in ASCII or EBCDIC format on an IBM mainframe. You may need to use the ASCIIIDUMP command to set the character set first.

### Default

ASCIIDATA ON (same as EBCDICDATA OFF)

### Syntax

ASCIIDATA {ON | OFF} | EBCDICDATA {ON | OFF}

## ASCIIDUMP | EBCDICDUMP

Use ASCIIDUMP or EBCDICDUMP to set the character set for the output of the DUMP command on an IBM mainframe. The hex part of the dump display is not affected by this command.

### Default

ASCIIDUMP ON (same as EBCDICDUMP OFF)

### Syntax

ASCIIDUMP {ON | OFF} | EBCDICDUMP {ON | OFF}



---

## ASCIIHEADER | EBCDICHEADER

Use ASCIIHEADER or EBCDICHEADER to control whether or not the table name in the record header is in ASCII or EBCDIC format on an IBM mainframe. You may need to use the ASCIIDUMP command to set the character set first.

### Default

ASCIIHEADER ON (same as EBCDICHEADER OFF)

### Syntax

ASCIIHEADER {ON | OFF} | EBCDICHEADER {ON | OFF}

---

## BEGIN

Use `BEGIN` to do a binary search through a TMF or Oracle GoldenGate trail to locate a record at or near the specified time.

### Default

None

### Syntax

```
BEGIN timestamp
```

***timestamp***

The timestamp for which to search.

## BULKIOSTATS

---

Use `BULKIOSTATS` to display statistics for bulk I/O records, including the number of physical and logical reads and current and average read times.

### Default

None

### Syntax

`BULKIOSTATS`

---

## CALCTLFKEY

Use CALCTLFKEY to work around the @GETENV ("TLFKEY", SYSKEY "unique\_key") " function when it generates duplicate keys. The TLFKEY option associates a unique key with TLF/PTLF records in ACI's BASE24 application. CALCTLFKEY performs the calculation and displays the value for each record.

Without an argument, CALCTLFKEY displays whether this feature is enabled or disabled.

### Default

OFF

### Syntax

CALCTLFKEY {ON | OFF}

## CD

Use CD to set the default directory, volume, or subvolume. An alias for this command is VOLUME.

### Default

None

### Syntax

CD {*directory* | *volume* | *subvolume*}

---

## COMPUTETIMESTAMP

Use COMPUTETIMESTAMP to convert a datetime string to Julian format.

### Default

None

### Syntax

COMPUTETIMESTAMP *string*

***string***

A datetime string in the format of:

`[yy]yy-mm-dd [hh[:mm][:ss]]`

### Example

```
COMPUTETIMESTAMP 2005-01-01 12:00:00
```

This example returns the following:

```
2005-01-01 12:00:00 is JulianTimestamp 211971340800000000
```

## COUNT

Use **COUNT** to produce a record count summary and other information related to the amount of data in the file. The basic output, without options, shows the following:

- The RBA where the count began
- The number of records in the file
- The total data bytes and average bytes per record
- Information about the operation types
- Information about the transactions

When the **DETAIL** command is issued prior to issuing **COUNT**, the information includes a count for each table or data file. **COUNT** options allow you to show table detail without using the **DETAIL** command first, set a start and end time for the count, filter the count for a table, data file, trail file, or extract file, and specify a time interval for counts. You can use the **DETAIL OFF** command to turn off the collection of this detailed information.

For arguments that take a time string, use the following format:

```
[ [yy]yy-mm-dd] [hh[:mm][:ss]]
```

### Default

Produce a count summary of all records.

### Syntax

```
COUNT
[, DETAIL]
[, END[TIME] time_string]
[, FILE specification]
[, INT[ERVAL] minutes]
[, LOG wildcard]
[, START[TIME] time_string]
```

#### **DETAIL**

Adds a count for each table or data file that was processed by Extract to the summary count. The information includes the total and average number of data bytes and information about the operations that were performed. This data can also be obtained by using the **DETAIL** command before issuing **COUNT**.

#### **END[TIME] time\_string**

Stops the count with the last record written at the specified time.

#### **FILE specification**

Specifies the count to be generated for the specified table or data file or group of names designated with a wildcard (\*).

#### **INT[ERVAL] minutes**

Displays statistics for total bytes, average bytes, and number of each type of operation that occurred within a specified interval of time, in minutes. Then it displays the totals for those statistics.

**LOG wildcard**

Produces a count for multiple trail or extract files specified with a wildcard.

**START[TIME] time\_string**

Begins the count with the first record written at the specified time.

**Examples****Example 1**

```
COUNT START 2011-01-11 12:00:00 , END 2011-01-12 12:00:00
```

**Example 2**

```
COUNT INTERVAL 4
```

This displays something similar to the following. Individual table or data file count has been truncated due to space constraints.

On Windows or UNIX (file names will differ):

```
Interval from 2011/02/28 11:30:00.000 to 2011/02/28 11:34:00.000,
```

Recs	3
Total Data Bytes	120
Avg Bytes/Record	40
Delete	3
Before Images	3
LogTrail /home/ggs/dirdat/rt000000 has 304 records	
Total Data Bytes	12120
Avg Bytes/Record	39
Delete	3
Insert	300
FieldComp	1
Before Images	3
After Images	301

Average of 303 Transactions

Bytes/Trans .....	88
Records/Trans ...	1
Files/Trans .....	1

HR.JOBS Partition 4

Total Data Bytes	5911
Avg Bytes/Record	68
Insert	86
After Images	86

HR.REGIONS Partition 4

Total Data Bytes	512
Avg Bytes/Record	32
Insert	16
After Images	16

On NonStop:

```
LogTrail \GGQA.$QA01.QADAT.LS000000 has 29656 records
```

Total Data Bytes	3561022
Avg Bytes/Record	120
Delete	50
Insert	21221
Update	8379



```

GSSPurgedata                6
Before Images                50
After Images                 29606

Average of 3621 Transactions
  Bytes/Trans .....        1376
  Records/Trans ...         8
  Files/Trans .....         1

\GGQA.$QA01.QAESRC.ACCTS                Partition 0
Total Data Bytes                286414
  Avg Bytes/Record              142
Delete                          17
Insert                         2000
Before Images                   17
After Images                    2000

\GGQA.$QA01.QAESRC.ACCTN                Partition 0
Total Data Bytes                281700
  Avg Bytes/Record              100
Delete                          17
Insert                         2000
Update                         800
Before Images                   17
After Images                    2800

```

### Example 3

```
COUNT LOG ls*
```

This produces a count for all files whose names begin with LS. (Individual table or data file count has been truncated due to space constraints.)

### On NonStop:

```

Current LogTrail is \GGQA.$QA01.QADAT.LS000000
Bad record found at RBA 5287, format 5.50)
  2A56 623F | *vb?
LogTrail \GGQA.$QA01.QADAT.LS000000 has 33 records
LogTrail \GGQA.$QA01.QADAT.LS000000 closed
Current LogTrail is \GGQA.$QA01.QADAT.LS000001
LogTrail \GGQA.$QA01.QADAT.LS000001 has 99 records
LogTrail \GGQA.$QA01.QADAT.LS000001 closed
Current LogTrail is \GGQA.$QA01.QADAT.LS000002
LogTrail \GGQA.$QA01.QADAT.LS000002 has 0 records
LogTrail \GGQA.$QA01.QADAT.LS000002 closed
Current LogTrail is \GGQA.$QA01.QADAT.LS000003
LogTrail \GGQA.$QA01.QADAT.LS000003 has 0 records
LogTrail \GGQA.$QA01.QADAT.LS000003 closed
LogTrail \GGQA.$QA01.QADAT.LS* has 132 records

Total Data Bytes                9468
  Avg Bytes/Record              71
Insert                         132
After Images                    132

Average of 4 Transactions
  Bytes/Trans .....        3951
  Records/Trans ...         33
  Files/Trans .....         3

```

```

QAHRTS.JOBS                                     Partition 4
Total Data Bytes                                5220
  Avg Bytes/Record                              68
Insert                                           76
After Images

```

76

On Windows or UNIX (file names will differ):

```

Current LogTrail is c:\goldengate802\dir\ls000000
Bad record found at RBA 5287, format 5.50)
  2A56 623F                                     | *vb?
LogTrail c:\goldengate802\dir\ls000000 has 33 records
LogTrail c:\goldengate802\dir\ls000000 closed
Current LogTrail is c:\goldengate802\dir\ls000001
LogTrail c:\goldengate802\dir\ls000001 has 99 records
LogTrail c:\goldengate802\dir\ls000001 closed
Current LogTrail is c:\goldengate802\dir\ls000002
LogTrail c:\goldengate802\dir\ls000002 has 0 records
LogTrail c:\goldengate802\dir\ls000002 closed
Current LogTrail is c:\goldengate802\dir\ls000003
LogTrail c:\goldengate802\dir\ls000003 has 0 records
LogTrail c:\goldengate802\dir\ls000003 closed
LogTrail c:\goldengate802\dir\ls* has 132 records

```

```

Total Data Bytes                                9468
  Avg Bytes/Record                              71
Insert                                           132
After Images                                    132

```

Average of 4 Transactions

```

  Bytes/Trans ..... 3951
  Records/Trans ... 33
  Files/Trans ..... 3

```

```

HR.JOBS                                     Partition 4
Total Data Bytes                                5220
  Avg Bytes/Record                              68
Insert                                           76
After Images                                    76

```

#### Example 4

COUNT DETAIL

This produces something similar to the following:

On Windows or UNIX (file names will differ):

```

LogTrail /home/ggs/dir\rt000000 has 304 records
Total Data Bytes                                12120
  Avg Bytes/Record                              39
Delete                                           3
Insert                                           300
FieldComp                                       1
Before Images                                   3
After Images                                    301

```

Average of 303 Transactions

```

  Bytes/Trans ..... 88
  Records/Trans ... 1
  Files/Trans ..... 1

```

```

GGS.TCUSTMER                                Partition 4
Total Data Bytes                            12120
  Avg Bytes/Record                          39
Delete                                      3
Insert                                      300
FieldComp                                  1
Before Images                              3
After Images                               301

Files      1, Coll      0, Chain      0

```

### On NonStop:

LogTrail \GGQA.\$QA01.QADAT.LS000000 has 29656 records

```

Total Data Bytes                            3561022
  Avg Bytes/Record                          120
Delete                                      50
Insert                                      21221
Update                                      8379
GSSPurgedata                               6
Before Images                              50
After Images                               29606

```

### Average of 3621 Transactions

```

  Bytes/Trans ..... 1376
  Records/Trans ... 8
  Files/Trans ..... 1

```

```

\GGQA.$QA01.QAESRC.ACCTS                    Partition 0
Total Data Bytes                            286414
  Avg Bytes/Record                          142
Delete                                      17
Insert                                      2000
Before Images                              17
After Images                               2000

```

---

## CTIME

Use CTIME to convert a C timestamp to an ASCII timestamp.

### Default

None

### Syntax

```
CTIME C_timestamp_string
```

### Example

```
CTIME 1109823330
```

This returns the following:

```
timestamp = 1109823330 (0x42268f62)
localtime  = Wed Mar  2 20:15:30 2005
gmtime     = Thu Mar  3 04:15:30 2005
```

## DATAFILE

---

Use DATAFILE to open an Enscribe data file from within Logdump

---

---

**Note:** You can use the WRITEREC command to write a Oracle GoldenGate record to the Enscribe file.

---

---

### Default

None

### Syntax

DATAFILE *file*

### Example

DATAFILE \SYSA.\$DATA04.SALES.CUSTMER

## DECRYPT

---

Use **DECRYPT** to decrypt data that was encrypted with Oracle GoldenGate trail encryption, so that it can be viewed with Logdump.

### Default

OFF

### Syntax

```
DECRYPT {OFF | ON [KEYNAME key_name]}
```

#### **OFF**

No decryption. This is the default.

#### **ON [KEYNAME *key\_name*]**

- ON without the **KEYNAME** clause decrypts data that was encrypted with the **ENCRYPTTTRAIL** parameter without options (256-key byte substitution).
- ON with the **KEYNAME** clause decrypts data that was encrypted with **ENCRYPTTTRAIL** using an AES algorithm and a **KEYNAME** clause. For *key\_name*, supply the logical name of the encryption key that was used in the **KEYNAME *keyname*** clause of **ENCRYPTTTRAIL**.

For more information about **ENCRYPTTTRAIL**, see *Reference for Oracle GoldenGate for Windows and UNIX*.

### Example

```
DECRYPT ON
```

### Example

```
DECRYPT ON KEYNAME mykey
```

## DETAIL

Use **DETAIL** to include additional information in the Logdump output. By default, Logdump only shows the hex and ASCII representation of the record.

Without options, **DETAIL** displays the status of record detail (**ON** or **OFF**). Options do the following:

- **DETAIL ON** displays a list of columns that includes the column ID, length, and value in hex and ASCII.
- **DATA** adds hex and ASCII data values to the column list.
- **DETAIL OFF** turns off detailed display; **OFF** is the default.

**DETAIL** can be shortened to **DET**.

### Default

Display a column list

### Syntax

```
DETAIL {ON | OFF | DATA}
```

#### **ON**

Shows detailed column information.

#### **OFF**

Suppresses detailed column information.

#### **DATA**

Adds the hex and ASCII data values to the column information.

## DUMP

Use `DUMP` to display a HEX/ASCII or HEX/EBCDIC dump of the specified number of bytes from the open trail or extract file, starting at the current RBA.

`DUMP` does not work when reading TMF audit trails, because I/O to the TMF trails is done by `TMFARLIB`.

### Default

256

### Syntax

`DUMP bytes`

#### ***bytes***

The number of bytes forward to display. Valid values are from 1 through 28672.

### Example

`DUMP 300`

This produces something similar to the following example. Note: This example shows only a few lines of the record.

```
Dump   300  Bytes at RBA 0
4700 0047 4800 003B 4500 0041 0000 646D 02F1 3387 | G..GH..;E..A..dm...3.
841D FE98 0000 0000 0000 0000 5EA8 DC3C 0352 0000 | .....^...<.R..
0000 5C54 5249 4C4C 2E24 5141 3031 2E51 4153 5243 | ..\TRILL.$QA01.QASRC
2E41 4343 544E 005A 0000 4747 0000 4748 0000 3B45 | .ACCTN.Z..GG..GH..;E
```



# ENCRYPT

Use `ENCRYPT` to encrypt text supplied as an argument. The encryption method is 256-key byte substitution. The results are printed to screen.

## Default

None

## Syntax

`ENCRYPT text`

## Example

`ENCRYPT 123456789`

This produces the following:

```
Before
 3132 3334 3536 3738 39 | 123456789
After
EF2E C1DC E4A7 68B4 14 | .....h..
```

---

## ENV

Use ENV to show current Logdump settings.

### Default

None

### Syntax

ENV

### Example

The following shows typical ENV settings on Windows and on NonStop.

Windows (UNIX is similar except for file names):

```
Current Volume      : C:\GoldenGate 002
LogTrail            : C:\goldengate002\dir\dat\j0000001
Trail Format         : New
End of File         : 15861
Current Position    : 0
Next Position       : 0
Last Modtime        : 2013/01/01 13:45:51.000.000
Display RecLen      : 140
Logtrail Filter     : On
Show Ghdr           : On
Detail              : On
Trans History       : 0 Transactions, Records 100, Bytes 100000
LargeBlock I/O      : On, Blocksize 57344
Local System        : Little Endian
Logtrail Data       : Big Endian/ASCII
Logtrail Headers    : ASCII
Dump                : ASCII
Timeoffset          : LOCAL
Scan Notify Interval : 10000 records, Scrolling On
```

NonStop:

```
Current Volume      : $QU01.QAGGS
LogTrail            : \TRGGS.$QA01.QADAT.LS000000
Trail Format         : New
End of File         : 5831722
Current Position    : 0
Next Position       : 0
Last Modtime        : 2013/01/01 12:47:11.686.219
Display RecLen      : 140
Logtrail Filter     : On
Detail              : On
Trans History       : 0 Transactions, Records 100, Bytes 100000
LargeBlock I/O      : On, Blocksize 57344
Local System        : Big Endian
Logtrail Data       : Big Endian/ASCII
Logtrail Headers    : ASCII
Dump                : ASCII
Timeoffset          : LOCAL
Scan Notify Interval : 10000 records, Scrolling On
```

---

## ESBLOCK

Use ESBLOCK for debugging on a NonStop system. It displays an entry-sequenced syskey as a block number and record number.

### Default

None

### Syntax

```
ESBLOCK entry_sequenced_RBA
```

### Example

```
ESBLOCK 4294967302
```

This produces the following. It shows that the syskey value 4294967302 evaluates to block 1, record 6.

Interpreted	4294967302	0x000000001000000060	1.6
64-bit Syskey	4294967302	0x000000001000000060	
ES64_TO_RBA64	4102	0x000000000000010060	
RBA64_TO_ES64	4294967302	0x000000001000000060	

---

## EXIT

Use `EXIT` to exit Logdump and terminate the process. An alias for `EXIT` is `QUIT`.

### Default

None

### Syntax

`EXIT`

# FC

Use FC to edit a previously issued Logdump command and then execute it again. Previous commands are stored in the memory buffer and can be displayed by issuing the HISTORY command (see "HISTORY" on page 2-51). Issuing FC without arguments executes the most recently used command. By using options, you can retrieve a specific command by specifying its line number or a text substring.

## Using the Editor

The FC command displays the command and then opens an editor with a prompt containing a blank line starting with two dots. To edit a command, use the space bar to position the cursor beneath the character where you want the change to begin, and then enter one of the following arguments. Arguments are not case-sensitive and can be combined.

**Table 2–7 FC Command Options**

Argument	Description
i <i>text</i>	<p>Inserts text. For example:</p> <pre>Logdump 24&gt; fc 9 &gt; count ..    i detail count detail</pre>
r <i>text</i>	<p>Replaces text. For example:</p> <pre>Logdump 25&gt; fc 10 &gt; timeoffset local ..          rgmt timeoffset gmt</pre>
d	<p>Deletes a character. To delete multiple characters, enter a d for each one. For example:</p> <pre>Logdump 26&gt; fc 11 &gt; scanforrrbba ..          dd scanforrba</pre>
<i>replacement_text</i>	<p>Replaces the displayed command with the text that you enter on a one-for-one basis. For example:</p> <pre>Logdump 26&gt; fc 10 &gt; scanforrba 107 ..          127 scanforrba 127</pre>

To execute the command, press Enter twice, once to exit the editor and once to issue the command. To cancel an edit, type a forward slash (/) twice.

## Default

Execute the most recent command again

## Syntax

FC [*n* | *-n* | *string*]

***n***

Returns the specified command line. Each Logdump command line is sequenced, beginning with 1 at the start of the session.

***-n***

Returns the command that was issued *n* lines before the current line.

***string***

Returns the last command that starts with the specified text string.

## Examples

### Example 1

FC 9

### Example 2

FC -3

### Example 3

FC sca

## FILEHEADER

Use `FILEHEADER` to display the contents of the header of the currently open trail file.

The file header is stored as a record at the beginning of a trail file preceding the data records. The information that is stored in the trail header provides enough information about the records to enable an Oracle GoldenGate process to determine whether the records are in a format that the current version of Oracle GoldenGate supports.

The trail header fields are stored as tokens, where the token format remains the same across all versions of Oracle GoldenGate. If a version of Oracle GoldenGate does not support any given token, that token is ignored. Deprecated tokens are assigned a default value to preserve compatibility with previous versions of Oracle GoldenGate.

The current `FILEHEADER` command applies globally to the Logdump session, until a different `FILEHEADER` command is issued.

### To View the File Header

To view the file header:

1. Position to the beginning of the trail file with the following Logdump command.

```
pos 0
```

2. Issue the following Logdump command to see the first record of the file, the one that contains the file header.

```
next
```

### To Retrieve the File Header Tokens

To retrieve file header values as input parameters, use the `@GETENV` function with the `GGFILEHEADER` option. See *Reference for Oracle GoldenGate for Windows and UNIX*.

---

---

**Note:** The Logdump command `HEADERTOKEN` also shows trail tokens, but it shows a brief summary of each one. `FILEHEADER` shows actual token values.

---

---

**Table 2–8 Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
Signature	UINT32	Internal use.
Compatibility	UINT16	The version of the trail. The compatibility level of the Oracle GoldenGate software must be greater than, or equal to, that of the trail file for a process to be able to read the trail file. Current valid values are 0 or 1.
CharSet	INT32	The global character set of the trail file, as defined in the parameter file or the default value. For example: WCP1252-1 -3 indicates the system default.
CreationTime	Timestamp	The time that the trail file was created, in local GMT Julian time, INT 64.

**Table 2–8 (Cont.) Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
URI	String	<p>The universal resource identifier of the process that created the trail file, in the format of:</p> <p><i>host_name:dir[:dir][:dir_n]group_name</i></p> <p>Where:</p> <ul style="list-style-type: none"> <li>▪ <i>host_name</i> is the name of the server that hosts the process</li> <li>▪ <i>dir</i> is a subdirectory of the Oracle GoldenGate installation path.</li> <li>▪ <i>group_name</i> is the name of the process group that is linked with the process.</li> </ul> <p>Example:</p> <p>sys1:home:oracle:v9.5:extora</p> <p>Shows where the trail was processed and by which process. This includes a history of previous runs.</p>
URIHistory	String array	<p>List of the URIs of processes that wrote to the trail file before the current process.</p> <ul style="list-style-type: none"> <li>▪ For a primary Extract, this field is empty.</li> <li>▪ For a data pump, this field is URIHistory + URI of the input trail file.</li> </ul>
FileName	String	Name of the trail file. Can be absolute or relative path, with forward or backward slash depending on the file system.
MultiPart	Boolean	True/False flag indicating whether the trail file is a single file (such as one created for a batch run) or a sequentially numbered file that is part of a trail for online, continuous processing. If False, the SeqNum subtoken is not valid.
SeqNum	UINT32	The sequence number of the file in the trail, if MultiPart is true. Invalid if multipart is false. The value is the numerical sequence number, without any zero padding.
FileSize	UINT64	Size of the trail file. Value is NULL until the trail file is completed. Non-NULL values are in bytes.
FirstRecordCSN	CSN	The commit sequence number (CSN) of the first record in the trail file. Value is NULL until the trail file is completed.
LastRecordCSN	CSN	The commit sequence number (CSN) of the last record in the trail file. Value is NULL until the trail file is completed.
FirstRecordIOTime	Timestamp	The time that the first record in the trail file was written. Value is NULL until the trail file is completed.
LastRecordIOTime	Timestamp	The time that the last record in the trail file was written. Value is NULL until the trail file is completed.
SysName	String	<p>The name of the operating system, for example:</p> <p>SunOS</p> <p>Linux</p> <p>Microsoft Windows</p>
NodeName	String	The name of the machine, for example sys1.
Release	String	<p>The release level of the operating system, for example:</p> <p>5.10</p> <p>2.6.9-11.ELsmp</p>



**Table 2–8 (Cont.) Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
Version	String	The version of the operating system, for example: s10_69 #1 SMP Fri Feb 24 16:56:28 EST 2006
Hardware	String	The hardware type of the processor, for example: sun4u x86_64 x86
Vendor	UINT16	The name of the database vendor. Some (but not all) examples are: DB2 ZOS CTREE MSSQL MYSQL ORACLE SQLMX SYBASE TERADATA TIMESTEN NONSTOP ENSCRIBE
Name	String	The name of the database, for example findb.
Instance	String	The name of the database instance, if applicable to the database type, for example ORA1022A.
Charset	INT32	The character set of the database. Currently, the valid value is -1 (unknown). (For some databases, this will be empty.)
MajorVersion	UINT16	The major version of the database.
MinorVersion	UINT16	The minor version of the database.
VerString	String	The maintenance (patch) level of the database.
ClientCharset	INT32	The character set of the database client. Currently, the valid value is -1 (unknown). (For some databases, this will be empty.)
ClientVerString	String	The maintenance (patch) level of the database client. (For some databases, this will be empty.)
Name	String	The group name that is associated with the process.
DataSource	UINT16	The data source that was read by the process. Can be one of: <ul style="list-style-type: none"> <li>■ DS_EXTRACT_TRAILS (source was an Oracle GoldenGate extract file, populated with change data)</li> <li>■ DS_LOG_TABLE (source was an Oracle GoldenGate log table, used for trigger-based extraction)</li> <li>■ DS_DATABASE (source was a direct select from database table written to a trail, used for SOURCEISTABLE-driven initial load)</li> <li>■ DS_TRAN_LOGS (source was the database transaction log)</li> <li>■ DS_INITIAL_DATA_LOAD (source was Extract; data taken directly from source tables)</li> <li>■ DS_VAM_EXTRACT (source was a vendor access module)</li> <li>■ DS_VAM_TWO_PHASE_COMMIT (source was a VAM trail)</li> </ul>
MajorVersion	UINT16	The major version of the process (xx).

**Table 2–8 (Cont.) Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
MinorVersion	UINT16	The minor version of the process (xx.xx).
MaintenanceLevel	UINT16	The maintenance version of the process (xx.xx.xx).
PatchLevel	UINT16	The patch version of the process (xx.xx.xx.xx).
BuildNumber	UINT16	The build number of the process.
VerString	String	The version string of the process. For example: 11.1.1.17A not for production
RecoveryMode	UINT16	Internal use
LastCompletedCSN	CSN	Internal use
LastCompletedXids	Xid	Internal use
LastSCN	CSN	Internal use
LastXid	Xid	Internal use

## Default

OFF

## Syntax

FILEHEADER {ON | OFF | DETAIL}

### ON

Enables the display of the file header, showing the main header tokens.

### OFF

Disables the display of the file header.

### DETAIL

Provides detailed information that includes the sub-tokens.

## Examples

### Example 1

```
FILEHEADER ON
TokenID x46 'F' Record Header      Info x00 Length 587
TokenID x30 '0' TrailInfo           Info x00 Length 303
TokenID x31 '1' MachineInfo         Info x00 Length 103
TokenID x32 '2' DatabaseInfo        Info x00 Length 88
TokenID x33 '3' ProducerInfo        Info x00 Length 85
TokenID x34 '4' ContinuityInfo      Info x00 Length 4
TokenID x5a 'Z' Record Trailer      Info x00 Length 587
2011/1/18 13:39:18.951.346 FileHeader      Len 587 RBA 0
Name: *FileHeader*
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200 | 0../0...f..q1.....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400 | .....3.....x4...?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 | .7.1uri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 | ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e | Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3030 3700 0005 | /dirdat/er0000007...
```

```
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d | .8.....@9.....
```

```
GroupID x30 '0' TrailInfo      Info x00 Length 303
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200 | 0../0...f..q1....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400 | .....3.....x4...?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 | .7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 | ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e | Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3030 3700 0005 | /dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d | .8.....@9.....
a33b 0000 450a 3634 3136 3138 3936 3932 0000 0000 | .;.E.6416189692....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 3aff 0045 0000 0000 0000 | .....:..E.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 003d | .....=
0000 0c02 f178 34eb 556a 403c ff00 0c00 0000 0000 | .....x4.Uj@<.....
0000 00                                | ...
```

```
GroupID x31 '1' MachineInfo    Info x00 Length 103
3100 0067 3000 000b 0005 4c69 6e75 7831 0000 0f00 | 1..g0.....Linux1....
0974 656c 6c75 7269 616e 3200 0014 000e 322e 362e | .tellurian2....2.6.
392d 3131 2e45 4c73 6d70 3300 0029 0023 2331 2053 | 9-11.ELsmp3..).##1 S
4d50 2046 7269 204d 6179 2032 3020 3138 3a32 353a | MP Fri May 2018:25:
3330 2045 4454 2032 3030 3534 0000 0c00 0678 3836 | 30 EDT 20054.....x86
5f36 34                                | _64
```

```
GroupID x32 '2' DatabaseInfo   Info x00 Length 88
3200 0058 3000 0006 0007 3100 000e 0008 4f52 4131 | 2..X0.....1.....ORA1
3032 3241 3200 000e 0008 6f72 6131 3032 3261 3300 | 022A2.....ora1022a3.
0008 ffff ffff 3400 0006 0000 3500 0006 0000 3600 | .....4.....5.....6.
0006 0000 3700 0008 ffff ffff 3800 0010 000a 3130 | ....7.....8.....10
2e32 2e30 2e32 2e30                | .2.0.2.0
```

```
GroupID x33 '3' ProducerInfo   Info x00 Length 85
3300 0055 3000 000a 0004 4546 4152 3100 0006 0003 | 3..U0.....EFAR1.....
3200 0006 0000 3300 0006 0000 3400 0006 0000 3500 | 2.....3.....4.....5.
0006 0000 3600 0006 0017 3700 0023 001d 5665 7273 | ....6.....7..#..Vers
696f 6e20 5374 2e20 416e 6472 6577 7320 4275 696c | ion St. Andrews Buil
6420 3032 33                        | d 023
```

```
GroupID x34 '4' ContinunityInfo Info x00 Length 4
3400 0004                                | 4...
```

## Example 2

### FILEHEADER DETAIL

```
TokenID x46 'F' Record Header   Info x00 Length 587
TokenID x30 '0' TrailInfo       Info x00 Length 303
TokenID x31 '1' MachineInfo     Info x00 Length 103
TokenID x32 '2' DatabaseInfo     Info x00 Length 88
TokenID x33 '3' ProducerInfo     Info x00 Length 85
TokenID x34 '4' ContinunityInfo  Info x00 Length 4
TokenID x5a 'Z' Record Trailer   Info x00 Length 587
```

```
2011/01/18 13:40:26.034.631 FileHeader          Len 587 RBA 0
```

```
Name: *FileHeader*
```

```
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200 | 0../0...f..q1....2.
```

```

0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400 | .....3.....x4...?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 | .7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 | ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e | Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3030 3700 0005 | /dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d | .8.....@9.....

GroupID x30 '0' TrailInfo          Info x00 Length 303
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200 | 0../0...f..q1.....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400 | .....3.....x4...?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 | .7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 | ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e | Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3030 3700 0005 | /dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d | .8.....@9.....
a33b 0000 450a 363a 3136 3138 3936 3932 0000 0000 | .;.E.6416189692....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 3aff 0045 0000 0000 0000 | .....:..E.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 003d | .....=
0000 0c02 f178 34eb 556a 403c ff00 0c00 0000 0000 | .....x4.Uj@<.....
0000 00 | ...
TokenID x30 '0' Signature          Info x00 Length 8
660d 0a71 | f..q
TokenID x31 '1' Compatibility      Info x00 Length 6
0001 | ..
TokenID x32 '2' Charset            Info x00 Length 8
0000 0016 | ....
TokenID x33 '3' CreationTime       Info x00 Length 12
02f1 7834 eac7 7f3f | ..x4...?
TokenID x34 '4' URI                Info x00 Length 55
0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 6f6d | .luri:tellurian::hom
653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 4f72 | e:mccargar:ggs:ggsOr
6163 6c65 3a73 6f75 7263 65 | acle:source
TokenID x36 '6' Filename           Info x00 Length 23
0011 2e2f 6469 7264 6174 2f65 7230 3030 3030 30 | .../dirdat/er000000
TokenID x37 '7' MultiPart          Info x00 Length 5
01 | .
TokenID x38 '8' Seqno              Info x00 Length 8
0001 e240 | ...@
TokenID x39 '9' FileSize           Info x00 Length 12
0000 0000 0000 1da3 | .....
TokenID x3b ';' LastCSN            Info x00 Length 69
0a36 3431 3631 3839 3639 3200 0000 0000 0000 0000 | .6416189692.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 00 | .....
TokenID x3a ':' FirstCSN           Info xff Length 69
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 00 | .....
TokenID x3d '=' LastIOTime         Info x00 Length 12
02f1 7834 eb55 6a40 | ..x4.Uj@
TokenID x3c '<' FirstIOTime        Info xff Length 12
0000 0000 0000 0000 | .....

GroupID x31 '1' MachineInfo       Info x00 Length 103

```

```

3100 0067 3000 000b 0005 4c69 6e75 7831 0000 0f00 | 1..g0.....Linux1....
0974 656c 6c75 7269 616e 3200 0014 000e 322e 362e | .tellurian2.....2.6.
392d 3131 2e45 4c73 6d70 3300 0029 0023 2331 2053 | 9-11.ELsmp3..).##1 S
4d50 2046 7269 204d 6179 2032 3020 3138 3a32 353a | MP Fri May 20 18:25:
3330 2045 4454 2032 3030 3534 0000 0c00 0678 3836 | 30 EDT 20054.....x86
5f36 34 | _64
TokenID x30 '0' Sysname Info x00 Length 11
0005 4c69 6e75 78 | ..Linux
TokenID x31 '1' Nodename Info x00 Length 15
0009 7465 6c6c 7572 6961 6e | ..tellurian
TokenID x32 '2' Release Info x00 Length 20
000e 322e 362e 392d 3131 2e45 4c73 6d70 | ..2.6.9-11.ELsmp
TokenID x33 '3' Version Info x00 Length 41
0023 2331 2053 4d50 2046 7269 204d 6179 2032 3020 | .##1 SMP Fri May 20
3138 3a32 353a 3330 2045 4454 2032 3030 35 | 18:25:30 EDT 2005
TokenID x34 '4' Hardware Info x00 Length 12
0006 7838 365f 3634 | ..x86_64

GroupID x32 '2' DatabaseInfo Info x00 Length 88
3200 0058 3000 0006 0007 3100 000e 0008 4f52 4131 | 2..X0.....1.....ORA1
3032 3241 3200 000e 0008 6f72 6131 3032 3261 3300 | 022A2.....ora1022a3.
0008 ffff ffff 3400 0006 0000 3500 0006 0000 3600 | .....4.....5.....6.
0006 0000 3700 0008 ffff ffff 3800 0010 000a 3130 | ....7.....8.....10
2e32 2e30 2e32 2e30 | .2.0.2.0
TokenID x30 '0' Vendor Info x00 Length 6
0007 | ..
TokenID x31 '1' Name Info x00 Length 14
0008 4f52 4131 3032 3241 | ..ORA1022A
TokenID x32 '2' Instance Info x00 Length 14
0008 6f72 6131 3032 3261 | ..ora1022a
TokenID x33 '3' Charset Info x00 Length 8
ffff ffff | ....
TokenID x34 '4' MajorVersion Info x00 Length 6
0000 | ..
TokenID x35 '5' MinorVersion Info x00 Length 6
0000 | ..
TokenID x36 '6' VerString Info x00 Length 6
0000 | ..
TokenID x37 '7' ClientCharset Info x00 Length 8
ffff ffff | ....
TokenID x38 '8' ClientVerString Info x00 Length 16
000a 3130 2e32 2e30 2e32 2e30 | ..10.2.0.2.0

GroupID x33 '3' ProducerInfo Info x00 Length 85
3300 0055 3000 000a 0004 4546 4152 3100 0006 0003 | 3..U0.....EFAR1.....
3200 0006 0000 3300 0006 0000 3400 0006 0000 3500 | 2.....3.....4.....5.
0006 0000 3600 0006 0017 3700 0023 001d 5665 7273 | ....6.....7..#..Vers
696f 6e20 5374 2e20 416e 6472 6577 7320 4275 696c | ion St. Andrews Buil
6420 3032 33 | d 023
TokenID x30 '0' Name Info x00 Length 10
0004 4546 4152 | ..EFAR
TokenID x31 '1' DataSource Info x00 Length 6
0003 | ..
TokenID x32 '2' MajorVersion Info x00 Length 6
0000 | ..
TokenID x33 '3' MinorVersion Info x00 Length 6
0000 | ..
TokenID x34 '4' MaintLevel Info x00 Length 6
0000 | ..
TokenID x35 '5' BugFixLevel Info x00 Length 6

```

## FILEHEADER

0000					..
TokenID x36 '6' BuildNumber	Info x00	Length	6		
0017					..
TokenID x37 '7' VerString	Info x00	Length	35		
001d 5665 7273 696f 6e20 5374 2e20 416e 6472 6577					..Version St.Andrew
7320 4275 696c 6420 3032 33					s Build 023
GroupID x34 '4' ContinuityInfo	Info x00	Length	4		
3400 0004					4...

## FILES

Use `FILES` to display summary file information for files on the local system. The default command displays all files in the current directory or subvolume. To constrain the display to specific files, you can supply a wildcarded name.

This command can be shortened to `FL`. An alias for this command is `DIR` or `FILEINFO`.

### Default

Show all files in current directory or subvolume

### Syntax

```
FILES [directory | subvolume | volume.subvolume]
```

***directory* | *subvolume* | *volume.subvolume***

The name of a directory or subvolume or a wildcard for specific files.

If any file or directory in the specified path contains spaces, the entire path must be enclosed within double quotation marks.

### Example

```
FILES "c:\goldengate ver802\dir\cc*"
```

### Example

```
FILES $QAGG.QA01.*
```

## FILTER

Use `FILTER` to filter the display based on one or more criteria.

- You can string multiple `FILTER` commands together, separating each one with a semi-colon, as in:

```
FILTER INCLUDE FILENAME fin.act*; FILTER RECTYPE 5; FILTER MATCH ALL
```

Or...

```
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCTN; FILTER SYSKEY 4294967302; FILTER  
MATCH ALL
```

- To avoid unexpected results, avoid stringing filter options together with one `FILTER` command. For example, the following would be *incorrect*:

```
FILTER INCLUDE FILENAME fin.act*; RECTYPE 5; MATCH ALL
```

Or...

```
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCTN; SYSKEY 4294967302
```

Without arguments, `FILTER` displays the current filter status (ON or OFF) and any filter criteria that are in effect.

## Comparison Operators

For options that take comparison operators, the following standard operators may be used. The absence of an operator implies `Equal`.

**Table 2–9 Filter Option Comparison Operators**

Operator	Example
Equal	=
	EQ
	==
Less than	<
	LT
Less than or equal	<=
	LE
Greater than	>
	GT
Greater than or equal	>=
	GE
Not equal	<>
	NE
	!=

## Default

Shows current filter settings

## Syntax

```
FILTER [INCLUDE] [EXCLUDE] filter_option
```



Where:

*filter\_option* can be one of:

```
{
ANSINAME name [, name] |
AUDITRBA rba [comparison_operator] |
CLEAR {filter_spec | ALL} |
CSN | LogCSN [comparison_operator] [value]
ENDTIME time_string |
FILENAME name [, name] |
GGSTOKEN token_name [comparison_operator] [token_value] |
HEX "hex_string" [byte_range][, "hex_string" [byte_range]] [...] |
INT16 16_bit_integer |
INT32 32_bit_integer |
IOTYPE operation_type [, operation_type] |
MATCH {ANY | ALL} |
OFF |
ON |
PROCESS process_name |
RBA byte_address [comparison_operator] [...] |
RECLen length [comparison_operator] |
RECTYPE {type_number | type_name} |
SHOW |
STARTTIME time_string |
STRING [BOTH] [B],text [column_range]
      [[B],text [column_range]] [...] |
SYSKEY system_key [comparison_operator] [...] |
TRANSID transaction_identifier |
TRANSIND indicator [comparison_operator] |
TYPE type |
UNDOFLAG type [comparison_operator] |
USERTOKEN token_name [comparison_operator] [token_value]
}
```

#### **ANSINAME name [, name]**

Filters based on the ANSI name of a SQL/MX table or a table from a Windows or UNIX source system. For use on NonStop systems. The format for *name* is:

*catalog.schema.table*

Up to eight name specifications may be supplied. The command is case-sensitive.

To filter based on the name of a data file, use the FILENAME option.

#### **AUDITRBA rba [comparison\_operator]**

Filters based on the relative byte address of a commit record. For *comparison\_operator*, see ["Comparison Operators"](#) on page 2-38.

#### **CLEAR {filter\_spec | ALL}**

Removes filtering criteria.

- ALL removes all filter criteria.
- *filter\_spec* removes only the specified criterion. Specify any FILTER option, but not the value. The following example is valid:

```
FILTER CLEAR STRING
```

The following example is not valid:

```
FILTER CLEAR STRING "Denver"
```

An alias for CLEAR is RESET.

**CSN | LogCSN** [*comparison\_operator*] [*value*]

Filters based on a commit sequence value.

For *comparison\_operator*, see ["Comparison Operators"](#) on page 2-38.

**ENDTIME** *time\_string*

Ends the filter at the last record written at the specified time. For the time string, use the format of:

```
[[yy]yy-mm-dd] [hh[:mm][:ss]]
```

Example:

```
ENDTIME 2011-01-31 23:59:59
```

This command can be shortened to **ENDTS** or **END**.

**FILENAME** *name* [, *name*]

Filters based on the name of a SQL table, or a group of names, with the name format being:

```
[catalog.]owner.table  
[catalog.]owner.string*
```

Also filters on the name of a NonStop data file, or a group of names, with the name format being:

```
volume.subvolume.file  
volume.subvolume.string*
```

On Windows and UNIX, both types of objects are supported. On NonStop, only viewing NonStop files is supported. To view SQL tables on NonStop, use the **ANSINAME** option.

**FILENAME** is case-sensitive on Windows and UNIX systems. If the database requires quote marks around a name If opening a NonStop data file on Windows or UNIX, the file name is converted to upper case. **FILENAME** can be shortened to **FILE** or **FI**.

Up to eight name specifications may be supplied.

**GGSTOKEN** *token\_name* [*comparison\_operator*] [*token\_value*]

Filters based on a specific Oracle GoldenGate token in the record header.

- For *token\_name*, provide the name of the token, such as **TRANSID**.
- For *token\_value* provide the actual value for this token that is to be the filter string.

For *comparison\_operator*, see ["Comparison Operators"](#) on page 2-38

**HEX** "*hex\_string*" [*byte\_range*] [, "*hex\_string*" [*byte\_range*]] [...]

Filters based on a hex string and, optionally, a range of columns. To specify a range of columns, use the format of:

```
start_column:end_column
```

Example:

```
10:35
```

This option allows up to eight hex string and column arguments. Hex strings must be enclosed within quotes.

Hex filter strings must be in double quotes.

#### **INCLUDE**

Specifies that the filter will include the information specified with other options in the current `FILTER` statement. Can be shortened to `INC`.

#### **EXCLUDE**

Specifies that the filter will exclude the information specified with other options in the current `FILTER` statement. Can be shortened to `EXC`.

#### **INT16 16\_bit\_integer**

Filters based on a 16-bit integer. Use with 16-bit processors.

#### **INT32 32\_bit\_integer**

Filters based on a 32-bit integer. Use with 32-bit processors.

#### **IOTYPE operation\_type [, operation\_type]**

Filters based on the type of operation. A list of record types can be viewed with the `SHOW RECTYPE` command in Logdump. Up to 32 operation types can be specified with `IOTYPE`.

#### **MATCH {ANY | ALL}**

Controls filtering response when multiple filters have been specified. Can be shortened to `MAT` or `MA`.

- `ANY` includes a record for display or counts if the condition matches any of the filter conditions. This is the default.
- `ALL` includes a record for display or counts only if the condition matches all of the filter conditions.

#### **OFF**

Disables record filtering. By default, filtering is disabled. An alias for this option is `DISABLE`.

#### **ON**

Enables record filtering. An alias for this option is `ENABLE`.

#### **RBA byte\_address [comparison\_operator] [...]**

Filters based on a relative byte address. Accepts either a 32-bit or 64-bit value. Up to 32 specifications can be supplied.

#### **RECLen length [comparison\_operator]**

Filters based on a record length, in bytes. For *comparison\_operator*, see "[Comparison Operators](#)" on page 2-38.

#### **RECTYPE {type\_number | type\_name}**

Filters based on the type of record. Can be either of the following:

- The number assigned to the record type.

```
FILTER RECTYPE 10
```

- The name of the record type.

```
FILTER RECTYPE Update
```

To view the record type names and numbers, issue the `SHOW RECTYPE` command. (See ["SHOW"](#) on page 2-70.)

**SHOW**

Displays filter settings. Same as using `FILTER` without any options.

**STARTTIME *time\_string***

Starts the filter with the first record written at the specified time. For the time string, use the format of:

```
[[yy]yy-mm-dd] [hh[:mm][:ss]]
```

Example:

```
STARTTIME 2011-01-01 00:00:00
```

Can be shortened to `STARTTS` or `START`.

**STRING [BOTH] [B], "text" [column\_range] [[B], text [column\_range]] [...]**

- *text* filters based on a string. Enclose the string within double quotes.

- *column\_range* filters based on a range of columns. Use the format of:

```
start_column:end_column
```

Example:

```
10:35
```

- `BOTH` filters on both a string and a column range.
- `[B]` specifies a case-insensitive match. You can match up to eight string and column arguments.

If the trail data is EBCDIC, issue the `EBCDICDATA ON` or `ASCIIIDATA OFF` command before using `FILTER STRING` to ensure the correct matching.

`STRING` can be shortened to `STR`.

**SYSKEY *system\_key* [comparison\_operator] [...]**

Filters based on a NonStop source key. Accepts either a 32-bit or 64-bit value. Up to 32 specifications can be supplied.

**TRANSIND *indicator* [comparison\_operator]**

Filters based on the TransInd field of the record header. Valid values:

0 = start of transaction

1 = middle of transaction

2 = end of transaction

3 = only record in transaction

For example, to filter for the end of a transaction, use the following command, including the spaces in the syntax:

```
FILTER INCLUDE TransInd > = 2
```

For *comparison\_operator*, see ["Comparison Operators"](#) on page 2-38

**TRANSID '*transaction\_identifier*'**

Filters on the TMF transaction identifier when reading a TMF trail, for example:

```
FILTER INCLUDE TRANSID \GGQA(2).0.12792182.
```

**UNDOFLAG type [comparison\_operator]**

Filters based on the NonStop undo flag. The undo flag is set for records that are undone when a TMF transaction is aborted. Normally, UndoFlag is set to zero, but if the record is the backout of a previously successful operation, then UndoFlag will be set to 1. An undo that is performed by the disc process because of a constraint violation is not marked as an undo.

For *comparison\_operator*, see "[Comparison Operators](#)" on page 2-38

**USERTOKEN token\_name [comparison\_operator] [token\_value]**

Filters based on a specific user token in the trail file header.

- *token\_name* is the name of any token that is defined with the TOKENS clause of a TABLE statement of the Extract parameter file. It is not case-sensitive.
- *token\_value* is either a constant that is enclosed within double quotes or the result of an Oracle GoldenGate column-conversion function, depending on what was specified in the TOKENS clause for *token\_name*.
- For *comparison\_operator*, see "[Comparison Operators](#)" on page 2-38

The following shows filter options modified by comparison operators.

```
FILTER INCLUDE RECLen > 400
FILTER INCLUDE RECLen < 200
FILTER INCLUDE TRANSIND <> 1
FILTER INCLUDE SYSKEY > 202172700557313
```

The following filters for a data file name and for a relative key 19446, which has a hex value of 00004bf6. Because MATCH ALL is used, a record must meet all of the filter specifications to be included in the filter.

```
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCT*
FILTER INCLUDE HEX "00004bf6" 0:3
FILTER MATCH ALL
```

The following filters for tables that start with ACC except for the ACCDET table, and for records that contain a timestamp between the specified start and stop times. By default, if a record matches any of the INCLUDE specifications, it is included in the filter.

```
FILTER INCLUDE FILENAME SALES.ACC*
FILTER EXCLUDE FILENAME SALES.ACCDET
FILTER INCLUDE STARTTIME 2011-01-11 17:00:00
FILTER INCLUDE ENDTIME 2011-01-11 19:00:00
```

The following shows filter options with multiple specifications. By default, a record that matches any of these specifications will be included in the filter. Note that in the STRING filter, two of the criteria are not case-sensitive, while one is, and the filter is confined to a column range.

```
FILTER INCLUDE IOTYPE insert,update,delete
FILTER INCLUDE STRING b"String1" "string2" b"String3" 25:50
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCT1, $QA01.QAESRC.ACCT2, $QA01.QAESRC.ACCT3
```

## FLOAT

Use `FLOAT` to display a number or hex string in both its hex representation and as a floating-point number. This command is useful when looking for a specific floating-point number and you need the hex representation of that number. This command does not require a trail file to be opened.

The output of this command is *hex\_value float\_string*.

`FLOAT` assumes the floating point representation is the default for the current platform. It will not make a conversion between a Tandem floating point number (which is not IEEE-754) and a IEEE-754 floating point number, which is supported on UNIX and Windows systems.

### Default

None

### Syntax

`FLOAT input_string [format]`

#### ***input\_string***

Can be one of the following:

- A valid floating point number as a string in the format of the following: an optional sign character (+ or -), followed by a sequence of decimal digits, which can contain a decimal-point followed by an exponent (an e or E character, followed by an optional sign and a sequence of digits).
- A valid hexadecimal number as a string formed by the following: 0x, %H, %h, X, x, H or h, followed by a sequence of hexadecimal digits (1-9, a-f).

#### ***format***

Can be one of the following:

- One of the following to specify the output format sizing: IEEE, TDM, TANDEM, NSK, 64bit, 64-bit, F64, 32bit, 32-bit or F32.
- A format specifier formed by the string `FMT` followed by any valid C99 Print Format specifier (for example, %lx, %e, %g).

### Example

The following examples are different results that can be obtained for the same values 2.1 and 2.2.

```
Logdump 58 >float 2.1
4000cccccccccccd 2.100000
Logdump 59 >float 2.2
400199999999999a 2.200000
Logdump 60 >float 0x4000cccccccccccd
4000cccccccccccd 2.100000
Logdump 61 >float 0x400199999999999a
400199999999999a 2.200000
Logdump 62 >float %H400199999999999a
400199999999999a 2.200000
Logdump 63 >float 2.2 FMT %e
400199999999999a 2.200000e+00
```

```
Logdump 64 > float 2.2 FMT %g
4001999999999999a 2.2
Logdump 65 >float 0x4000ccccccccccd FMT %g
4000ccccccccccd 2.1
Logdump 66 >float 2.2e+01
4036000000000000 22.000000
Logdump 67 >float 2.2e-05
3ef711947cfa26a2 0.000022
```

## GGSTOKEN

---

Valid for Oracle.

Use GGSTOKEN to control whether or not Oracle GoldenGate automatically generated token data is displayed with each record. It applies to the automatically generated tokens like the transaction id, row id, fetching status and tag value. These values are stored in the record header and can be mapped to a target column or used for some other purpose during Oracle GoldenGate processing.

Without arguments, GGSTOKEN displays the status of user token display (ON or OFF). With the ON option, the name of the token and its length are displayed. The DETAIL option shows the actual token data.

### Default

Display token name and length.

### Syntax

```
GGSTOKEN {ON | OFF | DETAIL}
```

#### ON

Enables the display of automatically generated tokens.

#### OFF

Disables the display of automatically generated tokens.

#### DETAIL

Displays the automatically generated tokens including the transaction ID (XID), the row id for DML operations, the fetching status (if applicable), and tag value.token data.



## GHDR

Use GHDR to control whether or not the record header is displayed with each record. Each record contains a header that includes information about the transaction environment. Without arguments, GHDR displays the status of header display (ON or OFF).

### Default

OFF

### Syntax

GHDR {ON | OFF}

---

## HEADERTOKEN

Use `HEADERTOKEN` to control whether or not header token indicators are displayed with each record. The header token indicators are the following:

G — record header (begin of record)

H — header area

D — data area

T — Oracle GoldenGate internal token

U — user token area (does not display if user tokens are not in use)

Z — end of record

Without arguments, `HEADERTOKEN` displays the status of header token indicators (ON or OFF).

### Default

OFF

### Syntax

```
HEADERTOKEN {ON | OFF | DETAIL}
```

#### ON

Enables the display of header tokens.

#### OFF

Disables the display of header tokens.

#### DETAIL

Provides detailed token values.

### Examples

#### Example 1

`HEADERTOKEN, without DETAIL`

```
TokenID G, Info 0, Length 117
TokenID H, Info 0, Length 45
TokenID D, Info 0, Length 28
TokenID T, Info 0, Length 24
TokenID Z, Info 0, Length 117
```

#### Example 2

`HEADERTOKEN with DETAIL`

```
TokenID G, Info 0, Length 146
TokenID H, Info 0, Length 42
    4504 0041 3C00 05FF 402F AE6C 572A F102 F818 8F02 : E..A<...@/.1W*.....
    0000 0000 1000 0000 0152 0000 0001 4852 2E4A 4F42 : .....R....FR.JOB
    5300
TokenID D, Info 0, Length 60
TokenID T, Info 0, Length 24
```

TokenID Z, Info 0, Length 146

---

## HELP

Use `HELP` to view the syntax of Logdump commands.

### Default

None

### Syntax

`HELP`

## HISTORY

Use `HISTORY` to view the most recently issued Logdump commands since the session started, or to reset the command count starting at line 1 again. `HISTORY` can be shortened to `HIST`.

---

---

**Note:** You can use the `FC` command to re-execute a command in the list. See "[FC](#)" on page 2-27

---

---

### Default

Display recent commands

### Syntax

```
HISTORY [n] [CLEAR]
```

#### ***n***

Returns the specified number of previously issued commands, where *n* is any positive number.

#### **CLEAR**

Deletes the command history buffer and reverts the command line to 1.

### Example

```
HISTORY 3
```

The results of this command would be similar to:

```
1: ghdr on
2: detail on
3: scanforheader
```

---

## INTERPRETINTERVAL

Use `INTERPRETINTERVAL` to display a 64-bit Julian time interval in the format of *days-hh:mm:ss.ms.us*.

### Default

None

### Syntax

```
INTERPRETINTERVAL interval_string
```

***interval\_string***

A string representing the interval to be converted.

### Example

```
INTERPRETINTERVAL 1234567
```

This produces the following result:

```
Interval 1234567 is 0-00:00:01.234.567
```

---

## INTERPRETTIMESTAMP

Use INTERPRETTIMESTAMP to display a 64-bit Julian timestamp as an ASCII value.

### Default

None

### Syntax

```
INTERPRETTIMESTAMP timestamp
```

***timestamp***

A JULIANTIMESTAMP value.

### Example

```
INTERPRETTIMESTAMP 211976584185800569
```

This produces the following result:

```
2005/03/03 04:29:45.800.569 GMT
2005/03/02 20:29:45.800.569 LCT
```

---

## LOG

Use LOG to start and stop the logging of Logdump sessions. When enabled, logging remains in effect for all sessions of Logdump until disabled with the LOG STOP command. Without arguments, LOG displays the status of logging (ON or OFF). An alias for LOG is OUT.

### Default

Disabled

### Syntax

```
LOG {file_name | STOP}
```

#### ***file\_name***

Specifies the name of the log file. Specify a full path name to store the file in a directory other than the current working directory.

#### **STOP**

Stops logging.

### Example

```
LOG /home/ggs/dirrpt/logdumpout.txt
```

### Example

```
LOG $data01.glogggl.sesslog
```



---

## NEXT

Use `NEXT` to display the next record or records in the file. The default displays only the next record. `NEXT` can be shortened to `N`. An alias for `NEXT` is `RECORD`.

### Default

Display the next 1 record

### Syntax

```
NEXT [n]
```

***n***

Displays the specified number of subsequent records.

### Example

```
NEXT 10
```

---

## NEXTTRAIL

Use `NEXTTRAIL` to close an open trail file and open the next one in the sequence. An alias for `NEXTTRAIL` is `NT`.

### Default

None

### Syntax

`NEXTTRAIL`

---

## NOTIFY

Use `NOTIFY` to display the number of records scanned, the trail position, and the record timestamp at specified intervals when using `COUNT` and records are being suppressed from display through filtering options. An alias for `NOTIFY` is `NOTIFYINTERVAL`.

Instead of displaying each notify interval on a separate line, you can configure Logdump to simply update a single line with each new scan result. See ["SCANSROLLING"](#) on page 2-69.

### Default

None

### Syntax

```
NOTIFY interval
```

#### ***interval***

The notification interval expressed as a number of records.

### Example

The following shows the usage and result of this command.

```
Logdump 26> NOTIFY 1000
Logdump 27> FILTER INCLUDE FILE sales.res*
Logdump 28> COUNT
Scanned 1000 records, RBA 160380,2011/02/01 08:53:47.768.255
Scanned 2000 records, RBA 729961,2011/02/01 08:56:09.916.128
Scanned 3000 records, RBA 2032683,2011/02/01 08:56:09.916.128
Scanned 4000 records, RBA 3244585,2011/02/01 08:56:09.916.128
Scanned 5000 records, RBA 4568766,2011/02/01 08:56:09.916.128
```

## OBEY

---

Use OBEY to process a file that contains a list of Logdump commands. OBEY is useful for executing commands that are frequently used in sequence.

OBEY can be shortened to O. An alias for OBEY is SOURCE.

### Default

None

### Syntax

```
OBEY file_name
```

***file\_name***

The fully qualified name of the file containing the list of commands.

### Example

This is a UNIX example.

```
OBEY ./ldcommands.txt
```

### Example

This is a NonStop example.

```
OBEY $DATA01.GGSPARM.OBEY1
```

The preceding command executes a file that might look something like this:

```
ghdr on
usertoken on
detail
filter enable
filter clear
filter match all
```

## OPEN

Use **OPEN** to open a trail file or extract file in Logdump. Without arguments, the command displays the name of the file that is currently open. Aliases for **OPEN** are **FROM** and **LOGTRAIL**.

### Default

None

### Syntax

```
OPEN file_name
```

#### ***file\_name***

The fully qualified path name of the trail file or extract file to be opened. To specify a trail file, specify the trail name (a two-character prefix) and the sequence number, for example `jd000000`.

### Example

This is a UNIX example.

```
OPEN /home/ggs/dirdat/jd000000
```

### Example

This is a NonStop example.

```
OPEN $data01.glogg1.aa000000
```

---

## POSITION

Use `POSITION` to set the read position in the file. The position of a record in the file is noted in the record header in the `AuditPos` field.

Without options, `POSITION` displays the current read position. Options let you specify an exact position. After you set the position, issue the `NEXT` command to view the record at that position.

`POSITION` can be shortened to `POS`.

### Default

None

### Syntax

```
POSITION [bytes | {0 | FIRST}]
```

#### ***bytes***

Specifies the number of bytes into the file at which to read. Use the `NEXT` command to view the specified record.

#### **0 | FIRST**

Positions Logdump at the beginning of the file.

### Syntax

```
POS 77580548
```

## RECLen

Use RECLen to control how much of the record data is displayed. You can use RECLen to control the amount of scrolling that must be done when records are large, while still showing enough data to evaluate the record. Data beyond the specified length is truncated.

### Default

140 bytes

### Syntax

```
RECLen n
```

***n***

The number of bytes of the record that is displayed.

### Example

```
RECLen 280
```

---

## SAVE

Use **SAVE** to write a subset of the records to a new trail or extract file. By saving a subset to a new file, you can work with a smaller file that is easier to debug. Saving to another file also enables you to extract valid records that can be processed by Oracle GoldenGate, while excluding records that may be causing errors.

To set the version of the trail or file (to old or new format), use the **TRAILFORMAT** command.

### Default

None

### Syntax

```
SAVE file_name [!] {n records | n bytes}  
[NOCOMMENT]  
[OLDFORMAT | NEWFORMAT]  
[TRANSIND indicator]  
[TRUNCATE]
```

#### ***file\_name***

The name of the new file. To specify a trail file, specify the two-character trail name and a sequence number, for example `rt000001`.

**!**

Overwrites the specified file, if the same file already exists. First a purge is done, and then the specified records are saved to the file.

#### ***n* records | *n* bytes**

Specifies either a number of records or a number of data bytes to write to the new file. The *n* number of records or bytes are taken forward from the current position in the file. You can change the position with the **POSITION** command. See ["POSITION"](#) on page 2-60.

#### **EXT ( *pri*, *sec* [, *max*] )**

Specifies savefile extent sizes. This option is valid on NonStop only.

#### **MEGABYTES *n***

Specifies the size of a savefile extent. This option is valid on NonStop only.

#### **NOCOMMENT**

Suppresses the leading and trailing comment records that are placed by default in the new file. These records describe the context of the file. The begin comment record contains source trail information and the position where the save started. The end comment record identifies the end of the saved data. These headers are useful to separate different sets of records that are saved to the same file, but can be omitted.

#### **OLDFORMAT | NEWFORMAT**

Writes the data in either the current trail format (**NEWFORMAT**, the default) or the format that was used for Oracle GoldenGate versions 6.0 and earlier (**OLDFORMAT**).

#### **TRANSIND *indicator***

Sets the `TransInd` header field in the records written to one of the following:



FIRST  
MIDDLE  
END  
ONLY

This allows you to reorder records in a transaction. `TRANSIND` applies to all records written by a `SAVE` command.

**TRUNCATE**

Purges an existing file before saving new information to it.

**Example**

```
SAVE /home/ggs/dirdat/rt000001 10 records nocomment
```

**Example**

```
SAVE $data01.gloggl.ss000000 100 records
```

---

## SCANFORENDTRANS

Use `SCANFORENDTRANS` to scan for a record that has a transaction indicator of 2 or 3, as shown in the `TransInd` field of the header. When one of those indicators is found, Logdump displays the first record of the next transaction.

The indicators represent the following:

- 2 — last record in the transaction
- 3 — only record in the transaction

`SCANFORENDTRANS` can be shortened to `SFET`.

### Default

None

### Syntax

`SCANFORENDTRANS`

---

## SCANFORHEADER

Use SCANFORHEADER to go to the next record header. Before using this command, use the GHDR ON command to show record headers (see "[GHDR](#)" on page 2-47). SCANFORHEADER can be shortened to SFH.

### Default

None

### Syntax

```
SCANFORHEADER [PREV]
```

#### **PREV**

Displays the previous record header.

## SCANFORRBA

---

Use SCANFORRBA to scan for the record at a relative byte address specified by the AuditRBA field of the record header. Before using this command, use the GHDR command to show record headers (see "GHDR" on page 2-47). SCANFORRBA can be shortened to SFR.

### Default

None

### Syntax

```
SCANFORRBA relative_byte_address [file_name]
```

***relative\_byte\_address***

Specifies the relative byte address to find.

***file\_name***

Constrains the search to an Enscribe or SQL data file. A file name is required even if you are searching a file that is open in Logdump.

### Example

```
SCANFORRBA 321 /home/ggs/dirdat/rt000000
```

### Example

```
SCANFORRBA 321 $data01.gloggg1.rt000000
```

## SCANFORTIME

Use SCANFORTIME to scan for a record that contains a specific timestamp. The timestamp is contained in the IO Time field of the record header. Before using this command, use the GHDR command to show record headers (see ["GHDR"](#) on page 2-47). SCANFORTIME can be shortened to SFTS.

### Default

None

### Syntax

```
SCANFORTIME time_string [, name]
```

#### ***time\_string***

Scans for a specific timestamp. For the time string, use the format of:

```
[yy]yy-mm-dd [ hh[:mm][:ss]
```

#### ***name***

Constrains the search to a specific table or data file name, or a group of names specified with a wildcard.

### Example

```
SCANFORTIME 2011-01-27 14:33:57
```

---

## SCANFORTYPE

Use SCANFORTYPE to scan for the next record of the specified type. SCANFORTYPE can be shortened to SFT.

### Default

None

### Syntax

```
SCANFORTYPE {type_name | type_number}
```

***type\_name* | *type\_number***

Specifies the type of record to search for, either by type name or type number. To view a list of record types and their associated numbers, use the SHOW RECTYPE command (see "[SHOW](#)" on page 2-70).

### Example

Both of the following commands return the same result: They display commit records.

```
SCANFORTYPE Commit  
SFT 2
```

## SCANSCROLLING

---

Use `SCANSCROLLING` to configure Logdump to update a single line after `COUNT` scans when `NOTIFY` is enabled. Otherwise, each scan notification appears on a different line. See "[NOTIFY](#)" on page 2-57 for more information.

### Default

OFF

### Syntax

```
SCANSCROLLING {ON | OFF}
```

#### **ON**

Enables the use of a single line for count notification results.

#### **OFF**

Disables the use of a single line, causing a separate line to be used for each notification.

---

## SHOW

Use `SHOW` to display internal Logdump information, including files that are open if the system is NonStop, the current Logdump environment, a list of Oracle GoldenGate record types, and current filter settings. `SHOW` can be shortened to `SH` or `SHO`.

### Default

None

### Syntax

```
SHOW
[ENV]
[FILTER]
[OPEN]
[RECTYPE]
```

#### **ENV**

Displays the current Logdump environment. Same as the `ENV` command (see ["ENV"](#) on page 2-24).

#### **FILTER**

Displays current filter settings.

#### **OPEN**

Shows all NonStop files that are open in Logdump.

#### **RECTYPE**

Displays a list of Oracle GoldenGate record types that can be displayed with Logdump.

### Examples

#### **Example 1**

```
SHOW FILTER
```

This shows something similar to the following on Windows or UNIX:

```
Data filters are ENABLED
Include Match ALL
Filename-0 : $QA01.QAESRC.ACCT*
HEX-0      : ( 4), Col 0:3
0000 4BF6
Exclude Match ANY
```

It shows something similar to the following on NonStop:

```
Data filters are ENABLED
Include Match ALL
Rectypes   : Delete
Filename-0 : hr.regions
Exclude Match ANY
```

#### **Example 2**

```
SHOW OPEN
```



This shows something similar to the following:

```
0 : $RECEIVE
1 : \GGS2.$ZTN2.#PTW6EUX
2 : \GGS2.$DATA4.#0009047
3 : \GGS2.$ZTN2.#PTW6EUX
4 : \GGS2.$DATA4.CPSDAT.TM000000
```

### Example 3

```
SHOW RECTYPE
```

This shows results similar to the following. (This list might not reflect all possible record types. New types are added when needed to support new functionality.)

```
1 - Abort
2 - Commit
3 - Delete
4 - EndRollBack
5 - Insert
6 - Prepared
7 - TMF-Shutdown
8 - TransBegin
9 - TransRelease
10 - Update
11 - UpdateComp
12 - FileAlter
13 - FileCreate
14 - FilePurge
15 - FieldComp
16 - FileRename
17 - AuxPointer
18 - NetworkCommit
19 - NetworkAbort
20 - CurrentPos
89 - SQL/MX DDL OP
90 - GGSSQLCol
100 - GGSPurgedata
101 - GGSPurgeFile
102 - GGSCreateFile
103 - GGSAAlterFile
104 - GGSRenameFile
105 - GGSSetmode
107 - GGSControl
106 - GGSCChangeLabel
160 - DDL OP
115 - GGSKeyFieldComp
117 - GGSKeyFieldComp32
161 - RecordFragment
116 - LargeObject
132 - GGSCreateSequence
133 - GGSAAlterSequence
134 - GGSDropSequence
150 - RestartAbend
151 - RestartOK
152 - RecoveryEnd
```

200 - GGSBulkio  
201 - GGSFileClose  
202 - GGSLoggerTS  
203 - GGSExtractTS  
204 - GGSCollectTS  
205 - GGSComment  
250 - LibOpenTrace  
251 - LibCloseTrace  
252 - LoggerOpenTrace  
253 - LoggerCloseTrace  
254 - LoggerAddedInfo  
249 - LoggerAddedStats

## SKIP

---

Use `SKIP` to skip the specified number of records.

### Default

None

### Syntax

```
SKIP n
```

***n***

The number of records to skip.

### Example

```
SKIP 50
```

---

## TIME

Use `TIME` to display the current time in local and GMT formats.

### Default

None

### Syntax

`TIME`

## TIMEOFFSET

---

Use `TIMEOFFSET` to set the Logdump time format. Without arguments, `TIMEOFFSET` displays the current time offset. Options enable you to set the time to the local time, Greenwich Mean Time (GMT), or a specific offset from GMT. The specified time format applies to the timestamps shown in records as well as any Logdump commands that accept a time string argument.

### Default

`LOCAL`

### Syntax

```
TIMEOFFSET {LOCAL | GMT | GMT + hh[:mm] | GMT - hh[:mm]}
```

#### **LOCAL**

Sets the time to that of the local system.

#### **GMT**

Sets the time to Greenwich Mean Time (GMT).

#### **GMT + hh[:mm]**

Sets the time ahead of GMT by the specified number of hours and, optionally, minutes.

#### **GMT - hh[:mm]**

Sets the time behind GMT by the specified number of hours and, optionally, minutes.

### Example

```
TIMEOFFSET GMT -01
```

---

## TMFBFOREIMAGE

Use TMFBFOREIMAGE to view the before image for update operations from TMF audit.

### Default

OFF

### Syntax

```
TMFBFOREIMAGE {ON | OFF}
```

#### ON

Displays the before image for update operations from the TMF audit.

#### OFF

Displays only the after image for update operations from the TMF audit.

### Example

A sample display for TMFBFOREIMAGE ON is shown below.

```
2011/01/12 10:02:34.325.264 FieldComp          Len    38 RBA 615854956
Name: \NY.$DATA1.GGSDAT.TCUSTMER
Before Image:                                     Partition 0
0000 0004 414E 4E20 0002 0014 5345 4154 544C 4520 | ....ANN ....SEATTLE
2020 2020 2020 2020 2020 2020 0003 0002 5741      | ....WA
2011/01/12 10:02:34.325.264 FieldComp          Len    38 RBA 615854956
Name: \NY.$DATA1.GGSdat.TCUSTMER
After Image:                                     Partition 0
TRANSID      : \NY(2).0.7022034 (7998393398406021122)
0000 0004 414E 4E20 0002 0014 4E45 5720 594F 524B | ....ANN ....NEW YORK
2020 2020 2020 2020 2020 2020 0003 0002 4E59      | ....NY
```

---

## TMFBFOREIMAGE

Use `TMFBFOREIMAGE` to set the `TMFARLIB` to fetch the before image of the record and display it with the after image. Without an argument, this command displays whether the fetching of before images is on or off.

### Default

OFF

### Syntax

`TMFBFOREIMAGE {ON | OFF}`

---

## TMFGETRECADDR | NOTMFGETRECADDR

Use `TMFGETRECADDR` and `NOTMFGETRECADDR` to control the ability of Logdump to call the `ARGETRECADDR()` function of `TMFARLIB`. This function is used when examining a TMF audit trail.

### Default

None

### Syntax

`TMFGETRECADDR` | `NOTMFGETRECADDR`

#### **TMFGETRECADDR**

Enables the use of the `ARGETRECADDR()` function.

#### **NOTMFGETRECADDR**

Disables the use of the `ARGETRECADDR()` function.



---

## TMFIGNORERECCOUNT

Use `TMFIGNORERECCOUNT` to set the number of records that the `TMFARLIB` can ignore before returning a `CURRENTPOSITION` record.

### Default

None

### Syntax

`TMFIGNORERECCOUNT` *n*

---

## TRAILFORMAT

Use `TRAILFORMAT` to set the version of the Oracle GoldenGate trail or extract file that is being saved when using the `SAVE` command.

### Default

`NEW`

### Syntax

```
TRAILFORMAT {NEW | OLD}
```

#### **NEW**

Sets the format to that used by Oracle GoldenGate version 6.0 and later.

#### **OLD**

Sets the format to that used by Oracle GoldenGate versions earlier than 6.0.

---

## TRANSBYTELIMIT

Use `TRANSBYTELIMIT` to prevent normal-sized transactions from being tracked in the transaction table specified with the `TRANSHIST` command. It sets a lower boundary for the number of bytes in a transaction and should be set to represent a normal-sized transaction for the environment being evaluated with Logdump. Setting a boundary reduces the amount of data that is stored and, consequently, the amount that must be reviewed when troubleshooting.

### Default

10000 bytes

### Syntax

```
TRANSBYTELIMIT n
```

***n***

The number of bytes in a normal-sized transaction.

### Example

```
TRANSBYTELIMIT 9000
```

---

## TRANSHIST

Use `TRANSHIST` to keep track of the size of transactions in a trail or file. Logdump tracks the transactions in an internal history table in descending order according to the number of bytes of data in each one. When the history table is full, the smallest transaction is removed to allow a larger transaction to be added to the list.

Use `TRANSHIST` in conjunction with other Logdump commands to determine whether or not your applications generate large transactions and to identify their relative size. This information can be used when deciding how to group tables into different processing groups for faster throughput. For more information, see ["Evaluating Transaction Size"](#) on page 1-7.

---

---

**Note:** You can use the `SEND EXTRACT` command with the `SHOWTRANS` option to view a list of long-running transactions. Other options enable you to control whether those transactions are ignored or processed by Oracle GoldenGate.

---

---

### Default

0 (do not maintain history)

### Syntax

```
TRANSHIST n
```

***n***

Sets the size of the history table, in bytes. Valid values are 0 through 200 bytes. A value of 0 means that no transaction history is maintained.

### Example

```
TRANSHIST 150
```

---

## TRANSRECLIMIT

Use `TRANSRECLIMIT` to prevent normal-sized transactions from being tracked in the transaction table specified with the `TRANSHIST` command. It sets a lower boundary for the number of records in a transaction and should be set to represent a normal-sized transaction for the environment being evaluated with Logdump. Setting a boundary reduces the amount of data that is stored and, consequently, the amount that must be reviewed when troubleshooting.

### Default

100 operations

### Syntax

```
TRANSRECLIMIT n
```

***n***

The number of records in a normal-sized transaction.

### Example

```
TRANSRECLIMIT 90
```

---

## USERTOKEN

Use `USERTOKEN` to control whether or not user token data is displayed with each record. A user token is data specified by an Oracle GoldenGate user that is stored in the record header and can be mapped to a target column or used for some other purpose during Oracle GoldenGate processing.

Without arguments, `USERTOKEN` displays the status of user token display (`ON` or `OFF`). With the `ON` option, the name of the token and its length are displayed. The `DETAIL` option shows the actual token data.

### Default

Display token name and length.

### Syntax

```
USERTOKEN {ON | OFF | DETAIL}
```

#### **ON**

Enables the display of user tokens.

#### **OFF**

Disables the display of user tokens.

#### **DETAIL**

Displays the token data.

---

## VOLUME

Use `VOLUME` to set the default directory, volume or subvolume. An alias for this command is `CD`.

### Default

None

### Syntax

`VOLUME {directory | volume | subvolume}`

---

## WRITELOG

Use `WRITELOG` to write text to the session log. Before using this command, start logging with the `LOG` command (see "[LOG](#)" on page 2-54).

### Default

None

### Syntax

```
WRITELOG text
```

***text***

Any text string. Quotes are optional.

### Example

```
WRITELOG "Customer name is ABC Company."
```



## X

Use **x** to execute a program from within Logdump. When you exit the program, the Logdump prompt returns.

### Default

None

### Syntax

*x program [string]*

#### **command**

The program to run.

#### **string**

A character string, such as input arguments.

### Example

The following series of commands and output shows how you can exit Logdump, issue other commands from the shell or within GGSCI, and then return to the Logdump command line.

```
Logdump 696 >x ggsci

GoldenGate Command Interpreter
Version .....

GGSCI (sysa) 1> status er *
GGSCI (sysa) 2> start er *
GGSCI (sysa) 3> info er *
GGSCI (sysa) 4> exit
Logdump 697 >
```

