中南大學
CENTRAL SOUTH UNIVERSITY

Web程序设计

CH03 HTML（下）

内容回顾

中南大學
CENTRAL SOUTH UNIVERSITY

- HTML的基本结构
- HTML文本标签
- HTML列表标签
- HTML超链接标签

本章内容

- HTML图片标签
- HTML表格
- HTML表单控件
- 其他标签

图片标签-1

- 图片标签<img>
  - ✓ HTML使用<img>标签在网页中插入图片。

```
<img src="images/csu-1.jpg">
```


img是image（图片）的缩写

src是source（来源）的缩写

图片的存储目录和完整文件名

图片标签-2

- 图片标签的使用
  - ✓ 图片一般需要拷贝到项目文件夹中。
  - ✓ src属性的路径可以是相对路径和绝对路径，后缀名需要编写。
  - ✓ 图片只是被引入到了网页中，本质上并没有被插入到网页中，将来部署网站时，需要将images文件夹一起上传。

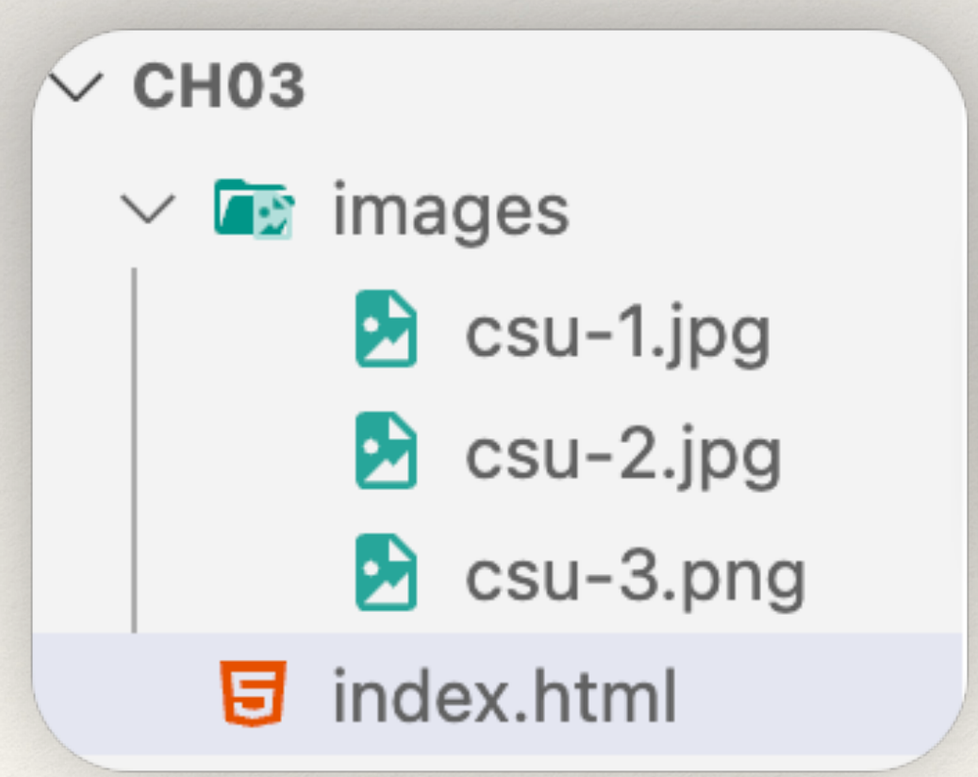



```
<body>
    <img src="images/csu-1.jpg">
</body>
```

图片标签-3

- 图片标签的常用属性
  - ✓ alt属性：alt是可选属性，是alternate的缩写，是对图像的文本描述。
  - ✓ 如果由于某种原因无法加载图像，浏览器会在页面上显示alt属性的文本；或者是当视力障碍的用户使用网页朗读器时，也会朗读alt中的文本。

```
<img src="images/csu-1.jpg" alt="潇湘校区">
```

```
src="images/csu-10.jpg"
```

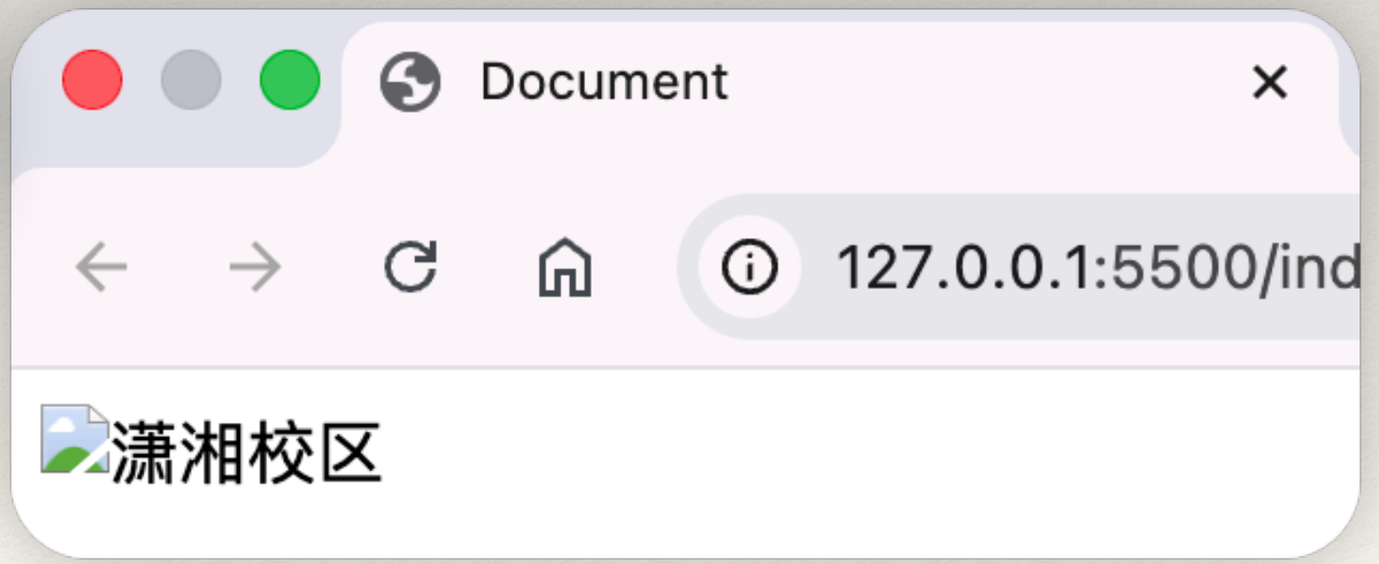


图片标签-3

中南大学 CENTRAL SOUTH UNIVERSITY

- 图片标签的常用属性
  - ✓ width属性和height属性：width和height属性分别设置图片的宽度和高度，单位是像素(px)，可以省略单位。
  - ✓ width和height属性一般只单独设置一个，以保证图片的原始比例缩放。

```
<img src="images/csu-1.jpg" alt="潇湘校区" width="500">
```

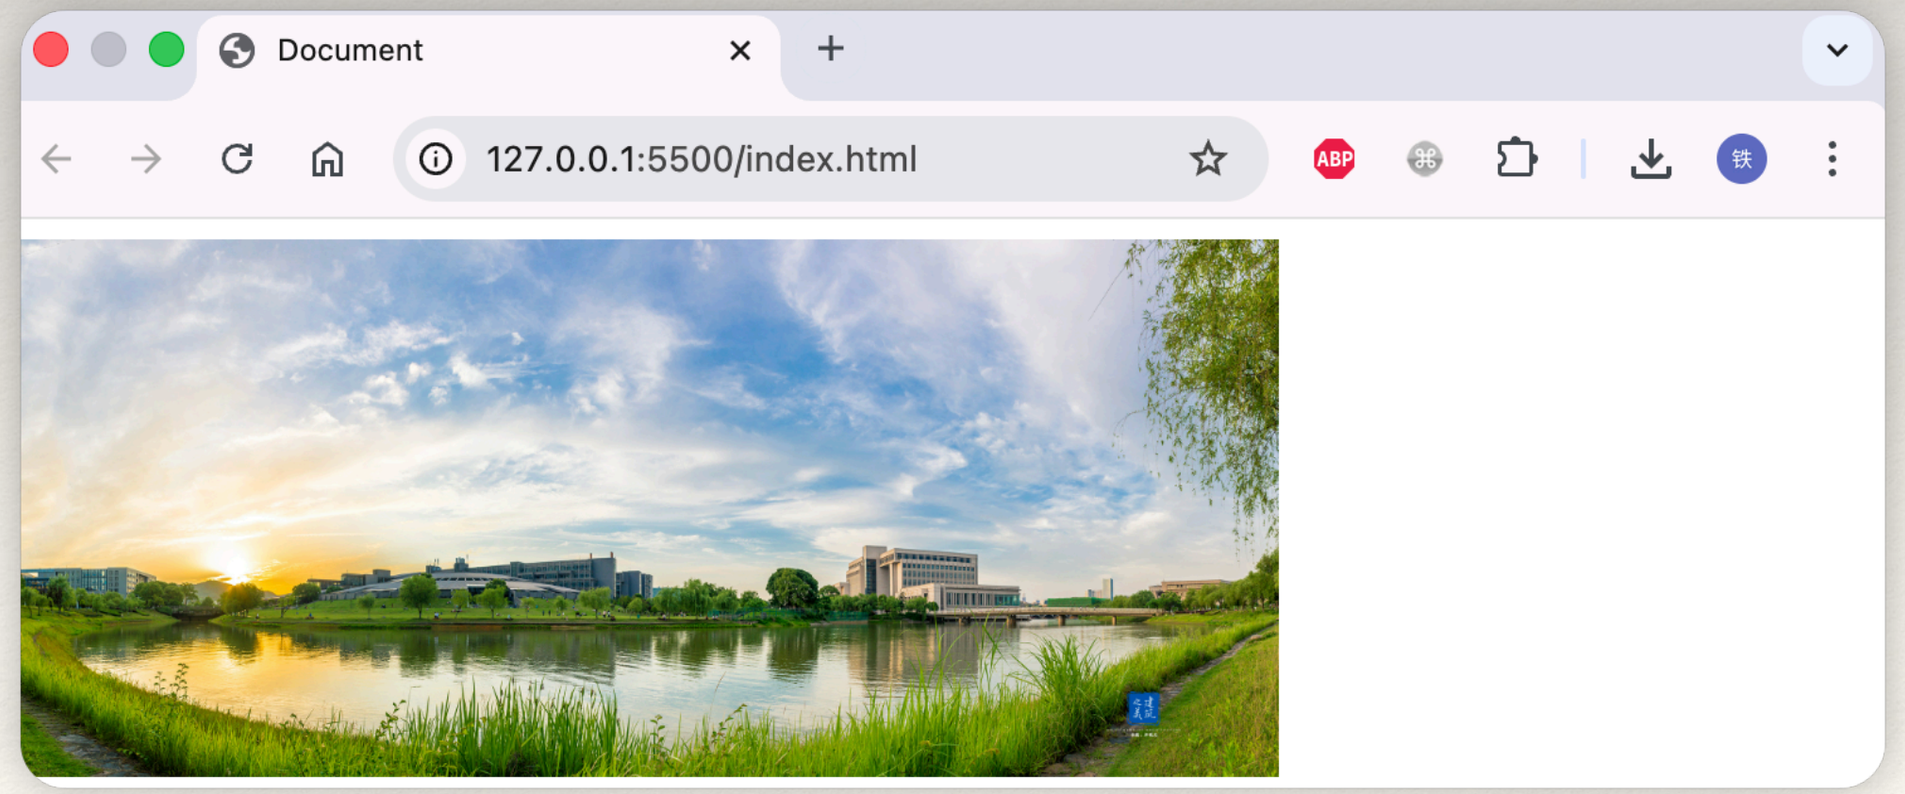

图

南大學
NTRAL SOUTH UNIVERSITY

- HTM

横式标志.png
横式标志 v2.png
竖式标志.png
下属机构横式组合.png
下属机构竖式组合.png
下属机构中轴式组合.png
校风.png
校风标准方格制图.jpg
校训.png
校训标准方格制图.jpg
中南大学标志标准方格制图曲线.cdr
中南大学标志标准图案-标准化方格制图.jpg
中南大学标志英文标准字体-标准化方格制图.jpg
中南大学标志中文标准字体-标准化方格制图.jpg
中南大学标志中文标准组合（横）-标准化方格制图.jpg
中南大学标志中文标准组合（竖）-标准化方格制图.jpg
中南大学标志中英文标准组合（横）-标准化方格制图.jpg
中南大学标志中英文标准组合（竖）-标准化方格制图.jpg
中轴式标志.png

等

图片标签-5

- HTML5中对图片标签的扩展

HTML chapter-05/figure-and-figure-caption.html

```
<figure>
  <img src="images/otters.jpg" alt="Photograph of
       two sea otters floating in water">
  <br />
  <figcaption>Sea otters hold hands when they
       sleep so they don't drift away from each
       other.</figcaption>
</figure>
```

RESULT



Sea otters hold hands when they sleep so they don't drift away from each other.

本章内容

- HTML图片标签
- HTML表格
- HTML表单控件
- 其他标签

认识表格-1

REUTERS | EDITION: U.S. | News & Markets | Sectors & Industries | Analysis & Opinion | Register | Sign In | Search News & Quotes | SEARCH

Commodities

Related Topics: MARKETS BUSINESS ECONOMY GREEN BUSINESS HOT STOCKS MORE TOPICS

THOMSON REUTERS/JEFFERIES CRB INDEX(TR/J CRB)

	Change	Open	High	Low	Times
▼ 359.42	-3.36	360.92	361.19	357.99	04/18 14:58

Data as of 3:45pm EDT (Delayed at least 20 minutes).

COMMODITY FUTURES

Energy: Oil, Natural Gas, Electricity

Metals: Base Metals, Precious Metals

Grains: Corn/Maize, Wheat, Barley, Rice

Oilseeds: Soybeans, Rapseed, Palm Oil

Softs: Sugar, Coffee, Cocoa, Rubber, Citrus, Cotton

Livestock: Lean Hogs, Live Cattle

THOMSON REUTERS EQUAL WEIGHT CONTINUOUS COMMODITIES INDEX (CCI)

Position of price in relation to its moving average. This chart is desied to identify cyclical turns. CCI works well in ranging markets and typically fluctuates between + 100 and - 100.

Commodity	Currency	Last	Change	% Change	Trade Date/Time
Hogs, Lean Pit CME Jun11	USD	101.28	+0.20	+0.20%	04/18 14:13
Oil, Heating New York No. 2 NYMEX May11	USD	3.19	-0.04	-1.18%	04/18 15:14
Crude Oil Light Sweet May11	USD	107.21	-2.45	-2.29%	04/18 15:14

MARKETS

U.S. | EUROPE | ASIA | SECTORS

SPONSORED BY Trade forex with Citi.

Market Indices » All Indices

Enter company name or Symbol SEARCH

DOW	12,189.14	▼ -152.69	-1.24%
S&P 500	1,305.75	▼ -13.93	-1.06%
NASDAQ	2,731.64	▼ -33.01	-1.19%
TR US INDEX	119.44	▼ -1.47	-1.22%


Currencies » All Currencies

EUR/USD	1.4234	-1.35%
GBP/USD	1.6262	-0.40%
USD/JPY	82.600	-0.63%

Commodities » All Commodities

GOLD	1,496.20	+10.20	+0.68%

认识表格-2

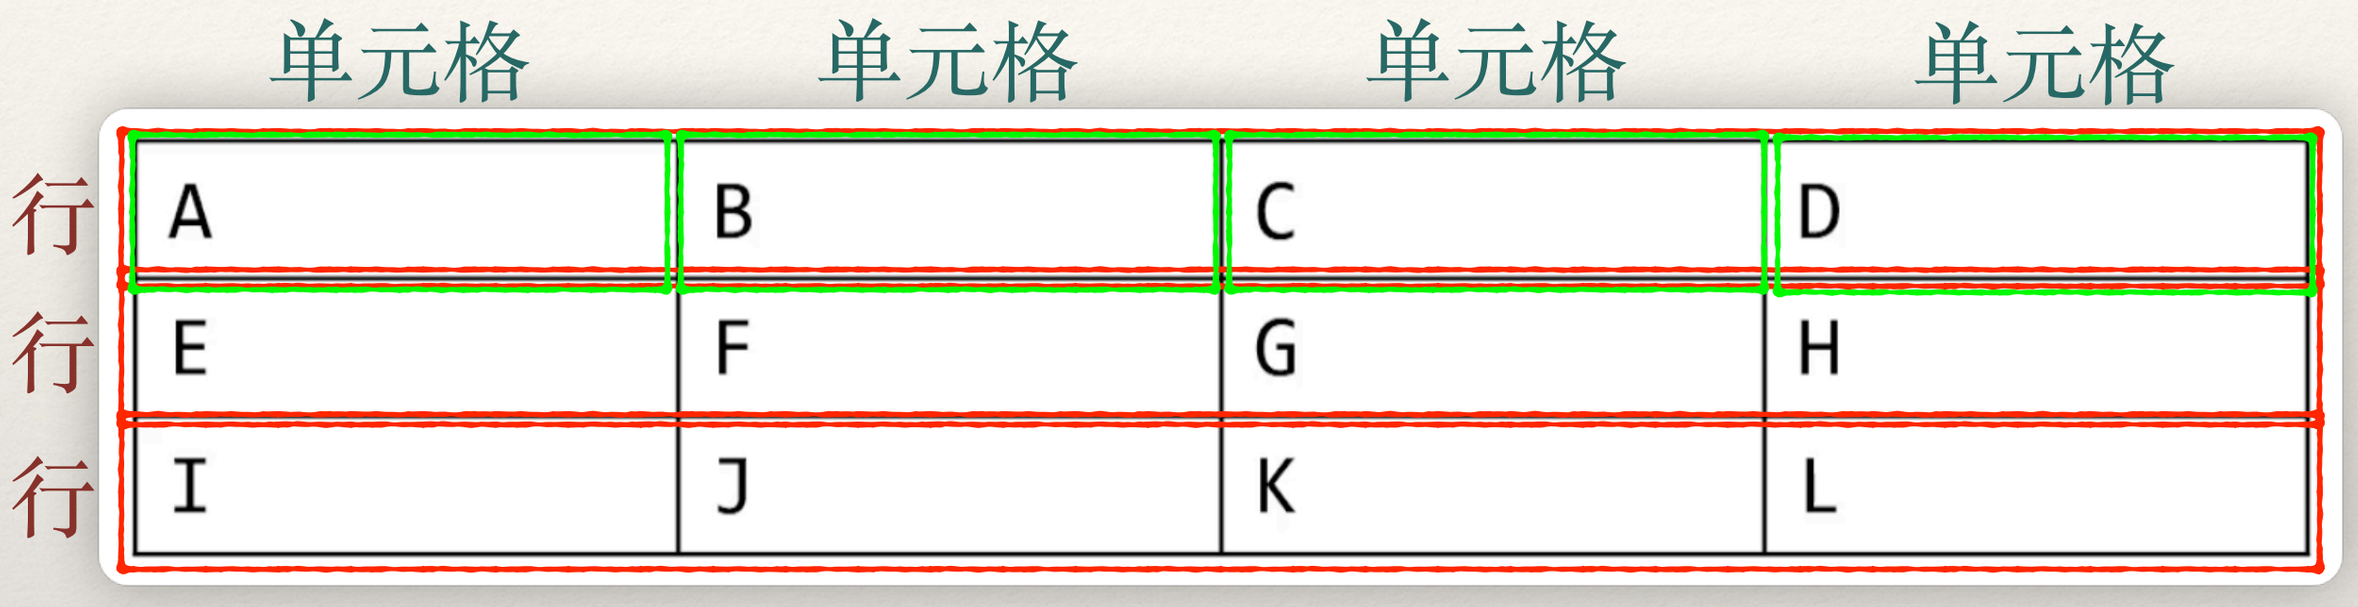


表格标签-1

```
<table>
    <tr>
        <td>A</td>
        <td>B</td>
        <td>C</td>
        <td>D</td>
    </tr>
    <tr>
        <td>E</td>
        <td>F</td>
        <td>G</td>
        <td>H</td>
    </tr>
    <tr>
        <td>I</td>
        <td>J</td>
        <td>K</td>
        <td>L</td>
    </tr>
</table>
```

- <table>、<tr>和<td>标签

- table标签就是表格的意思
- table row表格行
- table data表格数据

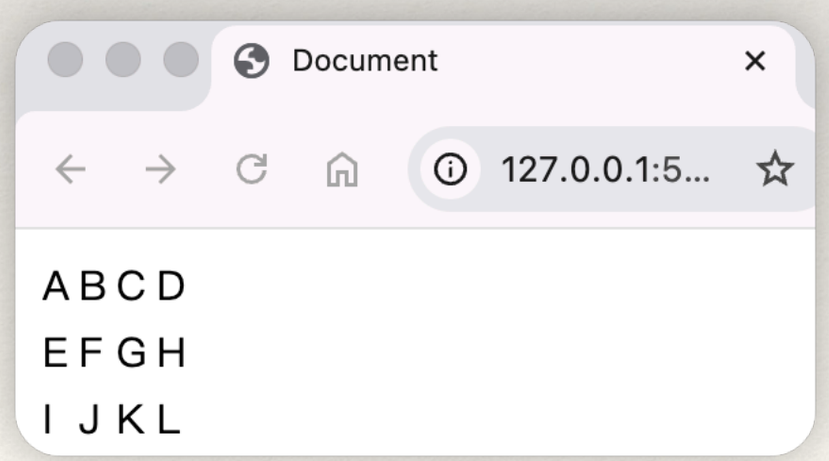

表格标签-2

- <table>标签的常用属性
  - ✓ 表格默认没有边框，通过设置border属性给表格设置边框，单位为像素。
  - ✓ 表格边框默认为双线框，比较不美观，一般通过CSS进行设置。
  - ✓ width属性给表格设置一个整体的宽度。

```
<table border="1" width="400">
```

A	B	C	D
E	F	G	H
I	J	K	L

```
<style>
    table,tr,td {
        border-collapse: collapse;
    }
</style>
```

A	B	C	D
E	F	G	H
I	J	K	L

表格标签-3

- <th>是标题单元格，可以替代<td>的作用，用于表格第一行

```
<table border="1" width="400">
    <tr>
        <th>第一学年</th>
        <th>第二学年</th>
        <th>第三学年</th>
        <th>第四学年</th>
    </tr>
    <tr>
```

第一学年	第二学年	第三学年	第四学年
A	B	C	D
E	F	G	H
I	J	K	L

表格标签-4

- 表格还可以有标题标签<caption>

```
<table border="1" width="400">
    <caption>表格的标题</caption>
    <tr>
        <th>第一学年</th>
        <th>第二学年</th>
        <th>第三学年</th>
        <th>第四学年</th>
    </tr>
    <tr>
```

表格的标题

第一学年	第二学年	第三学年	第四学年
A	B	C	D
E	F	G	H
I	J	K	L

表格标签-5

- 单元格的合并——跨行和跨列

2个列跨度

A		B	C
D	E	F	G
H		I	J

2个行跨度

表格标签-6

- <td>或<th>标签的colspan属性，设置列跨度

A		B	C
D	E		
F	G	H	I

```
<table border="1" width="300">
    <tr>
        <td colspan="2">A</td>
        <td>B</td>
        <td>C</td>
    </tr>
    <tr>
        <td>D</td>
        <td colspan="3">E</td>
    </tr>
    <tr>
        <td>F</td>
        <td>G</td>
        <td>H</td>
        <td>I</td>
    </tr>
</table>
```

表格标签-6

- <td>或<th>标签的rowspan属性，设


A	B	C	D
E	F	G	H
I		J	
K	L	M	

```
<table border="1" width="300">
    <tr>
        <td>A</td>
        <td>B</td>
        <td>C</td>
        <td>D</td>
    </tr>
    <tr>
        <td>E</td>
        <td rowspan="2">F</td>
        <td>G</td>
        <td rowspan="3">H</td>
    </tr>
    <tr>
        <td>I</td>
        <td>J</td>
    </tr>
    <tr>
        <td>K</td>
        <td>L</td>
        <td>M</td>
    </tr>
</table>
```

表格标签-7

- 同时设置rowspan和colspan进行跨行跨列

A	B	C	D
E	F	G	
H			
I	J		

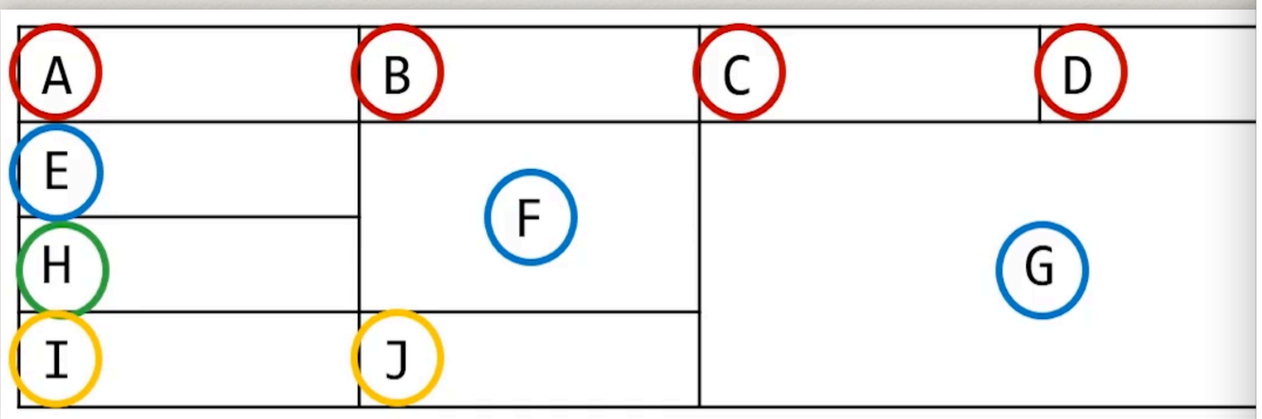


```
<table border="1" width="300">
    <tr>
        <td>A</td>
        <td>B</td>
        <td>C</td>
        <td>D</td>
    </tr>
    <tr>
        <td>E</td>
        <td rowspan="2">F</td>
        <td rowspan="3" colspan="2">G</td>
    </tr>
    <tr>
        <td>H</td>
    </tr>
    <tr>
        <td>I</td>
        <td>J</td>
    </tr>
</table>
```

表格标签-8

- 表格的其他特性(复杂表格)
  - ✓ <thead>标签定义表头
  - ✓ <tbody>标签定义表的核心内容
  - ✓ <tfoot>标签定义表脚，通常是汇总行

第一学年	第二学年	第三学年	第四学年
10	20	30	40
100	200	300	400

```
<table border="1" width="300">
    <thead>
        <tr>
            <th>第一学年</th>
            <th>第二学年</th>
            <th>第三学年</th>
            <th>第四学年</th>
        </tr>
    </thead>
    <tbody>
        <tr>
            <td>10</td>
            <td>20</td>
            <td>30</td>
            <td>40</td>
        </tr>
    </tbody>
    <tfoot>
        <tr>
            <td>100</td>
            <td>200</td>
            <td>300</td>
            <td>400</td>
        </tr>
    </tfoot>

</table>
```

表格标签-9

第一学年		第二学年		第
必修	选修	必修	选修	必修
10	20	30	40	10
100	200	300	400	100


```
<thead>
    <tr>
        <th colspan="2">第一学年</th>
        <th colspan="2">第二学年</th>
        <th colspan="2">第三学年</th>
        <th colspan="2">第四学年</th>
    </tr>
    <tr>
        <th>必修</th>
        <th>选修</th>
        <th>必修</th>
        <th>选修</th>
        <th>必修</th>
        <th>选修</th>
        <th>必修</th>
        <th>选修</th>
    </tr>
</thead>
```

本章内容

- HTML图片标签
- HTML表格
- HTML表单控件
- 其他标签

表单控件-1

- 表单控件：表单用来收集信息，比如注册、登录等。
  - ✓ 表单控件是指一系列的标签，由于历史的原因，有些是不同标签，有些是同一标签的不同属性。
  - ✓ 表单控件是一个需要和服务端程序进行交互的控件。

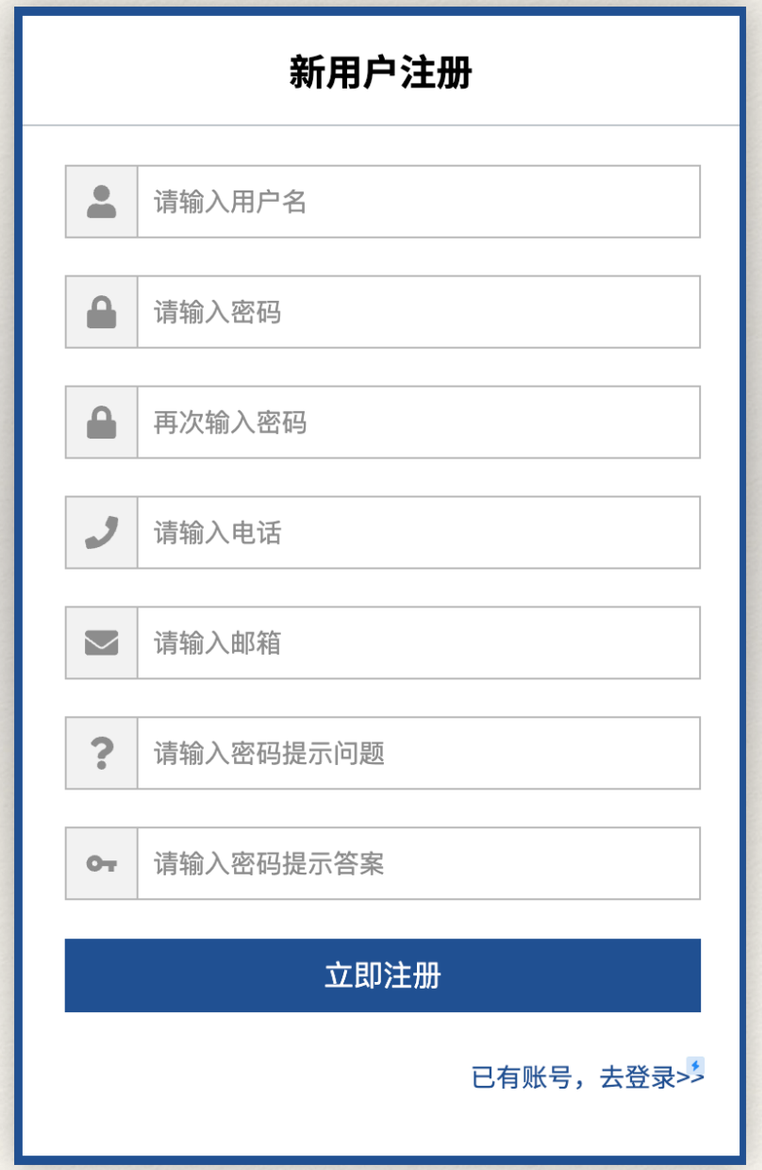

表单控件-2

- 所有表单控件都属于一个<form></form>元素内

```
<form action="login" method="POST">

</form>
```

action属性表示表单要提交到服务端程序的URL


method属性表示表单提交的方式，有POST或GET等

表单元素-1

中南大學 CENTRAL SOUTH UNIVERSITY

❖ 单行文本框

- ✓ 使用type属性为text的<input>标签，创建一个单行文本框，<input>标签为单标签。
- ✓ name属性为提交到服务端的变量名
- ✓ value属性为表格中默认已经填好的值
- ✓ placeholder属性表示输入框中的提示文本
- ✓ disabled属性表示用户不能与该元素交互，即不能编辑

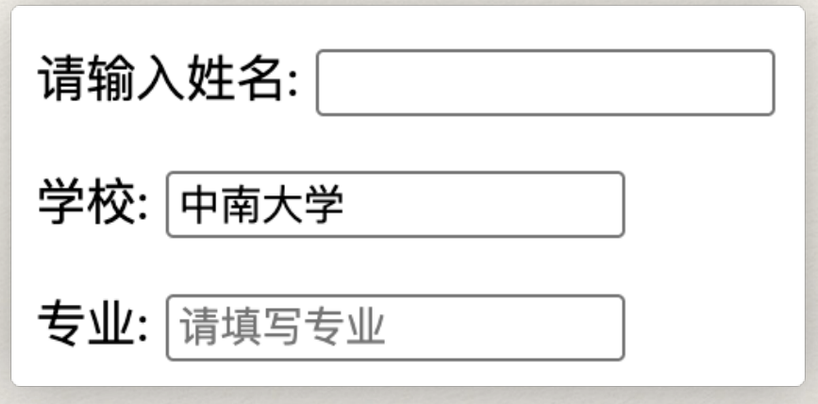


```
<form action="login" method="POST">
    <p>请输入姓名: <input type="text" name="username"></p>
    <p>学校: <input type="text" value="中南大学"></p>
    <p>专业: <input type="text" placeholder="请填写专业"></p>
</form>
```

表单元素-2

- 密码框
  - ✓ 使用type属性为password的<input>标签，创建一个密码框。

```
<p>
    用户名: <input type="text" name="username"> <br>
    密码: <input type="password" name="password">
</p>
```

用户名: 张三

密码: ••••••••

表单元素-3

❖ 单选按钮

- ✓ 使用type属性为radio的<input>标签，创建一个单选按钮
- ✓ 互斥的单选按钮应该将name属性设置为相同
- ✓ checked属性表示默认选中
- ✓ label标签可以让文本也能成为点击效果

性别: 男 女

```
<p>
    性别:
    <label>
        <input type="radio" name="gender" value="male" checked> 男
    </label>
    <label>
        <input type="radio" name="gender" value="female"> 女
    </label>
</p>
```

表单元素-4

- 复选框
  - ✓ 使用type属性为checkbox的<input>标签，创建一个复选框
  - ✓ 同组复选框应该将name属性设置为相同

爱好: ☑ 足球 ☐ 舞蹈 ☐ 篮球


```
<p>
    爱好:
    <label>
        <input type="checkbox" name="bobby" value="football" checked>足球
    </label>
    <label>
        <input type="checkbox" name="bobby" value="dancing">舞蹈
    </label>
    <label>
        <input type="checkbox" name="bobby" value="basketball">篮球
    </label>
</p>
```

表单元素-5

中南大學 CENTRAL SOUTH UNIVERSITY

- 下拉列表框
  - ✓ 使用<select>标签表示下拉列表，<option>是其内部的选项。

```
<p>
    支付方式:
    <select name="pay_option">
        <option value="alipay">支付宝</option>
        <option value="wx">微信</option>
        <option value="bank">银联</option>
    </select>
</p>
```

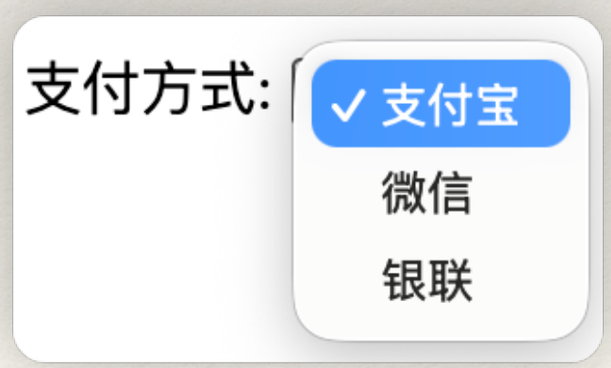

表单元素-6

- 多行文本框
  - ✓ 使用<textarea></textarea>表示多行文本框。
  - ✓ rows和cols属性，分别表示多行文本框的行数和列数。


```
<p>
    留言:
    <textarea cols="30" rows="10"></textarea>
</p>
```

留言:

表单元素-7

- 三种按钮
  - ✓ 表单中常见的三种按钮，也都是<input>标签，采用不同的type属性值。
  - ✓ button属性表示普通按钮，也可以写作<button></button>。
  - ✓ submit属性表示提交按钮，用于表单的提交。
  - ✓ reset属性表示重置按钮，用于将表单中所填写的内容重置。

```
<p>
    <input type="button" value="普通按钮1">
    <button>普通按钮2</button>
    <input type="reset" value="重置">
    <input type="submit" value="提交">
</p>
```

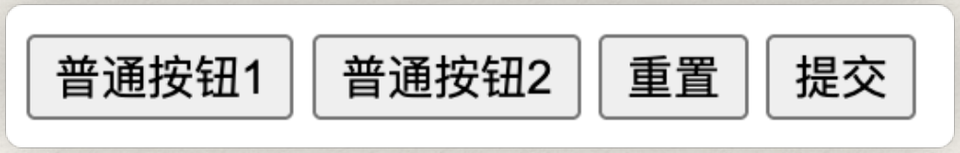

HTML5新表单标签-1


中南大學 CENTRAL SOUTH UNIVERSITY

- HTML5新增的表单验证属性

chapter-07/html5-form-validation.html HTML

```
<form action="http://www.example.com/login/"
    method="post">
  <label for="username">Username:</label>
  <input type="text" name="username"
    required="required" /></title><br />
  <label for="password">Password:</label>
  <input type="password" name="password"
    required="required" />
  <input type="submit" value="Submit" />
</form>
```

RESULT

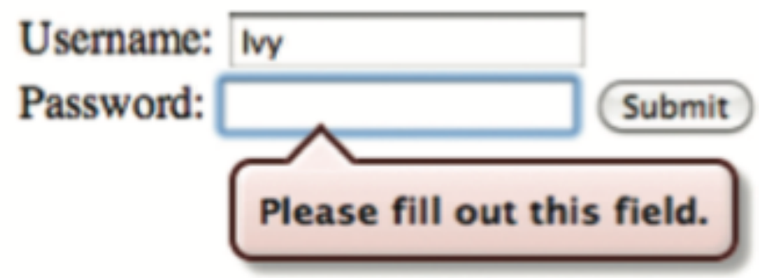

HTML5新表单标签-2


中南大學 CENTRAL SOUTH UNIVERSITY

- HTML5新增的表单属性

HTML chapter-07/html5-date-input.html

```
<form action="http://www.example.com/bookings/"
    method="post">
  <label for="username">Departure date:</label>
  <input type="date" name="depart" />
  <input type="submit" value="Submit" />
</form>
```

RESULT



HTML5新表单标签-3

中南大學 CENTRAL SOUTH UNIVERSITY

- HTML5新增的表单属性

chapter-07/html5-email-input.html HTML

```
<form action="http://www.example.org/subscribe.php">
  <p>Please enter your email address:</p>
  <input type="email" name="email" />
  <input type="submit" value="Submit" />
</form>
```

RESULT



chapter-07/html5-url-input.html HTML

```
<form action="http://www.example.org/profile
  <p>Please enter your website address:</p>
  <input type="url" name="website" />
  <input type="submit" value="Submit" />
</form>
```

RESULT



本章内容

- HTML图片标签
- HTML表格
- HTML表单控件
- 其他标签

通用属性

- id属性和class属性

chapter-08/id-attribute.html HTML

```
<p>Water and air. So very commonplace are these
   substances, they hardly attract attention - and
   yet they vouchsafe our very existence.</p>
<p id="pullquote">Every time I view the sea I feel
   a calming sense of security, as if visiting my
   ancestral home; I embark on a voyage of seeing.
</p>
<p>Mystery of mysteries, water and
   there before us in the sea.</p>
```

HTML chapter-08/class-attribute.html

```
<p class="important">For a one-year period from
   November 2010, the Marugame Genichiro-Inokuma
   Museum of Contemporary Art (MIMOCA) will host a
   cycle of four Hiroshi Sugimoto exhibitions.</p>
<p>Each will showcase works by the artist
   thematically contextualized under the headings
   "Science," "Architecture," "History" and
   "Religion" so as to present a comprehensive
   panorama of the artist's oeuvre.</p>
<p class="important admittance">Hours: 10:00 - 18:00
   (No admittance after 17:30)</p>
```

元素特性——默认样式

- 块级元素和内联元素

chapter-08/block-elements.html HTML

```
<h1>Hiroshi Sugimoto</h1>
<p>The dates for the ORIGIN OF ART exhibition are as
   follows:</p>
<ul>
  <li>Science: 21 Nov - 20 Feb 2010/11</li>
  <li>Architecture: 6 Mar - 15 May 2011</li>
  <li>History: 29 May - 21 Aug 2011</li>
  <li>Religion: 28 Aug - 6 Nov 2011</li>
</ul>
```



HTML chapter-08/inline-elements.html

```
Timed to a single revolution of the planet around
the sun at a 23.4 degrees tilt that plays out the
rhythm of the seasons, this <em>Origins of Art</em>
cycle is organized around four themes: <b>science,
architecture, history</b> and <b>religion</b>.
```



元素特性——默认样式

- 通过 标签构建块级元素，方便管理。

chapter-08/grouping-block-elements.html HTML

```
<div id="header">
  <img src="images/logo.gif" alt="Anish Kapoor" />
  <ul>
    <li><a href="index.html">Home</a></li>
    <li><a href="biography.html">Biography</a></li>
    <li><a href="works.html">Works</a></li>
    <li><a href="contact.html">Contact</a></li>
  </ul>
</div><!-- end of header -->
```

RESULT



- Home
- Biography
- Works
- Contact

元素特性——默认样式

中南大學 CENTRAL SOUTH UNIVERSITY

- 通过标签插入一段内联元素。

HTML chapter-08/grouping-inline-elements.html


```
<p>Anish Kapoor won the Turner Prize in 1991 and
   exhibited at the <span class="gallery">Tate
   Modern</span> gallery in London in 2003.</p>
```

RESULT

Anish Kapoor won the Turner Prize in 1991 and exhibited at the TATE MODERN gallery in London in 2003.

Flash和音视频-1


- Flash、音频和视频的发展

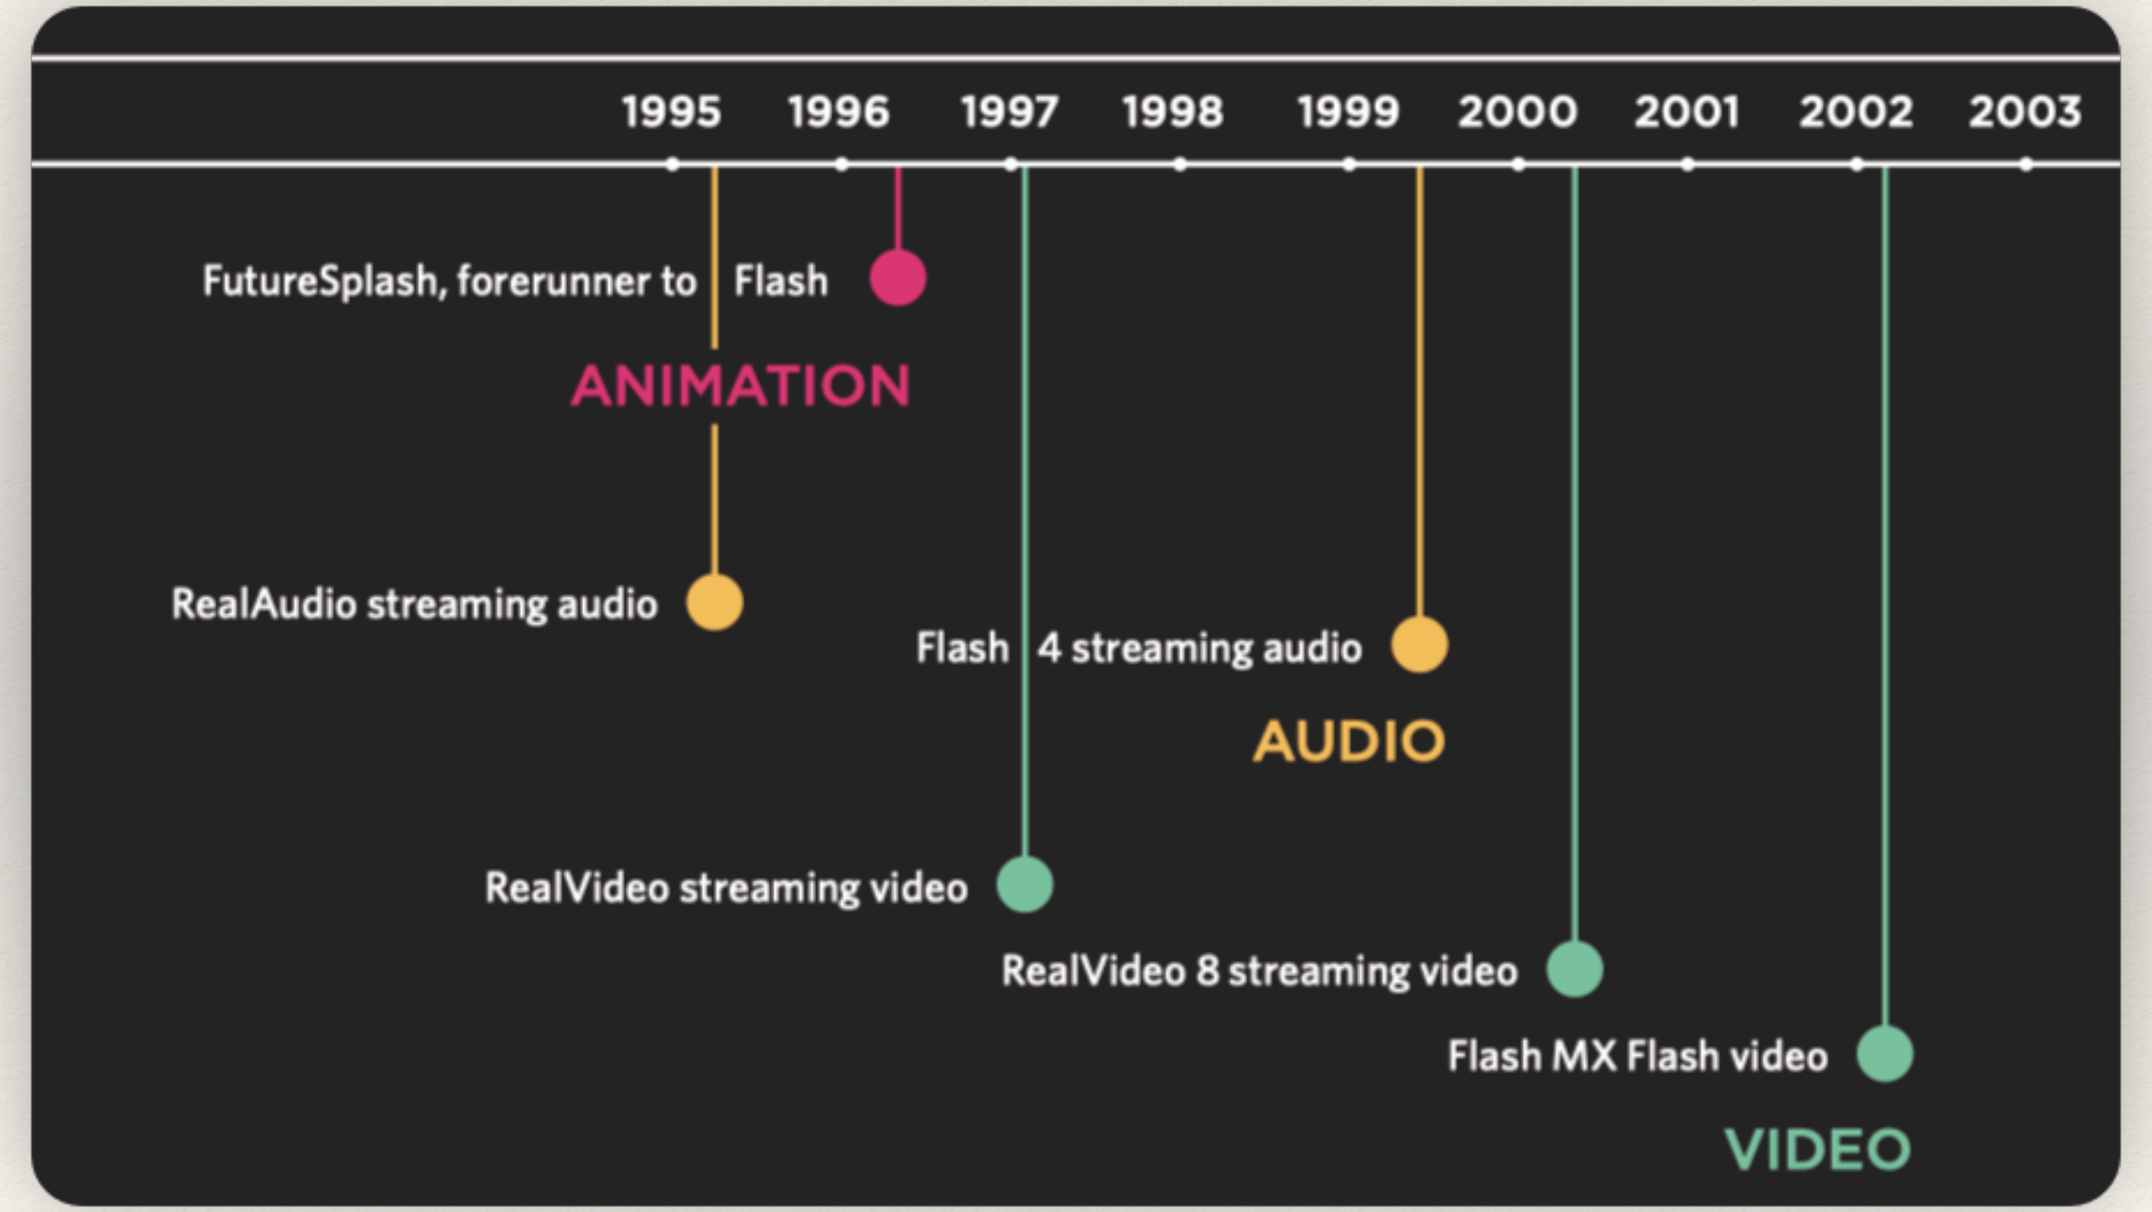

Flash和音视频-2

中南大學 CENTRAL SOUTH UNIVERSITY

- Flash、音频和视频的发展

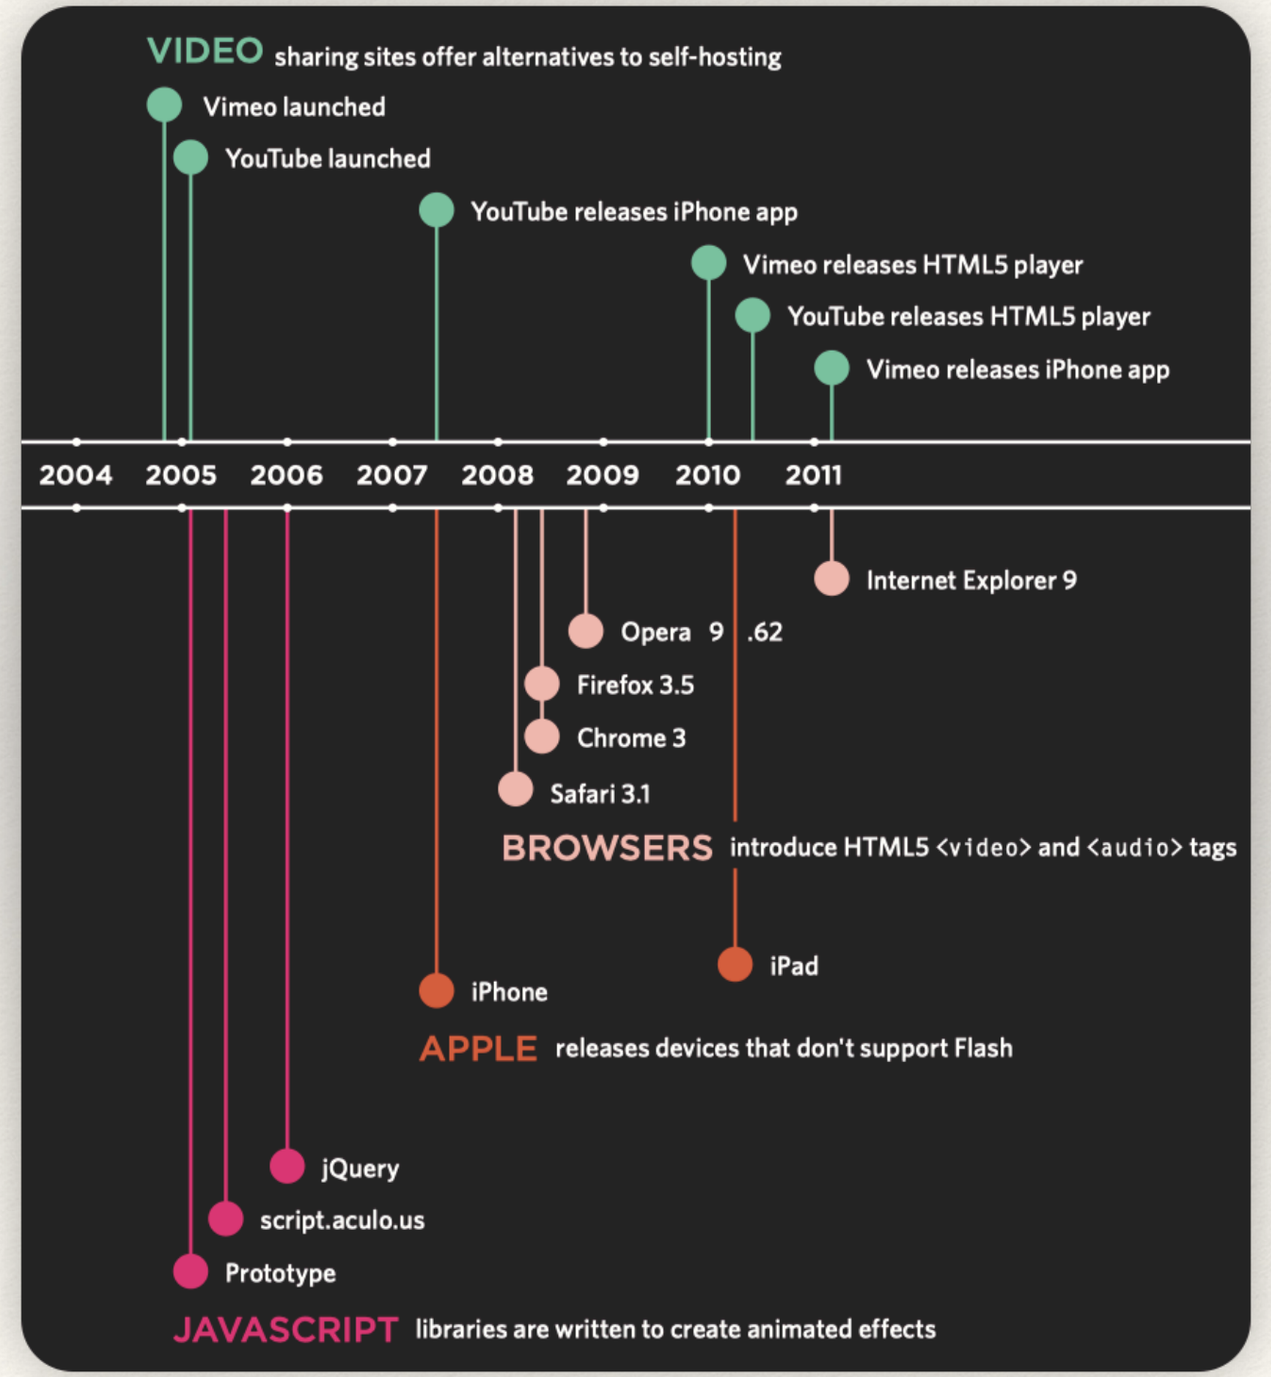

视频标签

- <video>标签

HTML chapter-09/adding-html5-video.html

```
<!DOCTYPE html>
<html>
  <head>
    <title>Adding HTML5 Video</title>
  </head>
  <body>
    <video src="video/puppy.mp4"
      poster="images/puppy.jpg"
      width="400" height="300"
      preload
      controls
      loop>
      <p>A video of a puppy playing in the snow</p>
    </video>
  </body>
</html>
```

音频标签

- <audio>标签

chapter-09/adding-html5-audio.html HTML

```
<!DOCTYPE html>
<html>
  <head>
    <title>Adding HTML5 Audio</title>
  </head>
  <body>
    <audio src="audio/test-audio.ogg"
      controls autoplay>
      <p>This browser does not support our audio
      format.</p>
    </audio>
  </body>
</html>
```

RESULT



本章小结

中南大學
CENTRAL SOUTH UNIVERSITY

- HTML图片标签
- HTML表格
- HTML表单控件
- 其他标签