
Outline of NLP pipeline without RAG

- * Data preprocessing
 - * Gathering textual data
 - * Tokenization (converting words to tokens 1,2,3...)
 - * Create word embedding (converting tokens to vector embeddings) nn.Embedding() BERT
- * NLP task
 - * Positional encoding layer
 - * Transformer NN (encoder-decoder, decoder only, encoder only)
 - * How to train a transformer?
 - * Machine translation ("Good morning" to "Guten Morgen")
 - * Chatbot question and answer: sentence pairs ("tell a joke" to "once a time...")
 - * Fill in blank (representation learning "hello and how _ you do?" e.g., BERT)
 - * How to do inference?
 - * Only provide the input to encoder. for decoder only input [<sos>] and produce rest of tokens one at a time.

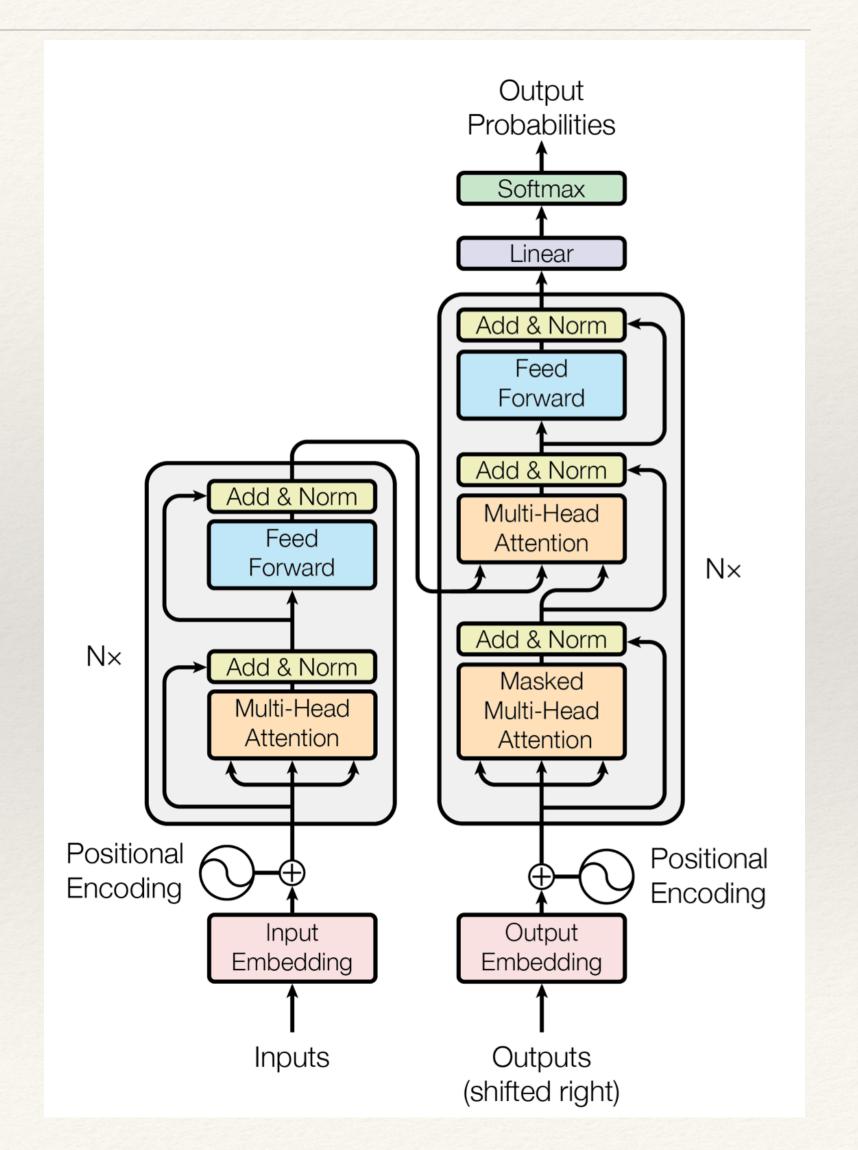

RAG+NLP


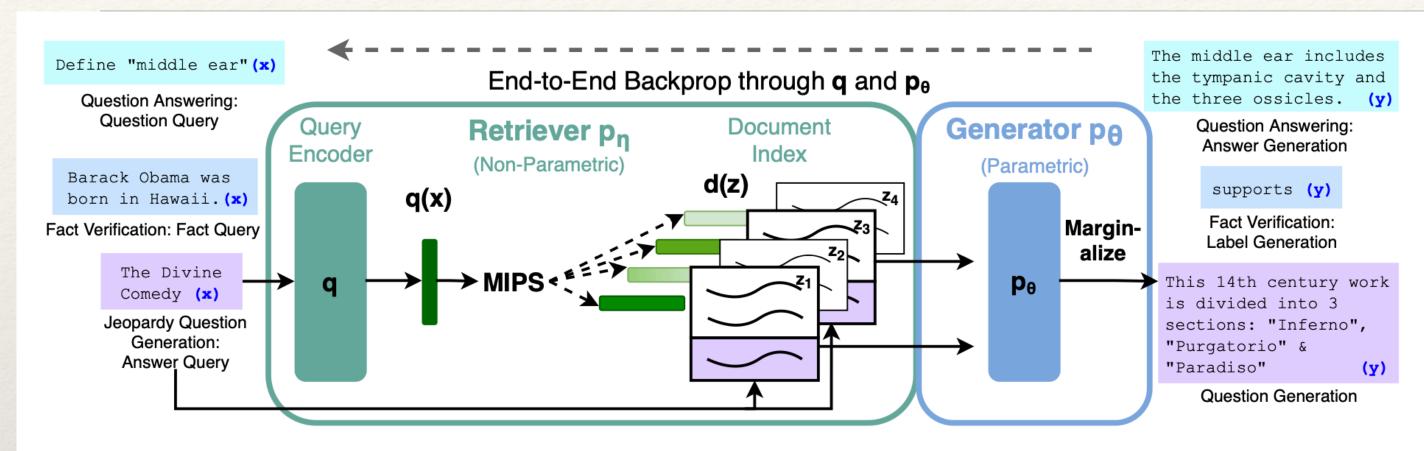


Figure 1: Overview of our approach. We combine a pre-trained retriever (Query Encoder + Document Index) with a pre-trained seq2seq model (Generator) and fine-tune end-to-end. For query x, we use Maximum Inner Product Search (MIPS) to find the top-K documents z_i . For final prediction y, we treat z as a latent variable and marginalize over seq2seq predictions given different documents.

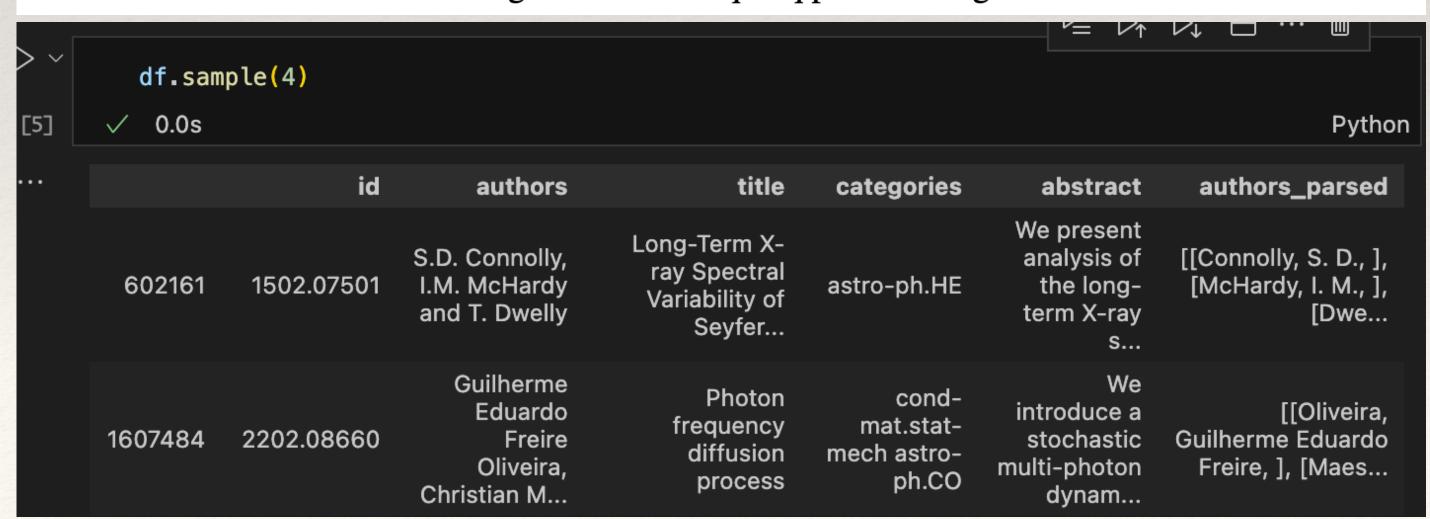

- * Let's use arXiv metadata (only) as an example
- * Get the metadata
- Build a query encoder which encodes the input query.
 - * query encoder is pretrained, e.g., BERT or DPR
- * Build a vector embedding for each document (ongoing work), make it a database indexed by document id
 - * using libraries such as faiss, Elasticsearch, ...
- The document and input query are concatenated and fed into the generator, which is a conventional transformer as discussed in previous page.
- * In principle we could create the entire pipeline without relying on chatGPT or Claude!

https://arxiv.org/pdf/2005.11401