伯乐 Agent SDK 交付验收交接报告

1. 结论摘要

- 交付物：Windows x64 C SDK + 随包运行时 + 控制台/界面示例 + 离线部署包 + 四份文档。
- 开发机已完成：真实内网网关下的 console 工具调用、B8 自检、GUI 长任务/取消、RSI 开关。
- 开发机 `acceptance.ps1` 在加 `-SkipCleanEnvironmentCheck` 后通过；该参数只用于有 Node 的开发机，干净 VM 不使用。
- 待测试：干净目标 VM、Windows 10（如适用）、Ornith（如现场使用）、EDR/签名、伙伴独立集成。
- 已知限制：验证阶段事件不产生；MCP 仅配置文件声明 + 重启，不支持运行时注册。
- 最终包：`bole-offline-r6-final.zip`
  - SHA256：`aaeeafd8c7e3a520743fd367ce8955b00923a500a453b7d6b604dc1f30dbcc0d`
  - tag：`bole-m0-20261023-r6`
  - 包内 toy MCP：12 个工具；运行时 `0.1.7-alpha.2`；SDK ABI `1.0.0`。

```
(base) PS D:\apps\BoleAgentSdk\samples\console-c> $zip = 'D:\bole-offline-r6-final.zip'
(base) PS D:\apps\BoleAgentSdk\samples\console-c> $root = 'D:\bole-offline-r6-final\bole-agent-sdk-win-x64'
(base) PS D:\apps\BoleAgentSdk\samples\console-c>
(base) PS D:\apps\BoleAgentSdk\samples\console-c> Get-Item $zip | Select-Object Name, Length

Name                         Length
----                         ------
bole-offline-r6-final.zip 236029892


(base) PS D:\apps\BoleAgentSdk\samples\console-c> Get-FileHash $zip -Algorithm SHA256 | Format-List


Algorithm : SHA256
Hash      : AAEEAFD8C7E3A520743FD367CE8955B00923A500A453B7D6B604DC1F30DBCC0D
Path      : D:\bole-offline-r6-final.zip



(base) PS D:\apps\BoleAgentSdk\samples\console-c> Get-Content (Join-Path $root 'VERSION.json')
{
    "sdk":  "0.1.0",
    "abi":  "1.0.0",
    "protocol":  1,
    "harness":  "0.1.7-alpha.2",
    "runtime":  "0.1.7-alpha.2",
    "node":  "v24.18.0",
    "presets":  [
                    "standard",
                    "rsi-infer"
                ],
    "plugins":  {
                    "@bole/sdk-server":  "0.1.0",
                    "@deepseek-ai/dsh-skill-bole-experience":  "0.1.7-alpha.2"
                },
    "experience":  {
                       "name":  "@deepseek-ai/dsh-skill-bole-experience",
                       "version":  "0.1.7-alpha.2"
                   },
    "tools":  {
                  "toy-mcp":  "0.2.0"
              },
    "builtAt":  "2026-10-23T02:11:04.8253076Z"
}
(base) PS D:\apps\BoleAgentSdk\samples\console-c>
```

2. 交付物清单

交付物	位置	说明
SDK 动态库	`bin/bole_agent.dll`	MSVC x64 `/MT`，仅依赖 `KERNEL32.dll`
导入库/头文件	`bin/bole_agent.lib`、`bin/bole_agent.h`	C ABI

交付物	位置	说明
随包运行时	`runtime/`	node.exe + dsh 依赖树 + 补丁
可写运行目录	`home/`	profile、会话、日志、MCP 配置
控制台示例	`samples/console-c/`	`bole_console.exe`、`bole_selfcheck.exe`
界面示例	`samples/gui-win32/`	双击即用、多轮、RSI、取消
玩具 MCP	`tools/toy-mcp/`	12 个无副作用工具
交付文档	`docs/`	接口、集成、离线部署、错误码
安装/验收脚本	包根	`install.ps1`、`verify.ps1`、`acceptance.ps1`

3. 环境与前置条件

项	值
目标 OS	Windows 10 / 11 x64（本次开发机：Windows 11 25H2）
目标机依赖	无 Node、无 VS/VC++ 运行库；普通用户
本次运行账号	管理员（开发机）；**干净 VM 需普通用户复核**
模型网关	`http://118.196.39.11:8009`
模型 ID	`qwen3.8-27b`
API key	无
网络	公司内网；开发机公网探测不可达

4. 安装与自检

先定义占位符：

占位符	含义
`<package-root>`	解压后的 `bole-agent-sdk-win-x64` 目录
`<target>`	第一次安装目录，例如 `D:\apps\BoleAgentSdk`；**不要用解压目录**
`<target-2>`	`acceptance.ps1` 专用的**全新**目录，不能已存在
`<gateway>`	内网网关根地址，例如 `http://118.196.39.11:8009`，不带 `/v1`
`<zip>`	原始 `bole-offline-r6-final.zip`


```
cd <package-root>

# <target> 是独立安装目录，不是解压出来的 bole-agent-sdk-win-x64 目录
.\install.ps1 -Target <target> -ModelGateway <gateway>

# 与 install 的 -Target 相同
.\verify.ps1 -Root <target>
```

期望：

```
verify ok
```

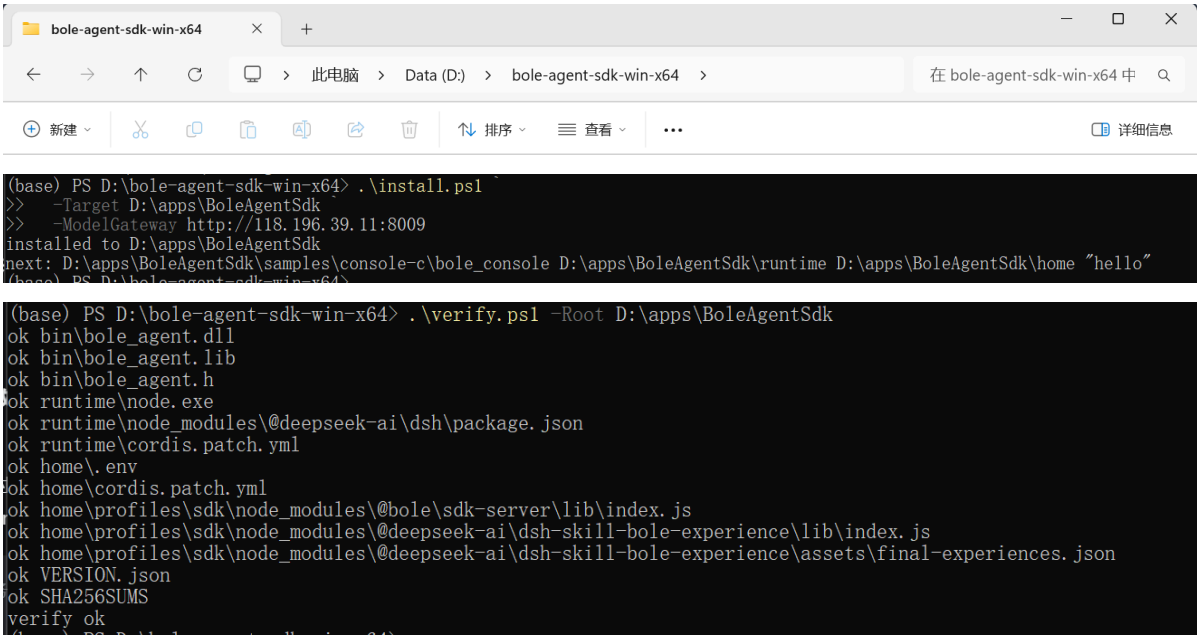

然后跑一键验收：

```
cd <package-root>

# 开发机（Node 在 PATH）使用：
.\acceptance.ps1 `
  -Package . `
  -Target <target-2> `
  -ModelGateway <gateway> `
  -Prompt "调用玩具工具 mcp__toy__add 计算 1+2，然后用结果回答。" `
  -ZipPath <zip> `
  -SkipCleanEnvironmentCheck

# 干净 VM：去掉 -SkipCleanEnvironmentCheck
# <target-2> 必须是全新目录，不能已存在
```

期望：

```
ACCEPTANCE PASS
```

```
(base) PS D:\apps\BoleAgentSdk> .\acceptance.ps1 `
>>   -Package . `
>>   -Target D:\apps\BoleAgentSdk-acceptance `
>>   -ModelGateway http://118.196.39.11:8009 `
>>   -Prompt "调用玩具工具 mcp__toy__add 计算 1+2，然后用结果回答。" `
>>   -ZipPath D:\bole-offline-r6-final.zip

=== environment ===
computer=TR
user=28032
admin=True
os=Microsoft Windows 11 家庭版 中文版 10.0.26200
ram_gb=15.7
node=D:\nodejs\node.exe
msvc_cl=not found
gateway=http://118.196.39.11:8009
package=D:\apps\BoleAgentSdk
target=D:\apps\BoleAgentSdk-acceptance
ACCEPTANCE FAIL: node is on PATH; this is not a clean target VM (use -SkipCleanEnvironmentCheck only on a dev host)
(base) PS D:\apps\BoleAgentSdk>
```

> 注意：这张图是"环境不干净"时的预期拒绝，不能作为最终验收通过证据；最终报告应替换为加参数后的 `ACCEPTANCE PASS` 截图，或由测试团队在干净 VM 上补拍。


5. 验收结果对照


原任务验收	结果	证据
1. 无外网/无开发环境，输入→模型→工具→结果 <1 分钟	开发机真实网关通过；干净 VM 待测试	图 5 console；
2. 任务期间界面可交互，取消生效	本机通过：sleep 5s 期间 `Responding=True`，Cancel 后 `finished (aborted)`	图 6 running、图 7 aborted
3. RSI 开关生效且可观测	通过；收据 `available`，`bundleId=qwen38-service-v3`	图 8 GUI RSI + 图 9 selfcheck
4. 按文档独立集成可复现	待测试/伙伴	四份文档 + 伙伴集成日志
5. 事件序列与 harness 一致、无伪造	通过；验证阶段明确不产生	图 9；`selfcheck-trace.jsonl` 截图待补；不伪造 `VERIFY_CHECK`


> 图 5-9 已按实际截图内容补图注；仍需补一张真正的 `ACCEPTANCE PASS` 截图和一张 `selfcheck-trace.jsonl` 截图（图 4 是 clean 检查拒绝，不能当 PASS）。

```
D:\apps\BoleAgentSdk\samples\console-c>.\bole_console.exe "调用玩具工具 mcp__toy__add 计算 1+2，然后用结果回答。"
[ready]


[answer] {"v":1,"turn":1,"step":1,"messageId":"e418bfd3-5e4b-4f7e-82ba-7a2e13acf767","text":"","reasoning":"","usage":{"
inputTokens":9117,"outputTokens":40,"totalTokens":9157}}
[tool] start {"v":1,"callId":"chatcmpl-tool-95fecaf9c8aa6287","tool":"mcp__toy__add","args":{"a":1,"b":2}}
[tool] done {"v":1,"callId":"chatcmpl-tool-95fecaf9c8aa6287","isError":false,"resultSummary":"3","truncated":false,"tool
":"mcp__toy__add"}
{"v":1,"channel":"text","attemptId":"console-33460:2","revision":11,"text":"1 +"}{"v":1,"channel":"text","attemptId":"co
nsole-33460:2","revision":11,"text":" 2"}{"v":1,"channel":"text","attemptId":"console-33460:2","revision":11,"text":" =
"}{"v":1,"channel":"text","attemptId":"console-33460:2","revision":11,"text":"3"}
[answer] {"v":1,"turn":1,"step":2,"messageId":"1520114d-bf96-456e-be68-449720df001c","text":"1 + 2 = 3","reasoning":"","
usage":{"inputTokens":9175,"outputTokens":8,"totalTokens":9183}}
[task] finished
```

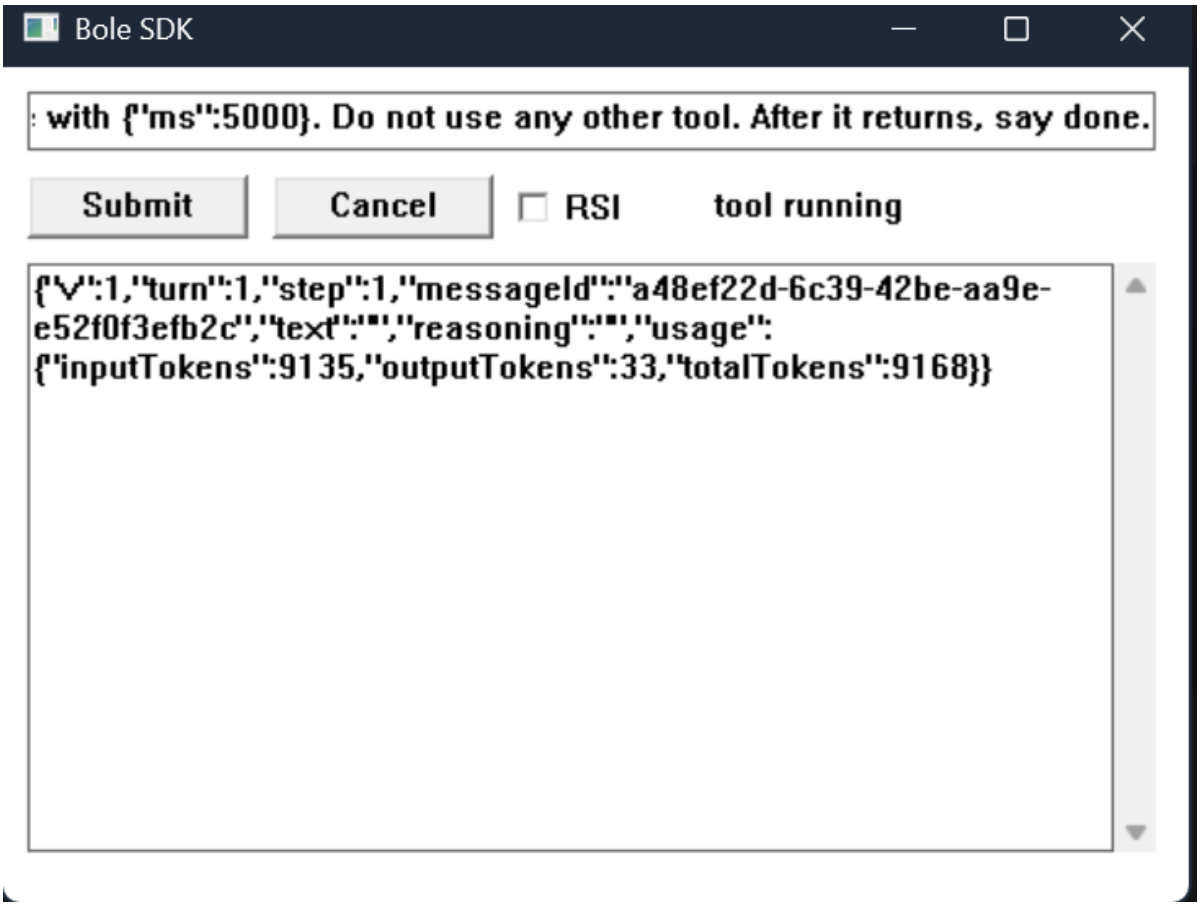

Bole SDK
: with {"ms":5000}. Do not use any other tool. After it returns, say done.
Submit
Cancel
RSI
tool running
{"v":1,"turn":1,"step":1,"messageId":"a48ef22d-6c39-42be-aa9e-e52f0f3efb2c","text":"","reasoning":"","usage":{"inputTokens":9135,"outputTokens":33,"totalTokens":9168}}

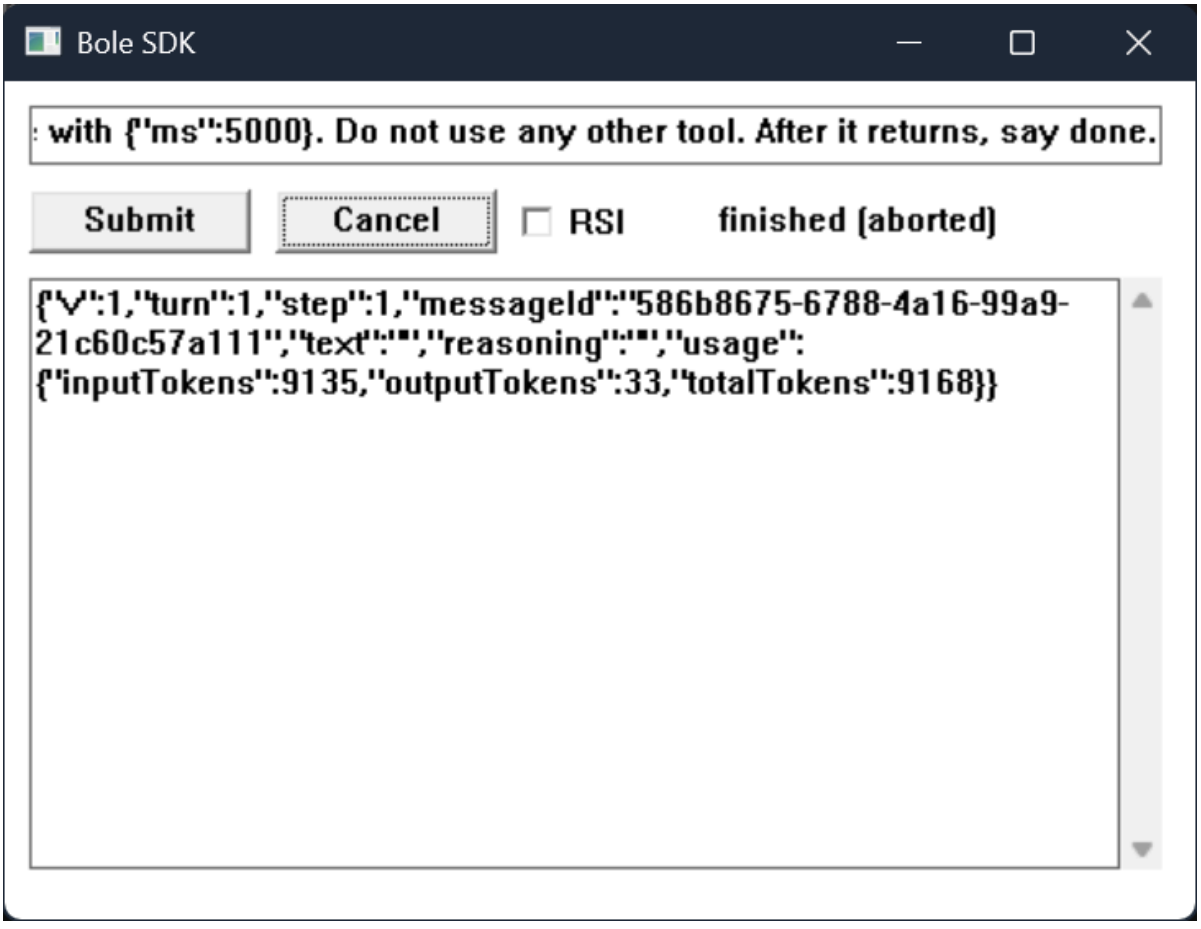
Bole SDK
: with {"ms":5000}. Do not use any other tool. After it returns, say done.
Submit
Cancel
RSI
finished (aborted)
{"v":1,"turn":1,"step":1,"messageId":"586b8675-6788-4a16-99a9-21c60c57a111","text":"","reasoning":"","usage":{"inputTokens":9135,"outputTokens":33,"totalTokens":9168}}

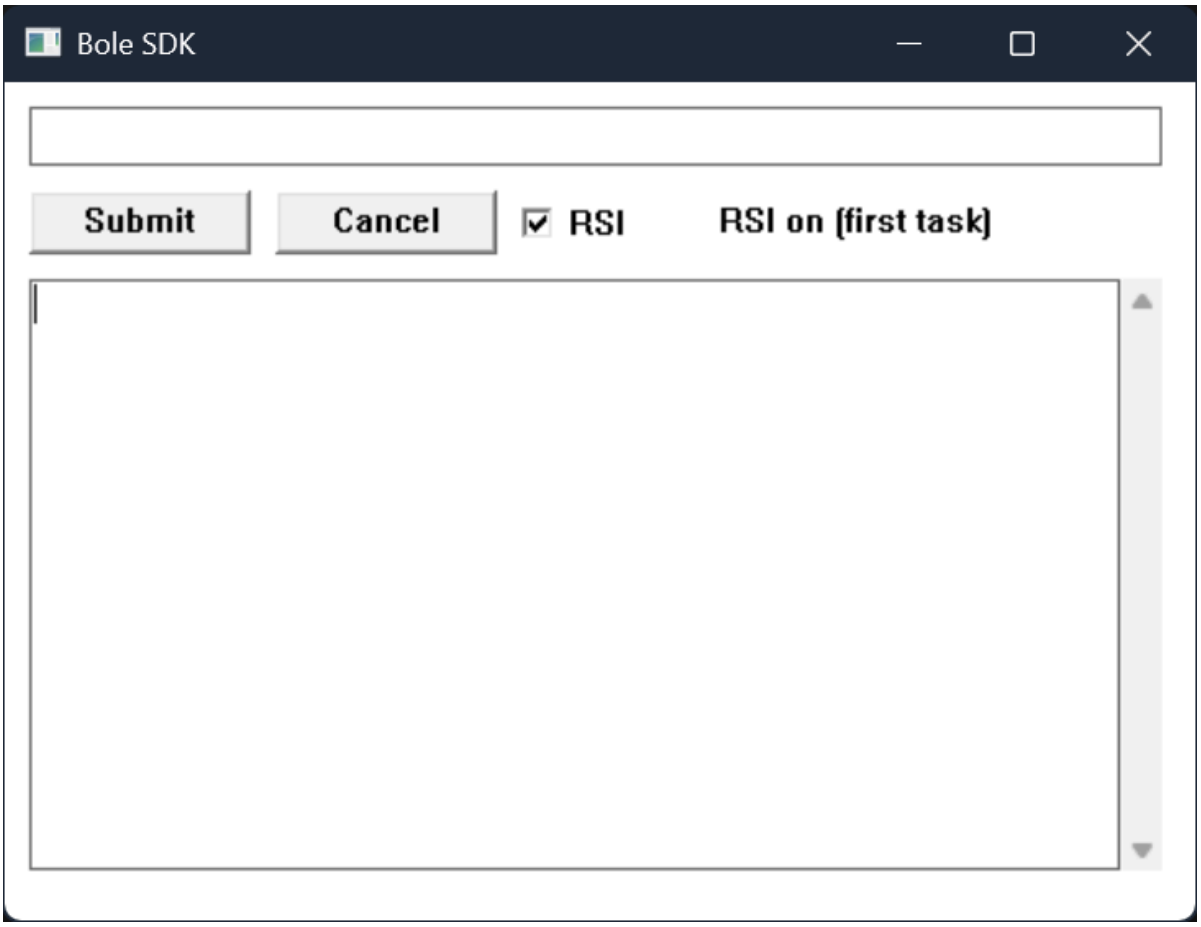


```
(base) PS D:\apps\BoleAgentSdk\samples\console-c> .\bole_selfcheck.exe
>>   "调用玩具工具 mcp__toy__add 计算 1+2，然后用结果回答。"
PASS runtime ready
PASS preset plane (standard)
PASS standard tool turn
PASS rsi-infer receipt ({"v":1,"scope":"session","sessionId":"selfcheck-rsi-14296","enabled":true,"preset":"rsi-infer","composed":tru
e,"source":"receipt","delivery":{"status":"available","bundleId":"qwen38-service-v3","deliveredMemoryIds":[],"provider":"bole","model
":"qwen3.8-27b","bodySha256":null}})
PASS cancel aborted turn
PASS trace export (19 events)
PASS selfcheck
(base) PS D:\apps\BoleAgentSdk\samples\console-c>
```

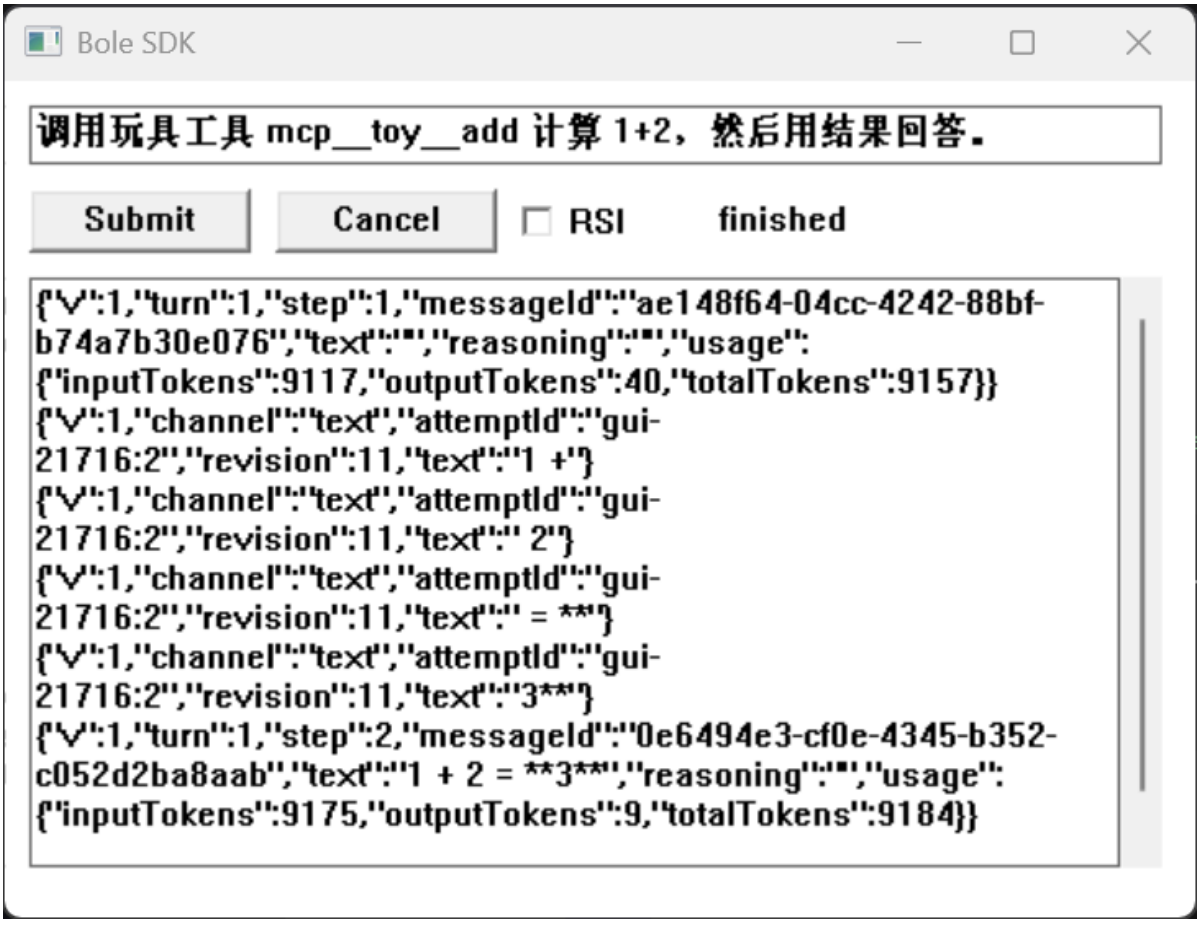

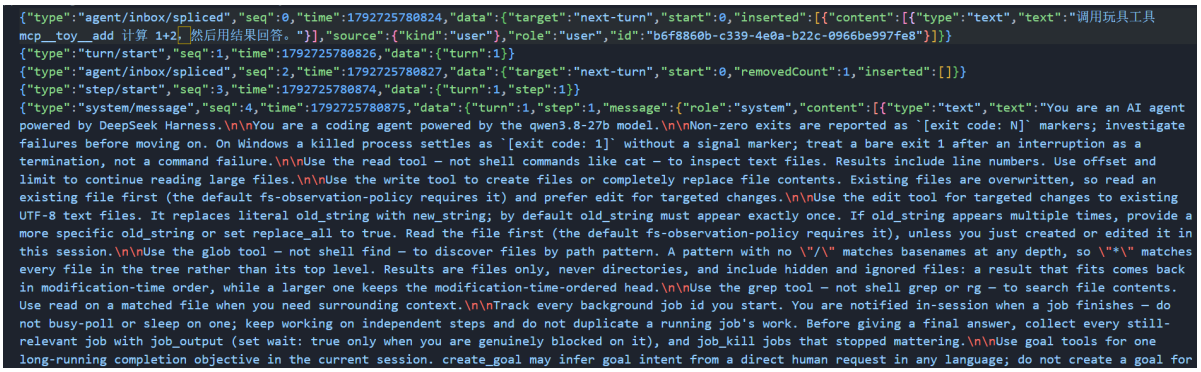
{"type":"agent/inbox/spliced","seq":0,"time":1792725780824,"data":{"target":"next-turn","start":0,"inserted":[{"content":[{"type":"text","text":"调用玩具工具 mcp__toy__add 计算 1+2，然后用结果回答。"}],"source":{"kind":"user"},"role":"user","id":"b6f8860b-c339-4e0a-b22c-0966be997fe8"}]}}
{"type":"turn/start","seq":1,"time":1792725780826,"data":{"turn":1}}
{"type":"agent/inbox/spliced","seq":2,"time":1792725780827,"data":{"target":"next-turn","start":0,"removedCount":1,"inserted":[]}}
{"type":"step/start","seq":3,"time":1792725780874,"data":{"turn":1,"step":1}}
{"type":"system/message","seq":4,"time":1792725780875,"data":{"turn":1,"step":1,"message":{"role":"system","content":[{"type":"text","text":"You are an AI agent powered by DeepSeek Harness.\n\nYou are a coding agent powered by the qwen3.8-27b model.\n\nNon-zero exits are reported as `[exit code: N]` markers; investigate failures before moving on. On Windows a killed process settles as `[exit code: 1]` without a signal marker; treat a bare exit 1 after an interruption as a termination, not a command failure.\n\nUse the read tool — not shell commands like cat — to inspect text files. Results include line numbers. Use offset and limit to continue reading large files.\n\nUse the write tool to create files or completely replace file contents. Existing files are overwritten, so read an existing file first (the default fs-observation-policy requires it) and prefer edit for targeted changes.\n\nUse the edit tool for targeted changes to existing UTF-8 text files. It replaces literal old_string with new_string; by default old_string must appear exactly once. If old_string appears multiple times, provide a more specific old_string or set replace_all to true. Read the file first (the default fs-observation-policy requires it), unless you just created or edited it in this session.\n\nUse the glob tool — not shell find — to discover files by path pattern. A pattern with no \"/\" matches basenames at any depth, so \"*\" matches every file in the tree rather than its top level. Results are files only, never directories, and include hidden and ignored files: a result that fits comes back in modification-time order, while a larger one keeps the modification-time-ordered head.\n\nUse the grep tool — not shell grep or rg — to search file contents. Use read on a matched file when you need surrounding context.\n\nTrack every background job id you start. You are notified in-session when a job finishes — do not busy-poll or sleep on one; keep working on independent steps and do not duplicate a running job's work. Before giving a final answer, collect every still-relevant job with job_output (set wait: true only when you are genuinely blocked on it), and job_kill jobs that stopped mattering.\n\nUse goal tools for one long-running completion objective in the current session. create_goal may infer goal intent from a direct human request in any language; do not create a goal for

6. 截图清单（交付前核对）

证据	当前状态	必须展示
包信息	已有	zip 文件名、SHA256、`VERSION.json`
安装	已有图 2/3	`installed to ...`、`verify ok`
console	已有图 5	`[tool] start`、`mcp__toy__add`、`isError:false`、`resultSummary:3`、`[task] finished`
selfcheck	已有图 9	B8 全 PASS，含 RSI receipt、cancel、trace
GUI 结果	已有图 10	输入、Submit、结果
GUI running	已有图 6	`tool running`，窗口可操作
GUI aborted	已有图 7	`finished (aborted)`
trace	图11	`selfcheck-trace.jsonl` 行数/片段

7. 已知限制

1. **验证阶段**：当前没有真实验证事件来源，`VERIFY_CHECK(40)` 不产生、不承诺；不伪造。验收第 5 条只能以 `TASK_FINISHED` / `TASK_FAILED` 为准。
2. **MCP 工具注册**：只支持 `<DSH_HOME>/cordis.patch.yml` 声明 + 重启；不支持运行时注册/注销。现场新增工具必须改配置并重启。
3. 不提供单会话关闭；会话随 `bole_release` 失效。
4. 仅 Windows 10/11 x64；不提供 32 位。
5. 未签名 DLL/exe；EDR/杀软策略需现场确认。
6. 经验包只对 `qwen3.8-27b` / `Ornith-1.5-35B-A3B` 投递；其他模型为 `unsupported-model`。
7. 本报告是开发机预验收；干净 VM、普通用户、断外网、Win10/Ornith/EDR 尚未由测试团队覆盖。

8. 测试团队执行项

- [ ] 干净 Win10/11 x64 VM，普通用户；
- [ ] 无 Node、无 VS、无 VC++ 运行库；
- [ ] 只开内网，断公网；
- [ ] 核对 zip SHA256；
- [ ] `install.ps1` + `verify.ps1`；
- [ ] `acceptance.ps1`（不加 `-SkipCleanEnvironmentCheck`）；
- [ ] GUI 长任务 + Cancel 录屏；
- [ ] 按四份 delivery 文档独立集成一次；
- [ ] 记录 OS/模型/网关/包 hash/耗时/失败复现步骤。

9. 附件清单

```
bole-offline-r6-final.zip
SHA256.txt
VERSION.json
acceptance/            # transcript、install/verify/console/selfcheck/gui 日志
assets/                # 本文截图
selfcheck-trace.jsonl
四份交付文档（包内 docs/）
```