

A Compact arXiv Template for Machine Learning Papers

Author 1¹♥ Author 2¹♥ Author 3² Author 4^{1,2}

¹The Ohio State University ²Example Research Lab

♥ Core contributors.

- 🌐 **Project Page:** [Project page template](#)
- 🔗 **Code:** [username/repo](#)
- 📄 **Data:** [username/data](#)
- 📦 **Models:** [model-7B](#) [model-13B](#)
- 📎 **Poster:** [poster.pdf](#)
- 📽 **Slides:** [slides.pdf](#)
- 📺 **Video:** [youtu.be/xxxx](#)
- ✉ **Contact:** author1@example.edu

Abstract



This document is both the template and its manual. It keeps the page geometry and type sizes of NeurIPS, so a conference submission moves to arXiv without reflowing, and adds a first page with authors, contribution notes, resource links, and an abstract box. Every element a machine learning paper typically needs is shown in context: a teaser figure, callout boxes, figures, tables, plots, algorithms, theorems, code listings, prompts, review comments, references, and an appendix with its own table of contents.


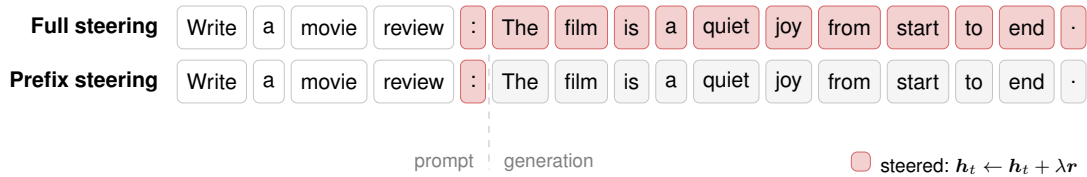


Figure 1 Teaser. Full steering shifts the hidden state at every generated position; Prefix Steering shifts it only over a short span starting at the final prompt token, and generation continues from the context this creates.

Contents

1	Introduction	3
2	Design	3
3	Writing Conventions	3
	References	5
	Appendix	6
A	Proofs	6
B	Implementation	6
B.1	Code	6
B.2	Prompts	6
B.3	Hyperparameters	6
B.4	Figures	7

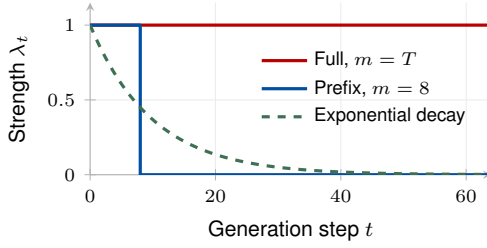

Algorithm 1 Prefix steering

Require: prompt x , direction r , strength λ , m

```

1: for  $t = 1, \dots, T$  do
2:    $h_t \leftarrow \text{FORWARD}(x, y_{<t})$ 
3:   if  $t \leq m$  then
4:      $h_t \leftarrow h_t + \lambda r$ 
5:   end if
6:    $y_t \sim p(\cdot \mid h_t)$ 
7: end for
8: return  $y_{1:T}$ 

```

Figure 2 Steering schedules. **Left:** strength λ_t in Eq. (1) under full, prefix, and decaying schedules, drawn with the arxiv plot pgfplots style. **Right:** the corresponding procedure, typeset with algpseudocode.

1 Introduction

Conference styles are designed for anonymous review, not for the version people read and cite. An arXiv version needs a first page that says who wrote the paper, where its resources live, and what it finds, while keeping the reviewed body text unchanged. This template does that on top of NeurIPS-like geometry [1] and keeps commands common in activation steering papers [2–4].

? Research questions

- Q1.** Can the arXiv version share the conference body text unchanged?
- Q2.** Can common paper elements be styled once, in the template, instead of per paper?

Running example. In activation steering, a hidden state h_t at generation step t is shifted along a unit direction r ,

$$h_t \leftarrow h_t + \lambda_t r, \quad \lambda_t = \lambda \mathbb{I}[t \leq m], \quad (1)$$

where full steering uses $m = T$ and prefix steering uses a short prefix $m \ll T$. Figure 2 plots these schedules and Algorithm 1 states the procedure.

2 Design

First page. `\maketitle` followed by the abstract environment produces the title, authors, resource rows, and abstract box; a figure with placement [H] right after the abstract becomes the teaser (Figure 1). All resource rows (project page, code, data, models, poster, slides, video, contact) are optional: keep only the ones you have, even just one, and the rest disappear. `\arxivaccent{R, G, B}` recolors the page. Review comments are on by default: **[ZZ: a comment.]** **[XZ: a comment.]** Revised, edited.

Outline. `\arxivoutline` after the teaser puts the contents on its own page, and the main text starts on the next page. Its optional argument sets how much of the appendix is listed: `\arxivoutline` lists appendix subsections, `\arxivoutline[section]` lists only appendix sections, and `\arxivoutline[none]` omits them. Remove the command to skip the outline page.

Typography. Body text is Times at 10 pt, headings and caption labels are Helvetica, and references are set one size smaller. Caption labels are bold sans serif and subfigure captions are one size smaller (Figure 3). Table 1 lists every command the template adds.

3 Writing Conventions

Results. State the claim, then the evidence. Use the `theorem`, `lemma`, `prop`, `cor`, `definition`, and `remark` environments, with proofs in the appendix (Appendix A); code and prompts are in Appendix B.

Table 1 Template commands. Everything else is standard L^AT_EX.

Command	Purpose
<code>\and, \institute, \arxivnotes, \coremark</code>	Authors, affiliations, contribution notes
<code>\projectpage, \code, \poster, \slides, \video, \contact</code>	Optional resource rows
<code>\arxivresource{icon}{label}{links}</code>	Custom resource row, e.g. data or models
<code>\arxivlogo[width]{file}</code>	Logo in the abstract box
<code>\arxivaccent{R, G, B}</code>	Title-block color
<code>\researchquestions, \takeaway</code>	Callout boxes
<code>promptbox, judgepromptbox</code>	Prompt boxes
<code>\zz, \xz, \revise, \edit</code>	Review comments and revisions
<code>\arxivoutline[depth]</code>	Contents page; depth of appendix entries
<code>\arxivappendix</code>	Appendix heading with its own contents
<code>\appref{label}</code>	Linked “Appendix X” reference

Proposition 1. *Under Eq. (1), the total intervention $\sum_{t=1}^T \lambda_t \|\mathbf{r}\|_2$ equals λm , so prefix steering uses a fraction m/T of the full-steering budget.*

References. Cite with `\citep` for parenthetical citations [5, 6] and `\citet` when the authors are the subject: Scalena et al. [7] compose several steering directions. Protect acronyms in titles with braces, such as {MMLU-Pro} [8]; datasets [9] use @misc with a url.

💡 Takeaway

Write the conference version first. The arXiv version only changes the preamble: swap the style file for `arxiv.sty`, add the title-block metadata, and start the appendix with `\arxivappendix`.

References

- [1] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901, 2020.
- [2] Alexander Matt Turner, Lisa Thiergart, Gavin Leech, David Udell, Juan J Vazquez, Ulisse Mini, and Monte MacDiarmid. Steering language models with activation engineering. *arXiv preprint arXiv:2308.10248*, 2023.
- [3] Nina Rimskey, Nick Gabrieli, Julian Schulz, Meg Tong, Evan Hubinger, and Alexander Turner. Steering Llama 2 via contrastive activation addition. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15504–15522, 2024. doi: 10.18653/v1/2024.acl-long.828.
- [4] Andy Zou, Long Phan, Sarah Chen, James Campbell, Phillip Guo, Richard Ren, Alexander Pan, Xuwang Yin, Mantas Mazeika, Ann-Kathrin Dombrowski, Shashwat Goel, Nathaniel Li, Michael J. Byun, Zifan Wang, Alex Mallen, Steven Basart, Sanmi Koyejo, Dawn Song, Matt Fredrikson, Zico Kolter, and Dan Hendrycks. Representation engineering: A top-down approach to AI transparency. *arXiv preprint arXiv:2310.01405*, 2023.
- [5] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. PaLM: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240):1–113, 2023.
- [6] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [7] Daniel Scalena, Gabriele Sarti, and Malvina Nissim. Multi-property steering of large language models with dynamic activation composition. In *Proceedings of the 7th BlackboxNLP Workshop*, 2024. URL <https://openreview.net/forum?id=yh0E8fq8zh>.
- [8] Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, et al. MMLU-Pro: A more robust and challenging multi-task language understanding benchmark. In *Advances in Neural Information Processing Systems*, volume 37, pages 95266–95290, 2024.
- [9] Intel. PoliteGuard. Hugging Face dataset, 2025. URL <https://huggingface.co/datasets/Intel/polite-guard>.

Appendix

Contents

A Proofs	6
B Implementation	6
B.1 Code	6
B.2 Prompts	6
B.3 Hyperparameters	6
B.4 Figures	7

A Proofs

Proof of Proposition 1. Since $\|\mathbf{r}\|_2 = 1$ and $\lambda_t = \lambda$ for $t \leq m$ and 0 otherwise, $\sum_{t=1}^T \lambda_t \|\mathbf{r}\|_2 = \sum_{t=1}^m \lambda = \lambda m$. Full steering has $m = T$, so the ratio is m/T . $\square$

Remark 1. The budget counts only direct interventions; it ignores how a shift at step t propagates to later steps through attention.

B Implementation

B.1 Code

```
1 def prefix_hook(module, inputs, output, step, r, lam, m):
2     """Add lam * r to the last hidden state for the first m generated tokens."""
3     if step < m: # prefix only
4         output[:, -1, :] += lam * r
5     return output
```

B.2 Prompts

User: Write a short story about a lighthouse keeper.
Assistant: [generated with prefix steering, $m = 8$]

Judge prompt


You are given a response. Answer YES if it expresses the target concept and NO otherwise. Output only the label.

B.3 Hyperparameters


Table 2 Hyperparameters. Values are template placeholders.

Parameter	Value
Prefix length m	8
Strength λ	xx.x
Maximum new tokens T	64


B.4 Figures



(a) First panel.



(b) Second panel.

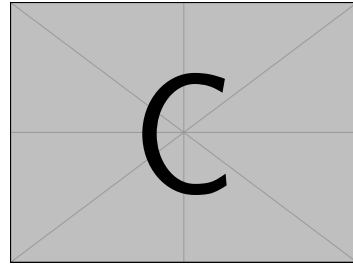

(c) Third panel.

Figure 3 Subfigures. Replace the placeholders with PDF figures from `figs/`.