

Typeset Code Listings and Emulate Console Screenshots with L^AT_EX Beautifully

<https://github.com/xziyue/latex-beautiful-listings-screenshot>

Ziyue “Alan” Xiang

May 10, 2020

Contents

1	Quick Start Guide	1
2	Typeset Source Code Listings	1
3	Typeset Generic Verbatims	2
4	Typeset Console Screenshots	3
4.1	Unicode Support	5
5	Add Captions	5

1 Quick Start Guide

1. Download `customlisting.sty` from source and place it in your project folder.
2. Load the style with `\usepackage{customlisting}`.

This package provides the following environments:

- `tcbconsole`, `tcbconsole*`
- `tcbcode`, `tcbcode*`
- `tcbverbatim`, `tcbverbatim*`

This package also provides the following commands:

- `tcbinputcode`, `tcbinputcode*`
- `tcbinputverbatim`, `tcbinputverbatim*`

The starred environments/commands offer *unbreakable* listing boxes; while normal ones are *breakable*.

2 Typeset Source Code Listings

- Typeset source code inside $\text{T}_{\text{E}}\text{X}$ files

```
1 \begin{tcbcode}{cpp}
2 #include <iostream>
3 using namespace std;
4
5 int main(){
6     cout<<"Hello World\n";
7     return 0;
8 }
9 \end{tcbcode}
```

Code

```
1 #include <iostream>
2 using namespace std;
3
4 int main(){
5     cout<<"Hello World\n";
6     return 0;
7 }
```

- Typeset source code from external source files

```
1 \tcbinputcode*{cpp}{example.cpp}
```

Code

```
1 #include <iostream>
2 using namespace std;
3
4 int main(){
5     cout<<"Hello World\n";
6     return 0;
7 }
```

- Inline source code

```
1 \cinline|printf("%s", "some text");|
2 \pyinline|map(lambda x:x, [1, 2])|
3 \rawinline|raw value|
```

`printf("%s", "some text");` `map(lambda x:x, [1, 2])` raw value

- Declare inline macros for other languages

```
1 \newmintinline[rubyinline]{ruby}{frame=none, fontsize=\fontsize{10}{10}}
2 \rubyinline|puts 'Hello, world!'|
```

`puts 'Hello, world!'`

3 Typeset Generic Verbatims

- Typeset generic verbatims inside $\text{T}_{\text{E}}\text{X}$ files

```
1 \begin{tcbverbatim}
2
3 \begin{tcbverbatim}
4 \begin{tcbverbatim}
5 \begin{tcbverbatim}
6 \begin{tcbverbatim}
7 \begin{tcbverbatim}
8 \end{tcbverbatim}
9 \end{tcbverbatim}
10 \end{tcbverbatim}
11 \end{tcbverbatim}
```

Verbatim

```
\begin{tcbverbatim}
\begin{tcbverbatim}
\begin{tcbverbatim}
\begin{tcbverbatim}
\begin{tcbverbatim}
\begin{tcbverbatim}
\end{tcbverbatim}
\end{tcbverbatim}
\end{tcbverbatim}
\end{tcbverbatim}
```

- Typeset generic verbatims from external files

```
1 \tcbinputverbatim*{wireshark.txt}
```

Verbatim

No.	Time	Source	Destination	Protocol	Length	Info
118	0.159070602	2604:6000:1419:404a::6	2607:f8b0:4009:805::2004	TCP	86	42136> 443 [ACK] Seq=936 Ack=52751 Win=2933 Len=0 TSval=2838670553 TSecr=302725484
119	0.177751097	192.168.0.1	192.168.0.100	DNS	140	Standard query response 0x529b A fonts.gstatic.com CNAME.gstaticadsdl1.google.com A 172.217.1.35 OPT
120	0.178038905	192.168.0.1	192.168.0.100	DNS	152	Standard query response 0x0ec8 AAAA fonts.gstatic.com CNAME.gstaticadsdl1.google.com AAAA 2607:f8b0:4009:805::2003 OPT
121	0.178444739	2604:6000:1419:404a::6	2607:f8b0:4009:805::2003	TCP	94	3566> 443 [SYN] Seq=0 Win=64800 Len=0 MSS=1440 SACK_PERM=1 TSval=4016727607 TSecr=0 WS=128
122	0.180362133	2607:f8b0:4009:805::2004	2604:6000:1419:404a::6	TCP	86	443> 42188 [ACK] Seq=1883 Ack=1337 Win=68096 Len=0 TSval=319629076 TSecr=2838670536
123	0.185824541	2607:f8b0:4009:806::2003	2604:6000:1419:404a::6	TCP	86	443> 53154 [ACK] Seq=1 Ack=591 Win=66816 Len=0 TSval=1161394810 TSecr=356743249
124	0.187455681	2607:f8b0:4009:806::2003	2604:6000:1419:404a::6	TLSv1.3	298	Server Hello, Change Cipher Spec, Application Data
125	0.187460441	2604:6000:1419:404a::6	2607:f8b0:4009:806::2003	TCP	86	53154> 443 [ACK] Seq=591 Ack=213 Win=64768 Len=0 TSval=356743285 TSecr=1161394811
126	0.187881868	2604:6000:1419:404a::6	2607:f8b0:4009:806::2003	TLSv1.3	150	Change Cipher Spec, Application Data
127	0.187975438	2604:6000:1419:404a::6	2607:f8b0:4009:806::2003	TLSv1.3	172	Application Data
128	0.188000758	2604:6000:1419:404a::6	2607:f8b0:4009:806::2003	TLSv1.3	323	Application Data
129	0.188267503	2604:6000:1419:404a::6	2607:f8b0:4009:806::2003	TLSv1.3	649	Application Data
130	0.194787446	2607:f8b0:4009:805::2004	2604:6000:1419:404a::6	TCP	86	443> 42136 [ACK] Seq=52751 Ack=936 Win=609 Len=0 TSval=302725520 TSecr=2838670548
131	0.211610817	2607:f8b0:4009:805::2003	2604:6000:1419:404a::6	TCP	94	443> 39596 [SYN, ACK] Seq=0 Ack=1 Win=65535 Len=0 MSS=1360 SACK_PERM=1 TSval=3015134314 TSecr=4016727607
132	0.211641489	2604:6000:1419:404a::6	2607:f8b0:4009:805::2003	TCP	86	3566> 443 [ACK] Seq=1 Ack=1 Win=64896 Len=0 TSval=4016727640 TSecr=3015134314

4 Typeset Console Screenshots

Typesetting console screenshots is a bit trickier. By far, it can be done most conveniently on Ubuntu 18.04+. The key is to convert ANSI color codes used by the console into HTML. As it is shown in Figure 1, on Ubuntu 18.04+, this can be done simply by selecting the desired region, right click and select “Copy as HTML”. On other platforms, this should be also doable by dumping the terminal output to a file and using a conversion tool such as `ansi2html`.

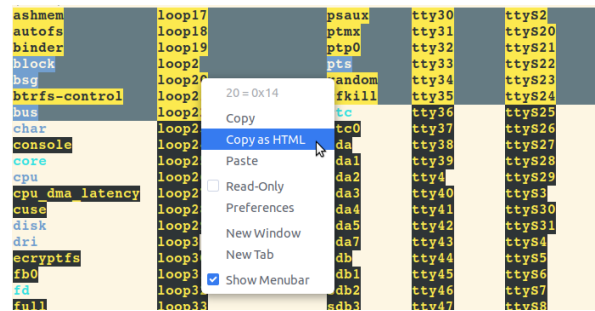


Figure 1: Converting terminal output to HTML on Ubuntu 18.04+.

Generally speaking, one needs to fulfill the following requirements:

1. Have a way of converting terminal output to HTML.
2. Be able to run the `html2latex` \LaTeX Python script. Currently, the script is dependent on `wxPython`, `TexSoup` and `PyLaTeX`. Notice that this software is very primitive and does not support many HTML features.

To typeset this screenshot in \LaTeX , one needs to run `html2latex` and paste the HTML in the upper text box. By pressing the “Convert” button, the corresponding \LaTeX code will appear in the lower text box, as it is shown in Figure 2. The result is shown as below.

```
1 \input{console-dev.txt}
```


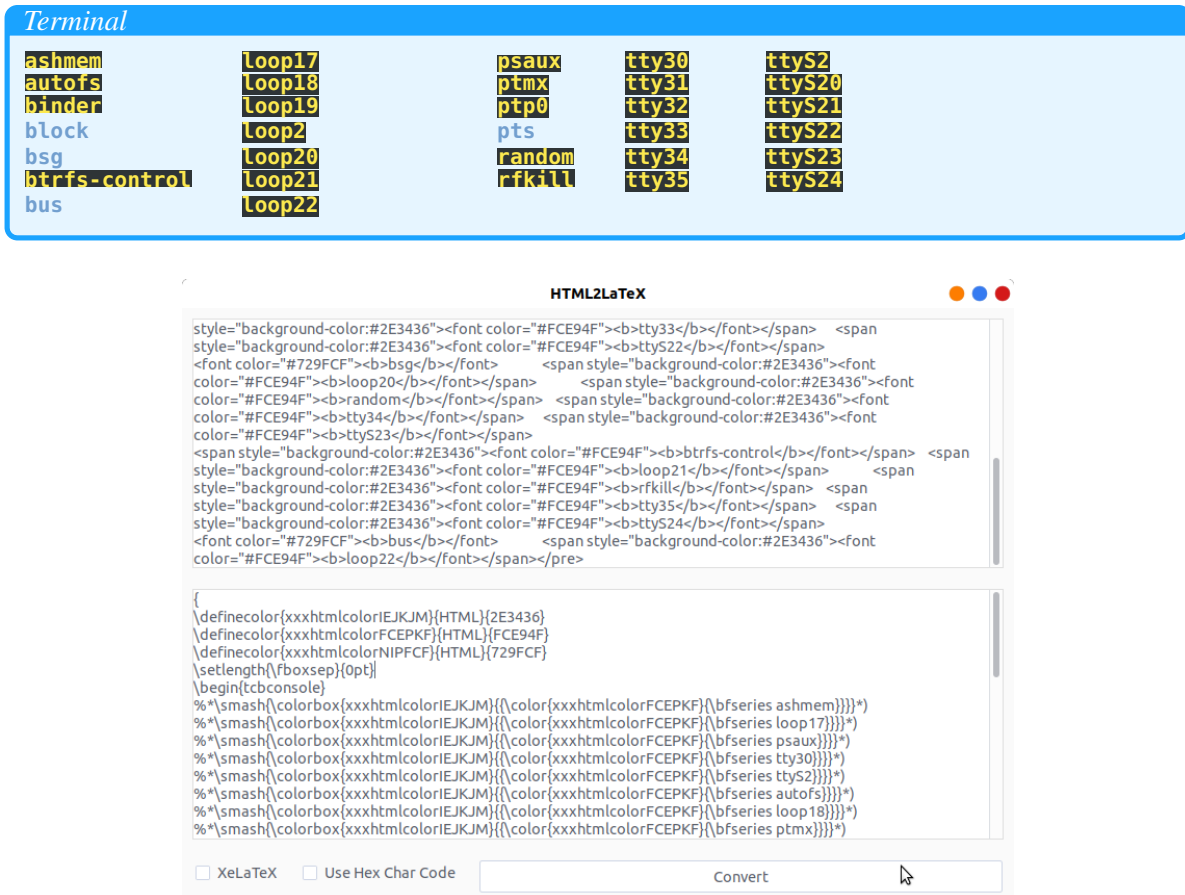


Figure 2: Using html2latex to convert HTML to \LaTeX .

Other classic command-line tools, such as emacs, are supported as well.

```
1 \input{console-emacs.txt}
```

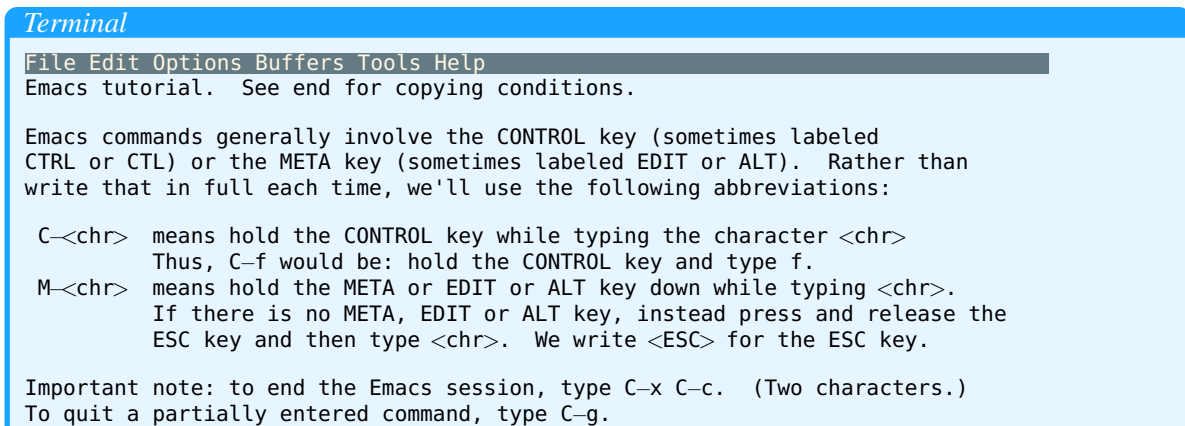

The characters ">>" at the left margin indicate directions for you to try using a command. For instance:

```
>> Now type C-v (View next screen) to move to the next screen.
    (go ahead, do it by holding down the CONTROL key while typing v).
    From now on, you should do this again whenever you finish
    reading the screen.
```

```
-UU-:----F1  TUTORIAL  Top L1  (Fundamental) -----
```

4.1 Unicode Support

Very frequently, the terminal output contains Unicode characters. For $\text{T}_{\text{E}}\text{X}$ distribution that supports Unicode input natively (e.g. $\text{X}_{\text{E}}\text{L}_{\text{A}}\text{T}_{\text{E}}\text{X}$, $\text{L}_{\text{u}}\text{a}\text{L}_{\text{A}}\text{T}_{\text{E}}\text{X}$), this should not be a problem. Just remember to tick the “XeLaTeX” check box in `html2latex`.

As for the most commonly used $\text{pdf}_{\text{L}}\text{A}_{\text{T}}\text{E}_{\text{X}}$, special treatment is needed. The solution is to use the `\unichar` command provided by loading `\usepackage[utf8x]{inputenc}`. Therefore, if you are using $\text{pdf}_{\text{L}}\text{A}_{\text{T}}\text{E}_{\text{X}}$ and there is Unicode character inside the terminal output, you should do the following:

1. Make sure to include `\usepackage[utf8x]{inputenc}` in your preamble.
2. Put `customlisting-unicode.sty` into your project folder and load it with `\usepackage{customlisting-unicode}`.
3. In `html2latex`, make sure “XeLaTeX” is unchecked.

A $\text{pdf}_{\text{L}}\text{A}_{\text{T}}\text{E}_{\text{X}}$ example is shown as below. However, keep in mind that this Unicode support is extremely limited: many characters are simply unavailable in $\text{pdf}_{\text{L}}\text{A}_{\text{T}}\text{E}_{\text{X}}$.

```
1 \input{console-unicode.txt}
```

Terminal

```
(base) alan@AlanShawn-SU-Ubuntu:~/latex-typeset-listings/doc$ cat unicode-test.txt
Basic Latin
! " # $ % & ' ( ) * +
Latin-1 Supplement
  i ç £ ¤ ¥ ¦ § ¨ © ª
Latin Extended-A
Ā ā Ă ă Ć ć Ĉ ĉ Ċ ċ
```

5 Add Captions