

Supplementary Visual A: Clipping Order


These archived panels illustrate where clipping occurs in the rendering chain. They use the same retained signed readout and are separate from the N0–Local PG completion comparison.

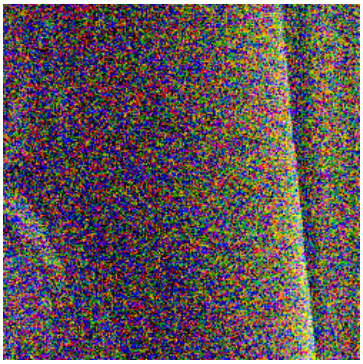


(a) Signed processing
$MH(V)$

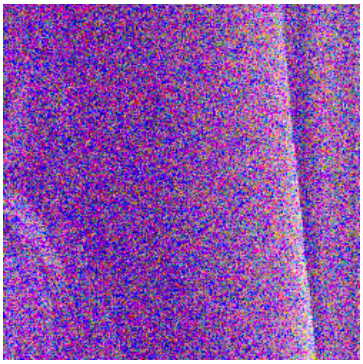

(b) Clip AHD camera RGB
$M[H(V)]_+$

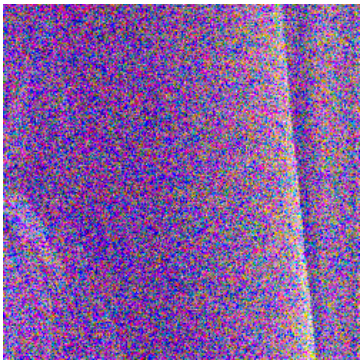

(c) Clip RAW before AHD
$MH([V]_+)$

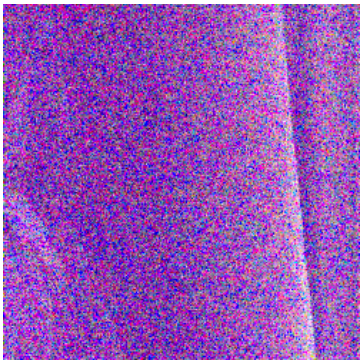

(d) Clip RAW and AHD RGB
$M[H([V]_+)]_+$

Here V is the retained signed Bayer readout, H is the fixed pedestal-preserving AHD renderer, $[x]_+ = \max(x, 0)$ acts componentwise, and M is fourfold signed-domain area averaging. Common white balance, color conversion, exposure, and final display clipping follow each displayed route.

Provenance: P2654749, Bayer crop $(x, y) = (0, 1500)$ of size 1000×1000, extracted after full-frame interpolation and reduced to the archived 250×250 panels. Original PNG pixels are reused without retouching; the delivery includes their hashes. The labels describe processing order rather than reconstruction algorithms.