

# **Python Packaging Essentials**

**Practical guide that walks you through creating, organizing, testing, and publishing Python packages.**

# Table of contents

<b>Preface</b>	<b>5</b>
Good to know . . . . .	5
 <b>I Create a package</b>	 <b>6</b>
Should I create a package? . . . . .	7
Is it hard? . . . . .	7
Is it only for large projects? . . . . .	7
 <b>1 Introduction to packaging</b>	 <b>8</b>
1.1 The <code>__init__.py</code> file . . . . .	8
1.2 Package vs Module vs Library . . . . .	8
1.3 Initialize the directory . . . . .	9
1.4 Reusable Python code . . . . .	9
1.4.1 Not reusable code . . . . .	9
1.4.2 Reusable code . . . . .	9
1.5 Package structure . . . . .	10
1.5.1 <code>my_module.py</code> . . . . .	10
1.5.2 <code>__init__.py</code> . . . . .	10
1.6 Use our package . . . . .	10
 <b>2 Organize a package</b>	 <b>12</b>
2.1 Add main Python project files . . . . .	12
2.1.1 <code>pyproject.toml</code> . . . . .	13
2.1.2 <code>LICENSE</code> . . . . .	14
2.1.3 <code>.git/</code> . . . . .	14
2.1.4 <code>.gitignore</code> . . . . .	15
2.1.5 <code>.venv/</code> . . . . .	15
2.1.6 <code>README.md</code> . . . . .	16
2.1.7 <code>sandbox.py</code> . . . . .	16
2.2 Add an internal function . . . . .	16
2.3 Final organization . . . . .	17
 <b>3 Handling dependencies</b>	 <b>19</b>
3.1 Specify dependencies . . . . .	19
3.1.1 Before . . . . .	19

3.1.2	After . . . . .	20
3.2	Avoiding dependencies . . . . .	20
3.3	Controlling the versions . . . . .	21
3.3.1	numpy==2.1.0 . . . . .	21
3.3.2	numpy<=2.1.0 . . . . .	21
3.3.3	numpy>=2.1.0,<2.2.0 . . . . .	21
3.3.4	numpy . . . . .	22
3.3.5	Set the minimum version required... . . . .	22
3.3.6	... test your code... . . . .	22
3.3.7	... and be convenient . . . . .	22
3.4	Breaking changes . . . . .	23
3.5	Required, Optional and Dev dependencies . . . . .	23
3.5.1	Required . . . . .	23
3.5.2	Optional dependencies . . . . .	24
3.5.3	Before . . . . .	25
3.5.4	After . . . . .	26
3.5.5	Dev dependencies . . . . .	26
<b>II</b>	<b>Code quality</b>	<b>28</b>
<b>4</b>	<b>Unit tests</b>	<b>29</b>
4.1	What is unit testing . . . . .	29
4.1.1	Quick definition . . . . .	29
4.1.2	Pytest . . . . .	29
4.2	Example with a simple function . . . . .	29
4.2.1	Simple function . . . . .	30
4.2.2	Simple test example and to run it . . . . .	30
4.3	In real projects . . . . .	31
4.3.1	Backward compatibility . . . . .	31
4.3.2	CI . . . . .	31
4.3.3	Collaborative work and external contributions . . . . .	32
<b>5</b>	<b>Writing documentation</b>	<b>33</b>
<b>6</b>	<b>Errors and warnings</b>	<b>34</b>
<b>7</b>	<b>API design</b>	<b>35</b>
7.0.1	Syntax 1 . . . . .	35
7.0.2	Syntax 2 . . . . .	35
7.0.3	Syntax 3 . . . . .	36

<b>III Workflow</b>	<b>37</b>
<b>8 Github Actions</b>	<b>38</b>
8.1 TLDR: Github Actions . . . . .	38
8.2 Unit testing . . . . .	39
8.3 Create and deploy documentation . . . . .	42
8.4 Code linting and formatting . . . . .	44
8.4.1 Add Ruff to your project . . . . .	44
8.4.2 Create the GitHub Action . . . . .	45
8.5 FAQ . . . . .	46
8.5.1 I didn't understand certain things . . . . .	46
8.5.2 Where does the code run? . . . . .	46
8.5.3 Can I run it on my machine? . . . . .	46
<b>9 Pre-commit Hooks</b>	<b>47</b>
9.1 TLDR: What is pre-commit? . . . . .	47
9.2 How it looks . . . . .	47
9.3 How to set up . . . . .	48
9.3.1 1. Configuration . . . . .	48
9.3.2 2. Install . . . . .	49
9.3.3 3. Commit . . . . .	49
9.4 FAQ . . . . .	50
9.4.1 "Files were modified by this hook" . . . . .	50
9.4.2 "Hook failed" . . . . .	50
9.4.3 "Nothing happens when I commit" . . . . .	50
<b>10 Publish to PyPI</b>	<b>51</b>
10.1 note . . . . .	51
10.2 PyPI (Python Package Index) . . . . .	51
10.3 pip (and friends) . . . . .	51
<b>11 Bonus</b>	<b>53</b>
<b>Contributing</b>	<b>54</b>
Set up environment . . . . .	54
Make changes . . . . .	55

# Preface

The aim of this site is to provide all the must known practices when it comes to create a Python package. It offers **multiple blog posts**, where each of them covers one topic with a few key points. The goal here is to empower anyone with just basic Python knowledge.

We'll go over concrete examples, use clear explanations, and try as much as possible to go straight to the point so that anyone with some Python knowledge can create their own Python packages.

All blog posts aim to be very practical, and do not try to be exhaustive. If you're looking to learn more about a very specific topic, it's recommended to use the official [Python packaging guide](#). As a matter of fact, this previous guide is cited a large number of times in the blog posts.

## Good to know

- All blog posts are **independant**. Even if they follow some sort of order, it's perfectly fine to just look at what interests you.
- This site is [open source](#) and in **continuous improvement**. If you want to suggest an improvement (correct an error, improve an explanation, add an example or anything else), it's more than welcomed. It starts [here](#).
- You can download the **PDF** version of this site in the top left of the site / navigation bar.

## **Part I**

# **Create a package**

## Should I create a package?

Before starting to create a package, it's good to ask if you should even create one. Because even if it's not fundamentally complicated, it's still some additional work compared to not doing so.

A good rule of thumb for this is to answer the question “Do I plan to reuse the code from this project elsewhere?” If so, then it makes sense to make it a package.

More generally, you can ask yourself whether you're building a tool or using tools. A statistical analysis probably does not belong in a package, while functions to do statistics probably should.

Also, note that it's unlikely you'll regret making a Python project a package, while the opposite might happen more often. Packages, if well done, are usually more modular and better organized compared to non-package projects.

## Is it hard?

Not really, especially if you take the time to read about it.

Making a Python package is mostly about organizing your project in a specific, standardized way. There are no low-level computer science concepts that you should know, but rather a more or less large set of rules to respect.

## Is it only for large projects?

Not at all! Even if your project is 200 lines of code in a single file, it might make sense to make it a package. You can find a fun example [here](#).

# 1 Introduction to packaging

Creating a Python package is all about making your code **reusable**, **shareable**, and **easy to install**. Whether you want to publish a library for the world or just organize your own projects better, understanding how packaging works is the first step.

## 1.1 The `__init__.py` file

At its simplest, a package is just a folder that contains an `__init__.py` file.

```
my_package/  
    __init__.py
```

The presence of `__init__.py` tells Python: “this is a package.”

Even if it’s an empty file, it’s important: it allows you to import parts of your code like this:

```
from my_package import something
```

Without it, Python treats the directory `my_package/` as a regular directory, **not something it can import from**.

## 1.2 Package vs Module vs Library

These terms get thrown around a lot. Here’s the quick breakdown:

- **Module:** A single `.py` file (e.g., `my_file.py`)
- **Package:** A directory with an `__init__.py`, possibly containing multiple modules (e.g., multiple files)
- **Library:** A more general programming term and refers to a bundle of code that can be used ([source](#))



Library and package most of the time refer to the same thing. All packages are libraries, the opposite is not true. For the sake of simplicity, it's ok to consider them “equivalent”, even though we're mostly interested in packages in practice.

Now, let's create the smallest Python package possible.

## 1.3 Initialize the directory

The very first step is to create a new directory named “*my\_package*”. Inside this directory, create another directory with the same name. The structure should look like this:

```
my_package/  
  my_package/
```

## 1.4 Reusable Python code

When creating a Python package, we want to write **a reusable piece of code**, not just put in a few scripts that do things. To illustrate:

### 1.4.1 Not reusable code

```
name = "Joseph"  
message = f"Hello {name}"  
print(message)
```

Hello Joseph

This code does something: it prints a message.

### 1.4.2 Reusable code

```
def say_hello(name):  
    message = f"Hello {name}"  
    print(message)
```

The code above does ‘nothing’. The only thing it does is create a function object that will be stored in memory. I can now call it and it will execute some code. For example:

```
say_hello("Joseph")
```

Hello Joseph

## 1.5 Package structure

Now, let's create our first Python module (which is just a file ending in `.py`). We'll call it `my_module.py`.

Our file `my_module.py` will be next to the `__init__.py` we talked about before:

```
my_package/  
  my_package/  
    __init__.py  
    my_module.py
```

### 1.5.1 `my_module.py`

```
def say_hello(name):  
    message = f"Hello {name}"  
    print(message)
```

### 1.5.2 `__init__.py`

```
from .my_module import say_hello  
  
__all__ = ["say_hello"]
```

## 1.6 Use our package

Now, how do we use our package, from a user point of view?

For this, you'll need to have [uv](#) installed.

Then we'll need to run a command in our terminal at `Desktop/my_package/`:

```
uv init
uv venv
uv pip install -e .
```

Don't worry too much about those commands yet.

This command will install our current package in **editable mode**. This allows us to test our package while making updates.

The next step is to open a new Python file, console or notebook, ideally not in the package directory. I usually like having a **sandbox.py** file. In this file, we'll run:

```
from package_name import say_hello

say_hello("Julia")
```

Hello Julia

And now we have a fully functional Python package! This is just the beginning, but this is an important foundation to have for what's coming next.

## 2 Organize a package

In order to follow the steps below, you'll need to have both [Git](#) and [uv](#) installed on your machine. Both are command-line tools, meaning you'll use your terminal to run commands that perform various actions.

Let's assume we're naming our Python package “*sunflower*”, with a single function:

```
sunflower/  
  sunflower/  
    __init__.py  
    my_module.py
```

To learn about this structure and why we need a `__init__.py` file, check out the [previous blog post](#).

We'll also assume that `my_module.py` looks like this:

```
import re  
  
def count_sunflowers(s):  
    s = re.sub(r"[^a-zA-Z\s]", "", s) # Remove non-text characters  
    s = s.lower()                    # Convert to lowercase  
    n_sunflower = s.split().count("sunflower")  
    n_sunflowers = s.split().count("sunflowers")  
    return n_sunflower + n_sunflowers
```

The `__init__.py` file look like this:

```
from .my_module import count_sunflowers  
  
__all__ = ["count_sunflowers"]
```

### 2.1 Add main Python project files

Next, we need to create a few essential files at the root of the project.

### 2.1.1 pyproject.toml

All the package metadata. It will contain a lot of useful information when we want to distribute this PyPI package so that everyone can install it easily. Don't worry too much about all of its content.

Here is a simple version of this file:

```
[project]
name = "sunflower"
description = "Create pretty sunflowers"
version = "0.1.0"
license = "MIT"
license-files = ["LICENSE"]
keywords = ["sunflower", "flower"]
authors = [
    { name="your_name", email="your_name@mail.com" },
]
readme = "README.md"
requires-python = ">=3.9"
classifiers = [
    "Programming Language :: Python :: 3",
    "Operating System :: OS Independent",
    "Development Status :: 3 - Alpha"
]
dependencies = []

[build-system]
requires = [
    "setuptools",
    "setuptools-scm",
]
build-backend = "setuptools.build_meta"

[tool.setuptools]
packages = ["sunflower"]

[tool.uv.sources]
sunflower = { workspace = true }

[project.urls]
Homepage = "https://your_name.github.io/sunflower/"
Issues = "https://github.com/your_name/sunflower/issues"
```

```
Documentation = "https://your_name.github.io/sunflower/"
Repository = "https://github.com/your_name/sunflower"
```

### 2.1.2 LICENSE

A basic text file containing the licence for your package. This licence is important because it tells other people what they are allowed to do with your package.

It is specific to each project, but you can find out more at [choosealicense.com](https://choosealicense.com).

Here is an example of the most common licence: the MIT licence.

```
Copyright (c) 2025 Your Name
```

```
Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:
```

```
The above copyright notice and this permission notice shall be included in all
copies or substantial portions of the Software.
```

```
THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE
SOFTWARE.
```

### 2.1.3 .git/

This is a directory used internally by the Git software to track all changes in the project. Assuming that the first “*sunflower*” directory is in your `Desktop/` directory, you should create this directory by running the `git init` command when you are in the `Desktop/sunflower/` directory.

It’s very likely that **you won’t see it**, as most operating systems (Windows, MacOS, etc.) hide files/directories that start with `.`, but it doesn’t matter. This directory will be managed entirely by Git itself, so we recommend that you **never make any manual changes to it**.

### 2.1.4 .gitignore

A file in which each line describes one or more files/directories that are not explicitly part of the project or are not relevant in general. Don't worry too much about this, you can just start with the example content below.

It is very likely that **you will not see it** outside your code editor, as most operating systems (Windows, MacOS, etc.) hide files/directories that start with `.`, but that doesn't matter.

```
# Python-generated files
__pycache__/
*.py[oc]
build/
dist/
wheels/
*.egg-info

# Virtual environments
.venv/
venv/
.env/
env/

# VS code config
.vscode/

# files on mac
.DS_Store

# all cache files
*cache*

# Sandbox files
sandbox.py
sandbox.ipynb
```

### 2.1.5 .venv/

A directory containing all the things we need to work properly in our Python environment. It contains a Python interpreter, all the packages used in the project (e.g. `numpy`, `requests`, etc), and a few other things.

The best way to create one is to run `uv venv`.

It is very likely that you will **not** see it outside your code editor, as most operating systems (Windows, MacOS, etc.) hide files/directories that start with `.`, but that doesn't matter.

### 2.1.6 README.md

A markdown file that describes the project, gives advice on how to use it, install it and so on. There are no rules about what to do with this file, it's just used to tell people what is the first thing they should read before using your package.

For example, it could be something like this:

```
# sunflower: my cool Python package

Welcome to the homepage of the `sunflower` project.

It's a new project, but it will be available soon!
```

### 2.1.7 sandbox.py

A file that we will use to test and use our package. It's optional but practical.

The organisation of our project now looks like this:

```
sunflower/
├── sunflower/
│   ├── __init__.py
│   └── my_module.py
├── .git/
├── .venv/
├── .gitignore
├── README.md
├── LICENSE
├── sandbox.py
└── pyproject.toml
```

## 2.2 Add an internal function

When creating a package, it is very practical to create functions that we will use internally: inside the package itself.



If we go back to our previous example, we might want to have a separate function that takes a string and cleans it up by removing non-text characters and putting it in lower case. Let's name this function `_clean_string()` and place it in a new file: `other_module.py`.

```
import re

def _clean_string(s):
    s = re.sub(r"[^a-zA-Z\s]", "", s) # Remove non-text characters
    s = s.lower()                     # Convert to lowercase
    return s
```

Our code in `my_module.py` should now become:

```
from .other_module import _clean_string

def count_sunflowers(s):
    s = _clean_string(s)
    n_sunflower = s.split().count("sunflower")
    n_sunflowers = s.split().count("sunflowers")
    return n_sunflower + n_sunflowers
```

We now have 2 functions:

- `count_sunflowers()` a **public** function that users of the package will use.
- `_clean_string()` a **private** function used internally. The underscore (`'_'`) at the beginning of the function name tells other people that it should not be used outside the package from which it came.

Note that `_clean_string()` is still usable by users if they run it:

```
from sunflower.other_module import _clean_string
```

But as you can see from the [documentation blog post](#), we won't have or create documentation on these functions, so they're unlikely to find it anyway.

## 2.3 Final organization

After all these steps, our package now looks like this:

```
sunflower/  
  sunflower/  
    __init__.py  
    my_module.py  
    other_module.py  
  .git/  
  .venv/  
  .gitignore  
  README.md  
  LICENSE  
  sandbox.py  
  pyproject.toml
```

## 3 Handling dependencies

Dependencies are the external Python packages your code needs in order to work, such as `requests`, `numpy`, or `pandas`.

Here we'll focus on using `uv` to handle dependencies, as it's currently the best tool for this out there (it's fast and fairly easy to use, especially if you know `pip`).

### 3.1 Specify dependencies

For example, let's say we have this function in our package:

```
import numpy as np

def normalize(array):
    min_val = np.min(array)
    max_val = np.max(array)
    return (array - min_val) / (max_val - min_val)
```

When people want to use our function, they **need** to have `numpy` installed for it to work, otherwise it will raise a `ModuleNotFoundError` on their machine.

So in order to ensure `numpy` is installed, we set `numpy` as a dependency of our package. This means that every time someone installs our package, they will also install `numpy`.

The dependencies of a package are listed in the `pyproject.toml` file. If you don't know what that is, check out [organizing a package](#).

With `uv`, we just have to run:

```
uv add numpy
```

This will automatically add `numpy` to our `pyproject.toml`.

#### 3.1.1 Before

```
[project]
name = "mypackage"
version = "0.1.0"
description = "Add your description here"
readme = "README.md"
requires-python = ">=3.13"
dependencies = []
```

### 3.1.2 After

```
[project]
name = "mypackage"
version = "0.1.0"
description = "Add your description here"
readme = "README.md"
requires-python = ">=3.13"
dependencies = [
    "numpy>=2.2.4",
]
```

If we add other dependencies, they will be added to the `dependencies` list.

## 3.2 Avoiding dependencies

In general, we want to **avoid** having too many dependencies. Why is that? Because when we install a package, we need to install its dependencies too, as well as the dependencies of those packages, and so on.

The issue with this is that it adds a lot complexity quickly and increase the risk of having **conflicts**.

For example, one package might need a version of `numpy` before `<2.0.0`, while another need a version above or equal to `>=2.2.0`. This kind of situation can quickly arise if not careful when adding too many dependencies, and it's usually a nightmare to resolve.

Note: packages with low or no dependencies are called **lightweight**. As an example, have a look at the [narwhals](#) package.

The thing with having lots of dependencies is that it makes it easier for you to write code because you can use other people code super easily. So it's always a trade-off somehow.

Always ask yourself those questions before adding a new package to your dependencies:

- is the dependency a well-known, stable package (`numpy`, `requests`, etc) or is it new and is likely to change in the future?
- does this dependency has lots of dependencies too? This might be a red flag
- can't you just code what it does yourself? If you only need a single function, go check their source code on Github and see if it's easy to do on your side (and ensure their License allow you to copy the code too).

### 3.3 Controlling the versions

What's the difference between `numpy 2.1.0` and `numpy 2.0.0`? Well, many things, but for example, in `numpy 2.0.0`, the `np.unstack()` function doesn't exist as it's a new one from `numpy 2.1.0`.

If our package relies on `np.unstack()` in one of our functions, we **can't** let people install any `numpy` version when installing our package. We need to ensure people install this version: `numpy>=2.1.0`. If we translate it, it means *any version of `numpy` above or equal to 2.1.0*. Let's see some other examples.

#### 3.3.1 `numpy==2.1.0`

Install exactly this version of `numpy`.

```
uv pip install numpy==2.1.0
```

#### 3.3.2 `numpy<=2.1.0`

Install the latest available version before 2.1.0 (including 2.1.0) of `numpy`.

```
uv pip install 'numpy<=2.1.0'
```

#### 3.3.3 `numpy>=2.1.0,<2.2.0`

Install the latest version between 2.1.0 (included) and 2.2.0 (excluded) of `numpy`.

```
uv pip install 'numpy>=2.1.0,<2.2.0'
```

### 3.3.4 numpy

Install the latest version of `numpy`.

```
uv pip install numpy
```

Note that for each of those, the package resolver will always try to install the latest version it can depending on the other dependencies. If a package requires `numpy<=2.1.0`, other packages **must** include `numpy 2.1.0` for it to work.

At this point, you might ask, **how do I know** which versions of each dependencies are required for my package? Well, as far as I know, there is no easy answer to this, but there are ways to ensure you don't get unexpected behaviors.

### 3.3.5 Set the minimum version required...

For each of your dependencies, set in your `pyproject.toml` the minimum version required. With `uv`, you can run the following to install a specific version:

```
uv pip install numpy==2.0.0
```

Warning: the command above will install a specific version of `numpy`, but will not change the requirements in `pyproject.toml`. Use `uv add` if you want to change them.

### 3.3.6 ... test your code...

You have to test that your code works as expected on those versions. The best way to do that is **unit testing**, and it's the point of the [next blog post](#).

### 3.3.7 ... and be convenient

Dependening on whether you're planning on distributing your package (e.g., put it on PyPI and allow other people to install it) or not, you might want to do different things here. We'll assume you want to distribute it at the end.

When your package goal is to be installed by other people, you want to be convenient. By that I mean **not being too restrictive**.

If we take our example from before, we know that we need at least `numpy==2.1.0` for our package to work, but we also know that **any numpy version above works too**. For this reason, we set `numpy>=2.1.0` instead of `numpy==2.1.0` to allow a broader range of possibility.

## 3.4 Breaking changes

By default, when installing our package, it will try to find the latest `numpy` version that satisfies the requirements.

But, you might say there's a risk it will break on a new `numpy` version? Yes, **it absolutely does**. And that's exactly why we said earlier why we wanted to avoid having too many dependencies and use stable ones only.

The good thing with packages like `numpy` is that it's one of the most important Python package and one of its core component. They **can't** make breaking changes on any significant feature. When they want to do it, they usually add warnings like this: *"The function xxx is deprecated and will be removed in a future version, please use yyy instead?"*.

But, if you want to be sure you don't get breaking changes, set the maximum version of the dependencies, with things like `numpy<=2.2.0`. This will ensure it's safe, but this also means you'll need to manually update it as new versions come out.

## 3.5 Required, Optional and Dev dependencies

When working with dependencies, it's useful to differentiate between three main types: required, optional, and development dependencies. Each serves a different purpose in your package.

### 3.5.1 Required

Required dependencies are the ones we've been discussing so far - packages that your code absolutely needs to function properly. These go in the `dependencies` list in your `pyproject.toml`.

```
[project]
dependencies = [
    "numpy>=2.1.0",
    "pandas>=2.0.0",
]
```

### 3.5.2 Optional dependencies

Optional dependencies are packages that enhance your code but aren't strictly necessary for core functionality. For example, if your data processing package works with CSV files by default but can also handle Excel files with an additional dependency.

You can specify these in your `pyproject.toml` using the `[project.optional-dependencies]` section:

```
[project.optional-dependencies]
excel = ["openpyxl>=3.1.0"]
plot = ["matplotlib>=3.7.0", "plotly>=5.23.0"]
```

This lets users install only what they need:

#### 3.5.2.1 mypackage

Install your package required dependencies **only**:

```
uv pip install mypackage
```

#### 3.5.2.2 mypackage[excel]

Install your package required dependencies as well `openpyxl`:

```
uv pip install "mypackage[excel]"
```

#### 3.5.2.3 mypackage[plot]

Install your package required dependencies as well `matplotlib` and `plotly`:



```
uv pip install "mypackage[plot]"
```

#### 3.5.2.4 mypackage[excel,plot]

Install with all optional dependencies:

```
uv pip install "mypackage[excel,plot]"
```

In your code, you'll need to handle cases where optional dependencies aren't installed:

```
def read_file(filename):
    if filename.endswith('.csv'):
        # Core functionality
        import pandas as pd
        return pd.read_csv(filename)
    elif filename.endswith('.xlsx'):
        try:
            # Optional functionality
            import openpyxl
            import pandas as pd
            return pd.read_excel(filename)
        except ImportError:
            raise ImportError(
                "Excel support requires 'openpyxl'. "
                "Install with 'pip install mypackage[excel]'"
            )
```

This will give your users a **clear and meaningful error message** that they can resolve very quickly. This kind of thing exist for the same reason we're talking about in this article: trying to minimize the number of dependencies (especially the unused ones!).

In order to add package to your optional dependencies, you can run:

```
uv add matplotlib --optional plot
```

This will add matplotlib to the plot section in the optional dependencies in your pyproject.toml.

### 3.5.3 Before

```
[project]
name = "mypackage"
version = "0.1.0"
description = "Add your description here"
readme = "README.md"
requires-python = ">=3.13"
dependencies = []
```

### 3.5.4 After

```
[project]
name = "mypackage"
version = "0.1.0"
description = "Add your description here"
readme = "README.md"
requires-python = ">=3.13"
dependencies = []

[project.optional-dependencies]
plot = ["matplotlib>=3.7.0"]
```

### 3.5.5 Dev dependencies

Development dependencies are packages you need only when developing your package, not when using it. These include testing frameworks, documentation generators, linters, and similar tools.

Specify these in your `pyproject.toml` like this:

```
[project.optional-dependencies]
dev = [
    "pytest>=7.0.0",
    "ruff>=0.11.5",
    "sphinx>=7.0.0",
]
```

In order to add a package to your dev dependencies, you can run:

```
uv add ruff --dev
```

Developers working on your package can install all optional dependencies as well as dev dependencies with:

```
uv sync --all-groups
```

# **Part II**

## **Code quality**

## 4 Unit tests

This blog posts explain the interest of unit testing when developing a Python package. It's **not** meant as an in-depth tutorial about how to do unit tests, but rather an overview of what problem it solves and how is it relevant to Python packaging.

### 4.1 What is unit testing

Unit testing is the practice of writing small, focused tests to verify that individual parts (units) of your code behave as expected. In the context of a Python package, unit tests help ensure that your functions, classes, and modules continue to work correctly as your code evolves.

#### 4.1.1 Quick definition

A *unit* is the smallest testable part of your application, typically a **single function**. A *unit test* checks if that function produces the correct output for a given input. These tests are automated and are typically run frequently during development.

#### 4.1.2 Pytest

[Pytest](#) is a popular testing framework in the Python ecosystem. It's known for its clean syntax, powerful features (like fixtures and parameterization), and ease of use. Pytest works with simple `assert` statements, so **you don't need to learn a special API to start testing**.

### 4.2 Example with a simple function

Let's look at how unit tests work using a basic example.

### 4.2.1 Simple function

Suppose you have a function that counts how many time there is the word “sunflower” in a string:

---

**Listing 4.1** sunflower/count\_sunflower\_module.py

---

```
import re

def count_sunflowers(s):
    s = re.sub(r"[^a-zA-Z\s]", "", s) # Remove non-text characters
    s = s.lower()                    # Convert to lowercase
    n_sunflower = s.split().count("sunflower")
    n_sunflowers = s.split().count("sunflowers")
    return n_sunflower + n_sunflowers
```

---

### 4.2.2 Simple test example and to run it

A test is actually a function (or a class) that calls the function we want to test. This new function must

- starts with `test_`
- be in a file in the `tests/` directory in a file that starts with `test`

For instance, our project could be organized as follow:

```
sunflower/
  sunflower/
    __init__.py
    count_sunflower_module.py
  tests/
    test_count_sunflower.py
  .venv/
  pyproject.toml
```

Our test function will verify if our original function **behaves as expected**. For example, we can test `count_sunflowers()` with the following test:

To run the test, simply use the `pytest` command in the terminal:

---

**Listing 4.2** tests/test\_count\_sunflower.py

---

```
import pytest
from sunflower import count_sunflowers

def test_count_sunflowers():
    output = count_sunflowers("sunflower sunflower cake")
    expected = 2
    assert output == expected
```

---

pytest

If the result of `assert output == expected` is `True`, then `pytest` will tell us that everything's fine, otherwise an error message with details on where the error come from for debugging.

## 4.3 In real projects

Unit testing becomes even more valuable as your project grows and others start using or contributing to it.

### 4.3.1 Backward compatibility

Tests protect against accidental changes that could break existing behavior. If you modify a function, running your tests will quickly show if the new version still satisfies the old expectations.

### 4.3.2 CI

Unit tests are often run automatically using Continuous Integration (CI) tools like GitHub Actions. Whenever someone pushes a commit or opens a pull request, the CI system runs the test suite to make sure nothing is broken. This reinforces trust in the codebase and speeds up development.

A dedicated blog post will cover GitHub Actions in more detail.

### **4.3.3 Collaborative work and external contributions**

Having a robust test suite helps contributors understand what your code is supposed to do. It also encourages better code quality and smoother collaboration, since developers can make changes confidently and verify them with tests.



## 5 Writing documentation

This page is a work in progress. You can see the current state of the project [here](#).

## 6 Errors and warnings

This page is a work in progress. You can see the current state of the project [here](#).

## 7 API design

This page is a work in progress. You can see the current state of the project [here](#).

Note that we can use any of the following syntaxes:

### 7.0.1 Syntax 1

```
from my_package import count_my_package

text = """
my_package petals bright and gold,
my_package fields, a sight to behold.
my_package dreams in the morning light,
Blooming softly, pure and bright.
"""

count_my_package(text)
```

### 7.0.2 Syntax 2

```
import my_package

text = """
my_package petals bright and gold,
my_package fields, a sight to behold.
my_package dreams in the morning light,
Blooming softly, pure and bright.
"""

my_package.count_my_package(text)
```

### 7.0.3 Syntax 3

```
import my_package as sfl # or any other alias like "sf" or "sunflo"

text = """
my_package petals bright and gold,
my_package fields, a sight to behold.
my_package dreams in the morning light,
Blooming softly, pure and bright.
"""

sfl.count_my_package(text)
```

## **Part III**

# **Workflow**

## 8 Github Actions

Having a package implies several things, most importantly:

- creating and deploying a documentation website
- testing that it works as expected using unit tests
- tracking changes with version control (Git)

In this post, we'll walk through 3 essential Github Actions you **need** in your workflow when developing Python packages.

This blog assumes basic Git/Github knowledge (push/pull, pull requests, branches).

### 8.1 TLDR: Github Actions

Github Actions are scripts that perform tasks (pretty much anything you want) when specific “events” occur. You can do **a lot** with them, but here we'll focus on practical use cases for developing a Python package.

These scripts live in the `.github/workflows/` directory and are written as `yml` files. For instance, a Python package named “sunflower” with two different Github Actions might be organized like this:

```
sunflower/  
  sunflower/  
    __init__.py  
    module1.py  
    module2.py  
  .github/  
    workflows/  
      unit-tests.yml  
      code-format.yml  
  tests/  
  .git/
```

```
.venv/  
.gitignore  
README.md  
LICENSE  
pyproject.toml
```

On certain “events” (as defined in those scripts), `unit-tests.yaml` and `code-format.yaml` will be triggered.

The events we care about here are:w

- Opening a pull request
- Merging or pushing to the main branch

Let’s look at a practical example to understand why these scripts are important.

## 8.2 Unit testing

If you’re not familiar with unit testing, check out [this dedicated blog post](#).

Suppose we have unit tests written with `pytest` in the `tests/` directory. We can now add a `unit-tests.yaml` file in `.github/workflows/` that looks like this:

```
name: Unit tests  
  
on:  
  pull_request:  
    branches: [main]  
  
jobs:  
  build:  
    runs-on: ${ matrix.os }  
    strategy:  
      matrix:  
        os: [ubuntu-latest, windows-latest, macos-latest]  
        python-version: ["3.9", "3.13"]  
  
    env:  
      UV_PYTHON: ${ matrix.python-version }  
    steps:  
      - uses: actions/checkout@v4
```

```
- name: Install uv
  uses: astral-sh/setup-uv@v5

- name: Enable caching
  uses: astral-sh/setup-uv@v5
  with:
    enable-cache: true

- name: Install the project
  run: uv sync --all-groups

- name: Run tests
  run: uv run pytest
```

What it does:


When someone pushes a commit to a branch with an open pull request (as specified in the [on](#) section), this action will:

- install `uv` (a Python package manager)
- install the project dependencies using `uv sync --all-groups`
- run the test suite with `uv run pytest`

This runs across multiple Python versions (3.9 and 3.13) and operating systems (Windows, macOS, and Linux). That gives us 6 combinations in total (2 Python versions  $\times$  3 OSes).

Here's what shows up on the pull request while the tests are running:



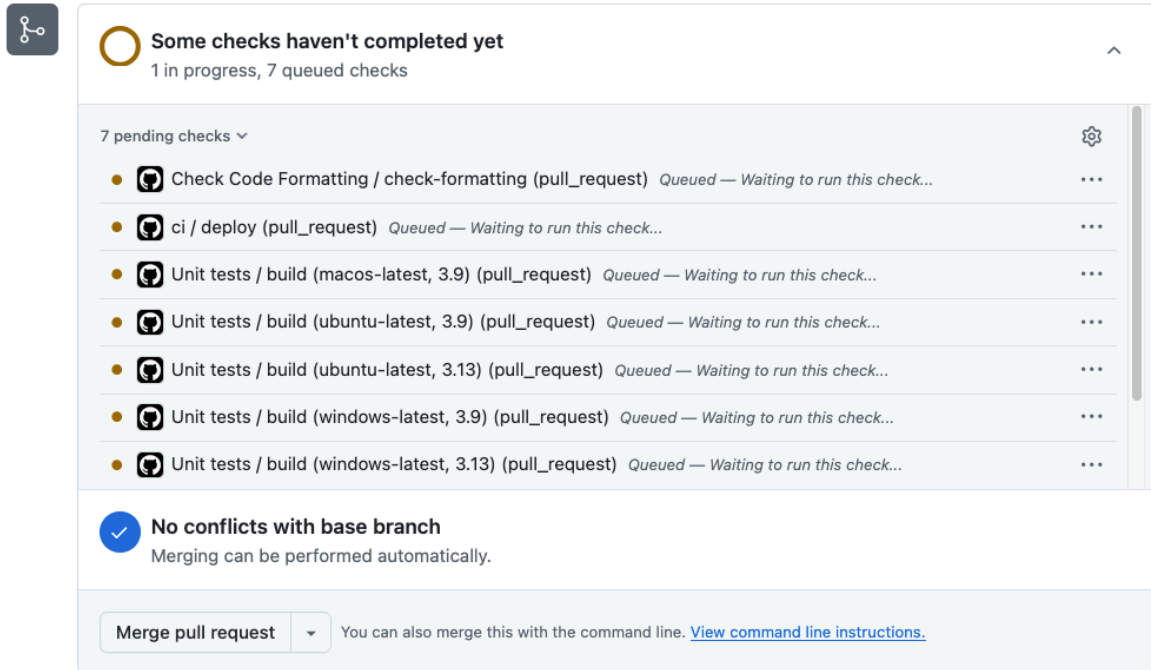

The image shows a GitHub pull request status interface. At the top, a yellow circle icon is followed by the text "Some checks haven't completed yet" and "1 in progress, 7 queued checks". Below this, a section titled "7 pending checks" lists seven checks, each with a yellow circle icon, a GitHub logo, and a status of "Queued — Waiting to run this check...". The checks are: "Check Code Formatting / check-formatting (pull\_request)", "ci / deploy (pull\_request)", "Unit tests / build (macos-latest, 3.9) (pull\_request)", "Unit tests / build (ubuntu-latest, 3.9) (pull\_request)", "Unit tests / build (ubuntu-latest, 3.13) (pull\_request)", "Unit tests / build (windows-latest, 3.9) (pull\_request)", and "Unit tests / build (windows-latest, 3.13) (pull\_request)". Below the pending checks, a blue circle icon with a checkmark is followed by the text "No conflicts with base branch" and "Merging can be performed automatically.". At the bottom, there is a button labeled "Merge pull request" and a link to "View command line instructions."

Some checks haven't completed yet  
1 in progress, 7 queued checks


7 pending checks

- Check Code Formatting / check-formatting (pull\_request) Queued — Waiting to run this check...
- ci / deploy (pull\_request) Queued — Waiting to run this check...
- Unit tests / build (macos-latest, 3.9) (pull\_request) Queued — Waiting to run this check...
- Unit tests / build (ubuntu-latest, 3.9) (pull\_request) Queued — Waiting to run this check...
- Unit tests / build (ubuntu-latest, 3.13) (pull\_request) Queued — Waiting to run this check...
- Unit tests / build (windows-latest, 3.9) (pull\_request) Queued — Waiting to run this check...
- Unit tests / build (windows-latest, 3.13) (pull\_request) Queued — Waiting to run this check...

No conflicts with base branch  
Merging can be performed automatically.

Merge pull request You can also merge this with the command line. [View command line instructions.](#)

If any of those combinations fail (meaning at least one test fails), you'll see a message indicating that something didn't work. For example, you might learn that your package fails on Windows with Python 3.9. Otherwise, you'll see something like this:

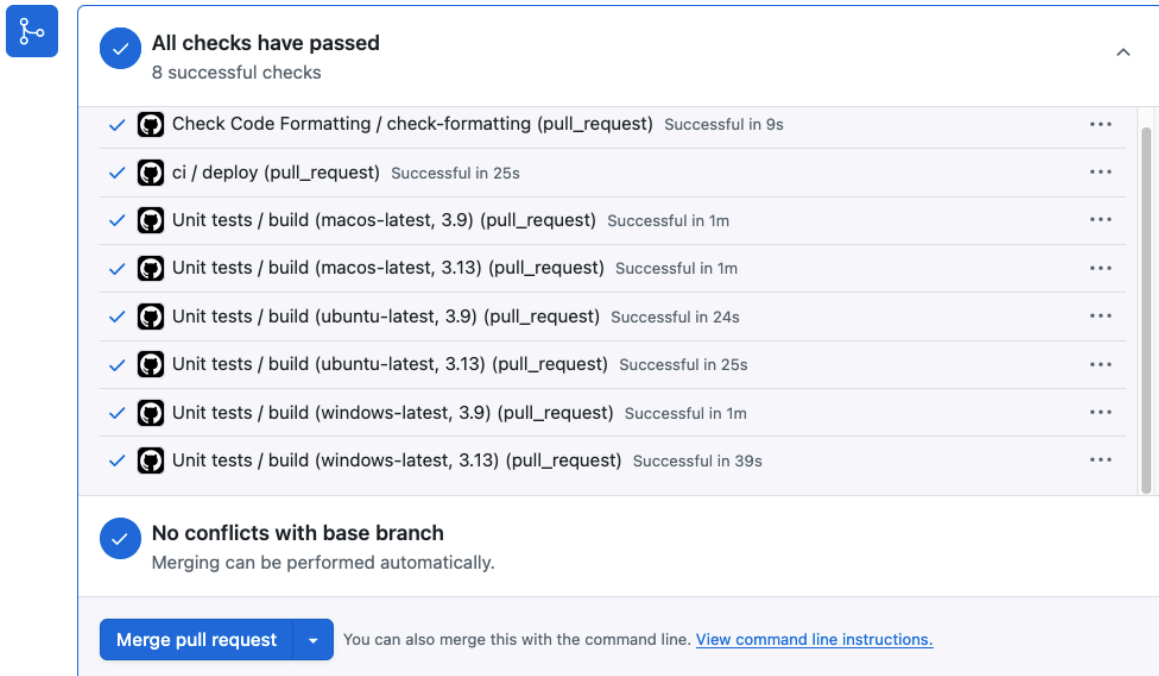

The purpose of setting up this Github Action is to **automatically and easily** verify that the package works in different environments, helping ensure that only valid code is merged into the main branch.

In this example, we used just two Python versions and one set of dependencies, but this approach can be extended to test the package under many more scenarios. That way, we get a clear and precise picture of what works and what doesn't.

## 8.3 Create and deploy documentation

There's a dedicated blog post on generating and deploying documentation for your package. Check it out [here](#).

Let's say we've created our documentation website with `mkdcs`. We then add a `deploy-site.yaml` file in `.github/workflows/`.

Since generating the documentation website creates a large number of files, it's not ideal to store them in version control. But how do we deploy it to Github Pages if it's not in version control? That's where Github Actions come in!

Now, let's take a look at the following Github Action script:

```

name: ci

on:
  push:
    branches: [main]

permissions:
  contents: write

jobs:
  deploy:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4
      - name: Configure Git Credentials
        run: |
          git config user.name github-actions[bot]
          git config user.email 41898282+github-actions[bot]@users.noreply.github.com
      - uses: actions/setup-python@v5
        with:
          python-version: 3.x
      - run: echo "cache_id=$(date --utc '+%V')" >> $GITHUB_ENV
      - uses: actions/cache@v4
        with:
          key: mkdocs-material-${{ env.cache_id }}
          path: .cache
          restore-keys: |
            mkdocs-material-

      - name: Install uv
        uses: astral-sh/setup-uv@v5

      - name: Enable caching
        uses: astral-sh/setup-uv@v5
        with:
          enable-cache: true

      - name: Install the project
        run: uv sync --all-groups

      - name: Deploy MkDocs
        env:

```

```
GITHUB_TOKEN: ${ secrets.GITHUB_TOKEN }}  
run: uv run mkdocs gh-deploy --force
```

What it does:

When someone merges or pushes to the main branch, this action will:

- install `uv` (a Python package manager)
- install the project dependencies using `uv sync --all-groups`
- generate the entire documentation website with `uv run mkdocs gh-deploy --force`
- push the documentation website to the `gh-pages` branch on Github

With this setup, assuming our website is deployed to Github Pages using the `gh-pages` branch, the documentation site is deployed automatically whenever a pull request is opened or we merge/push to the main branch. All without keeping the auto-generated files in version control.

This also **removes all manual work** related to building and deploying the documentation, as it's now fully automated through this Github Action.

## 8.4 Code linting and formatting

When working on a project, it's crucial to maintain standardized coding practices:

- Consistent formatting (e.g., indentation, spacing, quotes)
- Clean code free of unused imports, bad patterns, or minor bugs

This is where **code formatting** and **linting** tools come into play, and we can automate them using Github Actions.

We'll use `ruff` here, which is a super fast linter and formatter for Python. It can both check for issues (like `flake8` or `pylint`) **and** format code (like `black`), all in one tool.

### 8.4.1 Add Ruff to your project

First, add Ruff as a development dependency:

```
uv add --dev ruff
```

### 8.4.2 Create the GitHub Action

Now, create a file named `.github/workflows/code-format.yaml` with the following content:

```
name: Ruff lint and format

on:
  pull_request:
    branches: [main]

jobs:
  lint:
    runs-on: ubuntu-latest
    steps:
      - uses: actions/checkout@v4

      - name: Install uv
        uses: astral-sh/setup-uv@v5

      - name: Enable caching
        uses: astral-sh/setup-uv@v5
        with:
          enable-cache: true

      - name: Install dependencies
        run: uv sync --all-groups

      - name: Check formatting
        run: uv run ruff format . --check

      - name: Lint code
        run: uv run ruff check .
```

What it does:

When a pull request is opened against `main`, this action will:

- Install your project and its development dependencies using `uv`

- Check if the code is properly formatted with `ruff format . --check`
- Lint the code with `ruff check .` to catch any potential issues

If there's anything wrong (such as a file needing formatting or an unused import), the action will fail, and the pull request will show a red `.` That's your cue to fix the code.

This ensures that all code added to the codebase is well-formatted and adheres to the established rules.

Note that there's an additional way to enforce this called `pre-commit`, and there's a [dedicated blog post](#) on it.

## 8.5 FAQ

### 8.5.1 I didn't understand certain things

Github Actions is one of those things where you need to try it yourself to get the full picture. I recommend creating a basic Python package with documentation and tests, then testing the examples provided to see how they work.

### 8.5.2 Where does the code run?

When a Github Action is triggered, Github sets up a clean VM (virtual machine) to run your workflow. There are limits on usage, but they're quite generous before you'll need to enter your credit card details.

### 8.5.3 Can I run it on my machine?

Yes, you can! Thanks to a project called [act](#). In short, it uses [Docker](#) to run your Github Actions in the correct context.

## 9 Pre-commit Hooks

In this post, we'll walk through how to add `pre-commit` to your Python package to enforce good code hygiene *automatically*.

This post assumes you're already using Git and are familiar with what commits are. It also requires using [uv](#).

### 9.1 TLDR: What is `pre-commit`?

`pre-commit` is a framework for managing and running “hooks”, which are just scripts defined in a `.pre-commit-config.yaml` file that run at specific points in the Git lifecycle. The most common is the `pre-commit` hook, which runs **before** a commit is created.

The point of using pre-commit hooks is to prevent your codebase from including unwanted things, such as unformatted code, oversized files, print statements, and so on.

Here's what makes `pre-commit` awesome:

- **It runs locally** – unlike CI (e.g. [GitHub Actions](#)), it catches issues *before* they get pushed
- **It's fast** – runs only on the files you've changed
- **It's customizable** – tons of hooks are available, or you can write your own
- **It integrates with CI** – you can run `pre-commit` in CI to make sure everyone follows the same rules

### 9.2 How it looks

Here is a pre-commit hook that:

- checks if our code is both linted and formatted
- if not, it will try to fix it

```

repos:
  - repo: https://github.com/astral-sh/ruff-pre-commit
    rev: v0.11.7
    hooks:
      - id: ruff
        types_or: [python, pyi]
        args: [--fix]
      - id: ruff-format
        types_or: [python, pyi]

```

This will run each time we run `git commit`. If our code is not perfectly linted and formatted, it will prevent the commit and lint/format it (if possible).

Once our code is fixed, we can re-run `git add` and `git commit`, and it will accept our commit, which we can then push.

## 9.3 How to set up

### 9.3.1 1. Configuration

Create a `.pre-commit-config.yaml` file at the root of your project.

Let's use a relatively common pre-commit setup. It configures formatting and linting with `ruff`, checks for large files, and removes trailing whitespace:

```

repos:
  - repo: https://github.com/astral-sh/ruff-pre-commit
    rev: v0.11.7
    hooks:
      - id: ruff
        types_or: [python, pyi]
        args: [--fix]
      - id: ruff-format
        types_or: [python, pyi]

  - repo: https://github.com/pre-commit/pre-commit-hooks
    rev: v5.0.0
    hooks:
      - id: trailing-whitespace
      - id: check-added-large-files

```



- The `repo` field defines where the actual checks to run are defined
- Each `rev` pin ensures you're using a specific version of that hook for reproducibility
- The `id` defines the exact check to run

### 9.3.2 2. Install

Install it as a development dependency:

```
uv add --dev pre-commit
uv run pre-commit install
```

If you don't want to add it to your development dependencies, you can simply run :

```
uv pip install pre-commit
uv run pre-commit install
```

### 9.3.3 3. Commit

Now try editing a Python file (add spaces at the end of the file or change the formatting of something). Then try committing it:

```
git add .pre-commit-config.yaml
git commit -m "Test pre-commit"
```

You'll see the hooks run automatically and fix (or block) your commit if needed.

```
[INFO] Installing environment for https://github.com/astral-sh/ruff-pre-commit.
[INFO] Once installed, this environment will be reused.
[INFO] Running ruff-format...
[INFO] Files were modified by this hook. Please stage the changes and try again.
```

If `pre-commit` fixes files automatically, it will ask you to re-stage them and try committing again. This prevents broken or messy code from slipping into version control.

## 9.4 FAQ

### 9.4.1 “Files were modified by this hook”

This means the hook fixed your files. Run:

```
git add -A  
git commit -m "message"
```

### 9.4.2 “Hook failed”

Some hooks (like `ruff`) don’t fix issues automatically. You’ll need to fix them manually based on the error messages.

### 9.4.3 “Nothing happens when I commit”

Did you run `uv run pre-commit install`? That installs the Git hook. Without it, the hooks won’t run.

# 10 Publish to PyPI

This page is a work in progress. You can see the current state of the project [here](#).

## 10.1 note

- pyproject.toml to specify dependencies, python req, etc

## 10.2 PyPI (Python Package Index)

[PyPI](#) is the default online repository for Python packages. This is where packages are stored so that others can find and install them.

When you run:

```
pip install requests
```

You're downloading the `requests` package from PyPI. More specifically, you're downloading the package's distribution (which might be source code or precompiled binaries) to your local machine from PyPI servers.

## 10.3 pip (and friends)

`pip` is the tool used to install packages from PyPI. It's simple and widely supported.

Example:

```
pip install numpy
```

But when working with packages in Python, you need to take into account the package version. Maybe you need `numpy` 2.1.2 instead of 2.1.1 for your project.

You can read more about this in the [handling dependencies article](#), but in summary, it's important to control the version of the packages you use/distribute, to ensure reproducible workflows and avoid unexpected things.

Some newer tools are built around `pip` to offer additional features such as **dependency management** and **better performance**.

One of the most important things these tools do is called dependency resolution, which involves calculating which versions of each package are compatible with each other based on version constraints. For example, you might be using a version of numpy that is incompatible (for whatever reason) with matplotlib, and since matplotlib relies on numpy, there's a problem.

Since 2024, the best tool available is called [uv](#). It's super easy to use, super fast and does everything you need, in one place, with one tool. It's more of a Python project manager than a simple package installer.

## 11 Bonus

# Contributing

## Set up environment

In order to follow the steps below, you'll need to have both [Git](#), [uv](#) and [Quarto](#) installed on your machine.

- Fork the [Github repo](#)
- Git clone it:

```
git clone https://github.com/YourUsername/python-packaging-essentials.git
```

- Create a new Git branch

```
git checkout -b branch-name
```

- Set up your environment

### 11.0.0.1 MacOS/Unix-like

```
uv python install
uv sync
source .venv/bin/activate
```

### 11.0.0.2 Windows

```
uv python install
uv sync
.venv\Scripts\activate
```

## Make changes

Each blog post lives in a Quarto file (`.qmd`). It's a mix of markdown and chunk of code.

You can preview locally your changes with:

```
quarto preview
```

If not done automatically, open your browser at <http://localhost:4000/>