

Practical 25

AIM :- WAP to read and display XML file.

Xml file

```
<RECORDS>
<EMPLOYEE>
<ID>1</ID>
<NAME>Rick</NAME>
<SALARY>623.3</SALARY>
<STARTDATE>1/1/2012</STARTDATE>
<DEPT>IT</DEPT>
</EMPLOYEE>
<EMPLOYEE>
<ID>2</ID>
<NAME>Dan</NAME>
<SALARY>515.2</SALARY>
<STARTDATE>9/23/2013</STARTDATE>
<DEPT>Operations</DEPT>
</EMPLOYEE>
<EMPLOYEE>
<ID>3</ID>
<NAME>Michelle</NAME>
<SALARY>611</SALARY>
<STARTDATE>11/15/2014</STARTDATE>
<DEPT>IT</DEPT>
</EMPLOYEE>
<EMPLOYEE>
<ID>4</ID>
<NAME>Ryan</NAME>
<SALARY>729</SALARY>
<STARTDATE>5/11/2014</STARTDATE>
<DEPT>HR</DEPT>
</EMPLOYEE>
<EMPLOYEE>
<ID>5</ID>
<NAME>Gary</NAME>
<SALARY>843.25</SALARY>
<STARTDATE>3/27/2015</STARTDATE>
<DEPT>Finance</DEPT>
</EMPLOYEE>
<EMPLOYEE>
<ID>6</ID>
<NAME>Nina</NAME>
<SALARY>578</SALARY>
<STARTDATE>5/21/2013</STARTDATE>
<DEPT>IT</DEPT>
```

```

</EMPLOYEE>
<EMPLOYEE>
<ID>7</ID>
<NAME>Simon</NAME>
<SALARY>632.8</SALARY>
<STARTDATE>7/30/2013</STARTDATE>
<DEPT>Operations</DEPT>
</EMPLOYEE>
<EMPLOYEE>
<ID>8</ID>
<NAME>Guru</NAME>
<SALARY>722.5</SALARY>
<STARTDATE>6/17/2014</STARTDATE>
<DEPT>Finance</DEPT>
</EMPLOYEE>
</RECORDS>

```

Code:-

```

# Load the package required to read XML files.
library("XML")

# Also load the other required package.
library("methods")


# Give the input file name to the function.
result <- xmlParse(file="abc.xml")

xmldf <- xmlToDataFrame(result)

View(xmldf)

```

Output:-

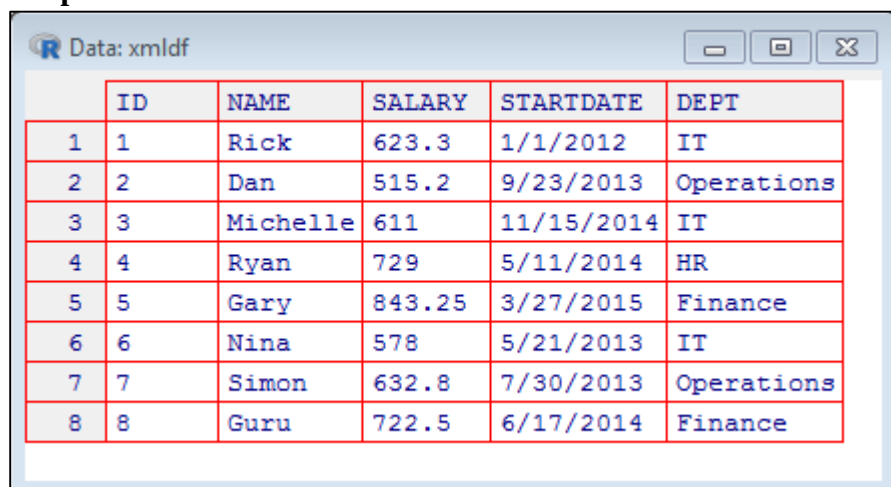

	ID	NAME	SALARY	STARTDATE	DEPT
1	1	Rick	623.3	1/1/2012	IT
2	2	Dan	515.2	9/23/2013	Operations
3	3	Michelle	611	11/15/2014	IT
4	4	Ryan	729	5/11/2014	HR
5	5	Gary	843.25	3/27/2015	Finance
6	6	Nina	578	5/21/2013	IT
7	7	Simon	632.8	7/30/2013	Operations
8	8	Guru	722.5	6/17/2014	Finance

Practical 26

AIM :- WAP for database connection and insert value in the table and display it.

Code:-

```
# Create a connection Object to MySQL database.
# We will connect to the sampel database named "sakila" that comes
with MySQL installation.

library(RMySQL)

t = dbConnect(MySQL(), user='root', password='', dbname='student',
host='localhost')

# List the tables available in this database.

dbListTables(t)


# Query the "actor" tables to get all the rows.

result = dbSendQuery(t, "select * from varni")

# Store the result in a R data frame object. n=4 is used to fetch
first 4 rows.

df = fetch(result, n=4)
print(df)
```

Output:-

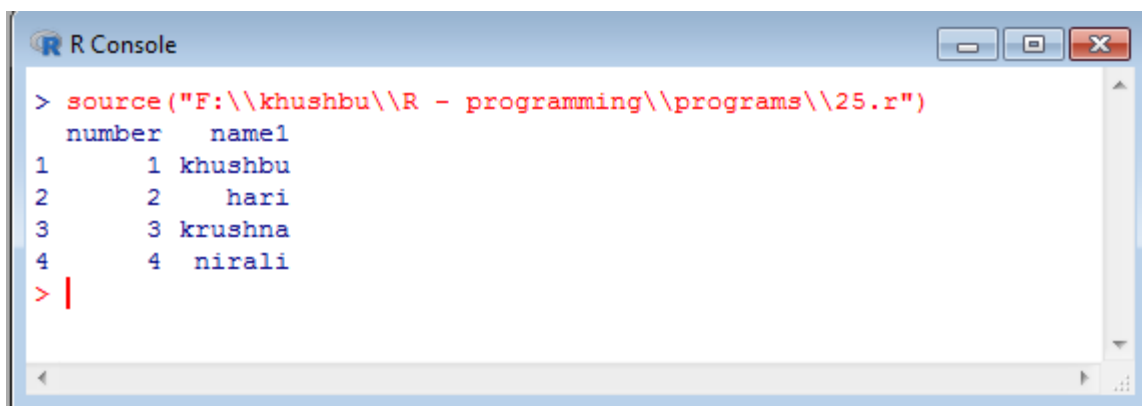

```
R Console
> source("F:\\khushbu\\R - programming\\programs\\25.r")
  number  name1
1      1 khushbu
2      2   hari
3      3 krushna
4      4  nirali
> |
```

Practical 27

AIM :- WAP to create table in the database using code and insert records in it and display particular record from the table.

Code:-

```
# Create a connection Object to MySQL database.
# We will connect to the sample database named "student" that comes
with MySqLinstallation.

library(RMySQL)

t = dbConnect(MySQL(), user='root', password='', dbname='student',
host='localhost')

# List the tables available in this database.

dbListTables(t)

# Query the "actor" tables to get all the rows.

result = dbSendQuery(t, "select * from varni")


# Store the result in a R data frame object. n=5 is used to fetch
first 5 rows.

df = fetch(result, n=5)
print(df)

closeAllConnections()
t = dbConnect(MySQL(), user='root', password='', dbname='student',
host='localhost')

dbSendQuery(t, "insert into varni values(6, 'swiku')")
result2 = dbSendQuery(t, "select * from varni")
df1 = fetch(result2, n=6)
cat("\nafter insertion \n")
print(df1)
```

Output:-

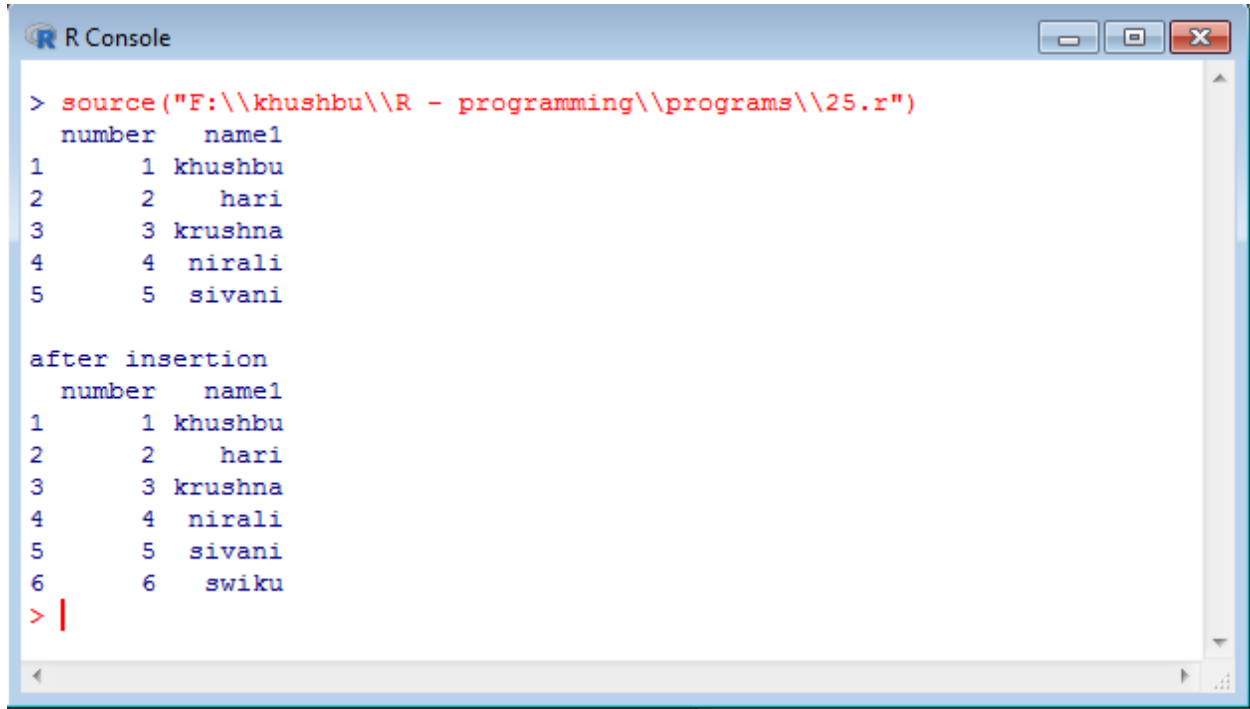

```
> source("F:\\khushbu\\R - programming\\programs\\25.r")
number  name1
1       1 khushbu
2       2   hari
3       3 krushna
4       4 nirali
5       5  sivani

after insertion
number  name1
1       1 khushbu
2       2   hari
3       3 krushna
4       4 nirali
5       5  sivani
6       6  swiku
> |
```