



ACTIVE MATRIMONIAL FLUTTER APP DOCUMENTATION

Mobile App for **Active Matrimonial CMS**



Release Date : April 2023

Author : Active IT zone

Software Framework : Flutter

Provided by : Codecanyon



BEST RATED MATRIMONIAL
PHP SCRIPT IN ENVATO



ACTIVE IT ZONE LIMITED

www.activeitzone.com

T E A M O F B O R D E R L E S S P R O S P E C T



DOCUMENTATION

1. What are the prerequisites?
2. How to run Flutter Application in Android Studio?
3. How to configure the App according to your setup?
4. How to change the package name?
5. How to build the App for testing (build and apk) ?
6. How to activate an app?
7. How to configure the Stripe payment gateway?
8. How to configure the Stripe payment gateway?
9. How to generate play store uploadable files for release?
10. How to run IOS on a simulator?
11. How to generate app store uploadable files?
12. How to Update for Android?
13. How to configure social login?
14. How to configure push notification?
15. My data is not changing. How to clear cache?

1. What are the prerequisites?

Answer:

This Flutter app can be hosted into Google Play Store + Apple App Store as your branded matrimonial CMS app. The app will communicate with your hosted matrimonial CMS web application through APIs. That means the prerequisite to publish the matrimonial Mobile application is to have the **matrimonial CMS Web application in the latest version always**.

- [Flutter version must be Flutter 3.41.2 • channel stable\(Dart 3.11.0.\)](#)
- [Android Studio Panda 1 | 2025.3.1 Patch 1](#)
- [Java version OpenJDK Runtime Environment \(build 21.0.5--12932927\)](#)

JAVA VERSION	OPERATING SYSTEM	ARCHITECTURE	JAVA PACKAGE	DOWNLOAD
21.0.7+6	Windows	x86 64-bit	JDK	.msi
21.0.7+6	Windows	x86 64-bit	JDK	.zip
21.0.6+7	Windows	x86 64-bit	JDK	.msi
21.0.6+7	Windows	x86 64-bit	JDK	.zip
21.0.5+11	Windows	x86 64-bit	JDK	.msi
21.0.5+11	Windows	x86 64-bit	JDK	.zip
21.0.4+7	Windows	x86 64-bit	JDK	.msi
21.0.4+7	Windows	x86 64-bit	JDK	.zip
21.0.3+9	Windows	x86 64-bit	JDK	.msi
21.0.3+9	Windows	x86 64-bit	JDK	.zip
21.0.3+1	Windows	x86 64-bit	JDK	.msi
21.0.3+1	Windows	x86 64-bit	JDK	.zip

- Make sure your **flutter** and **dart versions** are correct. Follow the **Flutter documentation** from <https://flutter.dev/docs/get-started/install> to install the given version of Flutter on your PC/mac.

```

Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\AI7L>flutter doctor -v
[✓] Flutter (Channel stable, 3.41.2, on Microsoft Windows [Version 10.0.19045.6466], locale en-US) [2.1s]
    • Flutter version 3.41.2 on channel stable at C:\appdev\flutter
    • Upstream repository https://github.com/flutter/flutter.git
    • Framework revision 90673a4eef (6 days ago), 2026-02-18 13:54:59 -0800
    • Engine revision 6c0baa9bf7
    • Dart version 3.11.0
    • DevTools version 2.54.1
    • Feature flags: enable-web, enable-linux-desktop, enable-macos-desktop, enable-windows-desktop, enable-android,
      enable-ios, cli-animations, enable-native-assets, omit-legacy-version-file, enable-lldb-debugging,
      enable-uiscene-migration

[✓] Windows Version (10 Pro 64-bit, 22H2, 2009) [25.7s]

[✓] Android toolchain - develop for Android devices (Android SDK version 36.1.0) [7.9s]
    • Android SDK at C:\Users\AI7L\AppData\Local\Android\sdk
    • Emulator version 36.4.9.0 (build_id 14788078) (CL:N/A)
    • Platform android-36, build-tools 36.1.0
    • Java binary at: C:\Program Files\Android\Android Studio\jbr\bin\java
    • This is the JDK bundled with the latest Android Studio installation on this machine.
    • To manually set the JDK path, use: `flutter config --jdk-dir="path/to/jdk"`
    • Java version OpenJDK Runtime Environment (build 21.0.9+14649483-b1163.86)
    • All Android licenses accepted.

[✓] Chrome - develop for the web [15ms]
    • Chrome at C:\Program Files\Google\Chrome\Application\chrome.exe

```

2. How to run Android Application in Android Studio?

Answer:

- Extract the source_code.zip. You will find this inside the main zip.
- Open the folder in your android studio.
- Even if you are building an app for ios, use android studio for the build.
- Then in your android studio terminal run: **flutter pub get**

**** You need this to get all 3rd party packages from pub.dev**

3. How to configure the App according to your setup?

Answer:

- App Config:

This helps you connect your app to your server.

Open lib/app_config.dart

You can change the [copyright_text](#), [app_name](#), [purchase_code](#), [HTTPS,DOMAIN_PATH](#) variable.

Do not change the other variables.

Make sure that `purchase_code` is given. Otherwise your app will not work properly.

If your site does not have https or your are using a local machine as server (localhost) the make `HTTPS = false`;

Your `DOMAIN_PATH` is your site url without any protocol. (see screenshot below)

If you are using localhost, `DOMAIN_PATH` should be `"your_ip_address/your_project"`;

**** "localhost/your_project" will not not work ****

Normally you do not have to change the `BASE_PATH`. Keep it as given.

```
var this_year = DateTime.now().year.toString();

Codeium: Refactor | Explain
class AppConfig {
  static String copyright_text = "@ ActiveItZone " + this_year; //it will show in your splash screen
  static String app_name = "ACTIVE MATRIMONIAL"; //it will show in your splash screen

  // enter string purchase_code here
  static String purchase_code = 'your_purchase_code';

  // configure this
  static const bool HTTPS = true; //if you are using localhost set it to false

  static const DOMAIN_PATH =
    "your_domain.com";
  // do not configure these below
  static const String API_ENDPATH = "api";
  static const String PROTOCOL = HTTPS ? "https://" : "http://";
  static const String RAW_BASE_URL = "${PROTOCOL}${DOMAIN_PATH}";
  static const String BASE_URL = "${RAW_BASE_URL}/${API_ENDPATH}";
}
```

- Theme Config:

This helps you change your app's colors according to your theme/branding

Open lib/const/my_theme.dart


You can change the `accent_color`, `gradient_color_1`, `gradient_color_2` variable.

Flutter by default does not support hex color. Do not change the other variables.

Use <https://www.rapidtables.com/convert/color/hex-to-rgb.html> To get the RGB value if you do not already know your theme's RGB color.

You should keep the Opacity value 1 (Opacity can be 0, 0.1, 0.2, ,0.9 ,1)

See the screenshot below:

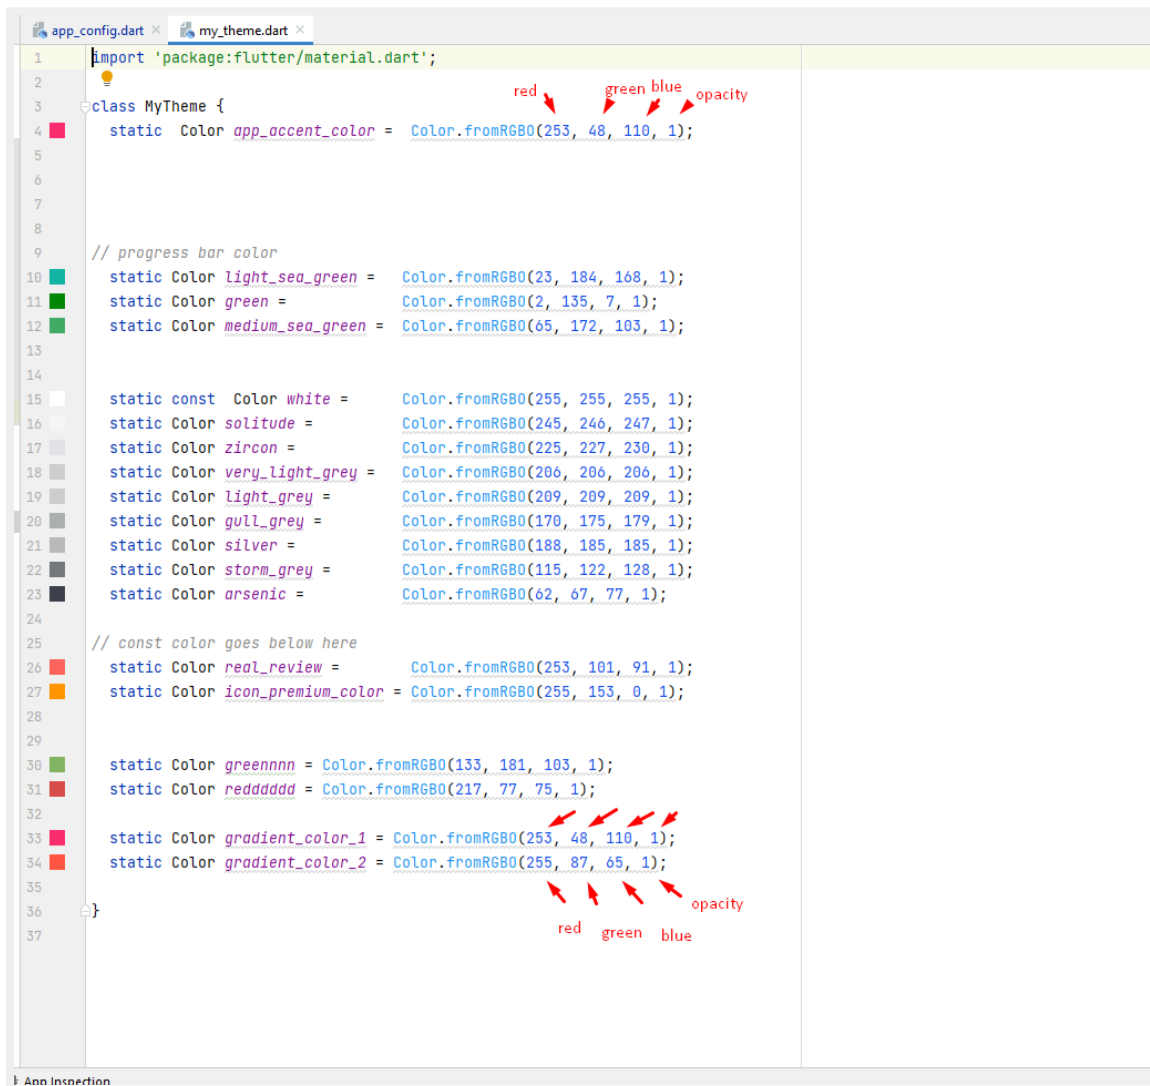

- Configure the launcher icon:

This helps you change your app's launcher icon.

Change the [app_icon.png](#) in [assets/logo](#) folder with your own

logo. Your file name should also be [app_icon.png](#) and it should be a [512x512 png](#) image and the image format should be the same.

After replacing the file, **uninstall** your app from your emulator. Otherwise the logo will not be changed.

Then in your android studio terminal run:

```
flutter pub get
```


Then run:

```
flutter pub run flutter_launcher_icons:main
```

Then run your app (shift +10). The app will be installed again with your given launcher icon.

- Configure other logos:

In the asset folders we have other logos that you may want to change according to your branding.

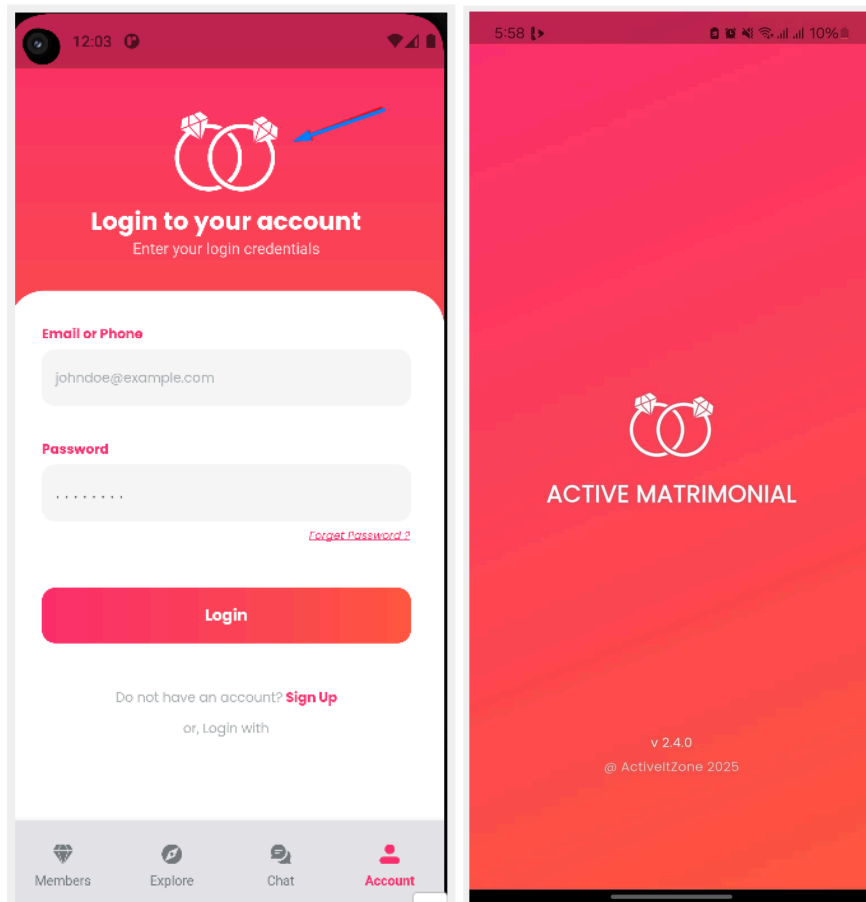

This logos will be found in :

[assets/logo/app_logo.png \(512x512\)](#)

[assets/appbar_logo.png \(512x512\)](#)

Change this logo with your own logo. File name, image format and size should be the same for each logo.

Then in your android studio terminal run:

```
flutter pub get
```

Then restart your app (shift + R). You should see your own logo in these places.


This placeholder image will be found in :

assets/images/220x320.jpg

assets/images/342x200.jpg

assets/images/342x632.jpg

These images need to be replaced with your own placeholder image.

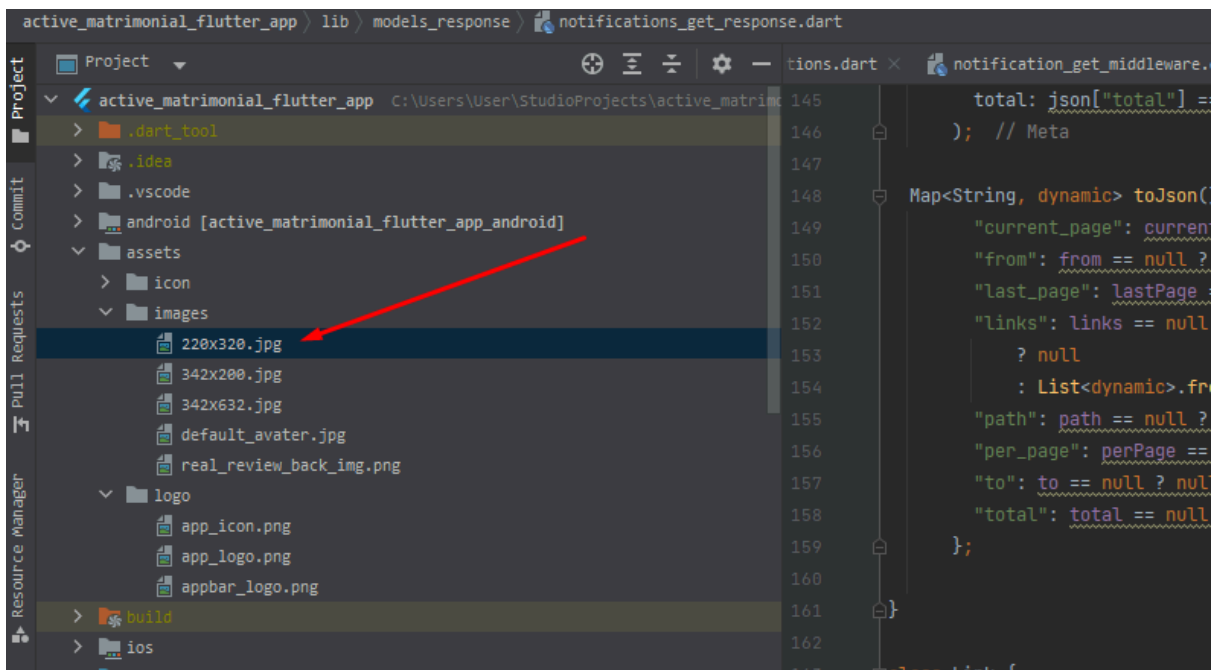

4. How to change the package name?

Answer:

This is very important. Your app cannot have the same package name as other apps. If it does, the play store will not accept it as a unique application. So rename your app according to your business/brand name. Try to write a unique package name.

Naming convention: <https://docs.oracle.com/javase/tutorial/java/package/namingpkgs.html>

For example

Let's say your package is: `com.onatcipli.networkUpp`

And your app name is "Network Upp"

Then,

Run this command inside your flutter project root.

Run the command in android studio terminal:

```
flutter pub run rename setBundleId --value=com.onatcipli.networkUpp
```

```
flutter pub run rename setAppName --targets=ios,android --value="Network Upp"
```

Try uninstalling the app from the emulator , then run the commands and then restart the app.

If it does not work, first uninstall, then restart the app then run the commands.

****In case the above do not work:**

In Android

for **package name** just change in build build.gradle only (android/app/build.gradle)

```
defaultConfig {  
    applicationId "com.onatcipli.networkUpp"  
    .....  
}
```

For iOS:

Change the bundle identifier from your Info.plist file inside your ios/Runner directory.

```
<key>CFBundleIdentifier</key>
```

```
<string>com.onatcipli.networkUpp</string>
```

If you face issues consult a flutter developer.

5. How to Build the app for testing (build an apk) ?

Answer:

<https://flutter.dev/docs/deployment/android> see the doc for reference

In terminal run: `flutter build apk`

It will build an apk and show the folder. You can then install it in your phone to test, or share to multiple users for testing.

6. How to activate an app?

Answer:

Before running the app you need to activate your flutter app otherwise the app will show an inactivated screen.

1. Go to this link <https://activeitzone.com/activation/addon>
2. Put your name in the name field.
3. Put your email in the email field.
4. Put your purchase code in the purchase field.
5. Put your codecanyon user name in the codecanyon user name field.
6. Put your domain name in the domain field.
7. Select **Active Matrimonial** option from main item.
8. Select the **Matrimonial Flutter App** option from the item.
9. Click the **Activate** button After filling all the fields and activate your app.

7. How to Configure the Stripe payment gateway?

Answer:

Please follow the below procedure:

Just put www before your domain name

Also make sure your server is configured with www

8. How to generate play store uploadable files for release?

Answer:

<https://flutter.dev/docs/deployment/android> see the doc for reference

Signing the app:

To publish on the Play Store, you need to give your app a digital signature. Use the following instructions to sign your app.

Go through the screenshots below carefully to understand how to generate key and use it for the released signed app:

Note:

- The `keytool` command might not be in your path—it's part of Java, which is installed as part of Android Studio. For the concrete path, run `flutter doctor -v` and locate the path printed after 'Java binary at:'. Then use that fully qualified path replacing `java` (at the end) with `keytool`. If your path includes space-separated names, such as `Program Files`, use platform-appropriate notation for the names. For example, on Mac/Linux use `Program\ Files`, and on Windows use `"Program Files"`.
- The `-storetype JKS` tag is only required for Java 9 or newer. As of the Java 9 release, the keystore type defaults to `PKS12`.

Setup environment for keytool:

- Run this command in your system terminal: `flutter doctor -v`
- Find the Java binary at: copy this path except the "java" folder.
- Change your terminal path by running this command : `cd "past here your copied path"` then press enter. Example: `cd C:\Program Files\Android\Android Studio\jre\bin`

- Run the keytool.exe file. Example: **C:\Program Files\Android\Android Studio\jre\bin>keytool.exe**

```
C:\Users\User>flutter doctor -v
[V] Flutter (Channel stable, 3.0.2, on Microsoft Windows [Version 10.0.19044.1889], locale en-US)
  • Flutter version 3.0.2 at C:\flutter_sdk\flutter
  • Upstream repository https://github.com/flutter/flutter.git
  • Framework revision cd41fdd495 (3 months ago), 2022-06-08 09:52:13 -0700
  • Engine revision f15f824b57
  • Dart version 2.17.3
  • DevTools version 2.12.2

[!] Android toolchain - develop for Android devices (Android SDK version 32.1.0-rc1)
  • Android SDK at C:\Users\User\AppData\Local\Android\sdk
  • Platform android-32, build-tools 32.1.0-rc1
  • Java binary at: C:\Program Files\Android\Android Studio\jre\bin\java (Copy this path)
  • Java version OpenJDK Runtime Environment (build 11.0.12+7-b1504.28-7817840)
  ! Some Android licenses not accepted. To resolve this, run: flutter doctor --android-licenses

[V] Chrome - develop for the web
  • Chrome at C:\Program Files\Google\Chrome\Application\chrome.exe

[X] Visual Studio - develop for Windows
  X Visual Studio not installed; this is necessary for Windows development.
  Download at https://visualstudio.microsoft.com/downloads/.
  Please install the "Desktop development with C++" workload, including all of its default components

[V] Android Studio (version 2021.2)
  • Android Studio at C:\Program Files\Android\Android Studio
  • Flutter plugin can be installed from:
    https://plugins.jetbrains.com/plugin/9212-flutter
  • Dart plugin can be installed from:
    https://plugins.jetbrains.com/plugin/6351-dart
  • Java version OpenJDK Runtime Environment (build 11.0.12+7-b1504.28-7817840)

[V] VS Code (version 1.70.2)
  • VS Code at C:\Users\User\AppData\Local\Programs\Microsoft VS Code
  • Flutter extension can be installed from:
    https://marketplace.visualstudio.com/items?itemName=Dart-Code.flutter

[V] Connected device (4 available)
  • sdk gphone64 x86 64 (mobile) • emulator-5554 • android-x64 • Android 12 (API 31) (emulator)
  • Windows (desktop)           • windows-x64   • Microsoft Windows [Version 10.0.19044.1889]
  • Chrome (web)                • chrome        • web-javascript • Google Chrome 104.0.5112.102
  • Edge (web)                  • edge         • web-javascript • Microsoft Edge 104.0.1293.54

[V] HTTP Host Availability
  • All required HTTP hosts are available

! Doctor found issues in 2 categories.

C:\Users\User>cd C:\Program Files\Android\Android Studio\jre\bin
C:\Program Files\Android\Android Studio\jre\bin>keytool.exe
Key and Certificate Management Tool

Commands:
-certreq          Generates a certificate request
-changealias      Changes an entry's alias
-delete           Deletes an entry
-exportcert       Exports certificate
-genkeypair       Generates a key pair
-genseckey        Generates a secret key
-gencert          Generates certificate from a certificate request
-importcert       Imports a certificate or a certificate chain
```

Create jks file for uploading app on playstore:

- Open your project path and run this command: **keytool -genkey -v -keystore android/app/key.jks -storetype JKS -keyalg RSA -keysize 2048 -validity 10000 -alias key**
- Provide all information.

```


PS C:\Users\User\Desktop\main\source_code> keytool -genkey -v -keystore android/app/key.jks -storetype JKS -keyalg RSA -keysize 2048 -validity 10000 -alias key
Enter keystore password:
Re-enter new password:
What is your first and last name?
[Unknown]: Test
What is the name of your organizational unit?
[Unknown]: Test
What is the name of your organization?
[Unknown]: Test
What is the name of your City or Locality?
[Unknown]: Test
What is the name of your State or Province?
[Unknown]: Test
What is the two-letter country code for this unit?
[Unknown]: TS
Is CN=Test, OU=Test, O=Test, L=Test, ST=Test, C=TS correct?
[no]: y

Generating 2,048 bit RSA key pair and self-signed certificate (SHA256withRSA) with a validity of 10,000 days
    for: CN=Test, OU=Test, O=Test, L=Test, ST=Test, C=TS
Enter key password for <key>

```

**keytool -genkey -v -keystore android/app/key.jks -storetype JKS -keyalg
RSA -keysize 2048 -validity 1000000 -alias key**

Your created JKS file is located your project->android->app folder

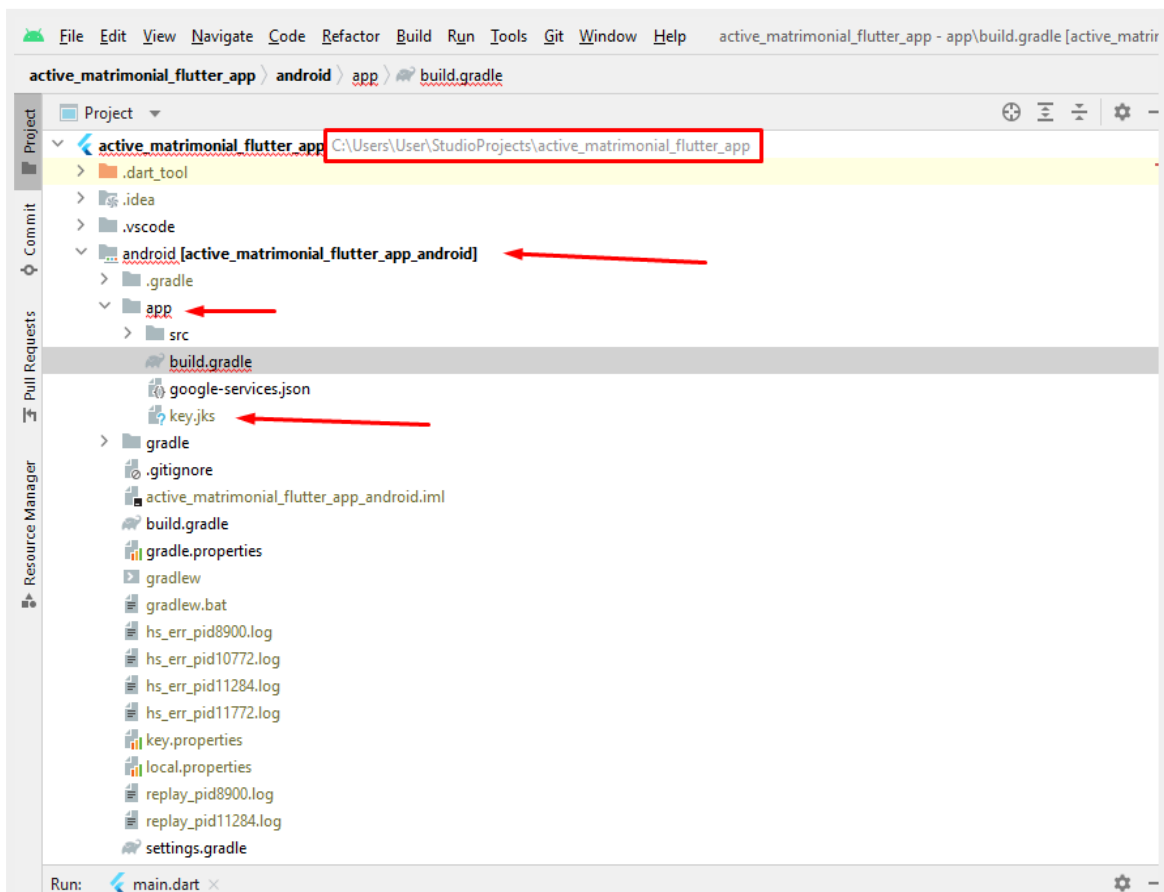


Reference the keystore from the app

Create a file named `<your app dir>/android/key.properties` that contains a reference to your keystore:

```
storePassword=<password from previous step>
keyPassword=<password from previous step>
keyAlias=key
storeFile=<location of the key store file, such as /Users/<user name>/key.jks>
```

**** If you lose the jks file , you will not be able to release a new update your app in playstore****

Create new file `key.properties` in the android folder . Enter the information

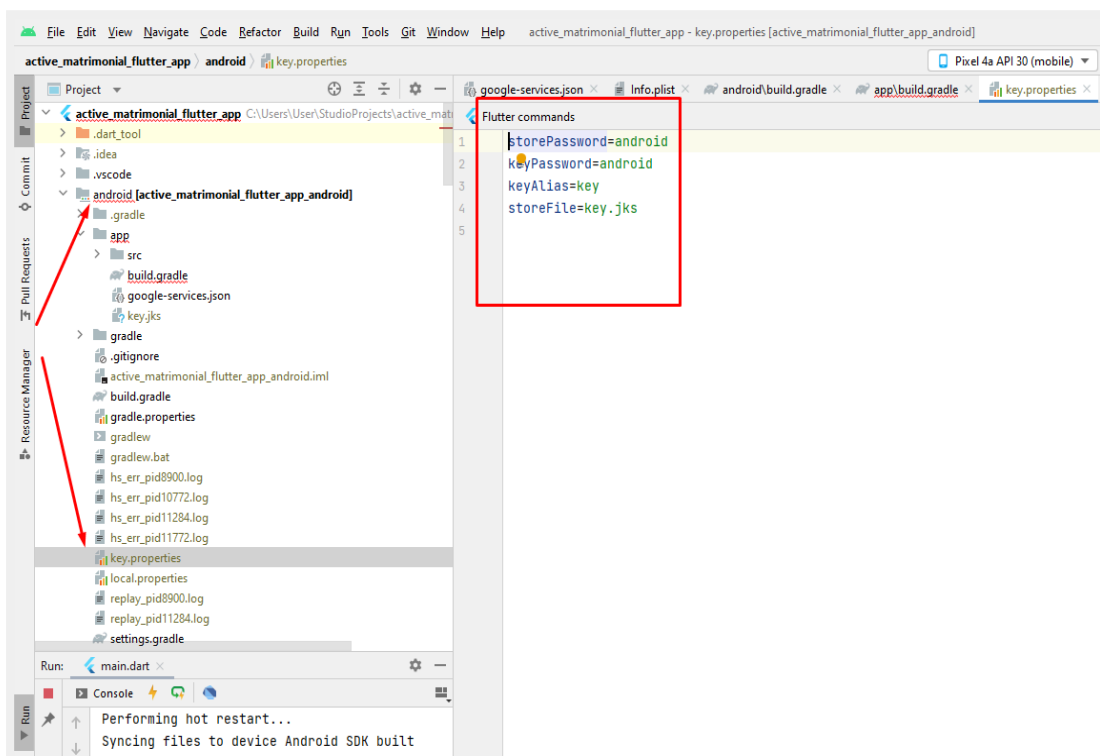

Please Read this:

Configure signing in gradle

Configure signing for your app by editing the `<your app dir>/android/app/build.gradle` file.

1. Add code before `android` block:

```
android {  
    ...  
}
```

With the keystore information from your properties file:

```
def keystoreProperties = new Properties()  
def keystorePropertiesFile = rootProject.file('key.properties')  
if (keystorePropertiesFile.exists()) {  
    keystoreProperties.load(new FileInputStream(keystorePropertiesFile))  
}  
  
android {  
    ...  
}
```

Load the `key.properties` file into the `keystoreProperties` object.

2. Add code before `buildTypes` block:

```
buildTypes {  
    release {  
        // TODO: Add your own signing config for the release build.  
        // Signing with the debug keys for now,  
        // so 'flutter run --release' works.  
        signingConfig signingConfigs.debug  
    }  
}
```


With the signing configuration info:

```
signingConfigs {  
    release {  
        keyAlias keystoreProperties['keyAlias']  
        keyPassword keystoreProperties['keyPassword']  
        storeFile keystoreProperties['storeFile'] ? file(keystoreProperties['storeFile']) : null  
        storePassword keystoreProperties['storePassword']  
    }  
}  
buildTypes {  
    release {  
        signingConfig signingConfigs.release  
    }  
}
```

Configure the `signingConfigs` block in your module's `build.gradle` file.

Release builds of your app will now be signed automatically.

in app/build.gradle do necessary changes

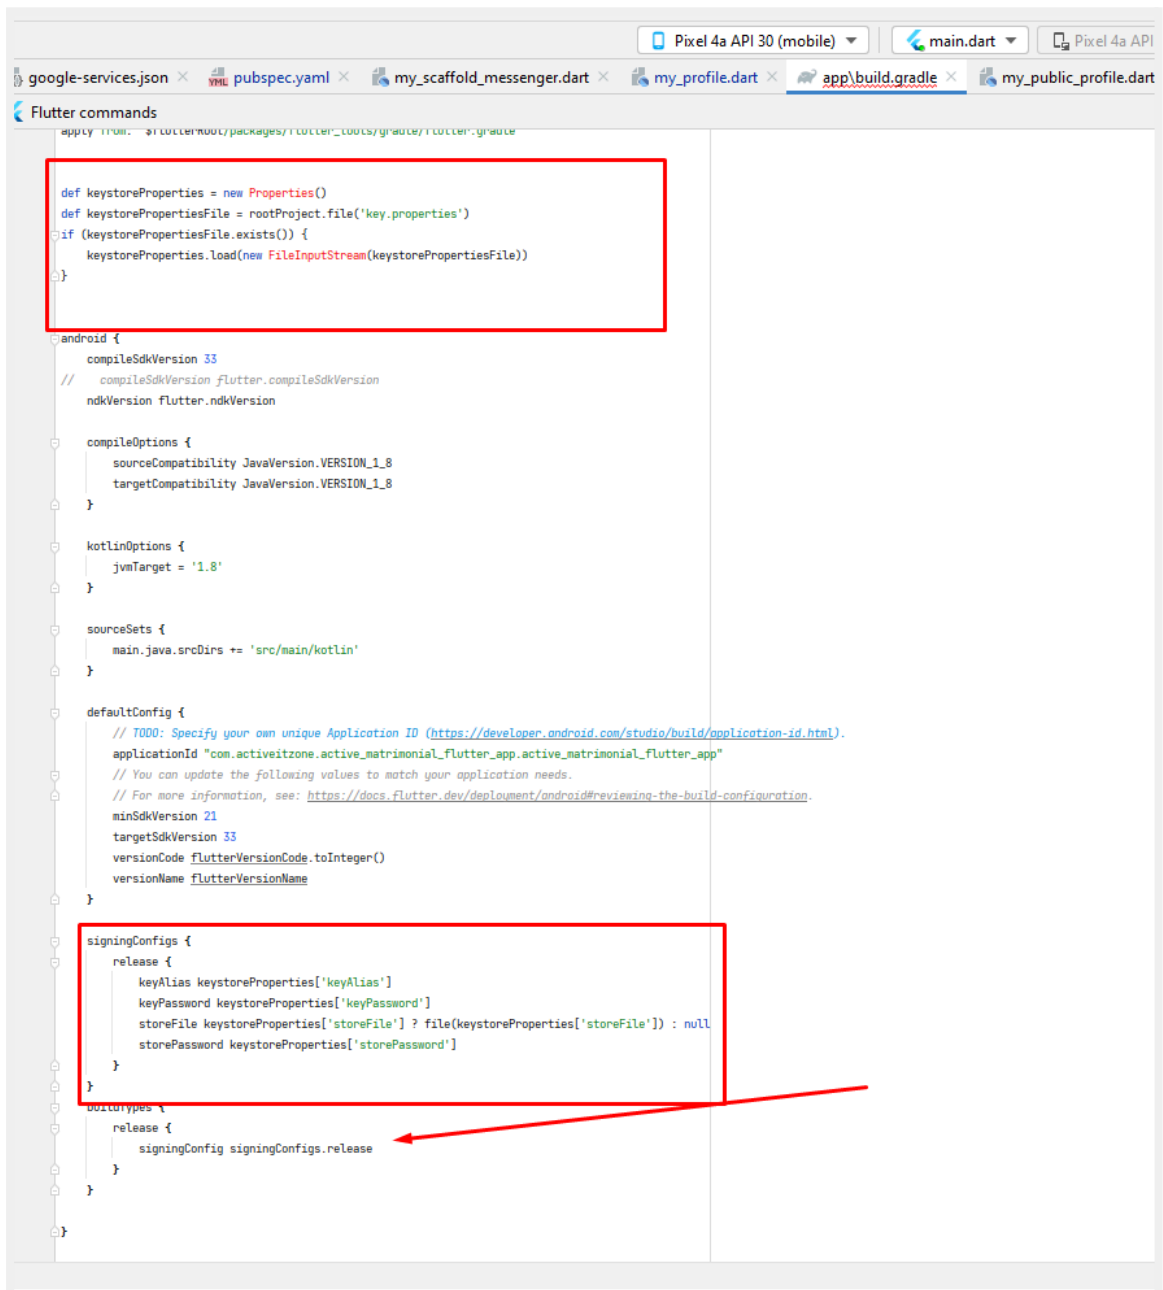

Note: You may need to run `flutter clean` after changing the gradle file. This prevents cached builds from affecting the signing process.

Now you are almost done

In your terminal run: `flutter build appbundle`

The release bundle for your app is created at

`<your app dir>/build/app/outputs/bundle/release/app.aab.`

Upload this app.aab file to your google play console

9. How to run IOS? ****Read all the points carefully before doing anything**

Answer:

- Install Xcode on your mac.
- Open your ios folder in Xcode and select your developer team from Signin and capabilities.
- You need to open a simulator. Run this command for open a simulator `open -a simulator`
- Change the platform version according to your simulator version.
 - Goto your source_code->ios->Podfile add your ios simulator version.
 - Run this command `flutter run`.

More info <https://docs.flutter.dev/get-started/install/macos>

10. How to generate app store uploadable files?

Answer:

Archive and upload your app using Xcode

- Before you can submit your app for review through App Store Connect, you need to upload the build through Xcode.
- In Xcode, select Generic iOS Device as the deployment target.
- Choose Product from the top menu and click on Archive.
- The Xcode Organizer will launch, displaying any archives you've create.
- Make sure the current build is selected and click on Upload to App Store in the right-hand panel.
- Select your credentials and click Choose.
- In the next window that appears, click on Upload in the bottom right-hand corner.

A success message will appear when the upload has been completed. Click Done.

11. How to update for android? ****Read all the points carefully before doing anything**

Answer:

- This section will help you if you are here for the update and have already generated the signed release apk/appbundle the last time and already have the keytool and the manifest file ready in your old project folder.
- If you are installing and building the release file for the first time this section is not for you.
- Extract the source_code.zip. You will find this inside the main zip.
- Open the folder in your android studio.
- ****Remember to open this in a separate folder than your old project.**
- Even if you are building an app for ios, use android studio for the build.
- Then in your android studio terminal run:
`flutter pub get`
- This will fetch all the necessary packages
- If you are updating, you must have build the key.jks previously
- Copy the key.jks , key.properties, and the manifest file from your old project and paste in the correct locations
- See the previous screenshots for the file locations
- If you are missing your old project, you have to configure key.properties, and the manifest file like described in the installation.
- As our source code is made ready for the fresh installation , you will have to do all your configuration (like domain path, app color, package name etc) shown in the previous steps.
- But do not create a new key.jks, you have to update your app with the existing key
- If you have somehow lost your previous key , you have to release a totally new app to the play store. You will not be able to release an update.
- In your terminal run: `flutter build appbundle`
- The release bundle for your app is created at
`<your app dir>/build/app/outputs/bundle/release/app.aab.`

- Upload this app.aab file to your google play console.

12. How to configure social login?

Answer:

- Create a firebase project.
 - First you need to have a google account and login in your browser.
 - Goto this link: <https://console.firebase.google.com/>
 - Click the "Add Project" Button.
 - Add your project name and continue.
 - Off the "disable google analytics" and Click the "Continue" Button.
 - Click the "Continue" Button.

Add Android app on your Firebase project

- Click the android icon.

Add some informations:

- Android package name
- App nickname
- Add signing certificate SHA-1 and SHA-256

How to get SHA-1 code in your project ?


- Goto android studio and open your project then open terminal and ensure that it shows your project directory in the terminal.
- Then drive into the android folder(cd android).
- For debug mode: write this command on your android studio terminal `./gradlew signinReport` then press enter.

```
Terminal: Local x + v
PS C:\Users\User\StudioProjects\active_matrimonial_flutter_app> cd android
PS C:\Users\User\StudioProjects\active_matrimonial_flutter_app\android> ./gradlew signingReport

> Configure project :app
Warning: Please apply google-services plugin at the bottom of the build file.

> Task :app:signingReport
Variant: debug
Config: debug
Store: C:\Users\User\.android\debug.keystore
Alias: AndroidDebugKey
MD5: 53:43:F9:DE:1A:22:02:7F:2C:B7:B0:DD:9A:28:5A:FF
SHA1: DD:8E:70:4E:63:51:F1:4C:FF:34:AE:3E:7C:47:A6:0A:69:94:A9:13
SHA-256: 3D:06:A7:08:63:22:7D:0D:E6:E0:E6:FB:41:38:42:C1:BF:8E:E3:95:AE:0F:55:08:B5:6A:67:7D:25:CE:B7:BE
Valid until: Wednesday, June 19, 2052
```

- For release mode: write this command on your android studio terminal “keytool -list -v -keystore YOUR_PROJECT_DIRECTORY\key.jks -alias key” then press enter.

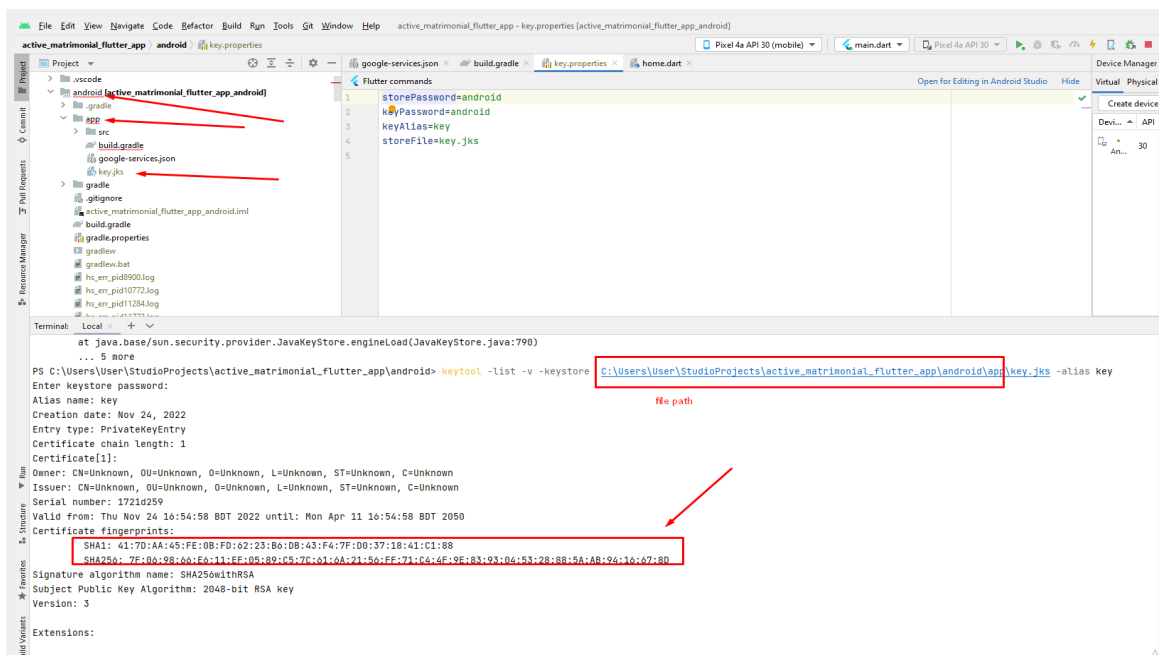

- Click the “Register App” button
- Download config file and add this file into your project->android->app folder
- Add firebase SDK
- Click the “Continue to console” button
- After upload your app on playstore you need to add signing certificate SHA-1 and SHA-256 in firebase project setting: Open your google play console->Your App->Setup->App integrity

Google Play Console

Search Play Console

All apps

Dashboard

Inbox 2

Statistics

Publishing overview

Release

Releases overview

Production

Testing

Reach and devices

Overview

Device catalog

App bundle explorer

Setup

App integrity

App integrity

Protect your app and your users [Show more](#)

Integrity API responses off Releases signed by Google Play

Integrity API **App signing**

App signing key certificate

This is the public certificate for the app signing key that Google uses to sign each of your releases. Use it to register your key with API providers. The app signing key itself is not accessible, and is kept on a secure Google server.

MD5 certificate fingerprint

SHA-1 certificate fingerprint

SHA-256 certificate fingerprint

Upgrade your app signing key for new installs

You can upgrade your app signing key for new installs, for example if you want to move to a cryptographically stronger key. Google will use the new key to sign all new installs and their updates. Your legacy key will still be used to sign updates for users who already have your app.

You must generate your own google-services.json. Do not use ours - it will not work for you.

File Edit View Navigate Code Refactor Build Run Tools Git Window Help active_matrimonial_flutter_app - google-services.json [active_matrimonial_flutter_app_android]

active_matrimonial_flutter_app android app google-services.json

Flutter commands

```

1 project_info: {
2   "project_number": "114132586564",
3   "project_id": "signin-eb114",
4   "storage_bucket": "signin-eb114.appspot.com"
5 },
6 "client": [
7   {
8     "client_info": {
9       "mobilesdk_app_id": "1:114132586564:android:9c77bba65d714880a80c11",
10      "android_client_info": {
11        "package_name": "com.activeitzone.active_matrimonial_flutter_app.active_matrimonial_flutter_app"
12      }
13     },
14   },
15   "oauth_client": [
16     {
17       "client_id": "114132586564-e264jglm8bam2fmp4hrapp318tr3sck7.apps.googleusercontent.com",
18       "client_type": 1,
19       "android_info": {
20         "package_name": "com.activeitzone.active_matrimonial_flutter_app.active_matrimonial_flutter_a"
21       },
22       "certificate_hash": "dd8e704e6351f14cfff34ae3e7c47a60a6994a913"
23     },
24     {
25       "client_id": "114132586564-pr2t81t159cgk22hb4lp0uppjjeagvt.apps.googleusercontent.com",
26       "client_type": 3
27     }
28   ],
29   "api_key": [
30     {
31       "current_key": "AIzaSyBs4MojvxfUc6jWltg6y7oIIAhB9avJMoM"
32     }
33   ],
34   "services": {
35     "appinvite_service": {
36       "other_platform_oauth_client": [

```

Project

android [active_matrimonial_flutter_app_android]

gradle

src

build.gradle

google-services.json

key.properties

gradle

gitignore

active_matrimonial_flutter_app_android.iml

gradle.properties

gradlew

gradlew.bat

hs_err_pid9900.log

hs_err_pid10772.log

hs_err_pid11284.log

hs_err_pid11772.log

key.properties

local.properties

replay_pid8900.log

replay_pid11284.log

settings.gradle

assets

demo_images

icon

images

logo

app_icon.png

app_logo.png

appbar_logo.png

build

ios

Flutter

Runner

Assets.xcassets

Base.lproj

AppDelegate.swift


GeneratedPluginRegistrant.h

GeneratedPluginRegistrant.m

Firebase Authentication :

- Goto signin method and then enable Google, facebook and twitter and apple.
- For facebook you need a facebook app id and app secret, we will create the next step.

Add these documents.

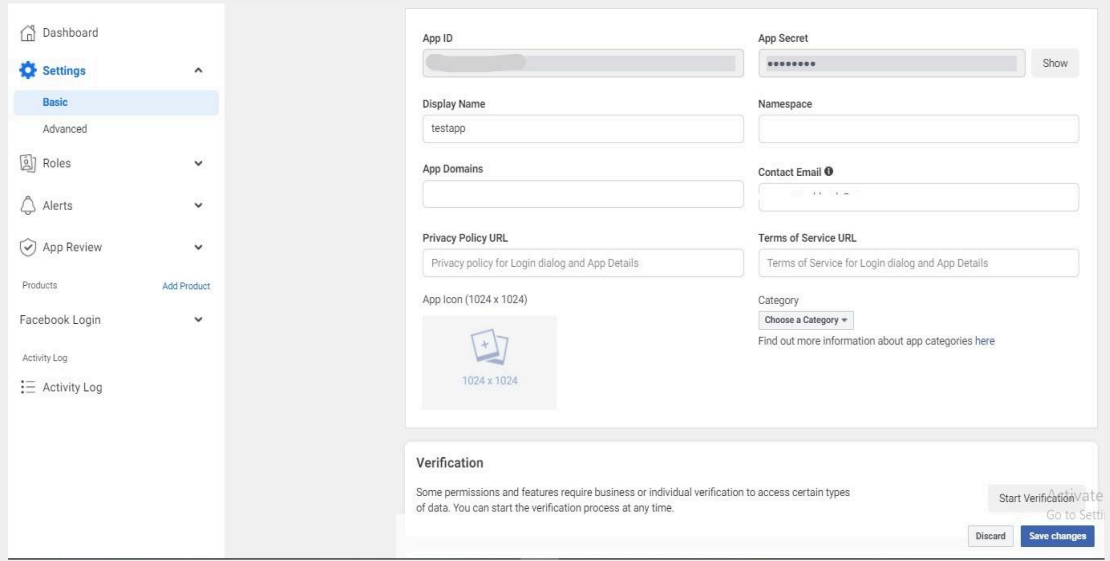

The screenshot shows the 'App Settings' page in the Firebase console. On the left is a sidebar with navigation links: Dashboard, Settings (selected), Basic, Advanced, Roles, Alerts, App Review, Products, Facebook Login, Activity Log, and Activity Log. The main content area is titled 'App Settings' and contains several input fields for configuring the app. The 'App ID' field is filled with a long alphanumeric string. The 'App Secret' field is filled with a long alphanumeric string and has a 'Show' button next to it. The 'Display Name' field is filled with 'testapp'. The 'Namespace' field is empty. The 'App Domains' field is empty. The 'Contact Email' field is empty. The 'Privacy Policy URL' field is filled with 'Privacy policy for Login dialog and App Details'. The 'Terms of Service URL' field is filled with 'Terms of Service for Login dialog and App Details'. The 'App Icon' field shows a placeholder image of a document with a plus sign and the text '1024 x 1024'. The 'Category' field is a dropdown menu with 'Choose a Category' selected. Below the 'App Settings' section is a 'Verification' section with a note: 'Some permissions and features require business or individual verification to access certain types of data. You can start the verification process at any time.' At the bottom right of the 'Verification' section are buttons for 'Start Verification', 'Activate', 'Go to Settings', 'Discard', and 'Save changes'.


- **Facebook:** Package Used

https://pub.dev/packages/flutter_facebook_auth


See its documentation and steps:

How to create a facebook app ?

- First you have to login facebook in your browser.
- Goto <https://developers.facebook.com/>
- Goto My Apps.

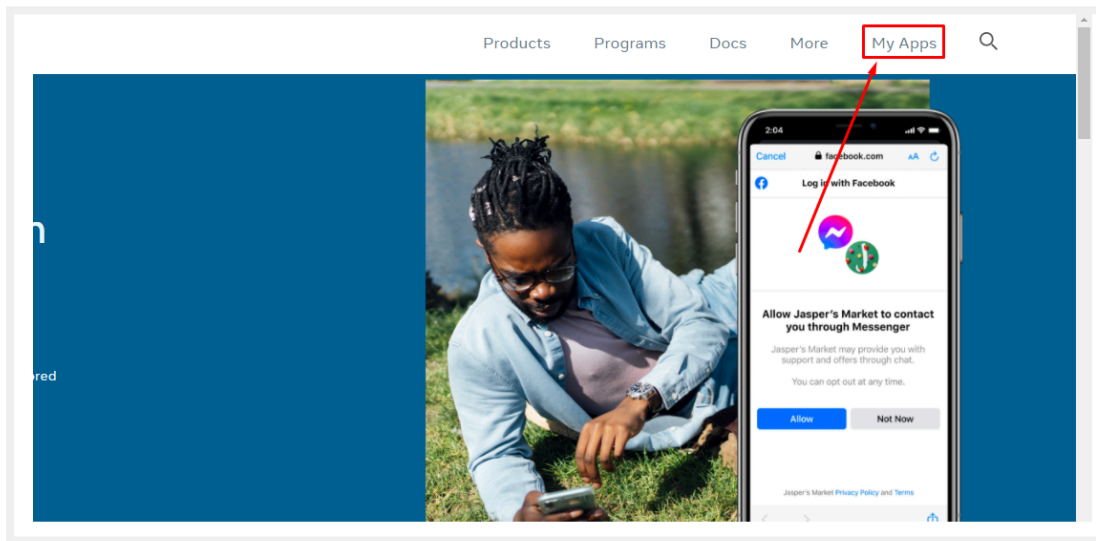

- Create an app.

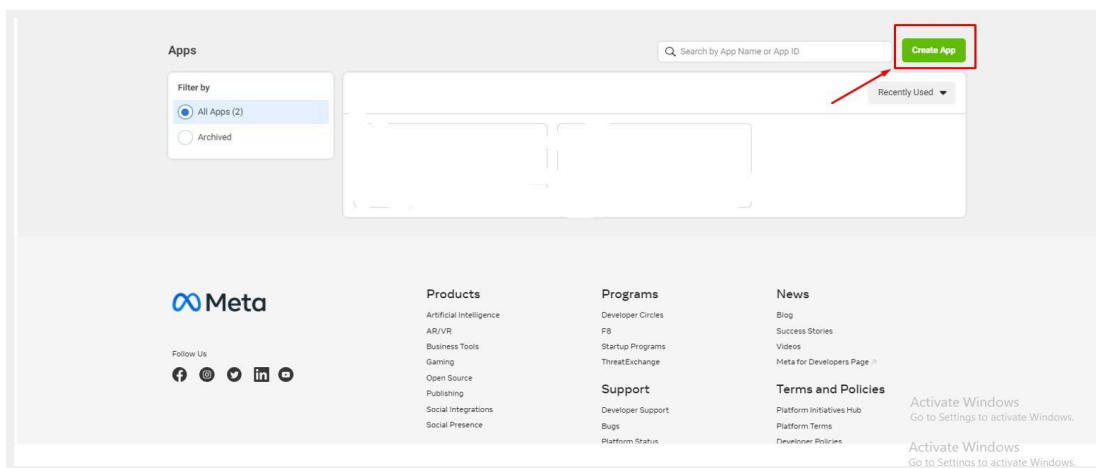

- Select App Type None.

Create an App [X] Cancel

Type Details

Select an app type
The app type can't be changed after your app is created. [Learn more](#)

- Business**
Create or manage business assets like Pages, Events, Groups, Ads, Messenger, WhatsApp and Instagram Graph API using the available business permissions, features and products.
- Consumer**
Connect consumer products, and permissions, like Facebook Login and Instagram Basic Display to your app.
- Games**
Create an HTML5 game hosted on Facebook.
- Gaming**
Connect an off-platform game to Facebook Login.
- Workplace**
Create enterprise tools for Workplace from Meta.
- None** (Selected)
Create an app with combinations of consumer and business permissions and products.

Next

- Add your app details
 - App Name.
 - App Contact Email.
 - Business Account. (Don't Change it).

Create an App [X] Cancel

Type **Details**

Add details

Display name (App Name)
This is the app name associated with your app ID. You can change this later.

App Contact Email (Email)
This email address is used to contact you about potential policy violations, app restrictions or steps to recover the app if it's been deleted or compromised.


Business Account - Optional
To access certain permissions or features, apps need to be connected to a Business Account.

Don't change this option (points to Business Account dropdown)
No Business Account selected


By proceeding, you agree to the [Facebook Platform Terms](#) and [Developer Policies](#).

Previous **Create App**

- Add product "Facebook Login".
- Click the "Set Up" button.

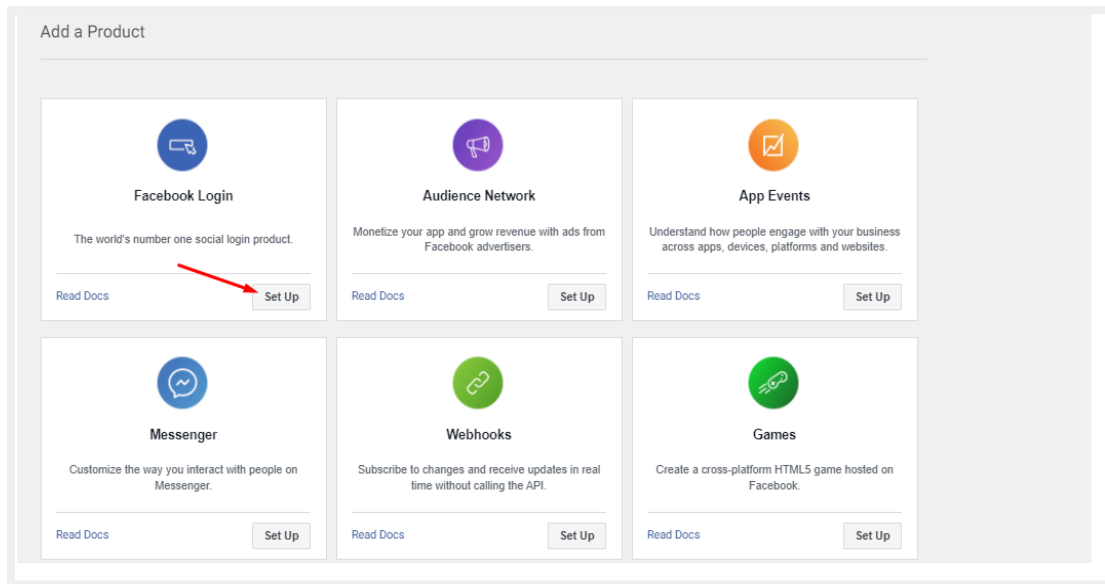

- Click the “Basic” Option.

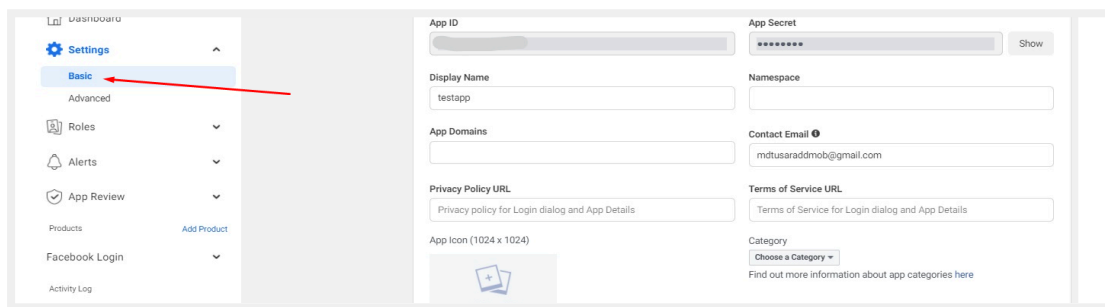

- Add some information and save it.
 - This app privacy policy url.
 - This app terms of service url.
 - This app icon (Icon size also 1024 X 1024 Or 512 X 512).
 - This app category.

Display Name: testapp

Namespace:

App Domains:

Contact Email: mdtusaraddmob@gmail.com

Privacy Policy URL: Privacy policy for Login dialog and App Details (labeled "Privacy Policy Url" with a red arrow)

Terms of Service URL: Terms of Service for Login dialog and App Details (labeled "Terms of service url" with a red arrow)

App Icon (1024 x 1024): [Icon placeholder] (labeled "App icon" with a red arrow)

Category: Choose a Category (labeled "Choose your app category" with a red arrow)

Find out more information about app categories [here](#)

- Now activate your app.
- Click the "Switch Mode" Button.

ActiveEcommma App ID: 339548018007876 In development

Dashboard

Settings

Basic

Advanced

Roles

Alerts

App Review

Products Add Product

App ID: [Redacted]

App Secret: [Redacted]

Display Name: ActiveEcommma

App Domains:

Privacy Policy URL: https://activeitzone.com/products-support-policy/

Terms of Service URL: https://activeitzone.com/customization/terms-policy/

App Icon (1024 x 1024): [Icon placeholder]

Category:

Switch to Live Mode?

Your app won't be able to access unapproved permissions or features that require App Review. [Learn more](#)

Cancel Switch Mode

ActiveEcommma App ID: 339548018007876 In development

Dashboard

Settings

Basic

Advanced

Roles

Alerts

App Review

Products Add Product

Facebook Login

Activity Log

App ID: [Redacted]

App Secret: [Redacted]

Display Name: ActiveEcommma

App Domains:

Privacy Policy URL: https://activeitzone.com/products-support-policy/

Terms of Service URL: https://activeitzone.com/customization/terms-policy/


App Icon (1024 x 1024): [Icon placeholder]

Category: Shopping

Find out more information about app categories [here](#)

- Make sure your app facebook login settings are on these options.


- Client OAuth Login.
- Web OAuth Login.
- Enforce HTTPS
- Use Strict Mode for Redirect URIs

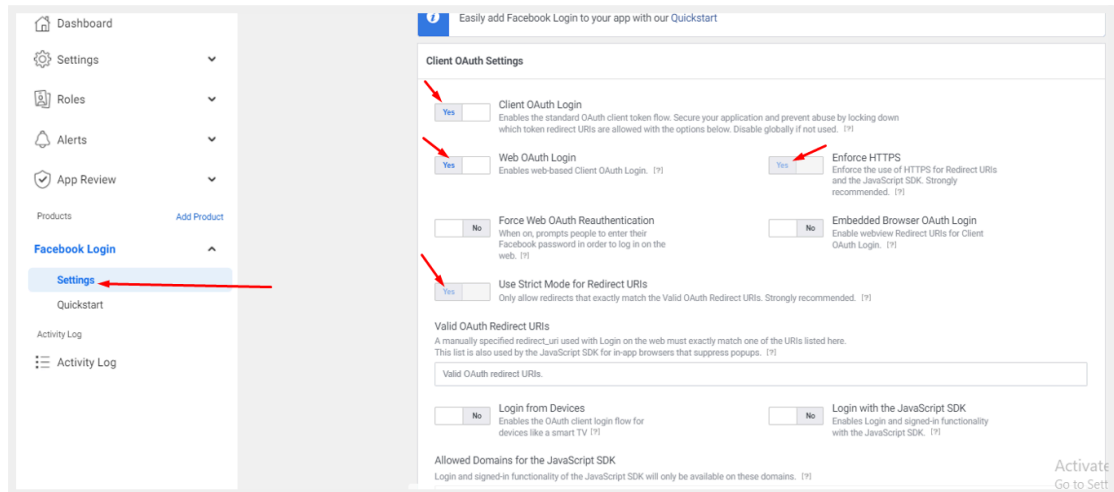

Integration


For Android:

- Add your facebook app id, app name, **facebook_client_token** and fb login protocol scheme (**NOTE**: The scheme needs to start with `fb` and then your ID.example: fb123456789) into your `project->android->app->src->main->res->values->string.xml` file.

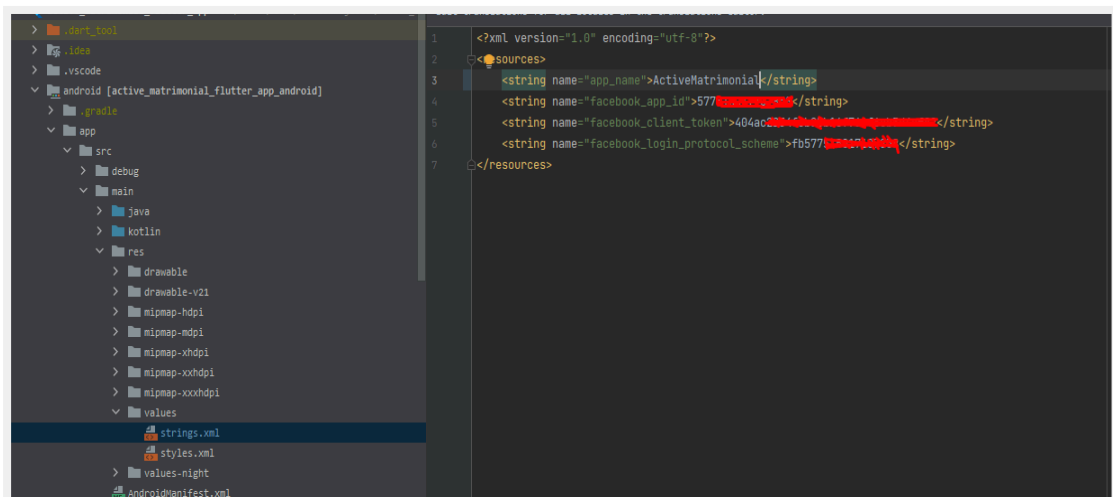


For IOS:

Goto Facebook Login->Quickstart then select iOS platform and just follow 1 and 2 steps.

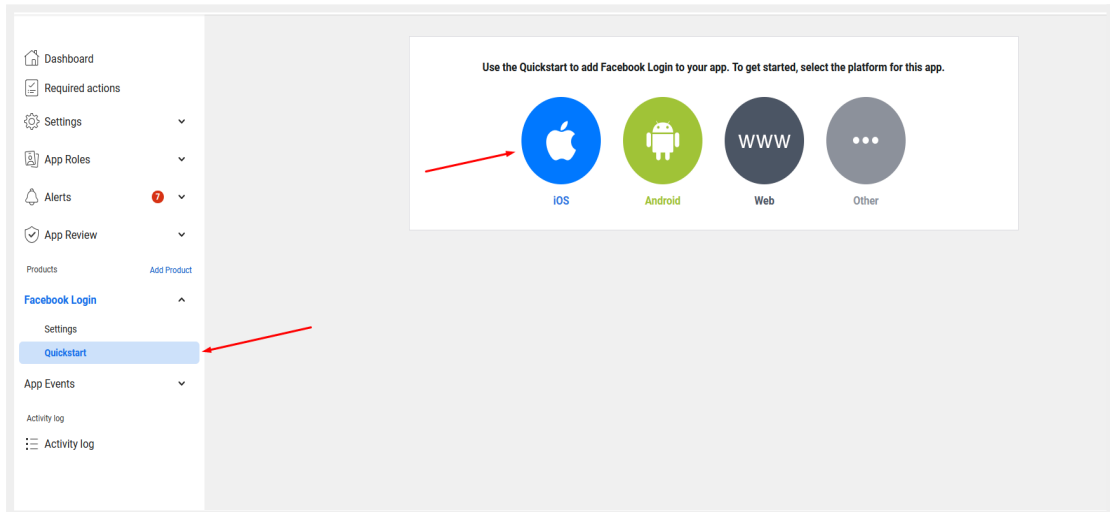

Then choose your environment SDK: CocoaPods

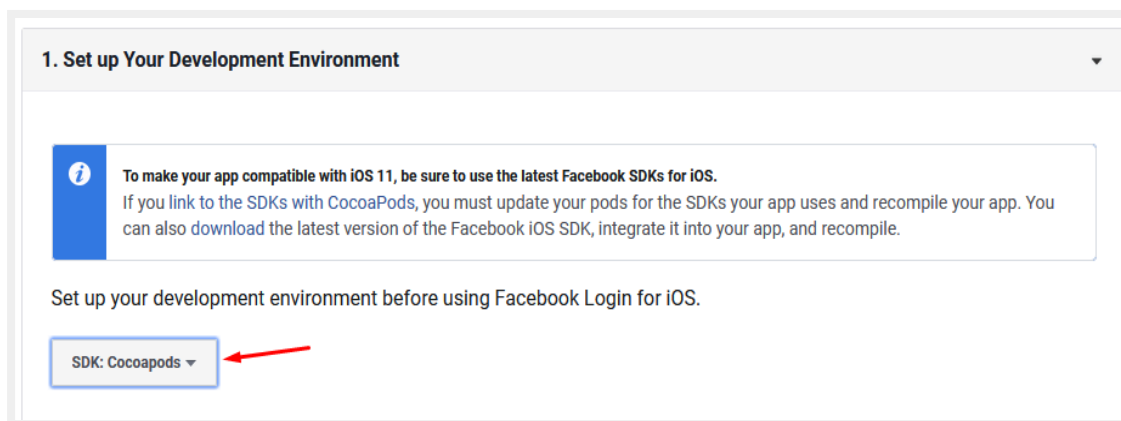

Then add your Bundle ID then save it and exit from the quick start page.

1. Set up Your Development Environment

2. Add your Bundle Identifier

The bundle identifier (Bundle ID) should appear in the box below. If the box is empty, find your bundle identifier in your Xcode Project's iOS Application Target and paste it into the box below.

Bundle ID

You can change your bundle identifier in the future via the iOS section on the settings page.

Save

Back **Continue**

Do not need to follow the others step in the quick start page.

Client Token: Where do you get the client token?

Ans: Goto your facebook app setting->advance finde the Client token

Dashboard

Settings

Basic

Advanced

Roles

Alerts

Update notification email

A notification email will be sent to this address when updates are made to

Client token

37706...33


Require app secret

Require app secret or app secret proof for API calls with access tokens used outside of trusted contexts.

Allow API Access to app settings

Set to No to prevent changes to app settings through API calls

In your project's ios folder: Add your facebook app id, app name, `facebook_client_token` and fb login protocol scheme (***NOTE**: The scheme needs to start with `fb` and then your ID.example: fb123456789*) into your `project->ios->Runner->info.plist` file.

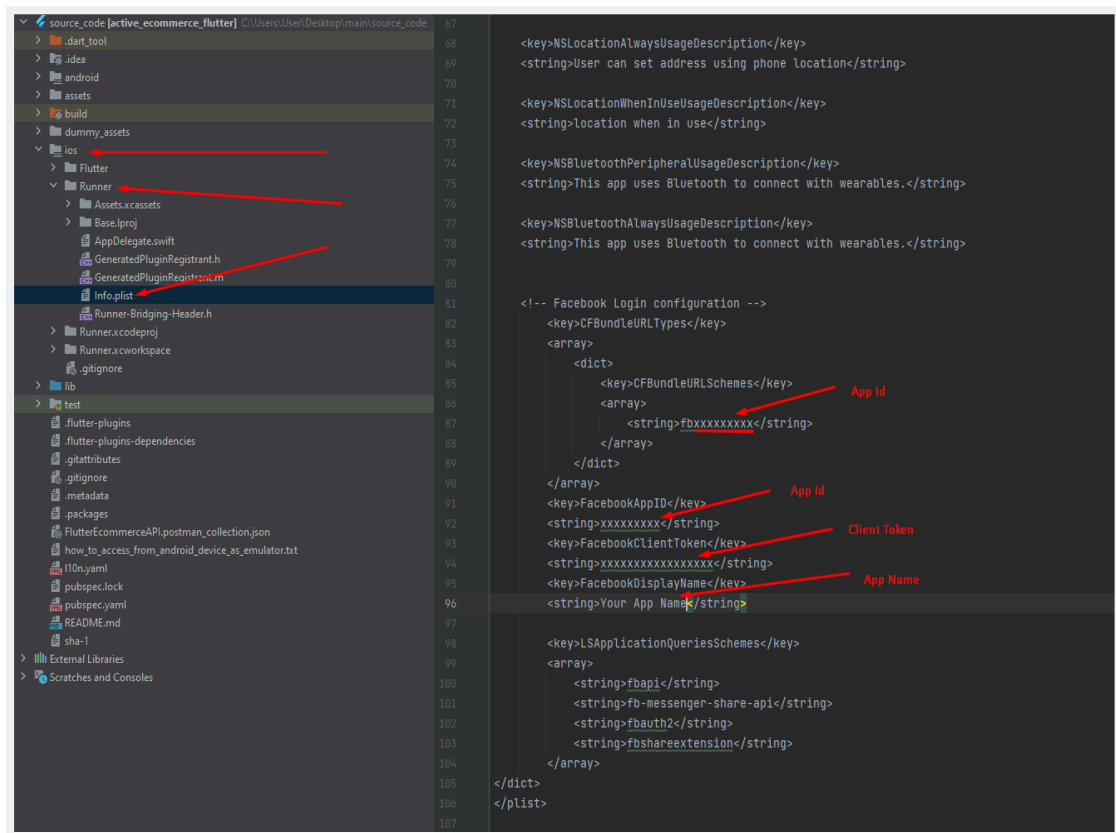

Google: Package Used

https://pub.dev/packages/google_sign_in


Integration

For IOS:

1. [First register your application.](#)
2. Make sure the file you download in step 1 is named GoogleService-Info.plist.
3. Move or copy GoogleService-Info.plist into the [my_project]/ios/Runner directory.
4. Open Xcode, then right-click on Runner directory and select Add Files to "Runner".
5. Select GoogleService-Info.plist from the file manager.
6. A dialog will show up and ask you to select the targets, select the Runner target.


7. Then add the CFBundleURLTypes attributes below into the [my_project]/ios/Runner/Info.plist file.

Open your GoogleService-Info.plist file and copy **REVERSED_CLIENT_ID**

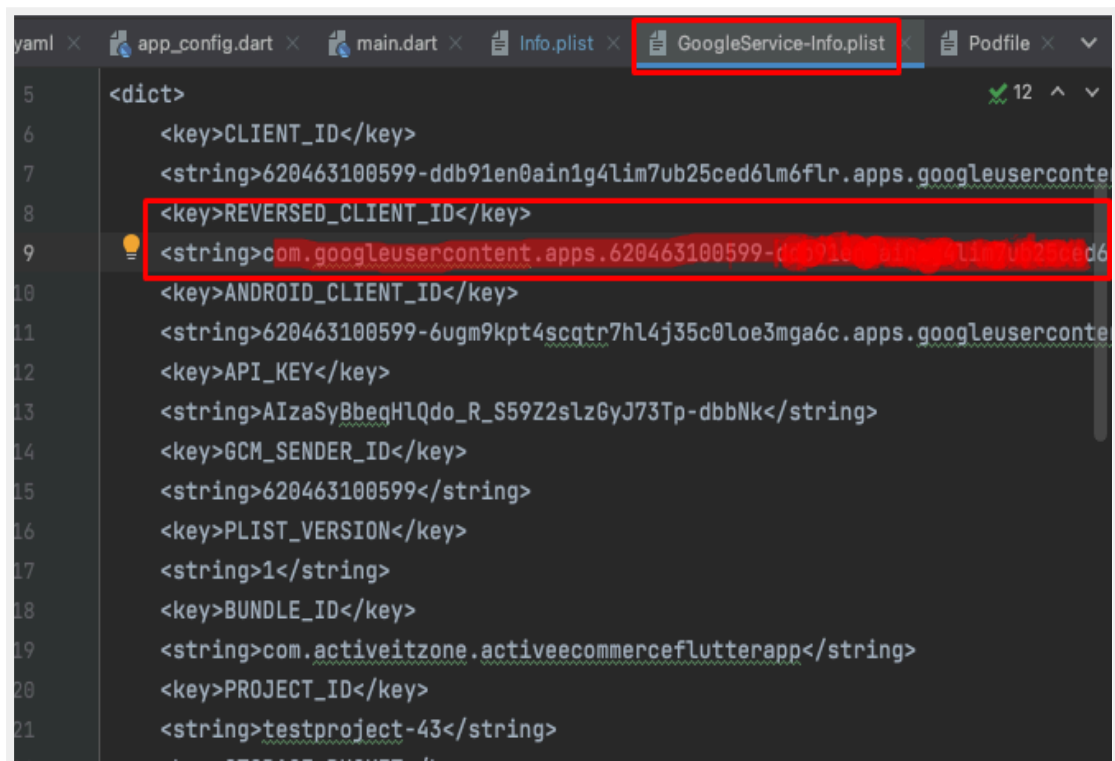

```
5 <dict>
6   <key>CLIENT_ID</key>
7   <string>620463100599-ddb91en0ain1g4lim7ub25ced6lm6flr.apps.googleusercontent.com</string>
8   <key>REVERSED_CLIENT_ID</key>
9   <string>com.googleusercontent.apps.620463100599-ddb91en0ain1g4lim7ub25ced6lm6flr</string>
10  <key>ANDROID_CLIENT_ID</key>
11  <string>620463100599-6ugm9kpt4scqtr7hl4j35c0loe3mga6c.apps.googleusercontent.com</string>
12  <key>API_KEY</key>
13  <string>AIzaSyBbegHLQdo_R_S59Z2slz6yJ73Tp-dbbNk</string>
14  <key>GCM_SENDER_ID</key>
15  <string>620463100599</string>
16  <key>PLIST_VERSION</key>
17  <string>1</string>
18  <key>BUNDLE_ID</key>
19  <string>com.activeitzone.activee-commerce-flutterapp</string>
20  <key>PROJECT_ID</key>
21  <string>testproject-43</string>
```

Put **REVERSED_CLIENT_ID** in your source_code->ios->info.plist files
CFBundleURLSchemes-> array-> string

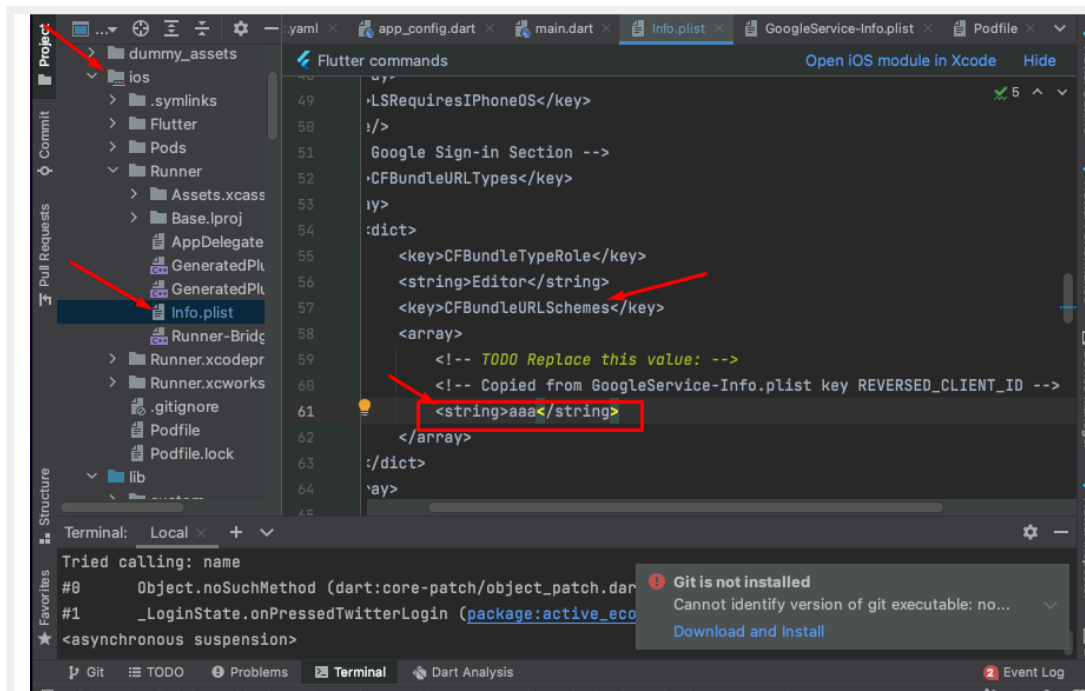


Follow the guideline from here https://pub.dev/packages/google_sign_in

Twitter : package used

https://pub.dev/packages/twitter_login

How to create a Twitter app.

- First you have to login twitter in your browser.
- Go to <https://developer.twitter.com/>
- Go to [Developer Portal](#).
- Go to Project & Apps->Overview create a new project.

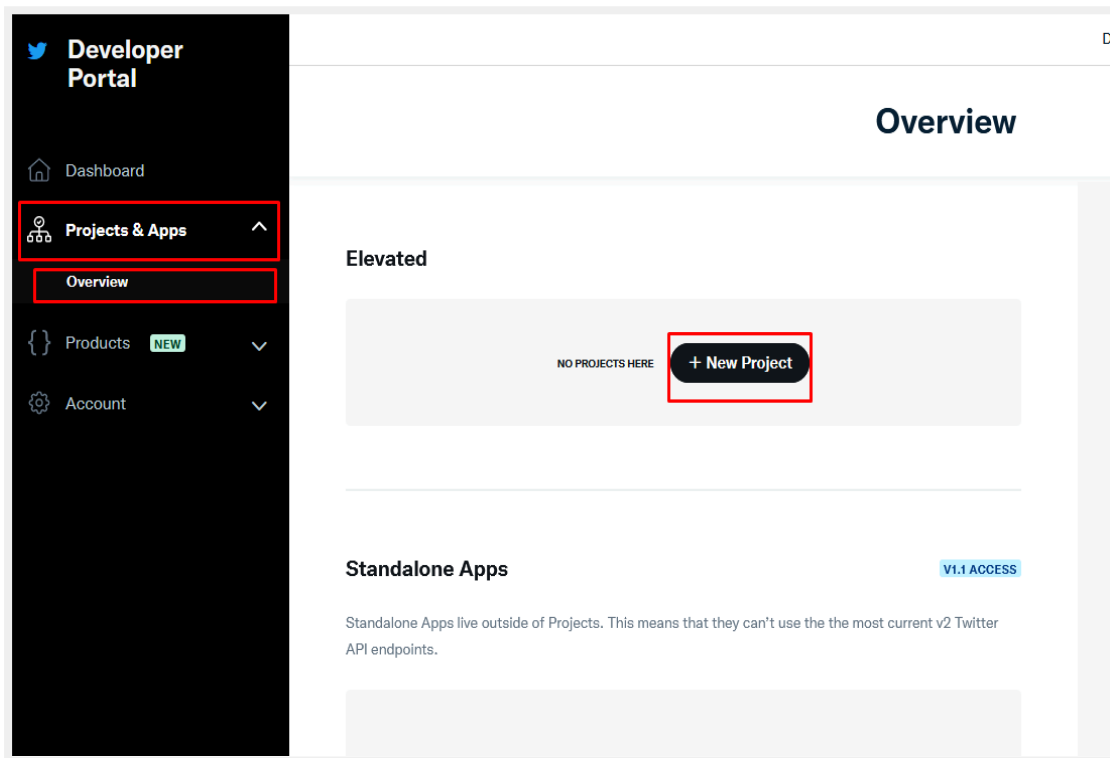

- Filup some information for your project. Project Name, Use case, Project description.

The image displays two screenshots of the Twitter Developer Portal project creation form. The left screenshot shows the 'Project name' tab (labeled 1) with a text input field containing 'Your project name' (highlighted with a red box). The right screenshot shows the 'Use case' tab (labeled 2) with a dropdown menu open, displaying a list of use cases. The selected use case is 'Building consumer tools (professional)' (highlighted with a red box). The 'Project description' tab (labeled 3) is also visible, showing a text input field for the project description.

1 Project name 2 Use case 3 Project description 4 App s

Your Project helps you organize your work and monitor your usage with the Twitter API.

Your project name

21

1

Project description

Required

This is how you intend to use the Twitter developer platform.

2

Building consumer tools (professional)

Select a use case

Doing academic research

Making a bot

Build customized solutions in-house

Embedding Tweets in a website

Exploring the API

Doing something else

Publishing ads programatically

Student

Teaching


Building tools for businesses

Building consumer tools (hobbyist)


Building consumer tools (professional)

@TW


- Setup your app
 - Select your app environment.
 - Enter your app name.
 - Collect your **API Key** and **API Key Secret**.(you will have to collect it.)

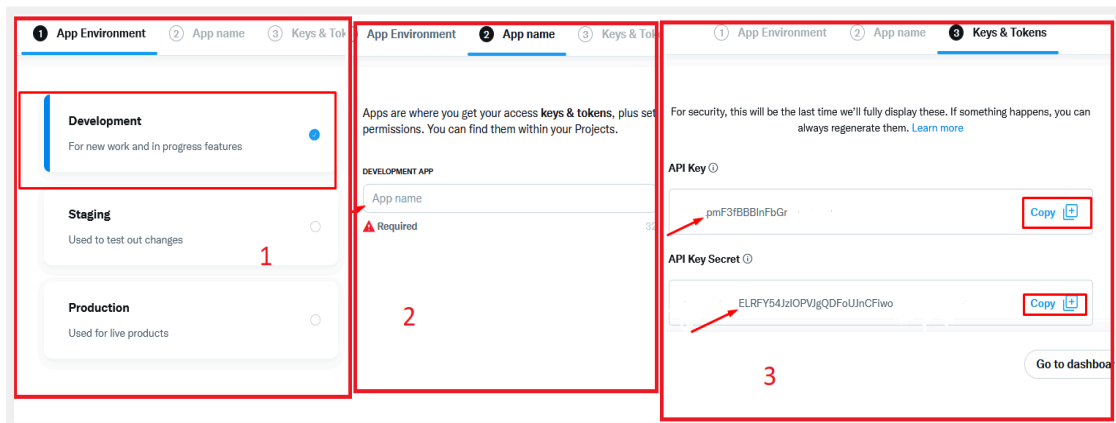

- Setup user authentication setting.
 - Go to Project & Apps-> select your project and then select your created app.
 - Find **User authentication settings**.
 - Click the **Setup** button.
 - Enable OAuth 2.0
 - Select **Type of App.(Native app)**
 - Callback URI.(**activematerialflutterapp://**).
 - Web site URL.(It's your web URL).
 - Save it.

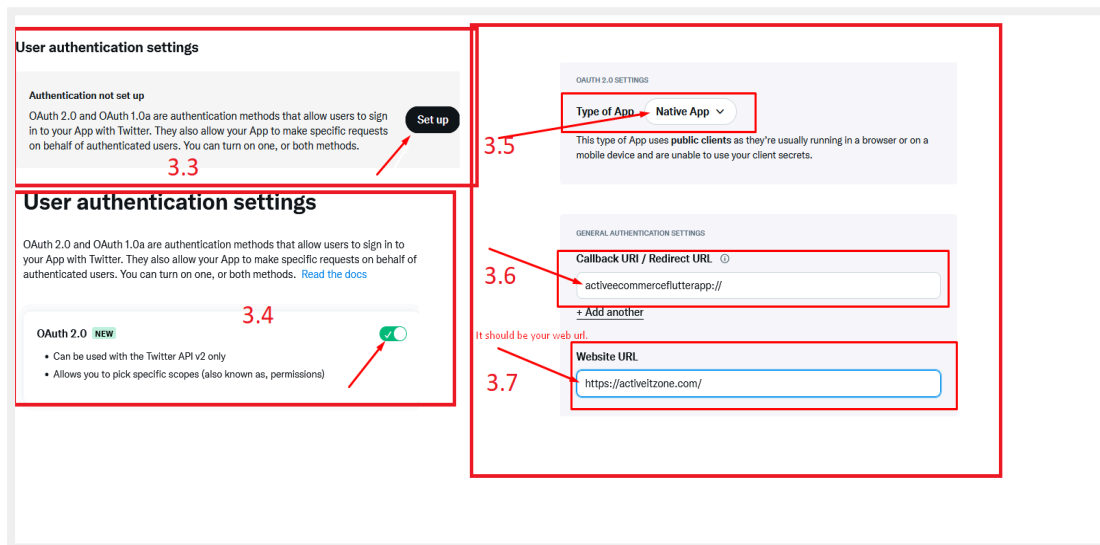

- Setup in your flutter e-commerce code.
 - Go to your flutter project->lib->social_config.dart
 - Enter your twitter_consumer_secret and twitter_consumer_key.

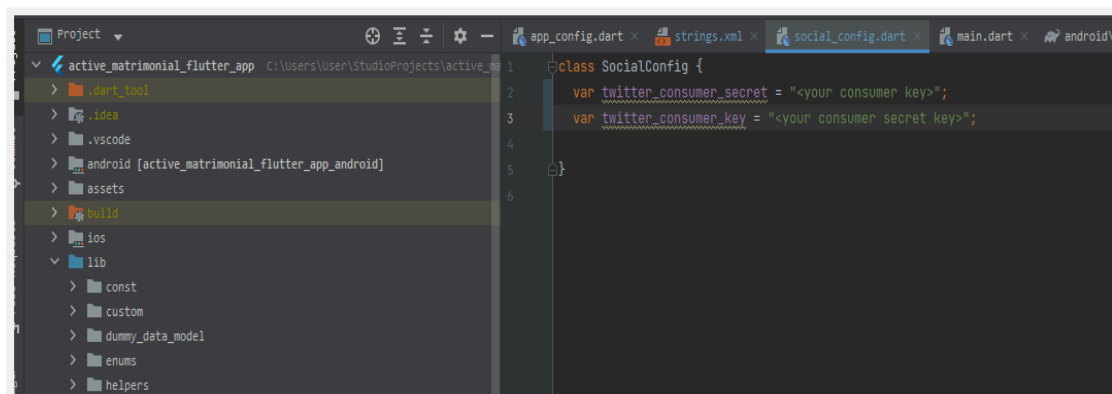


13. How to configure push notification?


Answer:

To use firebase follow the procedure which are mentioned below


- Go to this URL to create project <https://console.firebase.google.com/u/0/>
 **If you already have a project then continue with that.

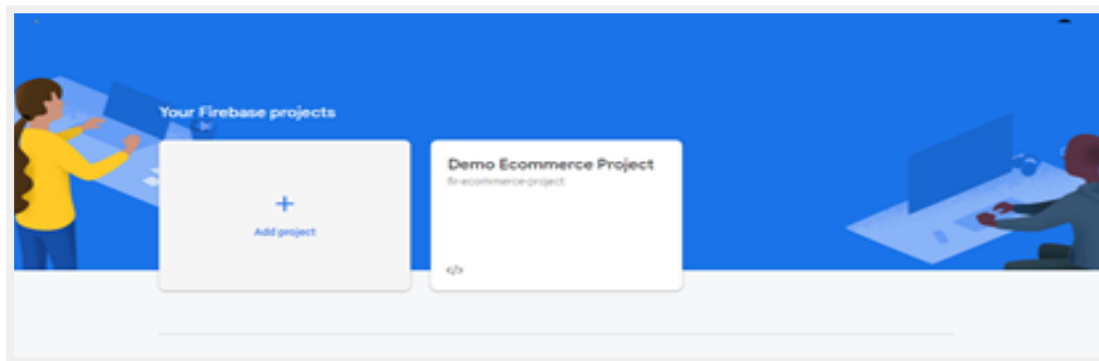


- Now go to project settings to get server key

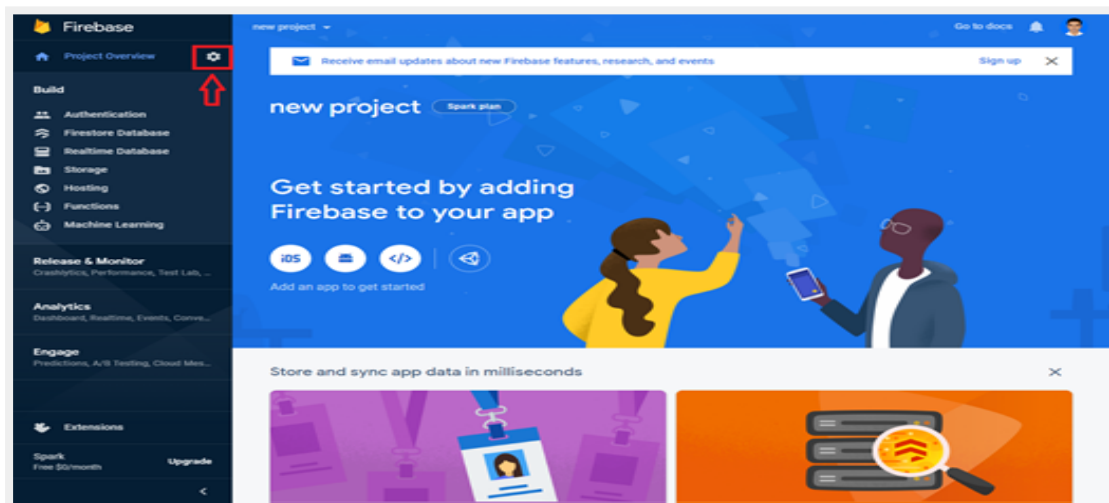


- To get server key click on Cloud Messaging option

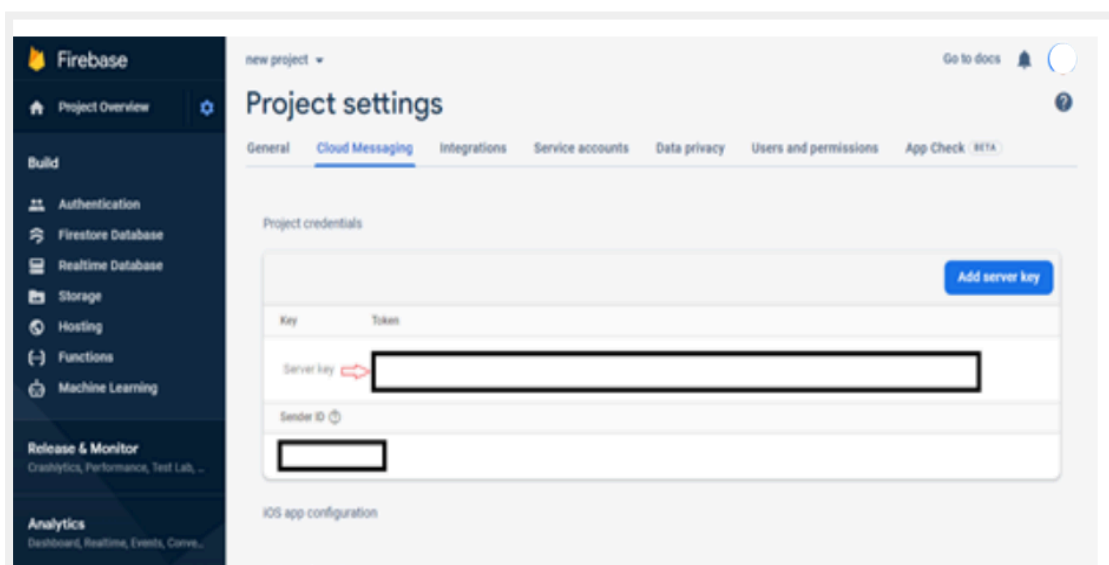

- Turn on the switch and put the server key in admin panel

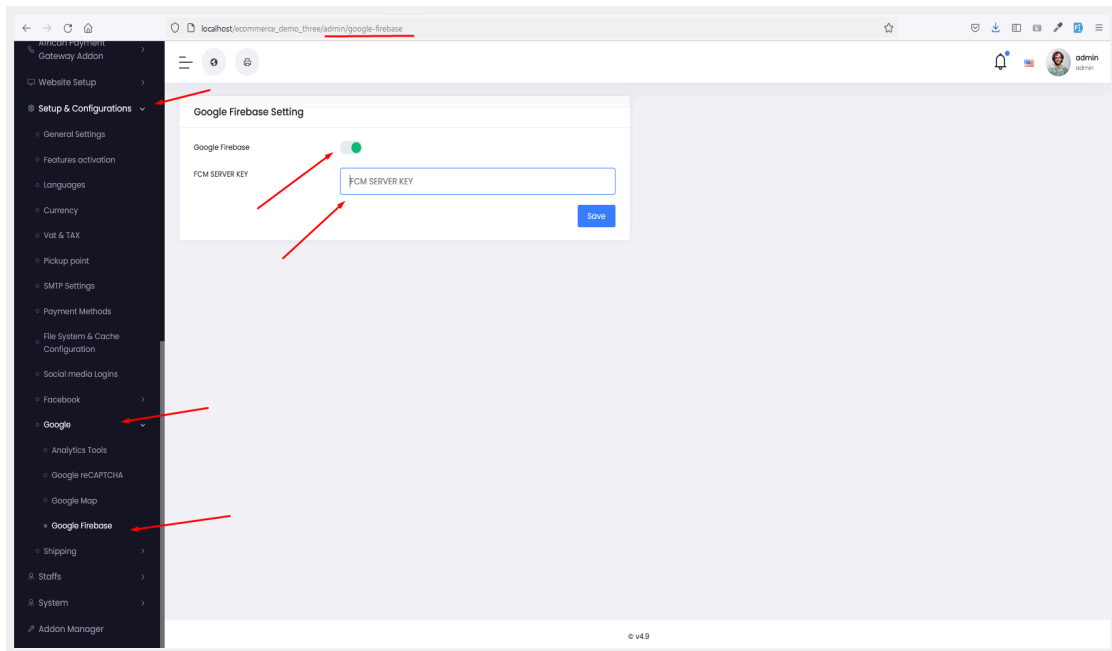

- You will need to generate your own google-services.json. Do not use ours - it will not work for you

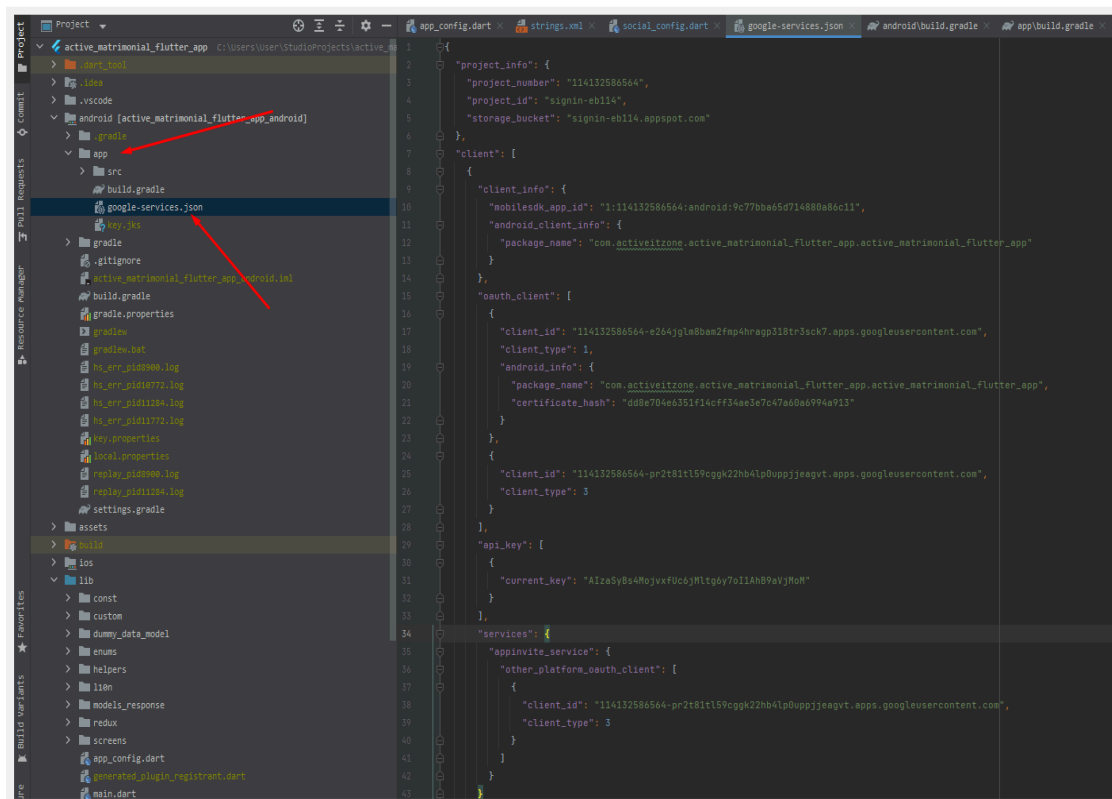


Firebase console:


<https://console.firebase.google.com/u/0/>

Follow the guideline from here https://pub.dev/packages/google_sign_in

You need to provide your fingerprints here (sha1 and sha 256)

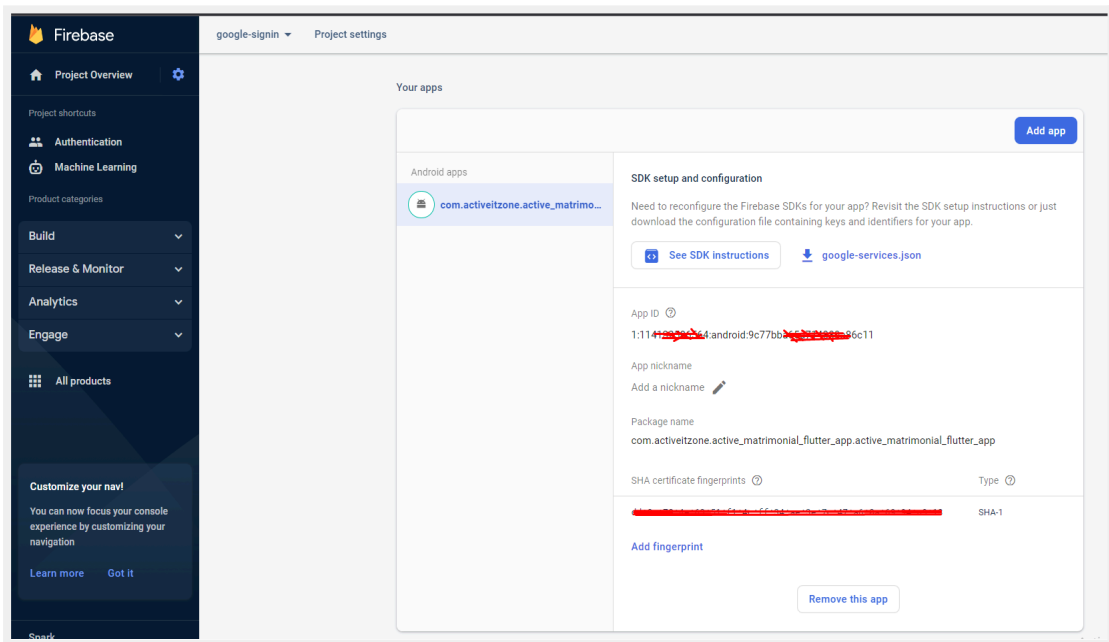

You will find your signature/fingerprints from here (Provided that you already have generated the key). You will also need the path of your key.jks. You may have already kept it in the root folder.

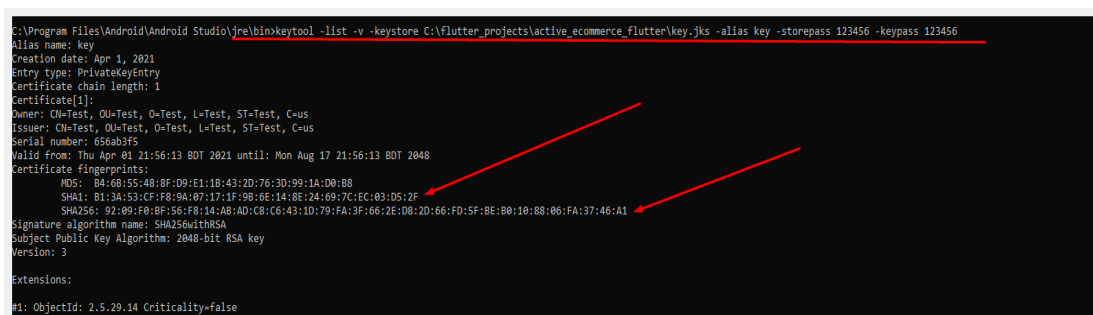

- Although most of the configuration for android is done you can check guidelines from here.

<https://firebase.google.com/docs/cloud-messaging/android/client>

- For ios follow this <https://firebase.google.com/docs/cloud-messaging/ios/client>
- Push notification is a little bit tricky , so follow the guidelines properly. Learn more about how a firebase application connects with your mobile app from google searching if needed.

14. How to remove cache data?

Answer:

To enrich user experience we have cached (Mostly for a day) a lot of api responses. If you think your app data is not changing even after your data has been changed from the backend, try clearing cache from the admin panel. There is a big red button on the top navbar in the admin panel to clear cache.