

 fs String Interpolation

→ let name = "John"; John works in Amazon


let company = "Amazon";

console.log (name, " works in", company);

Instead of just printing, we want to store it also.

let str = name + " works in " + company;

```
let str1 = `${name} works in ${company}`;
```

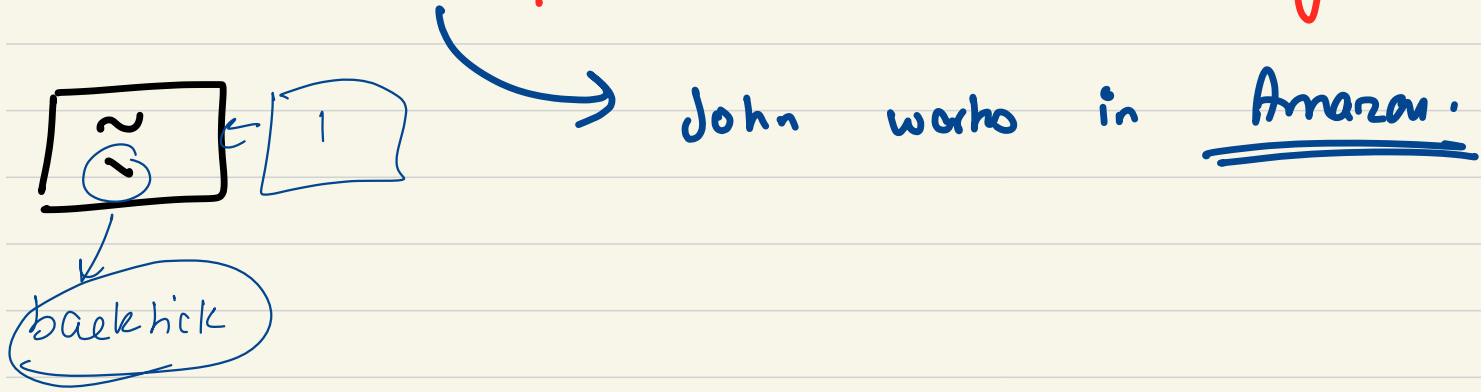

Interpolated strings means we can embed expressions directly inside the string which will be evaluated during runtime.

Q Given an array of strings, print all the unique strings in the array.

Ex → ["abc", "hello", 'c', 'd', "abc", 'c', "d"]

Ans →
abc
hello
c
d
} print all unique strings.

keys → unique

{ abc: true
hello: true
c: true
d: true }

Higher Order functions

These are functions that depends & operate on other funcⁿ. Higher order functions takes another function as an argument and then execute the

logic-

or return
a function

function gum() {

≡

}

function fun(gum) {

≡

gum();

}

Higher order
funcⁿ.