



Avances Pugnola

Pasos:


1. Carpeta llamada púgnela y se escribirá así C:\xampp\htdocs\pugnela
2. Hacer carpetas en Pugnela:
 - config
 - models
 - test_models.php

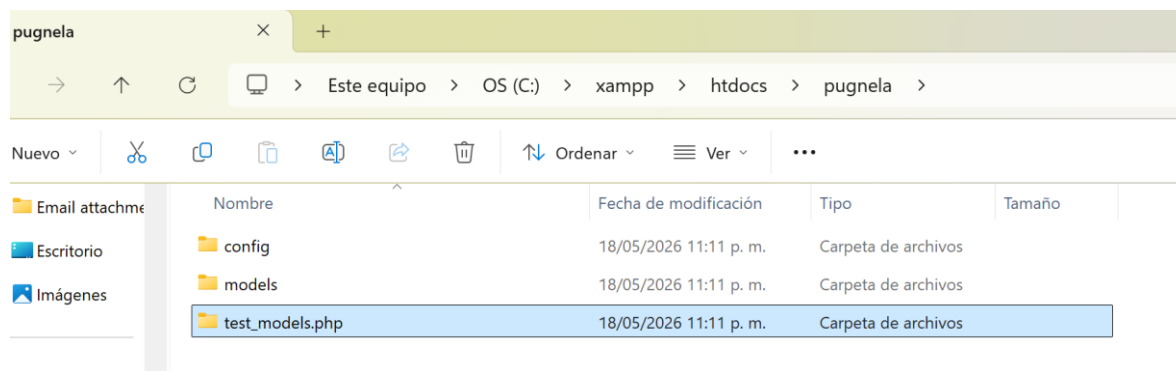

3. Abrir XAMP y activar

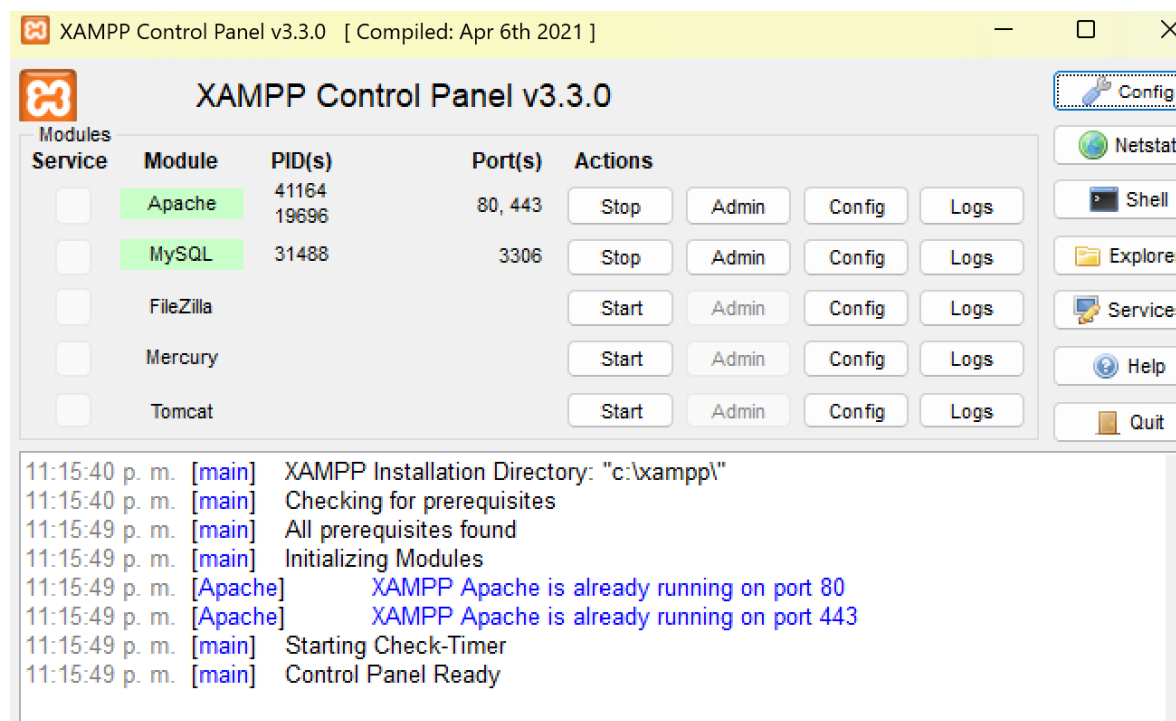

4. Crear base de datos púgnela_db:

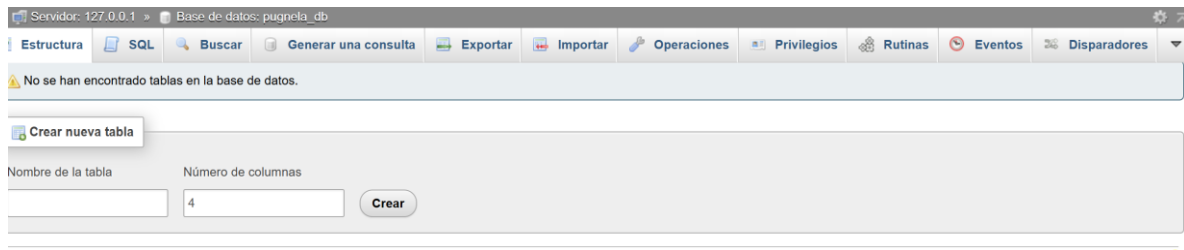


5. Crear SQL de usuarios y productos:



```
CREATE TABLE usuarios (  
    id INT AUTO_INCREMENT PRIMARY KEY,  
    nombre VARCHAR(100) NOT NULL,  
    email VARCHAR(100) NOT NULL UNIQUE,  
    password VARCHAR(255) NOT NULL  
);
```

```
CREATE TABLE productos (  
    id INT AUTO_INCREMENT PRIMARY KEY,  
    nombre VARCHAR(100) NOT NULL,  
    descripcion TEXT,  
    precio DECIMAL(10,2) NOT NULL,  
    created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP  
);
```

6. Crear archivo php de user

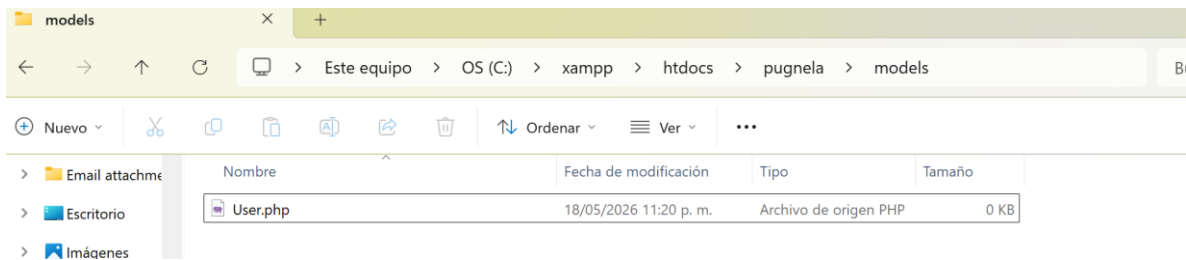

7. Agregar a User el siguiente código:

```
<?php
```

```
require_once __DIR__ . '/../config/database.php';
```

```
class User {
```

```
    private $conn;
```

```
    private $table_name = "usuarios";
```

```
    public function __construct() {
```

```
        $database = new Database();
```

```
        $this->conn = $database->getConnection();
```

```
    }
```

```
    public function login($email, $password) {
```

```
        $query = "SELECT * FROM " . $this->table_name . " WHERE email = :email";
```

```
        $stmt = $this->conn->prepare($query);
```

```
        $stmt->bindParam(':email', $email);
```

```
        $stmt->execute();
```

```

        if($stmt->rowCount() > 0) {

            $user = $stmt->fetch(PDO::FETCH_ASSOC);

            if($password == $user['password']) {
                return $user;
            }
        }

        return false;
    }

    public function getUserById($id) {

        $query = "SELECT id, nombre, email FROM " . $this->table_name . " WHERE id = :id";

        $stmt = $this->conn->prepare($query);
        $stmt->bindParam(':id', $id);
        $stmt->execute();

        return $stmt->fetch(PDO::FETCH_ASSOC);
    }
}

?>

```

8. Ahora crearemos una carpeta de Productos en PHP con el siguiente código:

```
<?php
```

```
require_once 'config/database.php';
```

```
class Product {
```

```
    private $conn;
```

```
    private $table_name = "productos";
```

```
    public function __construct() {
```

```
        $database = new Database();
```

```
        $this->conn = $database->getConnection();
```

```
    }
```

```
    public function getAll() {
```

```
        $query = "SELECT * FROM " . $this->table_name . "
```

```
            ORDER BY created_at DESC";
```

```
        $stmt = $this->conn->prepare($query);
```

```
        $stmt->execute();
```

```
        return $stmt->fetchAll(PDO::FETCH_ASSOC);
```

```
    }
```

```
    public function getById($id) {
```

```
        $query = "SELECT * FROM " . $this->table_name . "
```

```

        WHERE id = :id";

$stmt = $this->conn->prepare($query);

$stmt->bindParam(':id', $id);

$stmt->execute();

return $stmt->fetch(PDO::FETCH_ASSOC);
    }
}
?>

```

9. Ahora crearemos el test_model.php en la carpeta principal de púgnela con el siguiente código:

```

<?php

echo "<h1>Prueba de Modelos - Pugnela</h1>";

// Modelo User
require_once 'models/User.php';

$userModel = new User();

$email = "admin@pugnela.com";
$password = "Pugnela1234";

$user = $userModel->login($email, $password);

```

```

if($user) {

    echo "✅ Login exitoso: " . $user['nombre'] . "<br>";

} else {

    echo "❌ Login fallido<br>";
}

// Modelo Product
require_once 'models/Product.php';

$productModel = new Product();

$products = $productModel->getAll();

echo "<br>";
echo "✅ Roles encontrados: " . count($products) . "<br><br>";

foreach($products as $p) {

    echo "- " . $p['nombre'] . " - $ " . $p['precio'] . "<br>";
}

?>

```

10. Hacer una ruta de database de púgnela con el siguiente código:

```
<?php
```



```

class Database {

    private $host = "localhost";
    private $db_name = "pugnela_db";
    private $username = "root";
    private $password = "";

    public $conn;

    public function getConnection() {

        $this->conn = null;

        try {

            $this->conn = new PDO(
                "mysql:host=" . $this->host . ";dbname=" . $this->db_name,
                $this->username,
                $this->password
            );

            $this->conn->setAttribute(PDO::ATTR_ERRMODE, PDO::ERRMODE_EXCEPTION);

            $this->conn->exec("set names utf8");

        } catch(PDOException $exception) {

            echo "✖ Error de conexión: " . $exception->getMessage();
        }
    }
}

```

```
return $this->conn;

}

}

?>
```

11. Para los usuarios se hará lo siguiente



12. Ahora se abrirá en el navegador lo siguiente
http://localhost/pugnela/test_models.php:

