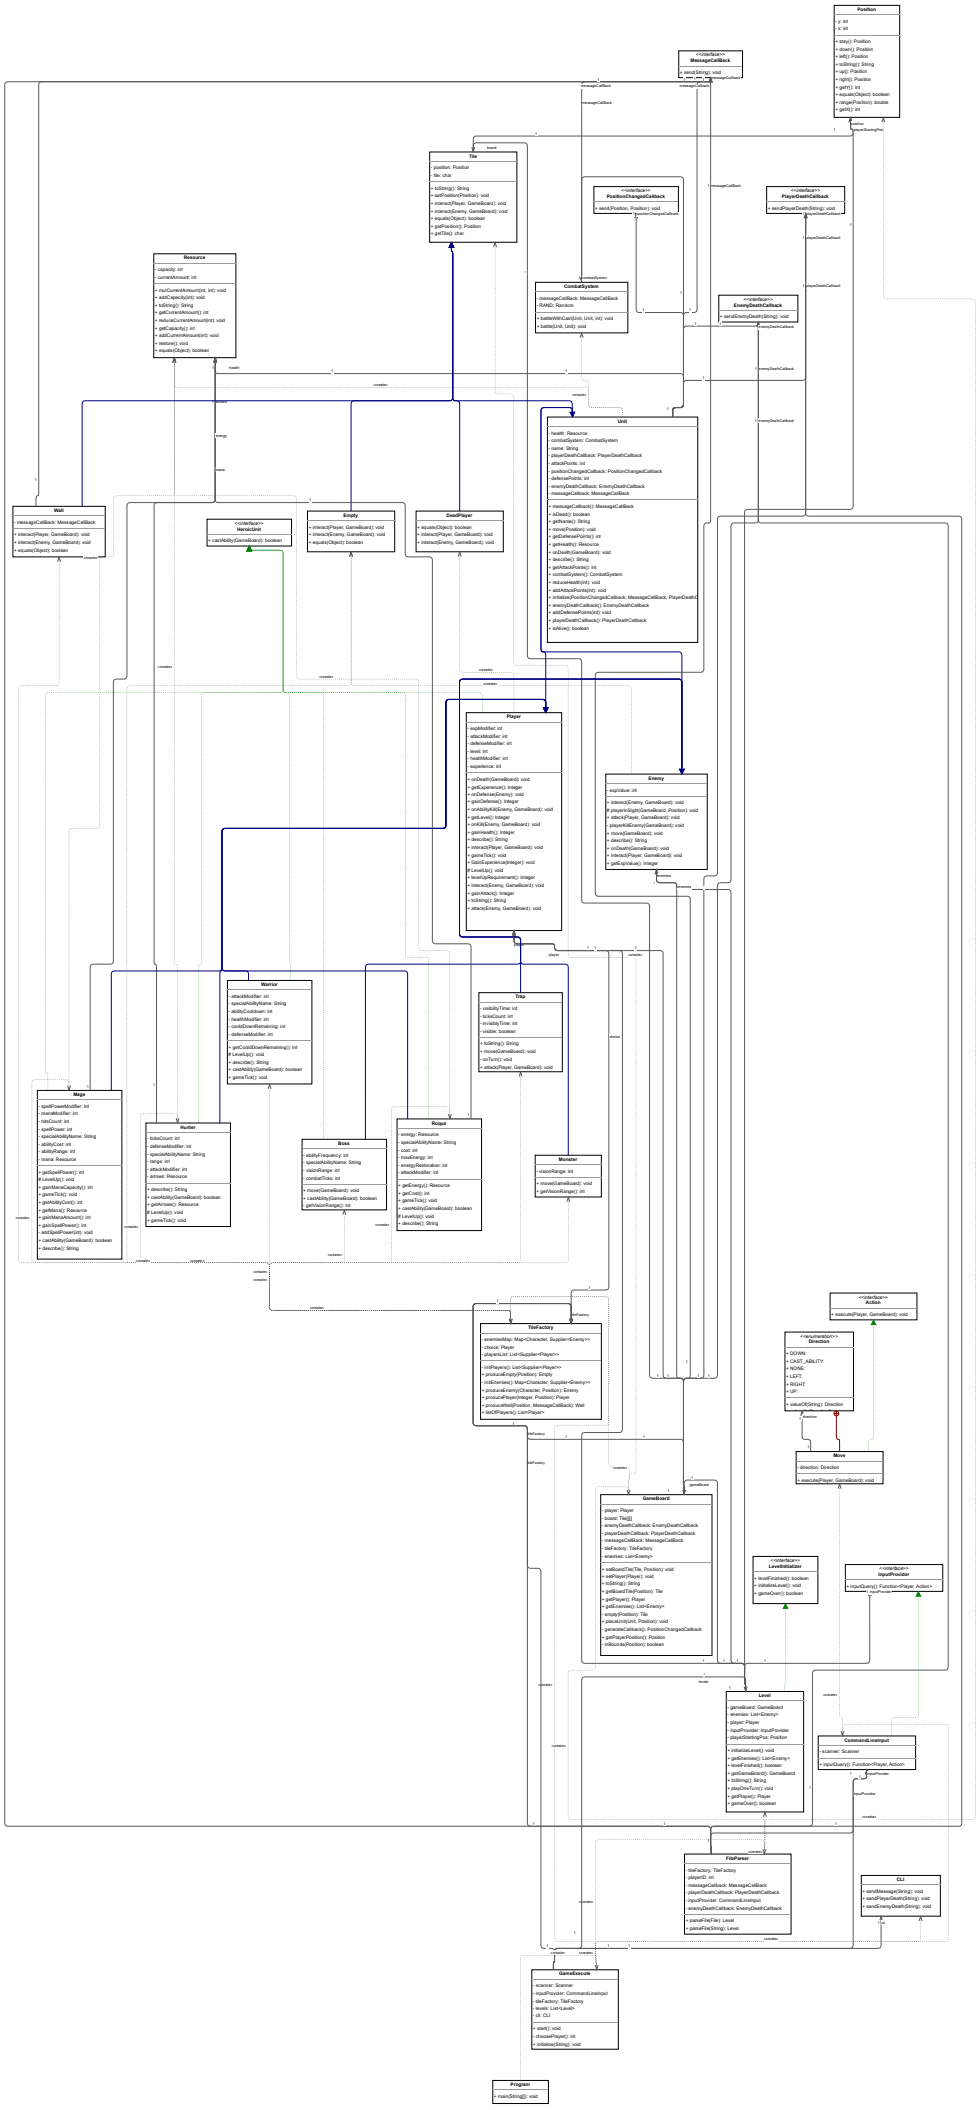
Position
- y: int
- x: int
+ step() : Position
+ down() : Position
+ left() : Position
+ toString() : String
+ up() : Position
+ right() : Position
+ get(Y) : int
+ equals(Object) : boolean
+ rangePosition() : double
+ get(X) : int
<<interface>>
MessageCallback
+ send(String) : void
+ sendMessageCallback() : void
Tile
- position: Position
- tile: char
+ toString() : String
+ setPosition(Position) : void
+ interact(Player, GameBoard) : void
+ interact(Enemy, GameBoard) : void
+ equals(Object): boolean
+ getPosition(): Position
+ getTile(): char
<<interface>>
PositionChangeCallback
+ send(Position, Position) : void
<<interface>>
PlayerDeathCallback
+ sendPlayerDeath(String) : void
Resource
- capacity: int
- currentAmount: int
+ maCurrentAmount(int, int): void
+ addCapacity(int): void
+ toString(): String
+ getCurrentAmount() : int
+ reduceCurrentAmount(int): void
+ getCapacity() : int
+ addCurrentAmount(int): void
+ restore() : void
+ equals(Object): boolean
CombatSystem
- messageCallback: MessageCallback
- RAND: Random
+ battleWithCard(Unit, Unit, int): void
+ battle(Unit, Unit): void
<<interface>>
EnemyDeathCallback
+ sendEnemyDeath(String): void
Unit
- health: Resource
- combatSystem: CombatSystem
- name: String
- playerDeathCallback: PlayerDeathCallback
- attackPoints: int
- positionChangeCallback: PositionChangeCallback
- defensePoints: int
- enemyDeathCallback: EnemyDeathCallback
- messageCallback: MessageCallback
+ messageCallback() : MessageCallback
+ isDead() : boolean
+ getName() : String
+ movePosition() : void
+ getDefensePoints() : int
+ getHealth() : Resource
+ onDeath(GameBoard): void
+ describe() : String
+ getAttackPoints() : int
+ combatSystem() : CombatSystem
+ reduceHealth(int) : void
+ addAttackPoints(int): void
+ initializePositionChangeCallback, MessageCallback, PlayerDeathC
+ enemyDeathCallback() : EnemyDeathCallback
+ addDefensePoints(int): void
+ playerDeathCallback() : PlayerDeathCallback
+ isAlive() : boolean
Wall
- messageCallback: MessageCallback
+ interact(Player, GameBoard): void
+ interact(Enemy, GameBoard): void
+ equals(Object): boolean
<<interface>>
HeroUnit
+ canAbility(GameBoard): boolean
Empty
+ interact(Player, GameBoard) : void
+ interact(Enemy, GameBoard): void
+ equals(Object): boolean
DeadPlayer
+ equals(Object): boolean
+ interact(Player, GameBoard): void
+ interact(Enemy, GameBoard): void
Player
- expModifier: int
- attackModifier: int
- defenseModifier: int
- level: int
- healthModifier: int
- experience: int
+ onDeath(GameBoard): void
+ getExperience() : Integer
+ onDefense(Enemy): void
+ gainDefense() : Integer
+ useAbility(Enemy, GameBoard): void
+ getLevel() : Integer
+ onKill(Enemy, GameBoard): void
+ gainHealth() : Integer
+ describe() : String
+ interact(Player, GameBoard): void
+ gameTick() : void
+ GainExperience(Integer): void
# LevelUp() : void
+ levelUpRequirement() : Integer
+ interact(Enemy, GameBoard): void
+ gainAttack() : Integer
+ toString() : String
+ attack(Enemy, GameBoard): void
Enemy
- expValue: int
+ interact(Enemy, GameBoard): void
+ playerSight(GameBoard, Position): void
+ attack(Player, GameBoard): void
+ playerNEnemy(GameBoard): void
+ move(GameBoard): void
+ describe() : String
+ onDeath(GameBoard): void
+ interact(Player, GameBoard): void
+ getExpValue() : Integer
Warrior
- attackModifier: int
- specialAbilityName: String
- abilityCooldown: int
- healthModifier: int
- coolDownRemaining: int
- defenseModifier: int
+ getCoolDownRemaining() : int
+ LevelUp() : void
+ describe() : String
+ castAbility(GameBoard): boolean
+ gameTick() : void
Trap
- visibilityTime: int
- ticksCount: int
- invisibilityTime: int
- visible: boolean
+ toString() : String
+ move(GameBoard): void
+ onTurn() : void
+ attack(Player, GameBoard): void
Mage
- spellPowerModifier: int
- manaModifier: int
- hitsCount: int
- spellPower: int
- specialAbilityName: String
- abilityCost: int
- abilityRange: int
- mana: Resource
+ getSpellPower() : int
# LevelUp() : void
+ getManaCapacity() : int
+ gameTick() : void
+ getAbility(Cost): int
+ getMana() : Resource
+ getManaAmount() : int
+ gainSpellPower() : int
+ setSpellPower(int): void
+ canAbility(GameBoard): boolean
+ describe() : String
Hunter
- ticksCount: int
- defenseModifier: int
- specialAbilityName: String
- range: int
- attackModifier: int
- arrows: Resource
+ describe() : String
+ castAbility(GameBoard): boolean
+ getArrows() : Resource
# LevelUp() : void
+ gameTick() : void
Boss
- abilityFrequency: int
- specialAbilityName: String
- visionRange: int
- combatTicks: int
+ move(GameBoard): void
+ canAbility(GameBoard): boolean
- getVisionRange(): int
Rogue
- energy: Resource
- specialAbilityName: String
- cost: int
- maxEnergy: int
- energyRestoration: int
- attackModifier: int
+ getEnergy() : Resource
+ getCost() : int
+ gameTick() : void
+ canAbility(GameBoard): boolean
+ LevelUp() : void
+ describe() : String
Monster
- visionRange: int
+ move(GameBoard): void
+ getVisionRange() : int
TileFactory
- enemiesMap: Map<Character, Supplier<Enemy>>
- choice: Player
- playersList: List<Supplier<Player>>
+ initPlayers() : List<Supplier<Player>>
+ produceEmpty(Position): Empty
+ initEnemies() : Map<Character, Supplier<Enemy>>
+ produceEnemy(Character, Position) : Enemy
+ producePlayer(Integer, Position): Player
+ produceWall(Position, MessageCallback): Wall
+ setPlayers() : List<Player>
<<interface>>
Action
+ execute(Player, GameBoard): void
<<enumeration>>
Direction
+ DOWN:
+ CAST_ABILITY:
+ NONE:
+ LEFT:
+ RIGHT:
+ UP:
+ valueOf(String): Direction
Move
- direction: Direction
+ execute(Player, GameBoard): void
GameBoard
- player: Player
- board: Tile[]
- enemyDeathCallback: EnemyDeathCallback
- playerDeathCallback: PlayerDeathCallback
- messageCallback: MessageCallback
- tileFactory: TileFactory
- enemies: List<Enemy>
+ setBoardTile(Tile, Position): void
+ setPlayer(Player): void
+ toString() : String
+ getBoardTile(Position): Tile
+ getPlayer() : Player
+ getEnemies() : List<Enemy>
- empty(Position): Tile
+ placeAt(Unit, Position): void
- generateCallback() : PositionChangedCallback
+ getPlayerPosition() : Position
- inBounds(Position): boolean
<<interface>>
LevelInitializer
+ levelFinished() : boolean
+ initializeLevel() : void
+ gameOver() : boolean
<<interface>>
InputProvider
+ inputQuery() : Function<Player, Action>
Level
- gameBoard: GameBoard
- enemies: List<Enemy>
- player: Player
- inputProvider: InputProvider
- playerStartingPos: Position
+ initializeLevel() : void
+ getEnemies() : List<Enemy>
+ levelFinished() : boolean
+ getGameBoard() : GameBoard
+ toString() : String
+ playOneTurn() : void
+ getPlayer() : Player
+ gameOver() : boolean
CommandLineInput
- scanner: Scanner
+ inputQuery() : Function<Player, Action>
FileParser
- tileFactory: TileFactory
- playerID: int
- messageCallback: MessageCallback
- playerDeathCallback: PlayerDeathCallback
- inputProvider: CommandLineInput
- enemyDeathCallback: EnemyDeathCallback
+ parseFile(File): Level
+ parseFile(String): Level
CLI
+ sendMessage(String): void
+ sendPlayerDeath(String): void
+ sendEnemyDeath(String): void
GameExecute
- scanner: Scanner
- inputProvider: CommandLineInput
- tileFactory: TileFactory
- levels: List<Level>
- cli: CLI
+ start() : void
+ choosePlayer() : int
+ initialize(String): void
Program
+ main(String[]): void