

assgmnt9

Suzan Nisa Çevik

2025-12-16

```
install.packages("magick")


## Installing package into '/cloud/lib/x86_64-pc-linux-gnu-library/4.5'
## (as 'lib' is unspecified)

library(magick)

## Linking to ImageMagick 6.9.10.23
## Enabled features: fontconfig, freetype, fftw, lcms, pango, webp, x11
## Disabled features: cairo, ghostscript, heic, raw, rsvg
## Using 16 threads

img <- "3D.png"

img1 <- image_read(img)
img1
```

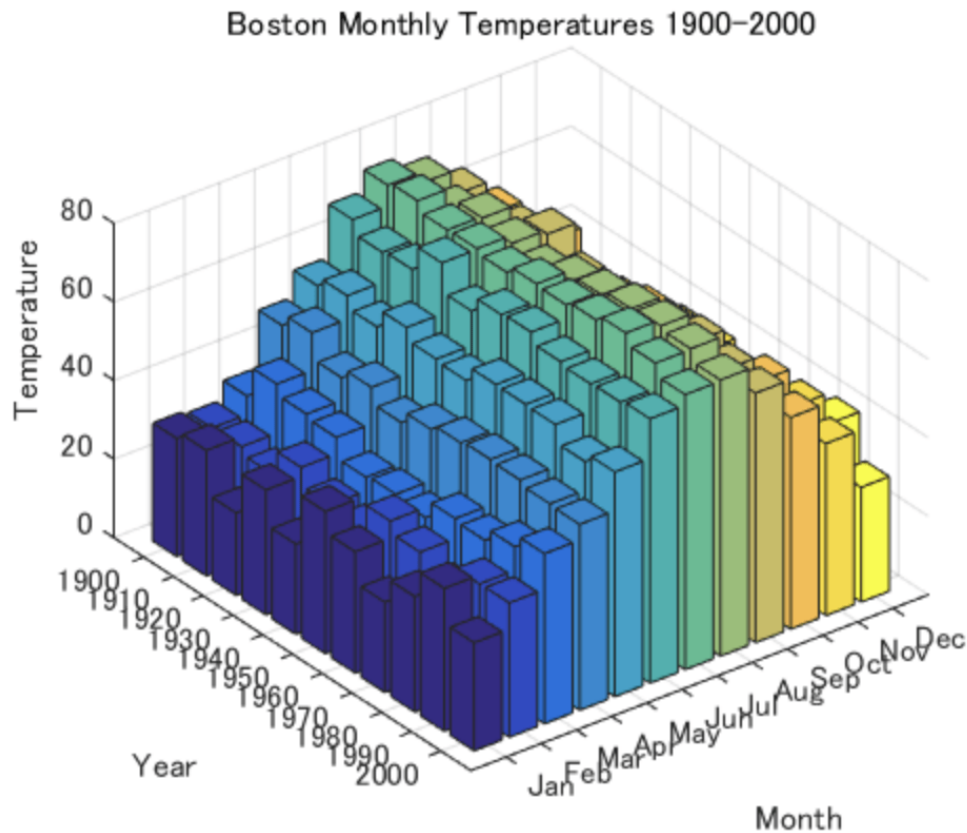

<https://datavizproject.com/data-type/3d-bar-chart/>

3D graphics make reading and interpreting data difficult due to perspective. The reader struggles to compare temperature values and may be unable to make interpretations and analyses, especially since the background bars are not visible. The colors transition between blue and yellow, but it is not clear what the color scale represents. Because the color transitions are very close to each other, some bars are difficult to see and read. Since the reader is not given the meaning of the colors, they cannot know which color corresponds to which temperature value.

To improve the graphic, we can opt for 2D graphics. A heatmap can be used for better readability. Legends should be added for the color scale, and the colors should be distinct and easy to see.