

## TP CAS 1:

### Testing rest API requests in postman:

The screenshot shows the Postman interface for a POST request to `http://localhost:8080/api/commandes`. The request is configured with the following details:

- Method:** POST
- URL:** `http://localhost:8080/api/commandes`
- Body Type:** raw (selected), with the format set to JSON.
- Body Content:**


```
1 {
2   "description": "New Commande",
3   "quantite": 10,
4   "date": "2023-10-10",
5   "montant": 100.0
6 }
```
- Status:** 200 OK, Time: 133 ms, Size: 251 B.
- Response Body:** Pretty view showing the JSON response:

```
1 {
2   "id": 1,
3   "description": "New Commande",
4   "quantite": 10,
5   "date": "2023-10-10",
6   "montant": 100.0
7 }
```

The screenshot shows the Postman interface for a GET request to `http://localhost:8080/api/commandes`. The request is configured with the following details:

- Method:** GET
- URL:** `http://localhost:8080/api/commandes`
- Body:** none (selected). The interface displays the message: "This request does not have a body".
- Status:** 200 OK, Time: 18 ms, Size: 253 B.
- Response Body:** Pretty view showing the JSON response:

```
1 [
2   {
3     "id": 1,
4     "description": "New Commande",
5     "quantite": 10,
6     "date": "2023-10-10",
7     "montant": 100.0
8   }
9 ]
```

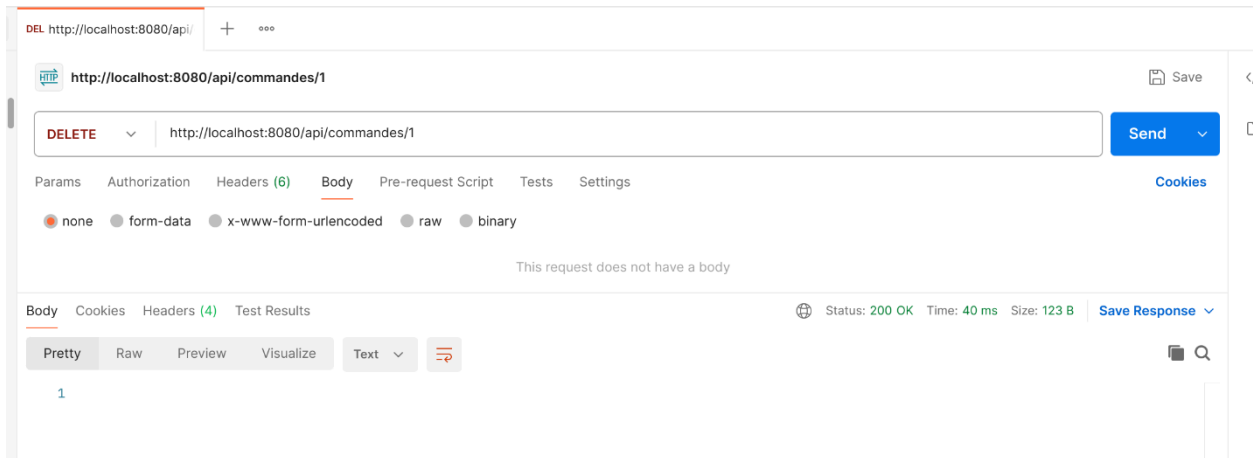

Health code:

