(a) CNN (MNIST family, 28×28)

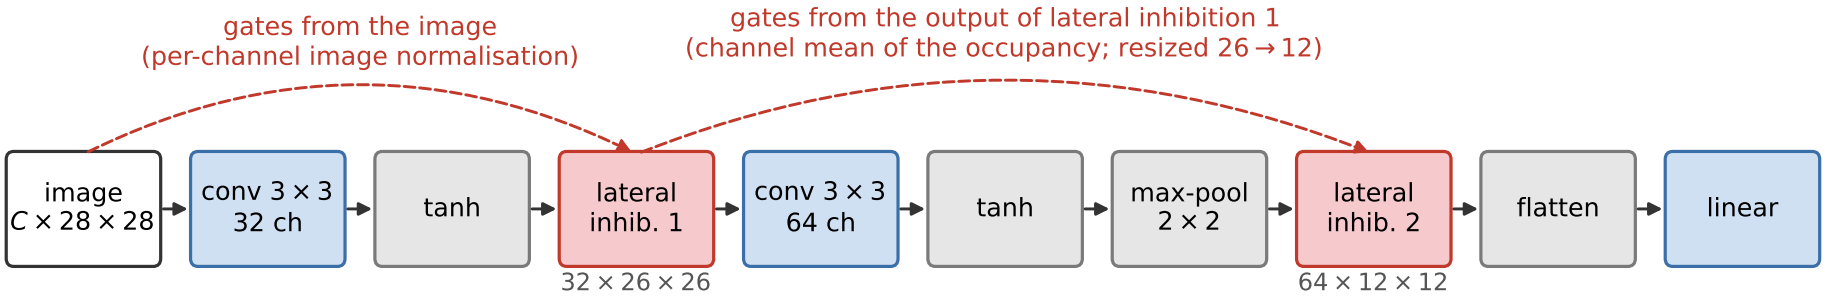

No normalisation layers; plain blend (no normaliser); outputs passed on as occupancies in $[0, 1]$.

(b) WRN (CIFAR-10, 32×32): 40 layers, widening factor 2

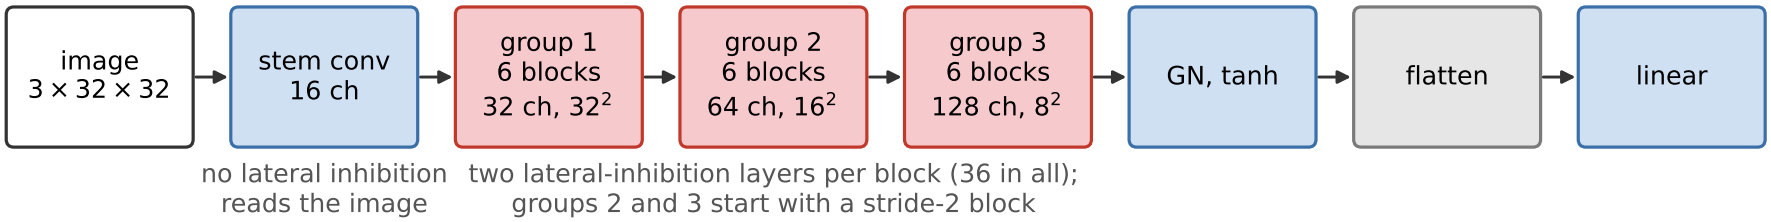

(c) one WRN block (pre-activation; the skip is added after lateral inhibition)

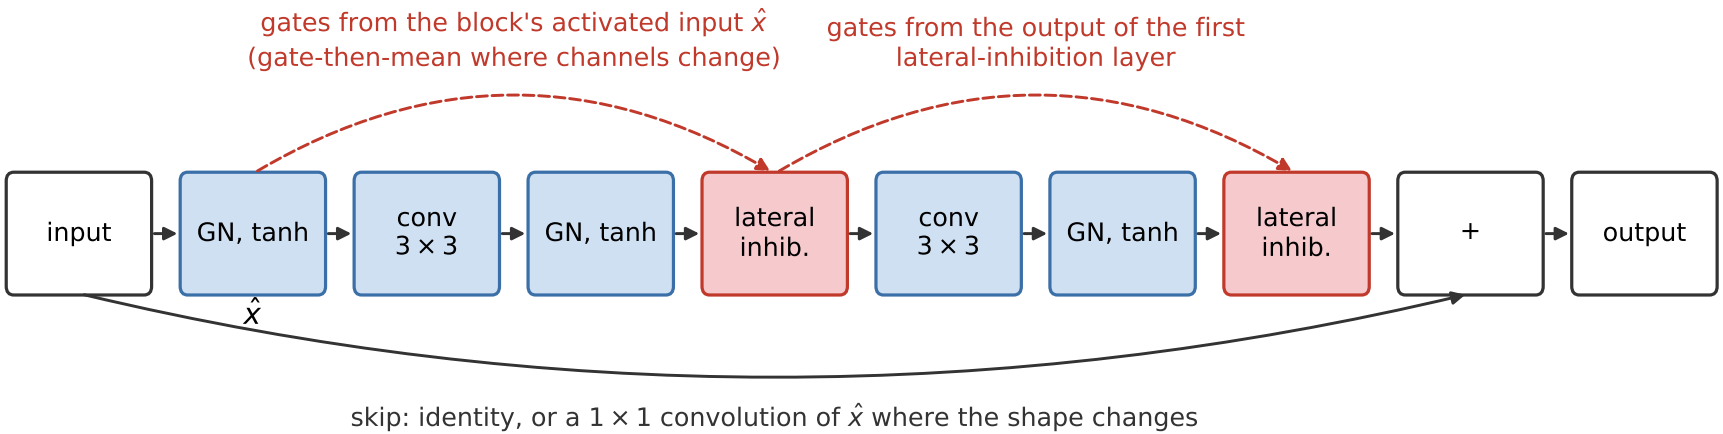

skip: identity, or a 1×1 convolution of $\hat{x}$ where the shape changes

GN: group normalisation; lateral inhibition: normalised blend, output passed on as an occupancy