

strlen() — get string length

Returns the number of characters in a string.

Example:

```
$str = "Hello";  
$result = strlen($str);
```

Result: 5

Explanation:

- Counts each character in the string, including letters, numbers, spaces, and symbols.
- Useful to check string size or validate input length.

~~~~~

## strtoupper() — convert to uppercase

Converts all letters in a string to uppercase.

Example:

```
$str = "hello";  
$result = strtoupper($str);
```

**Result: "HELLO"**

Explanation:

- Transforms all alphabetic characters to capital letters.
- Numbers and symbols are unaffected.

~~~~~

strtolower() — convert to lowercase

Converts all letters in a string to lowercase.

Example:

```
$str = "HELLO";  
$result = strtolower($str);
```

Result: "hello"

Explanation:

- Transforms all alphabetic characters to lowercase.
- Useful for case-insensitive comparisons.

~~~~~

## substr() — extract substring

Returns a part of a string based on start index and length.

Example:

```
$str = "Hello World";  
$result = substr($str, 6, 5);
```

Result: "World"

Explanation:

- Start at index 6 (0-based indexing).
- Take 5 characters from that position.
- Original string remains unchanged.

~~~~~

str_replace() — replace substring

Replaces all occurrences of a substring with another substring.

Example:

```
$str = "Hello World";  
$result = str_replace("World", "PHP", $str);
```

Result: "Hello PHP"

Explanation:

- Every instance of "World" is replaced with "PHP".

- Case-sensitive.
- Original string is not modified unless reassigned.

~~~~~

## strpos() — find position of substring

Finds the index of the first occurrence of a substring.

Example:

```
$str = "Hello World";  
$result = strpos($str, "World");
```

**Result: 6**

Explanation:

- Index is 0-based.
- Returns false if substring is not found.
- Case-sensitive.

~~~~~

str_contains() — check substring exists

Checks if a string contains a given substring.

Example:


```
$str = "Hello World";  
$result = str_contains($str, "World");
```

Result: true

Explanation:

- Returns true if substring exists, false otherwise.
- Case-sensitive.
- Useful for quick string checks.

- Use `var_dump($str)` to check the returned value

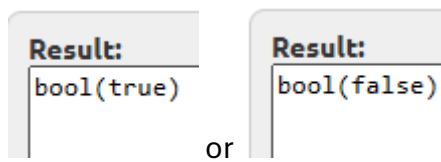

trim() — remove whitespace

Removes spaces (or other specified characters) from both ends of a string.

Example:

```
$str = " Hello ";  
$result = trim($str);
```

Result: "Hello"

Explanation:

- Only removes characters from the start and end.
- Internal spaces remain intact.

ucfirst() — capitalize first letter

Converts the first character of a string to uppercase.

Example:

```
$str = "hello";  
$result = ucfirst($str);
```

Result: "Hello"

Explanation:

- Only the very first character is affected.
 - Useful for names or sentence capitalization.
-

ucwords() — capitalize first letter of each word

Capitalizes the first character of each word in a string.

Example:

```
$str = "hello world";  
$result = ucwords($str);
```

Result: "Hello World"

Explanation:

- Splits string by spaces, capitalizes first character of each word.
- Numbers and symbols remain unchanged.

~~~~~

## explode() — split string into array

Splits a string into an array using a delimiter.

Example:

```
$str = "a,b,c";  
$result = explode(",", $str);
```

Result: ["a", "b", "c"]

Explanation:

- Breaks the string wherever the delimiter occurs.
- Returns an array of substrings.

~~~~~

implode() — join array into string

Joins array elements into a single string using a separator.

Example:

```
$arr = ["a", "b", "c"];  
$result = implode("-", $arr);
```

Result: "a-b-c"

Explanation:

- Concatenates array values with the separator between them.
- Original array remains unchanged.