

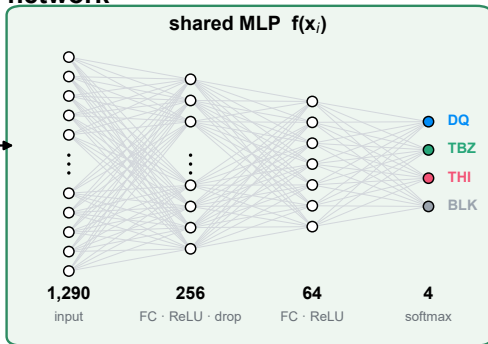


(a) Pixel-wise composition network

NNLS-gated hit pixels · $i = 1 \dots N$



$$p_i = \text{softmax}(f(x_i))$$



map composition

$\bar{p}$ = mean of p_i over hit pixels



(b) Calibration-anchored residual quantification

$p_i \cdot l_i$ (hit pixels)

