Experiment 7

AIM: Develop Feedback Management Module using MVC Layout, Partial View & Validation. (HTML Helpers, Validation, Layouts)

Source: File Name with extension
Feedback Management.slnx

Code:

FeedbackController.cs :

```
using System.Web.Mvc;
using FeedbackManagement.Models;

namespace FeedbackManagement.Controllers
{
    public class FeedbackController : Controller
    {
        public ActionResult Create()
        {
            return View(new Feedback());
        }

        [HttpPost]
        [ValidateAntiForgeryToken]
        public ActionResult Create(Feedback feedback)
        {
            if (ModelState.IsValid)
            {
                return RedirectToAction("Success");
            }

            return View(feedback);
        }

        public ActionResult Success()
        {
            return View();
        }
    }
}
```

Feedback.cs :

```
using System.ComponentModel.DataAnnotations;

namespace FeedbackManagement.Models
{
    public class Feedback
    {
        [Required(ErrorMessage = "Name is required")]
        public string Name { get; set; }

        [Required(ErrorMessage = "Email is required")]
        [EmailAddress(ErrorMessage = "Enter valid email")]
        public string Email { get; set; }

        [Required(ErrorMessage = "Message is required")]
        public string Message { get; set; }

        [Range(1, 5, ErrorMessage = "Please select a rating")]
        public int Rating { get; set; }
    }
}
```

_FeedbackForm.cshtml :

```
@model FeedbackManagement.Models.Feedback
@using System.Collections.Generic
@using System.Web.Mvc

<p>
    @Html.LabelFor(m => m.Name)
    @Html.TextBoxFor(m => m.Name)
    @Html.ValidationMessageFor(m => m.Name)
</p>

<p>
    @Html.LabelFor(m => m.Email)
    @Html.TextBoxFor(m => m.Email)
    @Html.ValidationMessageFor(m => m.Email)
</p>

<p>
    @Html.LabelFor(m => m.Message)
```

```
    <br />
    @Html.TextAreaFor(m => m.Message, 5, 30, null)
    <br />
    @Html.ValidationMessageFor(m => m.Message)
</p>

<p>
    @Html.LabelFor(m => m.Rating)

    @Html.DropDownListFor(
        m => m.Rating,
        new List<SelectListItem>
        {
            new SelectListItem { Text = "1 - Poor", Value = "1" },
            new SelectListItem { Text = "2 - Average", Value = "2" },
            new SelectListItem { Text = "3 - Good", Value = "3" },
            new SelectListItem { Text = "4 - Very Good", Value = "4" },
            new SelectListItem { Text = "5 - Excellent", Value = "5" }
        },
        "--Select--"
    )

    @Html.ValidationMessageFor(m => m.Rating)
</p>
```

Create.cshtml :

```
@model FeedbackManagement.Models.Feedback

@{
    ViewBag.Title = "Feedback";
}

<h2>FEEDBACK MANAGEMENT</h2>

@using (Html.BeginForm("Create", "Feedback", FormMethod.Post))
{
    @Html.AntiForgeryToken()

    @Html.Partial("_FeedbackForm", Model)

    <input type="submit" value="Submit Feedback" />
}
```

Success.cshtml :

```
@{
    ViewBag.Title = "Success";
}

<h2>FEEDBACK MANAGEMENT</h2>

<h4>Feedback Submitted Successfully!</h4>

<p>Thank you for your valuable feedback.</p>

<a href="@Url.Action("Create", "Feedback")">
    Back to Feedback
</a>
```

_Layout.cshtml :

```
<!DOCTYPE html>
<html>
<head>
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>@ViewBag.Title - My ASP.NET Application</title>
    <link href="~/Content/Site.css" rel="stylesheet" type="text/css" />
    <link href="~/Content/bootstrap.min.css" rel="stylesheet"
type="text/css" />
    <script src="~/Scripts/modernizr-2.6.2.js"></script>
</head>
<body>
    <div class="navbar navbar-inverse navbar-fixed-top">
        <div class="container">
            <div class="navbar-header">
                <button type="button" class="navbar-toggle" data-
toggle="collapse" data-target=".navbar-collapse">
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                </button>
                @Html.ActionLink("Application name", "Index", "Home",
new { area = "" }, new { @class = "navbar-brand" })
            </div>
```


```
            <div class="navbar-collapse collapse">



                <ul class="nav navbar-nav">
                </ul>
            </div>
        </div>
    </div>


    <div class="container body-content">
        @RenderBody()
        <hr />
        <footer>
            <p>&copy; @DateTime.Now.Year - My ASP.NET Application</p>
        </footer>
    </div>

    <script src="~/Scripts/jquery-1.10.2.min.js"></script>
    <script src="~/Scripts/bootstrap.min.js"></script>
</body>
</html>
```

Output Screenshot:

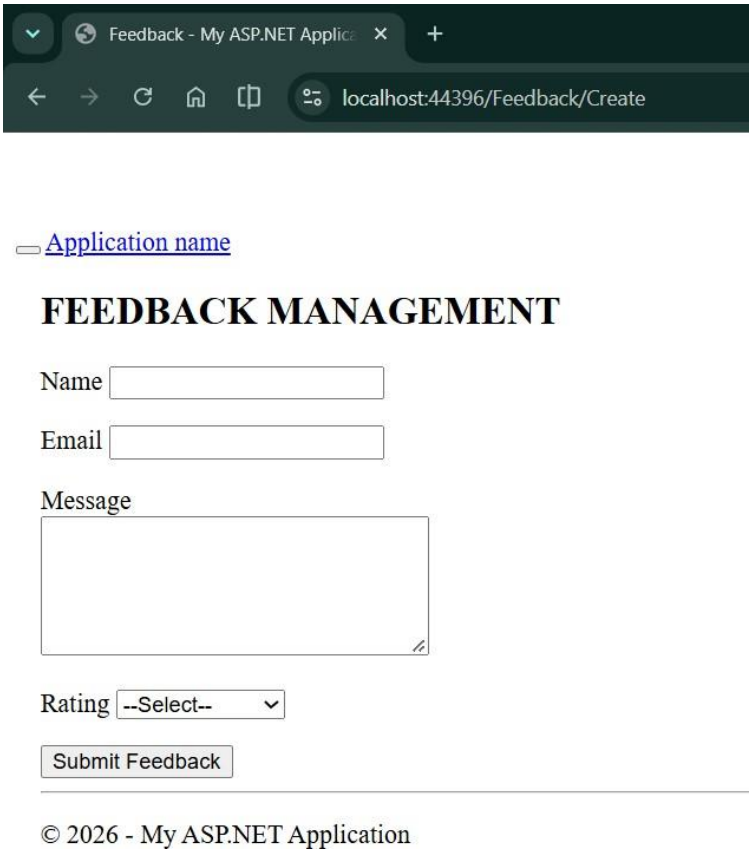

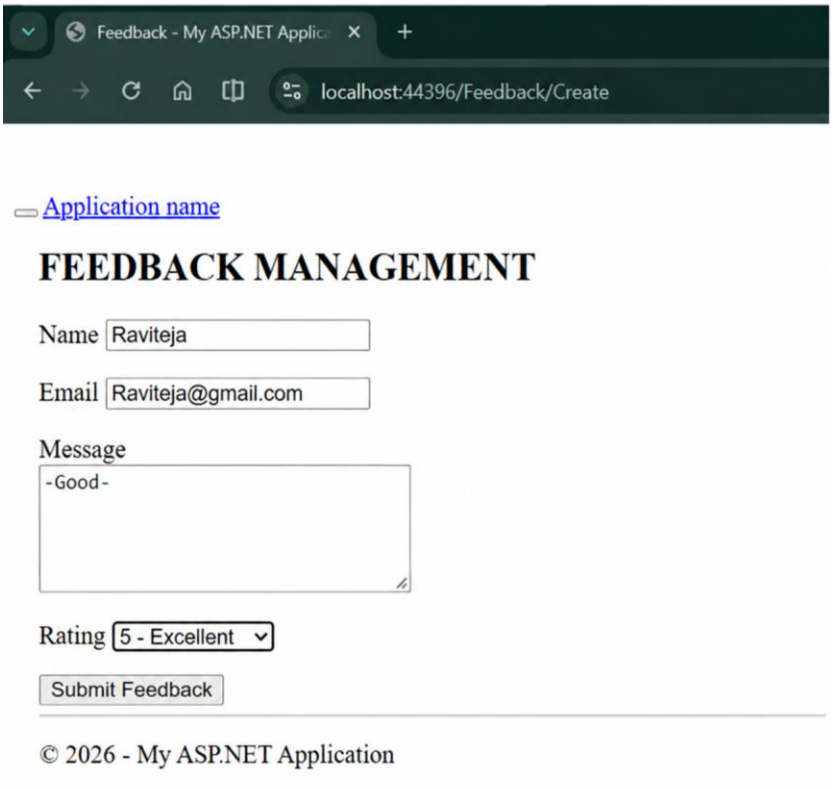

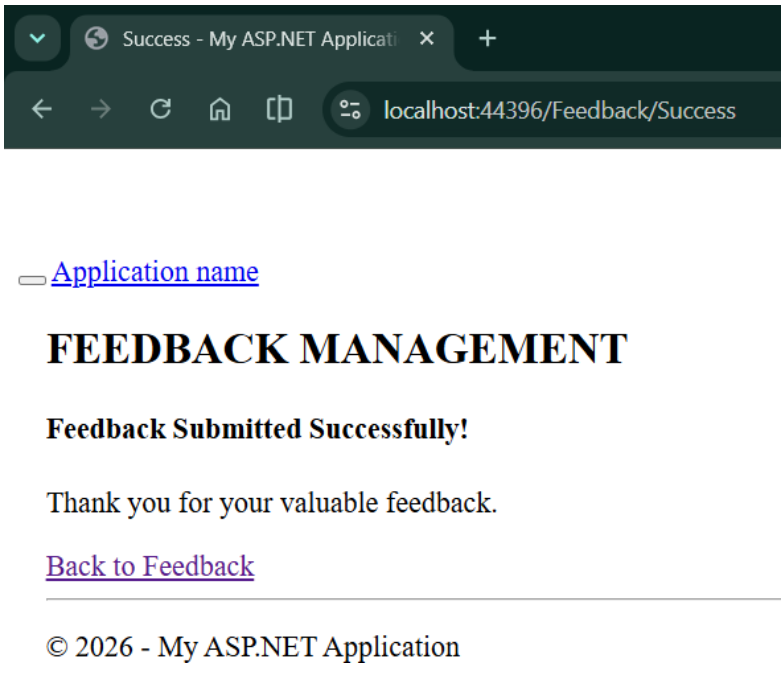

GitHub URL : https://github.com/Raviteja0629/practical7.git