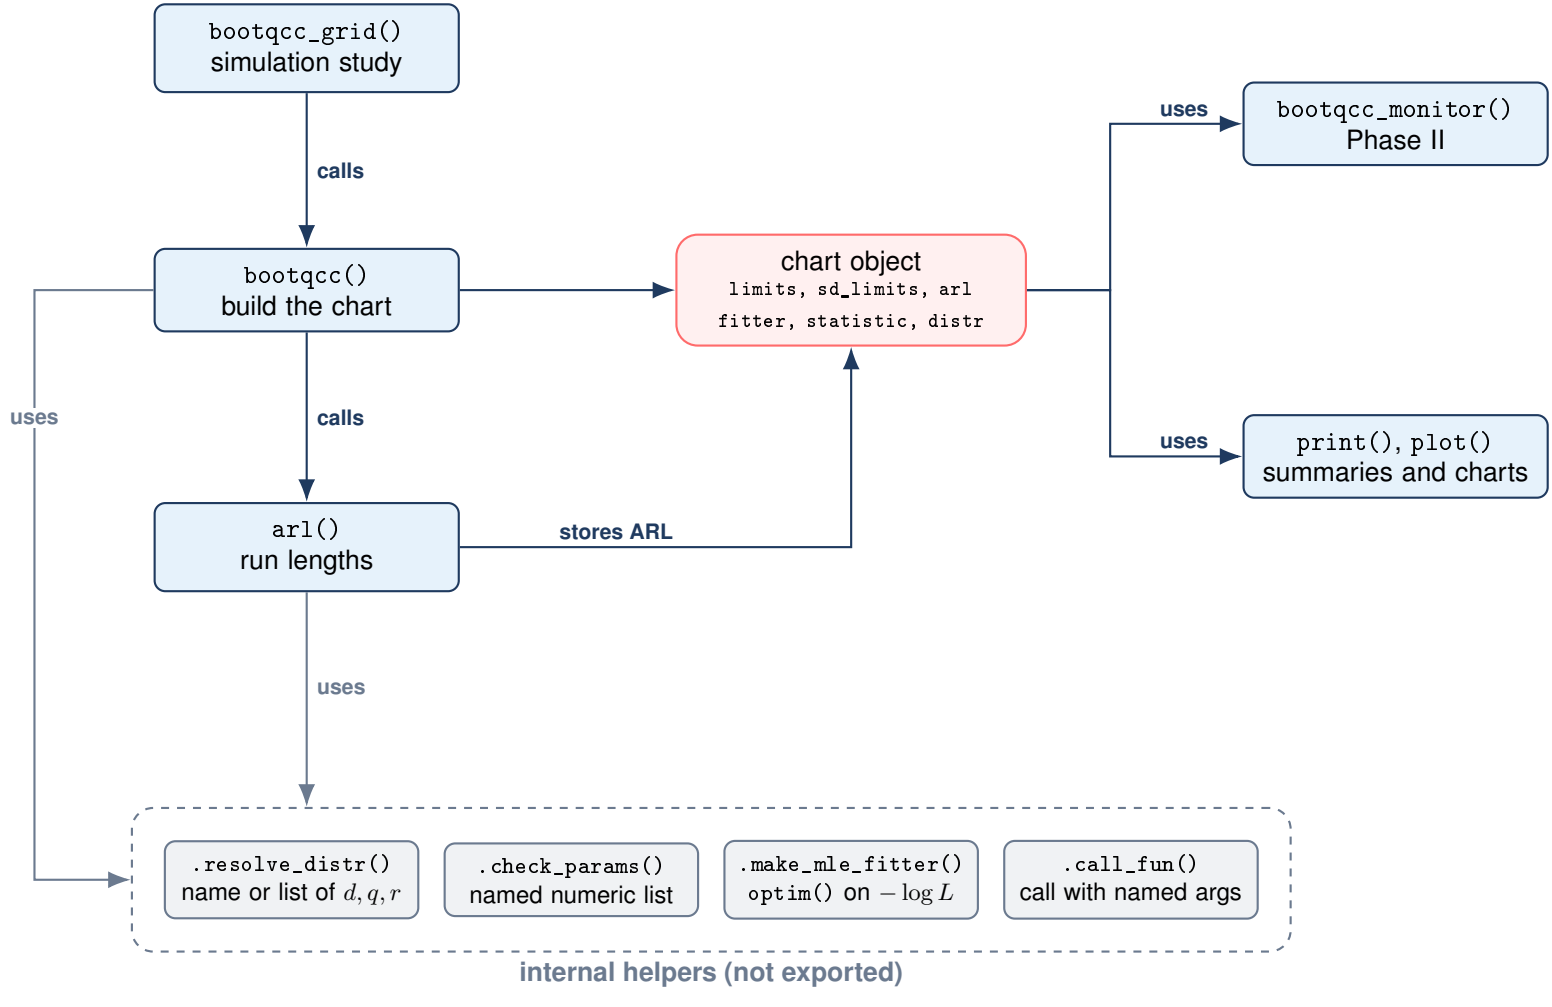

bootqcc_grid()
simulation study
calls
bootqcc()
build the chart
uses
calls
arl()
run lengths
stores ARL
uses
chart object
limits, sd_limits, arl
fitter, statistic, distr
uses
bootqcc_monitor()
Phase II
uses
print(), plot()
summaries and charts
.resolve_distr()
name or list of d, q, r
.check_params()
named numeric list
.make_mle_fitter()
optim() on $-\log L$
.call_fun()
call with named args
internal helpers (not exported)